

Exposure to electric or magnetic fields in the low and intermediate frequency range — Methods for calculating the current density and internal electric field induced in the human body —

**Part 3-1: Exposure to electric fields —
Analytical and 2D numerical models
(IEC 62226-3-1:2007)**

ICS 17.220.20

National foreword

This British Standard is the UK implementation of EN 62226-3-1:2007+A1:2017. It is identical to IEC 62226-3-1:2007, incorporating amendment 1:2016. It supersedes BS EN 62226-3-1:2007 which is withdrawn.

The start and finish of text introduced or altered by amendment is indicated in the text by tags. Tags indicating changes to IEC text carry the number of the IEC amendment. For example, text altered by IEC amendment 1 is indicated by A1 A1.

The UK participation in its preparation was entrusted to Technical Committee GEL/106, Human exposure to low frequency and high frequency electromagnetic radiation.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 October 2007

© The British Standards Institution 2017.
Published by BSI
Standards Limited 2017

ISBN 978 0 580 92814 7

Amendments/corrigenda issued since publication

Date	Comments
28 February 2017	Implementation of IEC amendment 2016 with CENELEC endorsement A1:2017

**Exposure to electric or magnetic fields
in the low and intermediate frequency range -
Methods for calculating the current density
and internal electric field induced in the human body -
Part 3-1: Exposure to electric fields -
Analytical and 2D numerical models
(IEC 62226-3-1:2007)**

Exposition aux champs électriques
ou magnétiques à basse
et moyenne fréquence -
Méthodes de calcul des densités
de courant induit et des champs électriques
induits dans le corps humain -
Partie 3-1: Exposition
à des champs électriques -
Modèles analytiques et numériques 2D
(CEI 62226-3-1:2007)

Sicherheit in elektrischen
oder magnetischen Feldern im niedrigen
und mittleren Frequenzbereich -
Verfahren zur Berechnung der induzierten
Körperstromdichte und des im menschlichen
Körper induzierten elektrischen Feldes -
Teil 3-1: Exposition gegenüber
elektrischen Feldern -
Analytische Modelle
und numerische 2D-Modelle
(IEC 62226-3-1:2007)

This European Standard was approved by CENELEC on 2007-09-01. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the Central Secretariat has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Central Secretariat: rue de Stassart 35, B - 1050 Brussels

Foreword

The text of document 106/125/FDIS, future edition 1 of IEC 62226-3-1, prepared by IEC TC 106, Methods for the assessment of electric, magnetic and electromagnetic fields associated with human exposure, was submitted to the IEC-CENELEC parallel vote and was approved by CENELEC as EN 62226-3-1 on 2007-09-01.

This European Standard is to be used in conjunction with EN 62226-1:2005.

The following dates were fixed:

- latest date by which the EN has to be implemented
at national level by publication of an identical
national standard or by endorsement (dop) 2008-06-01
- latest date by which the national standards conflicting
with the EN have to be withdrawn (dow) 2010-09-01

Endorsement notice

The text of the International Standard IEC 62226-3-1:2007 was approved by CENELEC as a European Standard without any modification.

Foreword to amendment A1

The text of document 106/376/FDIS, future IEC 62226-3-1:2007/A1, prepared by IEC/TC 106 "Methods for the assessment of electric, magnetic and electromagnetic fields associated with human exposure" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN 62226-3-1:2007/A1:2017.

The following dates are fixed:

- latest date by which the document has to be (dop) 2017-08-11
implemented at national level by
publication of an identical national
standard or by endorsement
- latest date by which the national (dow) 2019-11-11
standards conflicting with the
document have to be withdrawn

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

Endorsement notice

The text of the International Standard IEC 62226-3-1:2007/A1:2016 was approved by CENELEC as a European Standard without any modification.

CONTENTS

INTRODUCTION.....	6
1 Scope.....	7
2 Exposure to electric field	7
3 General procedure.....	10
3.1 Shape factor.....	10
3.2 Procedure	10
4 Human body models	11
4.1 General.....	11
4.2 Surface area	11
4.3 Semi-spheroidal model.....	12
4.4 Axisymmetrical body model	14
5 Calculation of induced current	15
5.1 General.....	15
5.2 Semi-spheroid	15
5.3 Axisymmetrical models.....	19
5.4 Comparison of the analytical and numerical models	26
6 Influence of electrical parameters	26
6.1 General.....	26
6.2 Influence of permittivity	26
6.3 Influence of conductivity.....	27
6.4 Non-homogeneous conductivity.....	27
7 Measurement of currents induced by electric fields.....	27
7.1 General.....	27
7.2 Current flowing to the ground	27
Annex A (normative) Analytical solutions for a spheroid in a uniform electric field.....	29
Annex B (normative) Human body axisymmetrical model	32
Annex C (informative) Child body model	37
Annex D (informative) Example of use of this standard	39
Annex E (informative) Numerical calculation methods.....	43
Bibliography.....	51
Figure 1 – Illustration of the phenomenon of currents induced by electric field in a human body standing on the ground	9
Figure 2 – Potential lines of the electric field generated by an energised wire in the absence of any objects (all distances in metres)	9
Figure 3 – A realistic body model.....	11
Figure 4 – Scheme of the semi-spheroid simulating a human being standing on a zero potential plane	12
Figure 5 – Equivalent spheroid radius, R , versus height, L , and for different mass, M	14
Figure 6 – The axisymmetrical body model for the reference man (left) and woman (right).....	14

Figure 7 – Conductive spheroid exposed to electric field	15
Figure 8 – Calculation of the <i>shape factor for electric field</i> K_E for an spheroid exposed to an unperturbed electric field.....	16
Figure 9 – Current density J_S induced by an unperturbed electric field (1 kV/m, 50 Hz) in a spheroid versus parameter L/R (values in $\mu\text{A}/\text{m}^2$).....	17
Figure 10 – Dimensions and mesh of the semi-spheroid	18
Figure 11 – Distortion of power frequency electric field lines close to the conductive semi-spheroid	18
Figure 12 – Calculated induced current density $J_A(h)$ in the body standing in a vertical 50 Hz electric field of 1 kV/m	20
Figure 13 – Computation domain	22
Figure 14 – Mesh of the man body model and distortion of power frequency electric field lines close to model.....	22
Figure 15 – Distribution of potential lines and 50 Hz electric field magnitude (man model)	23
Figure 16 – Computation of induced currents J_A along a vertical axis, and distribution of induced currents in the man model at 50 Hz	23
Figure 17 – Mesh of the woman body model and distortion of power frequency electric field lines close to model.....	24
Figure 18 – Distribution of potential lines and 50 Hz electric field magnitude (woman model)	25
Figure 19 – Computation of induced currents J_A along a vertical axis, and distribution of induced currents in the woman model at 50 Hz	25
Figure A.1 – Conductive spheroid exposed to electric field	29
Figure B.1 – Normalised axisymmetrical models. Left: man, Right: woman	34
Figure C.1 – Computation of induced currents J_Z along a vertical axis, and distribution of induced currents in the 10 years reference child model.....	38
Figure E.1 – Spheroid model.....	44
Figure E.2 – Space potential model	45
Figure E.3 – Exemple of charge simulation method using rings.....	46
Figure E.4 – Superficial charges integral equation method, cutting of the body into N elements.....	47
Figure E.5 – Mesh of the body using finite element method	48
Figure E.6 – Impedance method	49
Figure E.7 – Yee-method: Electric and magnetic grids for spatial discretization	50
Table 1 – Data for reference man and reference woman	12
Table 2 – Values of $\arcsin(e) / e$ for different values of L/R	13
Table 3 – Derived data using spheroid model at 50 Hz	19
Table 4 – Electric field E_{BR} required to produce basic restrictions J_{BR} in the neck at 50 Hz.....	21
Table 5 – Comparison of values of the shape factor for electric field K_E and corresponding current densities for an unperturbed 50 Hz electric field of 1 kV/m	26
Table B.1 – Measures from antropomorphic survey used to construct vertical dimensions of axisymmetrical model [56]	33

Table B.2 – Measures from antropomorphic survey used to construct the radial dimensions of axisymmetrical model [56]	33
Table B.3 – Normalised model dimensions.....	35
Table B.4 – Axisymmetric model dimensions for reference man and reference woman whose mass and height are defined by ICRP [38] and are given in Table 1.....	36
Table C.1 – Reference values provided by ICRP for male and female children.....	37
Table C.2 – Dimensions of the reference children (in m excepted SB_R in m ²)	37
Table C.3 – Results of analytical method for the reference children	38
Table D.1 – Normalised dimensions of the women model.....	40
Table D.2 – Calculation of the dimensions for a specific person	41

INTRODUCTION

Public interest concerning human exposure to electric and magnetic fields has led international and national organisations to propose limits based on recognised adverse effects.

This standard applies to the frequency range for which the exposure limits are based on the induction of voltages or currents in the human body, when exposed to electric and magnetic fields. This frequency range covers the low and intermediate frequencies, up to 100 kHz. Some methods described in this standard can be used at higher frequencies under specific conditions.

The exposure limits based on biological and medical experimentation about these fundamental induction phenomena are usually called “basic restrictions”. They include safety factors.

The induced electrical quantities are not directly measurable, so simplified derived limits are also proposed. These limits, called “reference levels” are given in terms of external electric and magnetic fields. They are based on very simple models of coupling between external fields and the body. These derived limits are conservative.

Sophisticated models for calculating induced currents in the body have been used and are the subject of a number of scientific publications. These models use numerical 3D electromagnetic field computation codes and detailed models of the internal structure with specific electrical characteristics of each tissue within the body. However such models are still developing; the electrical conductivity data available at present has considerable shortcomings; and the spatial resolution of models is still progressing. Such models are therefore still considered to be in the field of scientific research and at present it is not considered that the results obtained from such models should be fixed indefinitely within standards. However it is recognised that such models can and do make a useful contribution to the standardisation process, specially for product standards where particular cases of exposure are considered. When results from such models are used in standards, the results should be reviewed from time to time to ensure they continue to reflect the current status of the science.

EXPOSURE TO ELECTRIC OR MAGNETIC FIELDS IN THE LOW AND INTERMEDIATE FREQUENCY RANGE – METHODS FOR CALCULATING THE CURRENT DENSITY AND INTERNAL ELECTRIC FIELD INDUCED IN THE HUMAN BODY –

Part 3-1: Exposure to electric fields – Analytical and 2D numerical models

1 Scope

This part of IEC 62226 applies to the frequency range for which exposure limits are based on the induction of voltages or currents in the human body when exposed to electric fields.

This part defines in detail the coupling factor K – introduced by the IEC 62226 series to enable exposure assessment for complex exposure situations, such as non-uniform magnetic field or perturbed electric field – for the case of simple models of the human body, exposed to uniform electric fields. The coupling factor K has different physical interpretations depending on whether it relates to electric or magnetic field exposure. It is the so called “shape factor for electric field”.

This part of IEC 62226 can be used when the electric field can be considered to be uniform, for frequencies up to at least 100 kHz.

This situation of exposure to a “uniform” electric field is mostly found in the vicinity of high voltage overhead power systems. For this reason, illustrations given in this part are given for power frequencies (50 Hz and 60 Hz).

2 Exposure to electric field

Alternating electric fields are generated by energised conductors (i.e. under voltage). In the immediate vicinity of domestic electrical equipment, such as lights, switches, food mixers and irons, local electric-field strengths about 100 V/m may be found. Such fields are non-uniform, but their strengths are far below the levels recommended in safety guidelines, so there is no need of calculation of induced currents in such exposure situations.

Higher electric-field strengths may be found in the vicinity of high voltage equipment such as electric power line. In the frequency range covered by this standard, it is considered that exposure from power lines is the only significant exposure source for public regarding safety guidelines limits.

Guidelines on human exposure to electric fields are generally expressed in terms of induced current density or internal electric field. These quantities cannot be measured directly and the purpose of this document is to give guidance on how to assess these quantities induced in the human body by external (environmental) electric fields E_0 .

The induced current density J and the internal electric field E_i are closely linked by the simple relation:

$$J = \sigma \cdot E_i \quad (1)$$

where σ is the conductivity of the body tissue under consideration.

[A1] Although some guidelines on human exposure to electric fields adopt internal electric field as a limiting parameter, for reason of simplification, the content of this standard is presented mainly in terms of induced current densities J , from which values of internal electric field E_i can be easily derived using the previous formula. **[A1]**

All the calculation developed in this document use the low frequency approximation in which displacement currents are negligible, such that $\epsilon\omega/\sigma$ is less than 1 in the body. This approximation has been checked using published tissue data [29,31] ¹⁾ in the low frequency range and it has been found to be valid for frequencies up to at least 100 kHz and is probably valid at higher frequencies.

Computations based on sophisticated numerical models of the human body [24] also demonstrate that this assumption is valid at frequencies up to more than 100 kHz by showing that the relationship between the induced current density in the body and the product of frequency and external electric field hardly varies at all between 50 Hz and 1 MHz, and is only slightly altered at 10 MHz.

Analytical models can be used for simple cases of calculations.

Electric fields cause displacement of electric charges in conductive objects (including living bodies) and, because these fields are alternating, the electric charges move backwards and forwards. The result is an “induced” alternating current inside the conductive object. This current depends only on:

- the shape and size of the conducting object;
- the characteristics (magnitude, polarisation, degree of non-uniformity, etc.) of the unperturbed field (field which is measured in the absence of any conducting object);
- the frequency of the field
- the variation of conductivity of the object (in homogeneous media, the current density induced by electric fields does not depend on conductivity).

Figure 1 illustrates this induction phenomenon for the case where the body is in electrical contact with the ground.

¹⁾ Figures in square brackets refer to the Bibliography.

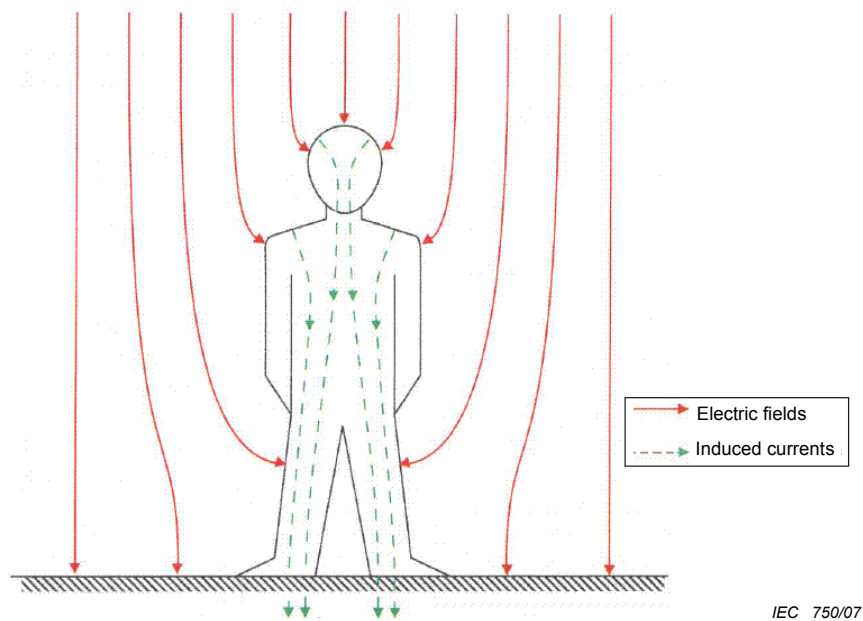


Figure 1 – Illustration of the phenomenon of currents induced by an electric field in a human body standing on the ground

The typical case of public exposure to an electric field is under high voltage power transmission lines. In this case, the distance between the source of field and the human body is large and the field in the zone close to the ground, in the absence of any conductive object, can be considered to be uniform (see Figure 2).

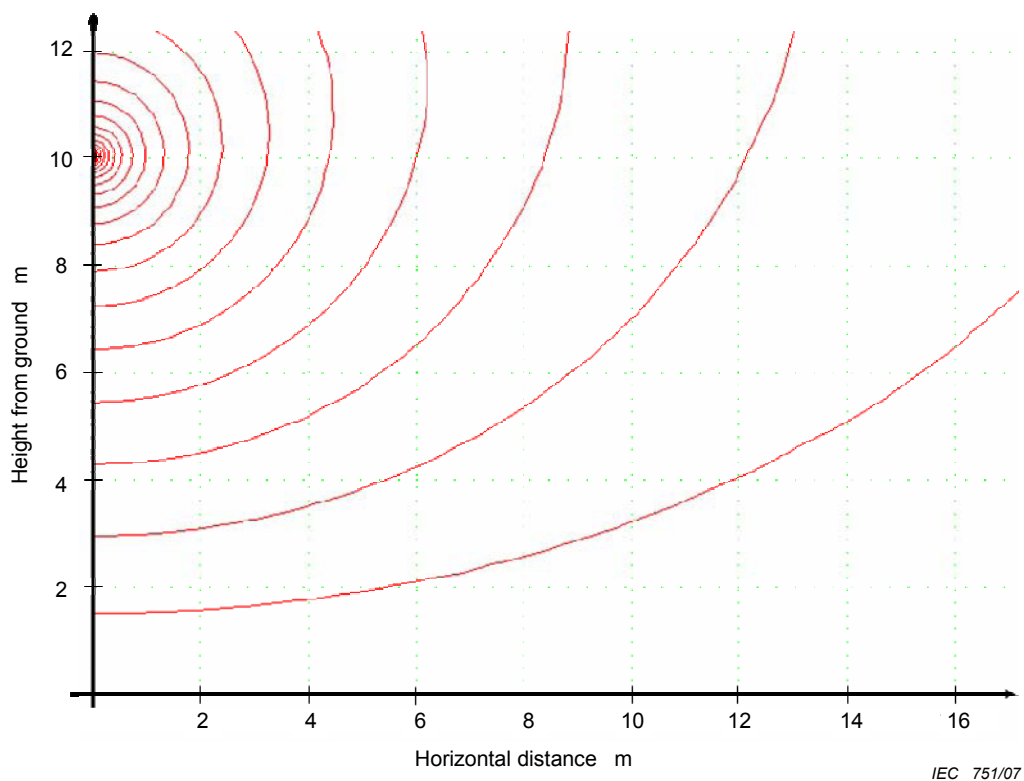


Figure 2 – Potential lines of the electric field generated by an energised wire in the absence of any objects (all distances in metres)

3 General procedure

3.1 Shape factor

In the low and intermediate frequency range, the relation between the induced current in the human body (J) and a uniform electric field (E_0) can be reduced to:

$$J = K_E \cdot f \cdot E_0 \quad (2)$$

Where:

f is the frequency;

E_0 is the magnitude of the unperturbed electric field;

K_E is defined as the “*shape factor for the electric field*”.

K_E is dependant on the size, the conductivity, the form and the position of the model of the human body. It is also dependant on the location within the body where the induced current density is evaluated. K_E is independent of the frequency for analytical assessment of the induced current produced by electric fields (see Annex A).

K_E is given in units of $A \cdot s \cdot V^{-1} \cdot m^{-1}$ or Farad per metre (F/m), which relates to the fact that the exposure to the electric field corresponds physically to a capacitive coupling between the field source and the conductive object exposed to the field.

[A1] NOTE The internal electric field E_i can be calculated from the current density J as $E_i = J/\sigma$, where σ is the conductivity of the human model (see equation (1)). **[A1]**

3.2 Procedure

The current density inside an individual can be estimated analytically, following a three stage process. The first stage is to compute the current density in a semi-spheroid, whose dimensions are chosen to best represent the particular body. As it will be shown in 5.3 of this standard, the current density is uniform throughout the spheroid but depends on the ratio L/R of its semi-major axis and semi-minor axis.

The second stage is to use a realistic axisymmetrical model of a human body to determine the current density as a function of vertical position within the body.

[A1] The third stage is to convert the current density averaged at a particular height to the local current density in the different tissues at that height. Health guidelines on exposure to EMF refer specifically to current density (or internal electric field) in the central nervous system, so the particular area of interest within the body is the spinal cord in the neck, due to the small cross section of the neck, which concentrates the current (or internal electric field) in that region. **[A1]**

Induced currents are calculated for men and women as well as children using reference values for their height, mass and surface area published by ICRP [38]. Sufficient information is given here to apply the method to persons of any weight and height.

Numerical calculations are also presented demonstrating the validity of the analytical procedure.

4 Human body models

4.1 General

In scientific literature, many models of different complexity have been used for the assessment of currents and internal fields induced by electric or magnetic field (Figure 3). Examples of such sophisticated calculations are given in the bibliography. It must be emphasised that these computations have been performed using dedicated softwares which require highly specialised competences and are not widely available. Therefore, it is considered that such computational techniques are not relevant with regard to standardisation objectives.

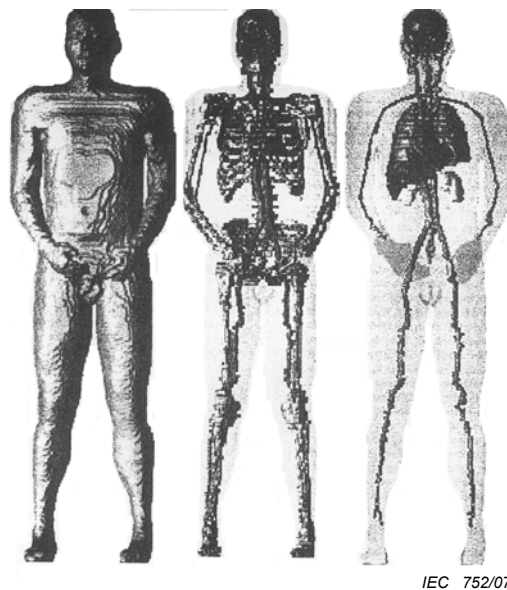


Figure 3 – A realistic body model

Analytical calculations are possible when using simple models, such as the model of a spheroid in a uniform electric field.

4.2 Surface area

The surface area of a body (SB) is used to scale both the spheroidal and the axisymmetrical body models for different sized bodies. It depends on the height and the mass of the body. The report of the ICRP [38], *Basic Anatomical and Physiological Data for Use in Radiological Protection: Reference Values*, provides an algorithm giving the total surface area (SB_T) of a person as a function of its height L (in metres) and mass M (in kg):

$$SB_T = 0,164\,4\,M^{0,514\,56}L^{0,422\,46} \quad (3)$$

In our case, only the outwards-facing surface area of the body is considered, which is approximately 82 % of the total surface area SB_T . The 18 % reduction comprises 3 % for excluding the soles of the feet, 6 % for excluding the touching surface of the legs, and 8 % for excluding the inner surface of the arms and hands and 1 % for the perineum. The reduced surface area (SB_R) is therefore:

$$SB_R = 0,82\,SB_T \quad (4)$$


Table 1 gives the results for the reference man and the reference woman which are introduced in 4.4 and Annex B.

Table 1 – Data for reference man and reference woman

	Reference man	Reference woman
Height, m	1,76	1,63
Mass, kg	73	60
Total surface area SB_T , m ²	1,889	1,662
Reduced surface area SB_R , m ²	1,557	1,363

4.3 Semi-spheroidal model

To calculate the induced current density inside a human standing on a conducting plane it is necessary to model the reflection of the body in the ground. Thus the body is represented by half of the spheroid (Figure 4) and the reflection by the other half (Figure 7). The semi-major axis L of the spheroid is set to the height of the person being represented.

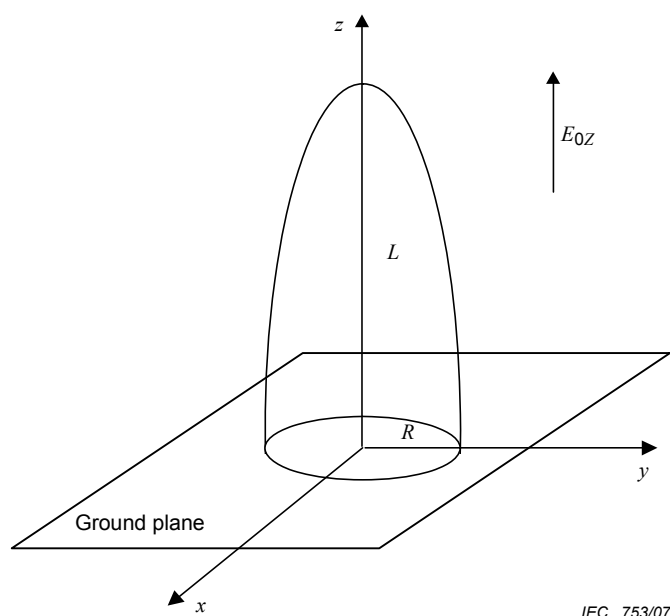

IEC 753/07

Figure 4 – Scheme of the semi-spheroid simulating a human being standing on a zero potential plane

The semi-minor axis (i.e. the radius) R is chosen to give the same total current flowing into the ground through the feet when the body is grounded as for the body it represents. This is achieved by ensuring that the spheroid has the same outward-facing surface area SB_R as the body it represents.

The surface area SB_S of a half spheroid of height L and radius R is given by:

$$SB_S = \pi R^2 \left[1 + \frac{L}{R} \frac{\arcsin(e)}{e} \right] \quad (5)$$

where e is the eccentricity:

$$e = \sqrt{1 - \frac{R^2}{L^2}}$$

R is determined from the mass M and L by solving equation (5) for R , with $SB_S = SB_R$, and where SB_R is given by equations (3) and (4). Thus

$$R = -\frac{B}{2} \pm \sqrt{\left(\frac{B}{2}\right)^2 + \frac{SB_S}{\pi}} \quad (6)$$

where

$$B = L \frac{\arcsin(e)}{e}$$

B is a function of R , but as $\arcsin(e)/e$ varies only slowly with L/R , as shown in Table 2, B also varies only slowly with L/R , and therefore B can be determined using an approximate value for L/R .

Table 2 – Values of $\arcsin(e)/e$ for different values of L/R

L/R	9,0	9,2	9,4	9,6	9,8	10
$\text{Arcsin}(e)/e$	1,469	1,471	1,473	1,474	1,476	1,478

Using $L/R = 9,8$ gives

$$B = 1,476 L$$

This is substituted into equation (6) to give the equation for R in terms of L and SB_S :

$$R = -0,738L + \sqrt{0,545L^2 + \frac{SB_S}{\pi}} \quad (7)$$

Figure 5 presents the result graphically. It can be used to find the radius R from the height L and mass M of a person. For example, the reference man, whose mass is 73 kg and height is 1.76 m, the radius R is 0,178 m and L/R is 9,86.

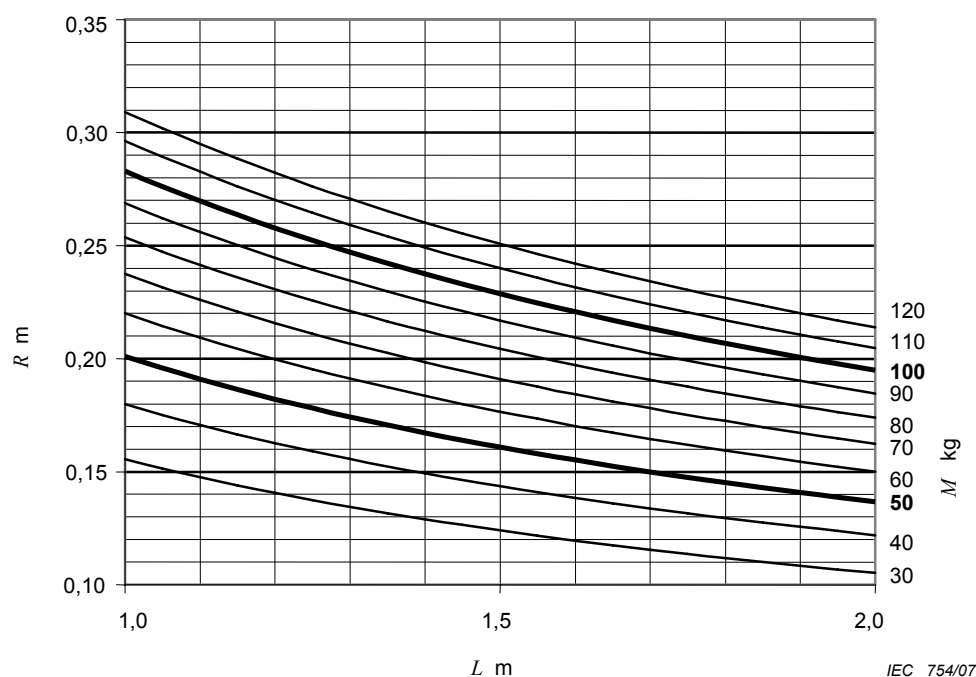


Figure 5 – Equivalent spheroid radius, R , versus height, L , and for different mass, M

4.4 Axisymmetrical body model

The axisymmetrical body model represents the essential features of the body: its height, total surface area, neck dimensions, and approximate vertical profile. However it cannot be a perfect representation of the body because the body is not axisymmetrical. Figure 6 illustrates the radial cross section of the axisymmetrical model for the reference man and woman.

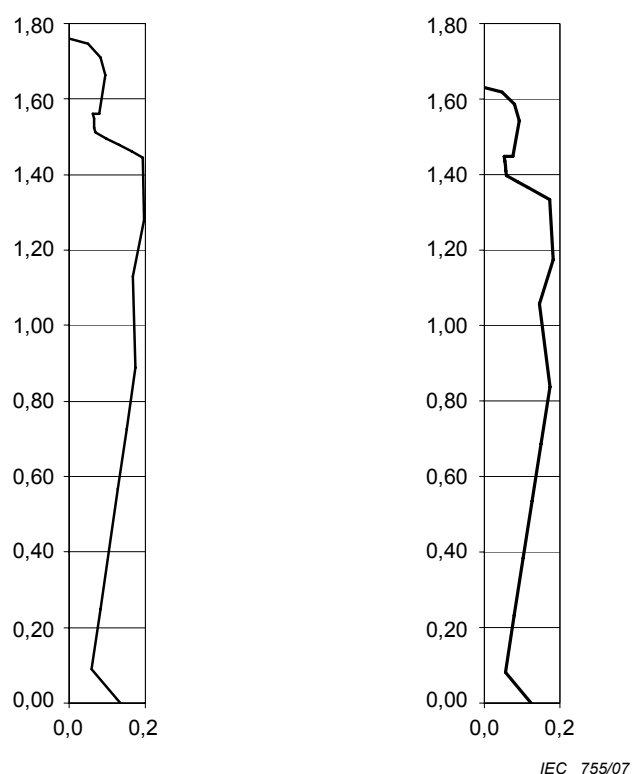


Figure 6 – The axisymmetrical body model for the reference man (left) and woman (right)

Annex B describes how data from an anthropometric survey of 2 208 women and 1 174 men, chosen as a representative sample from the US Army, were used to develop the axisymmetrical model. The model is defined by 13 (radius, height) coordinates.

5 Calculation of induced current

5.1 General

Analytical models to quantify the relationship between induced currents in conductive bodies and external electric fields are generally based upon the most simple assumption that the external fields are uniform and at a single frequency, and that the bodies are homogeneous and with a shape that can be described analytically (as is the case of spheres, spheroids, etc.). Therefore, they cannot easily take into account the fact that the human body is a non-homogeneous structure with a complex shape.

Nevertheless, analytical models can be used for simple cases of calculations and/or to validate numerical calculations.

In the particular case of the homogeneous models developed in this standard, the induced current density is independent of the conductivity and the permittivity (low frequency approximation).

5.2 Semi-spheroid

5.2.1 Analytical

In Annex A, the detailed analytical solutions for a spheroid in a uniform electric field are presented as a function of spheroid's geometrical and electrical parameters and of the magnitude and direction of the electric field vector (Figure 7). The spheroid representation is equivalent to the semi-spheroid in the presence of the ground plane as explained in 4.3.

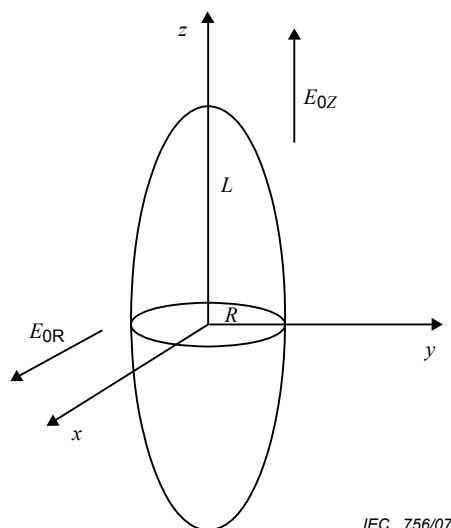


Figure 7 – Conductive spheroid exposed to electric field

L is the length of the semi-major (rotational) axis of the spheroid (axis Z), R is the length of the semi-minor axis of the spheroid (R is also the radius of the circular cross section of the spheroid at the symmetry plane (plane XY)).


The shape factor for electric field K_E is calculated for 2 orientations of the field vector: E_0 parallel to Z axis (therefore K_E and E_0 are called K_{EZ} and E_{0Z}) and E_0 perpendicular to Z axis (therefore K_E and E_0 are called K_{ER} and E_{0R}).

The results of this analytical calculation are summarised hereunder in Figures 8 and 9.

Figure 8 gives in a graphic form the result of the calculation of K_{EZ} and K_{ER} as a function of the ratio L/R (shape parameter).

[A1] Figure 9 gives the result of the analytical calculation of the local current density J_s , for a field magnitude of 1 kV/m at 50 Hz.

NOTE The internal electric field E_i can be calculated from the current density J as $E_i = J/\sigma$, where σ is the conductivity of the human model. **[A1]**

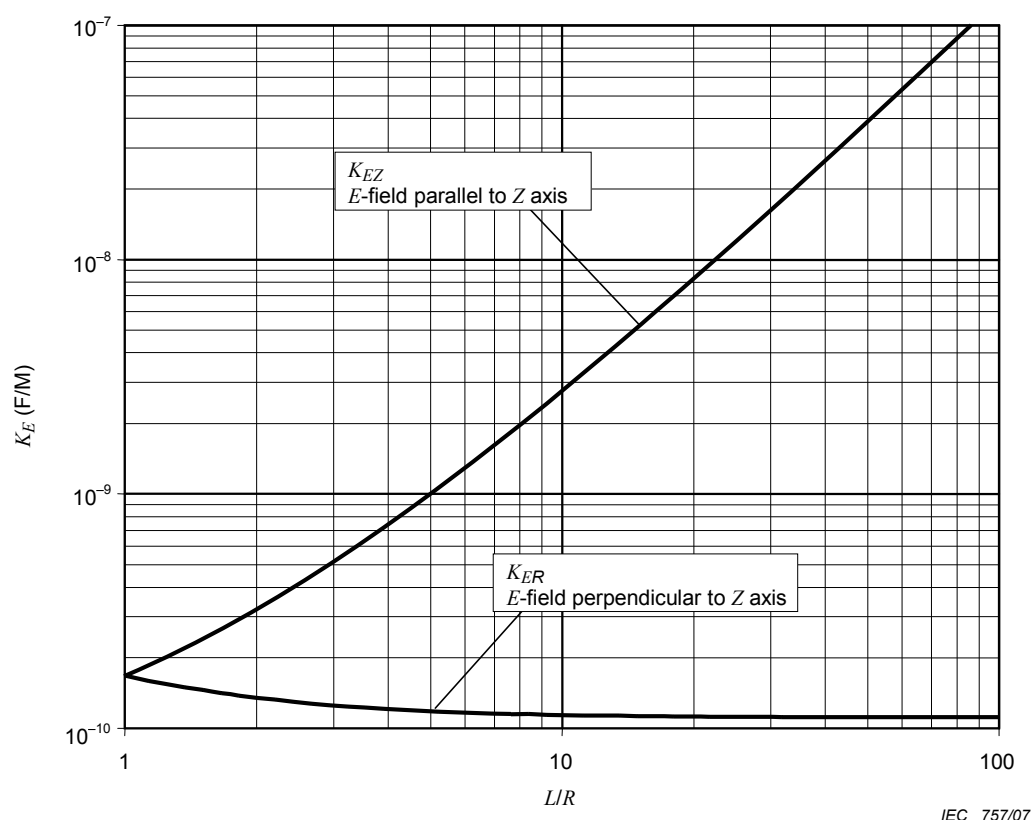

[A1] Figure 8 – Calculation of the shape factor for electric field K_E for a spheroid exposed to an unperturbed electric field **[A1]**