


FED. SUPPLY CLASS

5310

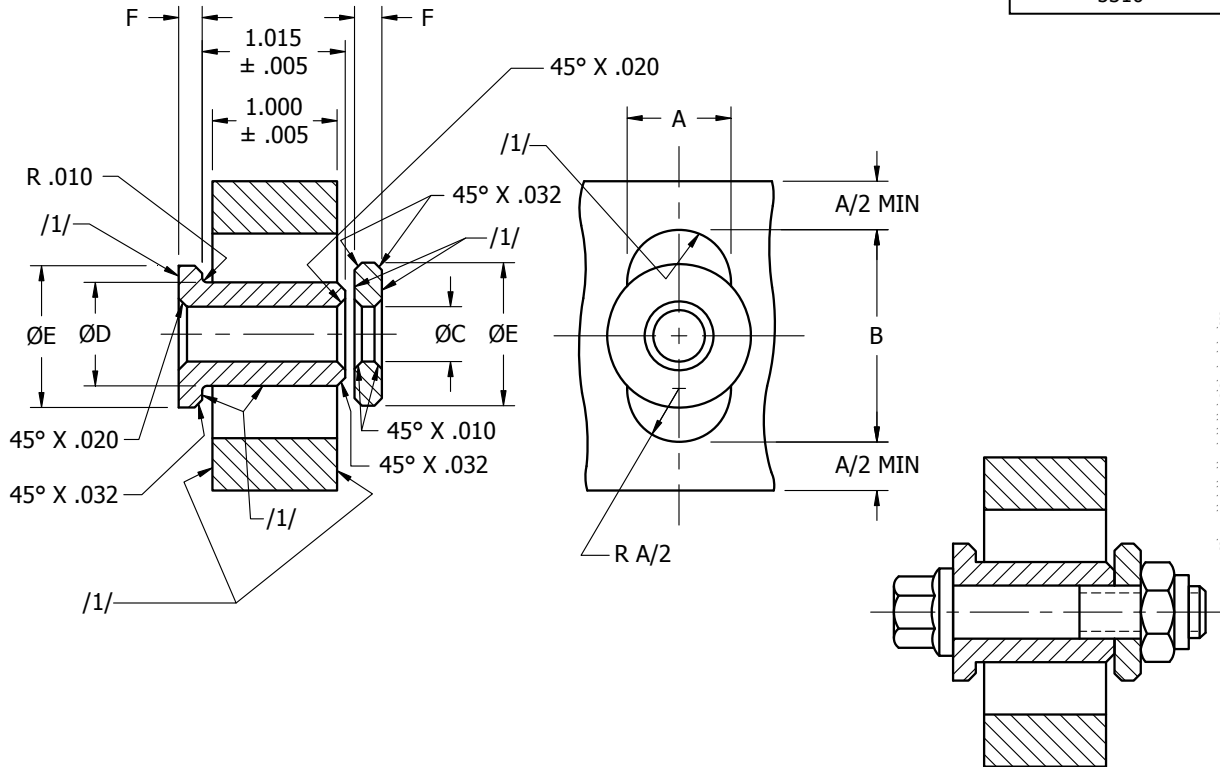

SIZE	A SLOT WIDTH +.005 -.002	B SLOT HEIGHT ±.002	ØC ID WASHER AND CYLINDER ±.002	ØD OD CYLINDER ±.002	ØE OD WASHER ±.005	F WASHER FACE THICKNESS ±.002
#10	.328	1.071	.200	.322	.550	.123
1/4	.500	1.245	.265	.495	.750	.163
5/16	.625	1.370	.328	.620	.875	.163
3/8	.750	1.495	.390	.745	1.000	.163
7/16	.875	1.620	.452	.870	1.200	.188
1/2	1.000	1.745	.515	.990	1.375	.188
9/16	1.125	1.870	.578	1.115	1.550	.213
5/8	1.250	1.995	.640	1.240	1.700	.213

① COMPLETELY REVISED

THIRD ANGLE PROJECTION	CUSTODIAN NATIONAL AEROSPACE STANDARDS COMMITTEE	REVISION 1
PROCUREMENT SPECIFICATION NONE	TITLE FIXTURES, VIBRATION TEST, SELF-LOCKING NUTS	CLASSIFICATION DESIGN STANDARD NAS3354 SHEET 1 OF 2

Material:

Steel.

Heat Treatment:

40-45 HRC.

Notes:

- /1/ Surface Roughness: Indicated surfaces, 32 microinches Ra per ASME B46.1.
- (2) Use: This fixture is used in vibration tests of self-locking nuts. An assembly of the fixtures, bolt and self-locking nut is shown.
- (3) Dimensions in inches.
- (4) This standard takes precedence over documents referenced herein.
- (5) Unless otherwise specified, part inventory manufactured to previous revisions of the applicable drawing or specification may be procured and used until stock is depleted.
- (6) Unless otherwise specified herein, referenced documents shall be the issue in effect on date of manufacture. However, existing material inventory certified to a previous revision of the applicable material specification(s) is acceptable for use until depletion.
- (7) Dimensioning and tolerancing per ANSI Y14.5M-1982.

① COMPLETELY REVISED

REVISION
1



NAS3354
SHEET 2

Document Sharing Hub