



BSI Standards Publication

Arc welding equipment

Part 1: Welding power sources

National foreword

This British Standard is the UK implementation of EN IEC 60974-1:2018+A1:2019. It is identical to IEC 60974-1:2017, incorporating amendment 1:2019. It supersedes BS EN IEC 60974-1:2018, which is withdrawn.

The start and finish of text introduced or altered by amendment is indicated in the text by tags. Tags indicating changes to IEC text carry the number of the IEC amendment. For example, text altered by IEC amendment A1 is indicated by A1 A1.

The UK participation in its preparation was entrusted to Technical Committee WEE/6, Electric arc welding equipment.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2019
Published by BSI Standards Limited 2019

ISBN 978 0 580 99559 0

ICS 25.160; 13.120; 25.160.30; 97.030

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 October 2018.

Amendments/corrigenda issued since publication

Date	Text affected
30 April 2019	Implementation of IEC amendment 1:2019 with CENELEC endorsement A1:2019

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN IEC 60974-1:2018/A1

April 2019

ICS 25.160

English Version

**Arc welding equipment - Part 1: Welding power sources
(IEC 60974-1:2017/A1:2019)**

Matériel de soudage à l'arc - Partie 1: Sources de courant
de soudage
(IEC 60974-1:2017)

Lichtbogenschweißeinrichtungen - Teil 1:
Schweißstromquellen
(IEC 60974-1:2017)

This European Standard was approved by CENELEC on 2018-07-15. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

© 2019 CENELEC All rights of exploitation in any form and by any means reserved worldwide for CENELEC Members.

EN IEC 60974-1:2018/A1:2019 (E)**European foreword**

The text of document 26/610/FDIS, future edition 5 of IEC 60974-1, prepared by IEC/TC 26 "Electric welding" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN IEC 60974-1:2018.

The following dates are fixed:

- latest date by which the document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2019-03-28
- latest date by which the national standards conflicting with the document have to be withdrawn (dow) 2021-09-28

This document supersedes EN 60974-1:2012.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC shall not be held responsible for identifying any or all such patent rights.

Endorsement notice

The text of the International Standard IEC 60974-1:2017 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standards indicated:

IEC 60038:2009	NOTE	Harmonized as EN 60038:2011 (modified)
IEC 60085	NOTE	Harmonized as EN 60085
IEC 60204-1	NOTE	Harmonized as EN 60204-1
IEC 60309-1	NOTE	Harmonized as EN 60309-1
IEC 60335-2-29	NOTE	Harmonized as EN 60335-2-29
IEC 60384-14	NOTE	Harmonized as EN 60384-14
IEC 60950-1	NOTE	Harmonized as EN 60950-1
IEC 60974-3	NOTE	Harmonized as EN 60974-3
IEC 60974-4	NOTE	Harmonized as EN 60974-4
IEC 60974-6	NOTE	Harmonized as EN 60974-6
IEC 60974-9	NOTE	Harmonized as EN IEC 60974-9
IEC 60974-10	NOTE	Harmonized as EN 60974-10
IEC 60974-12	NOTE	Harmonized as EN 60974-12
IEC 61032:1997	NOTE	Harmonized as EN 61032:1998 (not modified)
IEC 61558-1	NOTE	Harmonized as EN 61558-1
IEC 62281	NOTE	Harmonized as EN 62281
ISO 13732-1	NOTE	Harmonized as EN ISO 13732-1

Foreword to amendment A1

The text of document 26/653/CDV, future edition 5 of IEC 60974-1:2017/A1, prepared by IEC/TC 26 "Electric welding" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN IEC 60974-1:2018/A1:2019.

The following dates are fixed:

- latest date by which the document has to be (dop) 2019-11-15
implemented at national level by
publication of an identical national
standard or by endorsement
- latest date by which the national (dow) 2022-02-15
standards conflicting with the
document have to be withdrawn

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC shall not be held responsible for identifying any or all such patent rights.

This document has been prepared under a mandate given to CENELEC by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive(s).

For the relationship with EU Directive(s) see informative Annex ZZ, which is an integral part of this document.

Endorsement notice

The text of the International Standard IEC 60974-1:2017/A1:2019 was approved by CENELEC as a European Standard without any modification.

Annex ZA

(normative)

Normative references to international publications with their corresponding European publications

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 Where an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here: www.cenelec.eu.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 60050-151	-	International Electrotechnical Vocabulary - Part 151: Electrical and magnetic devices	-	-
IEC 60050-851	-	International Electrotechnical Vocabulary - Part 851: Electric welding	-	-
IEC 60245-6	-	Rubber insulated cables - Rated voltages up to and including 450/750 V -- Part 6: Arc welding electrode cables	-	-
IEC 60417	-	Graphical symbols for use on equipment. Index, survey and compilation of the single sheets.	HD 243 S12	-
IEC 60445	-	Basic and safety principles for man-machine interface, marking and identification – Identification of equipment terminals, conductor terminations and conductors	-	-
IEC 60529	-	Degrees of protection provided by enclosures (IP Code)	-	-
IEC 60664-1	2007	Insulation coordination for equipment within low-voltage systems - Part 1: Principles, requirements and tests	EN 60664-1	2007
IEC 60664-3	-	Insulation coordination for equipment within low-voltage systems - Part 3: Use of coating, potting or moulding for protection against pollution	EN 60664-3	-
IEC 60695-11-10	-	Fire hazard testing -- Part 11-10: Test flames - 50 W horizontal and vertical flame test methods	EN 60695-11-10	-
IEC 60974-7	-	Arc welding equipment -- Part 7: Torches	EN 60974-7	-

IEC 61140	-	Protection against electric shock - Common aspects for installation and equipment	EN 61140	-
IEC 61558-2-4	-	Safety of transformers, reactors, power supply units and similar products for supply voltages up to 1 100 V - Part 2-4: Particular requirements and tests for isolating transformers and power supply units incorporating isolating transformers	EN 61558-2-4	-
IEC 61558-2-6	-	Safety of transformers, reactors, power supply units and similar products for supply voltages up to 1 100 V -- Part 2-6: Particular requirements and tests for safety isolating transformers and power supply units incorporating safety isolating transformers	EN 61558-2-6	-
IEC 62133-1	-	Secondary cells and batteries containing alkaline or other non-acid electrolytes - Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications - Part 1: Nickel systems	EN 62133-1	-
IEC 62133-2	-	Secondary cells and batteries containing alkaline or other non-acid electrolytes - Safety requirements for portable sealed secondary lithium cells, and for batteries made from them, for use in portable applications - Part 2: Lithium systems	EN 62133-2	-
ISO 7010	2011	Graphical symbols - Safety colours and safety signs - Registered safety signs	EN ISO 7010	2012

Annex ZZ (informative)

Relationship between this European Standard and the safety objectives of Directive 2014/35/EU [2014 OJ L96] aimed to be covered

This European Standard has been prepared under a Commission's standardization request relating to harmonized standards in the field of the Low Voltage Directive, M/511, to provide one voluntary means of conforming to safety objectives of Directive 2014/35/EU of the European Parliament and of the Council of 26 February 2014 on the harmonization of the laws of the Member States relating to the making available on the market of electrical equipment designed for use within certain voltage limits [2014 OJ L96].

Once this standard is cited in the Official Journal of the European Union under that Directive, compliance with the normative clauses of this standard given in Table ZZ.1 confers, within the limits of the scope of this standard, a presumption of conformity with the corresponding safety objectives of that Directive, and associated EFTA regulations.

Table ZZ.1 — Correspondence between this European standard and Annex I of Directive 2014/35/EU [2014 OJ L96]

Safety objectives of Directive 2014/35/EU	Clause(s) / sub-clause(s) of this EN	Remarks / Notes
1(a)	Clauses 10.4, 15, 17.1, 17.2, O.15, O.17.1 O.17.2	
1(b)	Clause 17.1 Annex O.17.1	
1(c)	Clauses 1, 3, 4 Annex O.4 see also points 2 and 3 below	Testing during periodic maintenance or after repair is covered in separate standards
2(a)	Clauses 6.1, 6.2, 6.3, 10, 11.1, 11.4, 11.5, 11.6, 11.7, 12, 13 Annexes O.6.1, O.6.2, O.10	
2(b)	Clauses 7.3.1, 7.3.2, 7.3.3	Hazards arising from electric, magnetic, and electromagnetic fields, other ionizing and non-ionizing radiation are covered in separate standards
2(c)	Clauses 6.2.1, 6.2.2, 9.1, 10.5.2, 14 Annexes O.9.1, O.14, O.9.201, O.9.203, O.9.204, O.9.205	
2(d)	Clauses 6.1, 7.3.1 Annex O.6.1	
3(a)	Clause 14	

	Annex O.14	
3(b)	Clauses 4, 6.2.1, 10.9, 14.2.1, 17.1 r)	Functional safety is covered in separate standards Safety-related security is covered in separate standards
3(c)	Clause 9 Annex O.9	

WARNING 1 — Presumption of conformity stays valid only as long as a reference to this European standard is maintained in the list published in the Official Journal of the European Union. Users of this standard should consult frequently the latest list published in the Official Journal of the European Union.

WARNING 2 — Other Union legislation may be applicable to the product(s) falling within the scope of this standard.

This page deliberately left blank

CONTENTS

FOREWORD	8
1 Scope	10
2 Normative references	10
3 Terms and definitions	11
3.1 General terms	11
3.2 Terms related to battery systems	20
4 Environmental conditions	23
5 Tests	24
5.1 Test conditions	24
5.2 Measuring instruments	24
5.3 Conformity of components	24
5.4 Type tests	25
5.5 Routine tests	25
6 Protection against electric shock	26
6.1 Insulation	26
6.1.1 General	26
6.1.2 Clearances	27
6.1.3 Creepage distances	29
6.1.4 Insulation resistance	31
6.1.5 Dielectric strength	31
6.2 Protection against electric shock in normal service (direct contact)	33
6.2.1 Protection provided by the enclosure	33
6.2.2 Capacitors	33
6.2.3 Automatic discharge of supply circuit capacitors	34
6.2.4 Isolation of the welding circuit	34
6.2.5 Welding circuit touch current	34
6.2.6 Touch current in normal condition	35
6.3 Protection against electric shock in case of a fault condition (indirect contact)	36
6.3.1 Protective provisions	36
6.3.2 Isolation between windings of the supply circuit and the welding circuit	36
6.3.3 Internal conductors and connections	36
6.3.4 Additional requirements for plasma cutting systems	37
6.3.5 Movable coils and cores	37
6.3.6 Touch current in fault condition	37
7 Thermal requirements	38
7.1 Heating test	38
7.1.1 Test conditions	38
7.1.2 Tolerances of the test parameters	38
7.1.3 Duration of test	39
7.2 Temperature measurement	39
7.2.1 Measurement conditions	39
7.2.2 Surface temperature sensor	39
7.2.3 Resistance	39
7.2.4 Embedded temperature sensor	40
7.2.5 Determination of the ambient air temperature	40

7.2.6	Recording of temperatures	40
7.3	Limits of temperature rise	40
7.3.1	Windings, commutators and slip-rings.....	40
7.3.2	External surfaces.....	41
7.3.3	Other components	42
7.4	Loading test.....	42
7.5	Commutators and slip-rings	43
8	Thermal protection.....	43
8.1	General requirements	43
8.2	Construction	43
8.3	Location.....	43
8.4	Operating capacity.....	43
8.5	Operation.....	44
8.6	Resetting	44
8.7	Indication	44
9	Abnormal operation	44
9.1	General requirements	44
9.2	Stalled fan test.....	45
9.3	Short circuit test.....	45
9.4	Overload test	46
10	Connection to the supply network	46
10.1	Supply voltage	46
10.2	Multi-supply voltage	46
10.3	Means of connection to the supply circuit.....	46
10.4	Marking of terminals	47
10.5	Protective circuit	47
10.5.1	Continuity requirement.....	47
10.5.2	Type test	48
10.5.3	Routine test	48
10.6	Cable anchorage.....	49
10.7	Inlet openings	50
10.8	Supply circuit on/off switching device	50
10.9	Supply cables	51
10.10	Supply coupling device (attachment plug)	51
11	Output	52
11.1	Rated no-load voltage	52
11.1.1	Rated no-load voltage for use in environments with increased risk of electric shock	52
11.1.2	Rated no-load voltage for use in environments without increased risk of electric shock	52
11.1.3	Rated no-load voltage for the use with mechanically held torches with increased protection for the operator	52
11.1.4	Rated no-load voltage for special processes for example plasma cutting	52
11.1.5	Additional requirements	53
11.1.6	Measuring circuits	54
11.2	Type test values of the conventional load voltage	55
11.2.1	Manual metal arc welding with covered electrodes.....	55
11.2.2	Tungsten inert gas.....	55
11.2.3	Metal inert/active gas and flux cored arc welding	55

11.2.4	Submerged arc welding	55
11.2.5	Plasma cutting	55
11.2.6	Plasma welding	55
11.2.7	Plasma gouging	55
11.2.8	Additional requirements	55
11.3	Mechanical switching devices used to adjust output	56
11.4	Welding circuit connections	56
11.4.1	Protection against unintentional contact	56
11.4.2	Location of coupling devices	56
11.4.3	Outlet openings	56
11.4.4	Three-phase multi-operator welding transformer	56
11.4.5	Marking	57
11.4.6	Connections for plasma cutting torches	57
11.5	Power supply to external devices connected to the welding circuit	57
11.6	Auxiliary power supply	57
11.7	Welding cables	58
12	Control circuits	58
12.1	General requirement	58
12.2	Isolation of control circuits	58
12.3	Working voltages of remote control circuits	58
13	Hazard reducing device	59
13.1	General requirements	59
13.2	Types of hazard reducing devices	59
13.2.1	Voltage reducing device	59
13.2.2	Switching device for AC to DC	59
13.3	Requirements for hazard reducing devices	59
13.3.1	Disabling the hazard reducing device	59
13.3.2	Interference with operation of a hazard reducing device	60
13.3.3	Indication of satisfactory operation	60
13.3.4	Fail to a safe condition	60
14	Mechanical provisions	60
14.1	General requirements	60
14.2	Enclosure	60
14.2.1	Enclosure materials	60
14.2.2	Enclosure strength	61
14.3	Handling means	61
14.3.1	Mechanised handling	61
14.3.2	Manual handling	61
14.4	Drop withstand	62
14.5	Tilting stability	62
15	Rating plate	62
15.1	General requirements	62
15.2	Description	63
15.3	Contents	64
15.4	Tolerances	67
15.5	Direction of rotation	67
16	Adjustment of the output	67
16.1	Type of adjustment	67

16.2	Marking of the adjusting device	68
16.3	Indication of current or voltage control	68
17	Instructions and markings	69
17.1	Instructions	69
17.2	Markings	70
Annex A (informative)	Nominal voltages of supply networks	71
Annex B (informative)	Example of a combined dielectric test	72
Annex C (normative)	Unbalanced load in case of AC tungsten inert-gas welding power sources	73
C.1	General	73
C.2	Unbalanced load	73
C.3	Example for an unbalanced load	74
Annex D (informative)	Extrapolation of temperature to time of shutdown	75
Annex E (normative)	Construction of supply circuit terminals	76
E.1	Size of terminals	76
E.2	Connections at the terminals	76
E.3	Construction of the terminals	77
E.4	Fixing of the terminals	77
Annex F (informative)	Cross-reference to non-SI units	78
Annex G (informative)	Suitability of supply network for the measurement of the true r.m.s. value of the supply current	79
Annex H (informative)	Plotting of static characteristics	80
H.1	General	80
H.2	Method	80
H.3	Analysis of the results	80
Annex I (normative)	Test methods for a 10 Nm impact	81
I.1	Pendulum impact hammer	81
I.2	Free fall spherical steel weight	82
Annex J (normative)	Thickness of sheet metal for enclosures	83
Annex K (informative)	Examples of rating plates	86
Annex L (informative)	Graphical symbols for arc welding equipment	93
L.1	General	93
L.2	Use of symbols	93
L.2.1	General	93
L.2.2	Selection of symbols	93
L.2.3	Size of symbols	93
L.2.4	Use of colour	93
L.3	Symbols	94
L.3.1	General	94
L.3.2	Letter symbols	94
L.3.3	Graphical symbols	95
L.4	Examples of combinations of symbols	115
L.5	Examples of control panels	117
Annex M (informative)	Efficiency and idle state power measurement	120
M.1	Measuring efficiency	120
M.2	Measuring idle state power	120
Annex N (normative)	Touch current measurement in fault condition	122

Annex O (normative) Battery-powered welding power sources	127
O.1 General.....	127
O.4 Environmental conditions	128
O.5 Tests	128
O.5.1 Test conditions	128
O.5.3 Conformity of components	129
O.6 Protection against electric shock.....	130
O.6.1 Insulation.....	130
O.6.2 Protection against electric shock in normal service	131
O.7 Thermal requirements	132
O.7.1 Heating test	132
O.7.2 Temperature measurement.....	133
O.7.4 Loading test.....	133
O.7.201 Normal charging of lithium-ion systems.....	133
O.8 Thermal protection	134
O.8.1 General requirements	134
O.8.4 Operating capacity.....	134
O.9 Abnormal operation.....	134
O.9.1 General requirements	134
O.9.2 Stalled fan test	135
O.9.3 Short circuit test	135
O.9.4 Overload test	135
O.9.201 Welding power source – abnormal conditions	135
O.9.202 Welding circuit components – abnormal conditions	136
O.9.203 Lithium-ion charging systems – abnormal conditions	136
O.9.204 Lithium-ion battery short circuit.....	137
O.9.205 Batteries other than lithium-ion – overcharging	138
O.9.206 Battery pack disconnection	138
O.9.207 General purpose batteries	138
O.10 Connection to the supply network	138
O.10.5 Protective circuit.....	139
O.10.8 Supply circuit on/off switching device.....	139
O.14 Mechanical provisions.....	140
O.14.1 General requirements	140
O.14.2 Enclosure	140
O.14.4 Drop withstand	140
O.15 Rating plate	141
O.15.3 Contents.....	141
O.17 Instructions and markings	143
O.17.1 Instructions.....	143
O.17.2 Markings.....	144
Annex P (normative) Conformity of components	145
Bibliography.....	147
Figure 1 – Example of insulation configuration for Class I equipment.....	27
Figure 2 – Measurement of welding circuit touch current.....	35
Figure 3 – Measurement of touch current in normal condition	35
Figure 4 – Measurement of r.m.s. values	54
Figure 5 – Measurement of peak values.....	54

Figure 6 – Principle of the rating plate	63
Figure B.1 – Combined high-voltage transformers	72
Figure C.1 – Voltage and current during AC tungsten inert-gas welding	73
Figure C.2 – Unbalanced voltage during AC tungsten inert-gas welding	74
Figure C.3 – AC welding power source with unbalanced load	74
Figure I.1 – Test set-up	81
Figure K.1 – Single-phase transformer	86
Figure K.2 – Three-phase rotating frequency converter	87
Figure K.3 – Subdivided rating plate: single-/three-phase transformer rectifier	88
Figure K.4 – Engine-generator-rectifier	89
Figure K.5 – Single-/three-phase inverter type	90
Figure K.6 – Battery powered welding power source with integral battery	91
Figure K.7 – Battery powered welding power source with detachable / separable battery	92
Figure L.1 – Input voltage power switch	118
Figure L.2 – Arc force control potentiometer	118
Figure L.3 – Remote receptacle and selector switches	118
Figure L.4 – Terminals with inductance selector for MIG/MAG welding	118
Figure L.5 – Process switch (MMA, TIG, MIG)	119
Figure L.6 – Selector switch on AC/DC equipment	119
Figure L.7 – Panel indicator lights (overheat, fault, arc striking, output voltage)	119
Figure L.8 – Setting pulsing parameters using digital display	119
Figure N.1 – Measuring network for weighted touch current	122
Figure N.2 – Diagram for touch current measurement on fault condition at operating temperature for single-phase connection of appliances other than those of class II	124
Figure N.3 – Diagram for touch current measurement on fault condition for three-phase four-wire system connection of appliances other than those of class II	126
Figure O.1 – Marking of battery voltage class B electric components	144
 Table 1 – Minimum clearances for overvoltage category III	 28
Table 2 – Minimum creepage distances	30
Table 3 – Insulation resistance	31
Table 4 – Dielectric test voltages	32
Table 5 – Minimum distance through insulation	36
Table 6 – Temperature limits for windings, commutators and slip-rings	41
Table 7 – Temperature limits for external surfaces	42
Table 8 – Cross-section of the output short-circuit conductor	45
Table 9 – Current and time requirements for protective circuits	48
Table 10 – Minimum cross-sectional area of the external protective copper conductor	48
Table 11 – Verification of continuity of the protective circuit	49
Table 12 – Pull	50
Table 13 – Summary of allowable rated no-load voltages	53
Table 14 – Hazard reducing device requirements	59

Table E.1 – Range of conductor dimensions to be accepted by the supply circuit terminals.....	76
Table F.1 – Cross-reference for mm ² to American wire gauge (AWG).....	78
Table I.1 – Angle of rotation θ to obtain 10 Nm impact	81
Table I.2 – Mass of the free fall weight and height of the free fall	82
Table J.1 – Minimum thickness of sheet metal for steel enclosures	84
Table J.2 – Minimum thickness of sheet metal for enclosures of aluminium, brass or copper	85
Table L.1 – Letters used as symbols	94

INTERNATIONAL ELECTROTECHNICAL COMMISSION

ARC WELDING EQUIPMENT –**Part 1: Welding power sources****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60974-1 has been prepared by IEC technical committee 26: Electric welding.

This fifth edition cancels and replaces the fourth edition published in 2012 and constitutes a technical revision.

The significant changes with respect to the previous edition are the following:

- improvement of Figure 1 (6.1.1);
- modification of Table 3 (6.1.4);
- description of energy efficiency measurements in Annex M;
- inclusion of battery supplied welding power sources in the scope. Requirements therefore are described in Annex O.

The text of this standard is based on the following documents:

FDIS	Report on voting
26/610/FDIS	26/613/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

In this standard, the following print types are used:

- conformity statements: in *italic* type.
- terms defined in Clause 3: in **bold** type.

A list of all parts of the IEC 60974 series can be found, under the general title *Arc welding equipment*, on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

ARC WELDING EQUIPMENT –

Part 1: Welding power sources

1 Scope

This part of IEC 60974 is applicable to power sources for arc welding and allied processes designed for **industrial and professional use**, and supplied by a voltage not exceeding 1 000 V, battery supplied or driven by mechanical means.

This document specifies safety and performance requirements of welding power sources and **plasma cutting systems**.

This document is not applicable to limited duty arc welding and cutting power sources which are designed mainly for use by laymen and designed in accordance with IEC 60974-6.

This document includes requirements for battery-powered welding power sources and battery packs, which are given in Annex O.

This document is not applicable to testing of power sources during periodic maintenance or after repair.

NOTE 1 Typical allied processes are electric arc cutting and arc spraying.

NOTE 2 AC systems having a nominal voltage between 100 V and 1 000 V are given in Table 1 of IEC 60038:2009.

NOTE 3 This document does not include electromagnetic compatibility (EMC) requirements.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-151, *International Electrotechnical Vocabulary – Part 151: Electrical and magnetic devices* (available at: <http://www.electropedia.org>)

IEC 60050-851, *International Electrotechnical Vocabulary – Part 851: Electric welding* (available at: <http://www.electropedia.org>)

IEC 60245-6, *Rubber insulated cables – Rated voltages up to and including 450/750 V – Part 6: Arc welding electrode cables*

IEC 60417, *Graphical symbols for use on equipment* (available at: <http://www.graphical-symbols.info/equipment>)

IEC 60445, *Basic and safety principles for man-machine interface, marking and identification – Identification of equipment terminals, conductor terminations and conductors*

IEC 60529, *Degrees of protection provided by enclosures (IP Code)*

IEC 60664-1:2007, *Insulation coordination for equipment within low-voltage systems – Part 1: Principles, requirements and tests*

IEC 60664-3, *Insulation coordination for equipment within low-voltage systems – Part 3: Use of coating, potting or moulding for protection against pollution*

IEC 60695-11-10, *Fire hazard testing – Part 11-10: Test flames – 50 W horizontal and vertical flame test methods*

IEC 60974-7, *Arc welding equipment – Part 7: Torches*

IEC 61140, *Protection against electric shock – Common aspects for installation and equipment*

IEC 61558-2-4, *Safety of transformers, reactors, power supply units and similar products for supply voltages up to 1 100 V – Part 2-4: Particular requirements and tests for isolating transformers and power supply units incorporating isolating transformers*

IEC 61558-2-6, *Safety of transformers, reactors, power supply units and similar products for supply voltages up to 1 100 V – Part 2-6: Particular requirements and tests for safety isolating transformers and power supply units incorporating safety isolating transformers*

IEC 62133-1:— 1, *Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications – Part 1: Nickel systems*

IEC 62133-2:— 2, *Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications – Part 2: Lithium systems*

ISO 7010:2011, *Graphical symbols – Safety colours and safety signs – Registered safety signs*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60050-151, IEC 60050-851, IEC 60664-1 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1 General terms

3.1.1

welding power source

arc welding power source

equipment for supplying current and voltage and having the required characteristics suitable for arc welding and allied processes

Note 1 to entry: A **welding power source** can also supply services to other equipment and auxiliaries for example auxiliary power, cooling liquid, consumable arc welding electrode and gas to shield the arc and the welding area.

Note 2 to entry: This entry revises IEC 851-13-01, which will be updated.

¹ Under preparation. Stage at the time of publication: IEC CDV 62133-1:2015.

² Under preparation. Stage at the time of publication: IEC CDV 62133-2:2015.

3.1.2**industrial and professional use**

use intended only for **experts** or **instructed persons**

[SOURCE: IEC 60050-851:2008, 851-11-12]

3.1.3**expert****competent person****skilled person**

person who can judge the work assigned and recognize possible hazards on the basis of professional training, knowledge, experience and knowledge of the relevant equipment

Note 1 to entry: Several years of practice in the relevant technical field can be taken into consideration in assessment of professional training.

[SOURCE: IEC 60050-851:2008, 851-11-10]

3.1.4**instructed person**

person informed about the tasks assigned and about the possible hazards involved in neglectful behaviour

Note 1 to entry: If necessary, the person has undergone some training.

[SOURCE: IEC 60050-851:2008, 851-11-13]

3.1.5**type test**

test of one or more devices made to a given design to check if these devices comply with the requirements of the standard concerned

[SOURCE: IEC 60050-851:2008, 851-12-05]

3.1.6**routine test**

test made on each individual device during or after manufacture to check if it complies with the requirements of the standard concerned or the criteria specified

[SOURCE: IEC 60050-851:2008, 851-12-06]

3.1.7**visual inspection**

inspection by eye to verify that there are no apparent discrepancies with respect to provisions of the standard concerned

[SOURCE: IEC 60050-851:2008, 851-11-11]

3.1.8**drooping characteristic**

external **static characteristic** of a welding power source which, in its normal welding range, is such that the negative slope is greater than or equal to 7 V/100 A

Note 1 to entry: This entry revises IEC 851-12-34, which will be updated.

3.1.9

flat characteristic

external **static characteristic** of a welding power source which, in its normal welding range, is such that, as the current increases, the voltage either decreases by less than 7 V/100 A or increases by less than 10 V/100 A

[SOURCE: IEC 60050-851:2008, 851-12-35]

3.1.10

static characteristic

relationship between the voltage and the current at the output terminals of a welding power source when connected to a **conventional load**

Note 1 to entry: This entry revises IEV 851-12-32, which will be updated.

3.1.11

welding circuit

conductive material through which the **welding current** is intended to flow

Note 1 to entry: In arc welding, the arc is a part of the **welding circuit**.

Note 2 to entry: In certain arc welding processes, the welding arc can be established between two electrodes. In such a case, the workpiece is not necessarily a part of the **welding circuit**.

[SOURCE: IEC 60050-851:2008, 851-14-10]

3.1.12

control circuit

internal or external circuit for the operational control of the equipment or for protection of the power circuits, or both

EXAMPLE 1 **Control circuits** intended for interface between the welding power source and external equipment designed by the manufacturer.

EXAMPLE 2 **Control circuits** intended for interface between the welding power source and other types of ancillary equipment.

Note 1 to entry: This entry revises IEV 851-14-11, which will be updated.

3.1.13

welding current

current delivered by a welding power source during welding

3.1.14

load voltage

voltage between the output terminals when the welding power source is delivering **welding current**

[SOURCE: IEC 60050-851:2008, 851-12-04]

3.1.15

no-load voltage

voltage, exclusive of any arc striking or arc stabilizing voltage, between the accessible output terminals of a welding power source when the **welding circuit** is open but energized

Note 1 to entry: This entry revises IEV 851-12-24, which will be updated.

3.1.16

conventional value

standardized value that is used as a measure of a parameter for the purposes of comparison, calibration, testing, etc.

Note 1 to entry: **Conventional values** do not necessarily apply during the actual welding process.

[SOURCE: IEC 60050-851:2008, 851-12-07]

3.1.17

conventional welding condition

condition of the welding power source in the energized and thermally stabilized state defined by a **conventional welding current** driven by the corresponding **conventional load voltage** through a **conventional load** at **rated supply voltage** and frequency or speed of rotation

[SOURCE: IEC 60050-851:2008, 851-12-26]

3.1.18

conventional load

practically non-inductive constant resistive load having a power factor not less than 0,99

[SOURCE: IEC 60050-851:2008, 851-12-27]

3.1.19

conventional welding current

I_2

current delivered by a welding power source to a **conventional load** at the corresponding **conventional load voltage**

Note 1 to entry: The values of I_2 are given as r.m.s. values for AC and arithmetic mean values for DC.

3.1.20

conventional load voltage

U_2

load voltage of a welding power source having a specified linear relationship to the **conventional welding current**

Note 1 to entry: The values for U_2 are given as r.m.s. values for AC and arithmetic mean values for DC.

Note 2 to entry: The specified linear relationship varies in accordance with the process (see 11.2).

Note 3 to entry: This entry revises IEC 851-12-30, which will be updated.

3.1.21

rated value

assigned value, generally by the manufacturer, for a specified operating condition of a component, device or equipment

3.1.22

rating plate

name plate

plate, permanently affixed on an electric device, which indelibly states the rating and other information as required by the relevant standard

[SOURCE: IEC 60050-151:2001, 151-16-12]

3.1.23

rated output

rated values of the output of the equipment

Note 1 to entry: This entry revises IEC 851-12-17, which will be updated.

3.1.24**rated maximum welding current** $I_{2\max}$

maximum value of the **conventional welding current** that can be obtained at the **conventional welding condition** from a welding power source at its maximum setting

[SOURCE: IEC 60050-851:2008, 851-12-14]

3.1.25**rated minimum welding current** $I_{2\min}$

minimum value of the **conventional welding current** that can be obtained at the **conventional welding condition** from a welding power source at its minimum setting

[SOURCE: IEC 60050-851:2008, 851-12-15]

3.1.26**rated no-load voltage** U_0

no-load voltage at **rated supply voltage** and frequency or **rated no-load speed** of rotation

Note 1 to entry: If a welding power source is fitted with a **hazard reducing device**, this is the voltage measured before the **hazard reducing device** has performed its function.

3.1.27**rated reduced no-load voltage** U_r

no-load voltage of a welding power source, fitted with a voltage reducing device immediately after the device acts to effect a reduction in the voltage

3.1.28**rated switched no-load voltage** U_s

DC no-load voltage of a welding power source, fitted with an AC to DC switching device

3.1.29**rated supply voltage** U_1

r.m.s. value of supply voltage for which the equipment is designed

3.1.30**rated supply current** I_1

r.m.s. value of supply current to the welding power source at a rated **conventional welding condition**

3.1.31**rated no-load supply current** I_0

r.m.s. value of supply current to the welding power source at **rated no-load voltage**

3.1.32**rated maximum supply current** $I_{1\max}$

maximum value of the **rated supply current**

Note 1 to entry: This entry revises IEV 851-12-13, which will be updated.

3.1.33**maximum effective supply current** $I_{1\text{eff}}$

maximum value of the effective supply current, calculated from the **rated supply current** (I_1), the corresponding **duty cycle** (X) and the supply current at no-load (I_0) by the formula:

$$I_{1\text{eff}} = \sqrt{I_1^2 \times X + I_0^2 \times (1 - X)}$$

Note 1 to entry: The maximum effective supply current is not always at the duty cycle corresponding to the rated maximum supply current.

[SOURCE: IEC 60050-851:2008, 851-12-39]

3.1.34**rated load speed** n

speed of rotation of an engine-driven welding power source when operating at **rated maximum welding current**

Note 1 to entry: This entry revises IEC 851-12-12, which will be updated.

3.1.35**rated no-load speed** n_0

speed of rotation of an engine-driven welding power source when the external **welding circuit** is open

Note 1 to entry: If an engine is fitted with a device to reduce the speed when not welding, n_0 will be measured before the speed reduction device has operated.

Note 2 to entry: This entry revises IEC 851-12-16, which will be updated.

3.1.36**rated idle speed** n_i

reduced no-load speed of an engine-driven welding power source

[SOURCE: IEC 60050-851:2008, 851-12-18]

3.1.37**duty cycle** X

SUPERSEDED: duty factor

ratio, for a given time interval, of the uninterrupted on-load duration to the total time

Note 1 to entry: This ratio, lying between 0 and 1, is expressed as a percentage.

Note 2 to entry: For the purposes of this document, the time period of one complete cycle is 10 min. For example, in the case of a 60 % **duty cycle**, a continuous 6 min load period is followed by a no-load period of 4 min.

3.1.38**clearance**

shortest distance in air between two conductive parts

[SOURCE: IEC 60664-1:2007, 3.2]

3.1.39**creepage distance**

shortest distance along the surface of a solid insulating material between two conductive parts

[SOURCE: IEC 60664-1:2007, 3.3]

3.1.40

pollution degree

numeral characterizing the expected pollution of the **micro-environment**

Note 1 to entry: For the purpose of evaluating **creepage distances** and **clearances**, the following four **pollution degrees** in the **micro-environment** are established in 4.6.2 of IEC 60664-1:2007.

- a) **Pollution degree 1:** No pollution or only dry, non-conductive pollution occurs. The pollution has no influence.
- b) **Pollution degree 2:** Only non-conductive pollution occurs except that occasionally a temporary conductivity caused by condensation is to be expected.
- c) **Pollution degree 3:** Conductive pollution occurs, or dry, non-conductive pollution occurs which becomes conductive due to condensation which is to be expected.
- d) **Pollution degree 4:** The pollution generates persistent conductivity caused by conductive dust or by rain or snow.

[SOURCE: IEC 60664-1:2007, 3.13, modified – Modification of the Note to entry.]

3.1.41

micro-environment

immediate environment of the insulation which particularly influences the dimensioning of the **creepage distances**

[SOURCE: IEC 60664-1:2007, 3.12.2]

3.1.42

material group

materials separated into four groups by their comparative tracking index (CTI) values in accordance with IEC 60664-1

Note 1 to entry: The following four groups are defined in IEC 60664-1:

- Material group I $600 \leq \text{CTI}$
- Material group II $400 \leq \text{CTI} < 600$
- Material group IIIa $175 \leq \text{CTI} < 400$
- Material group IIIb $100 \leq \text{CTI} < 175$

3.1.43

temperature rise

difference between the temperature of a part of the equipment and that of the ambient air

3.1.44

thermal equilibrium

state reached when the observed **temperature rise** of any part of the equipment does not exceed 2 K/h

3.1.45

thermal protection

system intended to ensure the protection of a part, and hence the whole, of the equipment against excessive temperatures resulting from certain conditions of thermal overload

Note 1 to entry: It is capable of being reset (either manually or automatically) when the temperature falls to the reset value.

Note 2 to entry: This entry revises IEC 851-15-03, which will be updated.

3.1.46**environment with increased risk of electric shock**

environment where the probability of electric shock by arc welding is increased in relation to normal arc welding conditions

Note 1 to entry: Such environments are found, for example:

- a) in locations in which freedom of movement is restricted, so that the operator is forced to perform the welding in a cramped (for example kneeling, sitting, lying) position with physical contact with conductive parts;
- b) in locations which are fully or partially limited by conductive elements, and in which there is a high probability of unavoidable or accidental contact by the operator;
- c) in wet or damp or hot locations where humidity or perspiration considerably reduces the skin resistance of the human body and the insulating properties of accessories.

3.1.47**hazard reducing device**

device designed to reduce the hazard of electric shock that may originate from the **no-load voltage**

[SOURCE: IEC 60050-851:2008, 851-15-01]

3.1.48**class I equipment**

equipment with **basic insulation** as provision for basic protection and protective bonding as provision for fault protection

[SOURCE: IEC 60050-851:2008, 851-15-10]

3.1.49**class II equipment**

equipment with **basic insulation** as provision for basic protection, and **supplementary insulation** as provision for fault protection, or in which basic and fault protection are provided by **reinforced insulation**

[SOURCE: IEC 60050-851:2008, 851-15-11]

3.1.50**basic insulation**

insulation of hazardous-live-parts which provides basic protection

[SOURCE: IEC 60050-851:2008, 851-15-04]

3.1.51**supplementary insulation**

independent insulation applied in addition to **basic insulation** for fault protection

[SOURCE: IEC 60050-851:2008, 851-15-05]

3.1.52**double insulation**

insulation comprising both **basic insulation** and **supplementary insulation**

[SOURCE: IEC 60050-851:2008, 851-15-06]

3.1.53**reinforced insulation**

insulation of hazardous-live-parts which provides a degree of protection against electric shock equivalent to **double insulation**

Note 1 to entry: **Reinforced insulation** may comprise several layers which cannot be tested singly as **basic insulation** or **supplementary insulation**.

[SOURCE: IEC 60050-851:2008, 851-15-07]

3.1.54

plasma cutting system

combination of power source, torch, and associated safety devices for plasma cutting/gouging

[SOURCE: IEC 60050-851:2008, 851-13-03]

3.1.55

plasma cutting power source

equipment for supplying current and voltage and having the required characteristics suitable for plasma cutting/gouging and which may supply gas and cooling liquid

Note 1 to entry: A **plasma cutting power source** can also supply services to other equipment and auxiliaries, for example auxiliary power, cooling liquid and gas.

[SOURCE: IEC 60050-851:2008, 851-13-04]

3.1.56

safety extra-low voltage

SELV

voltage which does not exceed 50 V AC or 120 V ripple free DC between conductors, or between any conductor and earth, in a circuit which is isolated from the supply mains by such means as a safety isolating transformer

Note 1 to entry: Maximum voltage lower than 50 V AC or 120 V ripple free DC is specified in particular requirements, especially when direct contact with live parts is allowed.

Note 2 to entry: The voltage limit is not exceeded at any load between full load and no-load when the source is a safety isolating transformer.

Note 3 to entry: "Ripple-free" is conventionally an r.m.s. ripple voltage not more than 10 % of the DC component; the maximum peak value does not exceed 140 V for a nominal 120 V ripple-free DC system and 70 V for a nominal 60 V ripple-free DC system.

Note 4 to entry: This entry revises IEC 851-15-08, which will be updated.

3.1.57

supply circuit

input circuit

conductive material in the equipment through which the supply current is intended to flow

3.1.58

working voltage

highest r.m.s. value of the AC or DC voltage across any particular insulation which can occur when the equipment is supplied at rated voltage

Note 1 to entry: Transients are disregarded.

Note 2 to entry: Both open circuit conditions and normal operating conditions are taken into account.

[SOURCE: IEC 60050-851:2008, 851-12-31]

3.1.59

touch current

electric current passing through a human body or through an animal body when it touches one or more accessible parts of an installation or of equipment

Note 1 to entry: **Touch current** is measured by using a measuring network that simulates the impedance of the human body.

[SOURCE: IEC 60050-195:1998/AMD1:2001, 195-05-21, modified – Addition of a note to entry.]

3.1.60

remote control

device or circuit external to the equipment used for monitoring or operational control

3.1.61

single-fault condition

condition in which one means for protection against hazard is defective

Note 1 to entry: If a **single-fault condition** results unavoidably in another **single-fault condition**, the two failures are considered as one **single-fault condition**.

3.1.62

fixed installation

particular combination of several types of apparatus and, where applicable, other devices, which are assembled, installed and intended to be used permanently at a predefined location

3.1.63

protective circuit

circuit intended to be bonded to protective earth to protect against electric shock

3.1.64

class of insulation

standard classification applied to an insulating material for use in electrical apparatus and machines and specifying the nature of the material and a recommended limiting temperature

[SOURCE: IEC 60050-811:1991, 811-13-33]

3.1.65

functional insulation

insulation between conductive parts, necessary for the proper functioning of the equipment

[SOURCE: IEC 60050-195:1998, 195-02-41]

3.1.66

idle state

operating state in which the power is switched on and the **welding circuit** is not energized

Note 1 to entry: For some types of equipment there is no **idle state**, but a welding state preceding arc striking.

Note 2 to entry: For a power source in a mechanised system, the configuration to achieve **idle state** is defined by the manufacturer.

Note 3 to entry: An **idle state** can include a low energy state in which a welding process cannot be started without automatic or manual reactivation.

3.2 Terms related to battery systems

3.2.1

battery

assembly of one or more **cells** intended to provide electrical current to the welding power source

3.2.2**integral battery**

battery which is contained within the battery-powered welding power source and is not removed from the welding power source for charging purposes

Note 1 to entry: A **battery** that is to be removed from the battery-powered welding power source for disposal or recycling purposes only is considered to be an **integral battery**.

3.2.3**detachable battery pack**

battery which is contained in a separate enclosure from the battery-powered welding power source and is intended to be removed from the welding power source for charging purposes

3.2.4**separable battery pack**

battery which is contained in a separate enclosure from the battery-powered welding power source and is connected to the battery-powered welding power source by a cable

3.2.5**battery system**

combination of a **battery**, the **charging system**, the welding power source and the interfaces between them as existing during operation of the welding power source or during charging

3.2.6**C₅ rate**

current, in amperes, at which a **cell** or **battery** can be discharged for 5 h to the voltage cut-off point specified by the **cell** manufacturer

3.2.7**cell**

basic functional unit consisting of an assembly of electrodes, electrolyte, container, terminals, and usually separators, that is a source of electric energy obtained by direct conversion of chemical energy

[SOURCE: IEC 60050-482:2004, 482-01-01]

3.2.8**charger**

part or all of the **charging system** contained in a separate enclosure

Note 1 to entry: As a minimum, the **charger** includes some of the power conversion circuitry. Not all **charging systems** include a separate **charger** as in the case where a welding power source may be charged utilizing a mains supply cable or may incorporate a plug for attachment to a mains receptacle.

3.2.9**charging system**

combination of circuitry intended to charge, balance and/or maintain the state of charge of the **battery**

3.2.10**fully charged cell****fully charged battery**

cell or **battery** charged to the maximum state of charge permitted by the **battery charging system** intended for use with the welding power source

3.2.11**fully discharged cell****fully discharged battery**

battery or **cell** discharged until one of the following conditions occurs: discharge terminates due to protective circuitry or the **battery** (or **cell**) reaches a total voltage with an average voltage per **cell** equal to the end-of-discharge voltage for the **cell** chemistry being used unless a different end-of-discharge voltage is specified by the manufacturer of **battery/cell**

Note 1 to entry: The end-of-discharge voltages for common **cell** chemistries are provided in O.5.210.

3.2.12**general purpose batteries****general purpose cells**

batteries and **cells** available from a variety of manufacturers, through a variety of outlets intended for a variety of different manufacturers' products

Note 1 to entry: 12 V automotive **batteries** and AA, C and D alkaline **cells** are examples of **general purpose**.

3.2.13**maximum charging current**

highest current that a **cell** is permitted to pass during charging for a specified range of temperatures as specified by the **cell** manufacturer and evaluated in accordance with IEC 62133-1:— or IEC 62133-2:—

3.2.14**specified operating region**

range of permissible operation of **cells**, expressed by **cell** parameter limits

3.2.14.1**specified operating region for charging**

conditions for voltage and current during charging in which the **cell** is permitted to operate as specified by the **cell** manufacturer and evaluated in accordance with IEC 62133-1:— or IEC 62133-2:—

3.2.15**upper limit charging voltage**

highest voltage that a **cell** is permitted to attain during normal charging for a specified range of temperatures as specified by the **cell** manufacturer and evaluated in accordance with IEC 62133-1:— or IEC 62133-2:—

3.2.16**venting**

condition that occurs, when a **cell** releases excessive internal pressure intended by design to preclude **explosion**

3.2.17**electronic component**

part in which conduction is achieved principally by electrons moving through a vacuum, gas or semiconductor, with the exclusion of neon indicators

Note 1 to entry: Examples of **electronic components** are diodes, transistors, triacs and monolithic integrated circuits. Resistors, capacitors and inductors are not considered **electronic components**.

3.2.18**basic protection**

protection against electric shock under fault-free conditions

[SOURCE: IEC 60050-195:1998, 195-06-01]

3.2.19**battery voltage class A**

classification of an electric component or circuit with a maximum battery **working voltage** of 60 V DC

3.2.20**battery voltage class B**

classification of an electric component or circuit with a maximum battery **working voltage** between 60 V DC and 1 500 V DC

3.2.21**charring**

blackening of the cotton caused by combustion

Note 1 to entry: Discolouration of the cotton caused by smoke is acceptable.

3.2.22**consecutive operating cycle**

immediate on cycle after the thermal control device resets

3.2.23**explosion**

<of an explosive atmosphere> sudden increase of pressure and temperature, due to oxidation or other exothermic reaction

[SOURCE: IEC 60050-426:2008, 426-02-13]

4 Environmental conditions

Welding power sources shall be capable of delivering **rated outputs** at rated **duty cycles** when the following environmental conditions prevail:

- a) range of ambient air temperature:
during operation: $-10\text{ }^{\circ}\text{C}$ to $+40\text{ }^{\circ}\text{C}$;
- b) relative humidity of the air:
up to 50 % at $40\text{ }^{\circ}\text{C}$;
up to 90 % at $20\text{ }^{\circ}\text{C}$;
- c) ambient air, free from abnormal amounts of dust, acids, corrosive gases or substances, etc. other than those generated by the welding process;
- d) altitude above sea level up to 1 000 m;
- e) base of the welding power source inclined up to 10° .

Welding power sources shall withstand storage and transport at an ambient air temperature of $-20\text{ }^{\circ}\text{C}$ to $+55\text{ }^{\circ}\text{C}$ without any damage to function and performance.

NOTE Different environmental conditions can be agreed upon between the manufacturer and the purchaser and the resulting welding power source is marked accordingly (see 15.1). Examples of these conditions are: high humidity, unusually corrosive fumes, steam, excessive oil vapour, abnormal vibration or shock, excessive dust, severe weather conditions, unusual coastal or shipboard conditions, vermin infestation and atmospheres conducive to the growth of mould.

5 Tests

5.1 Test conditions

Tests shall be carried out on new, dry and completely assembled welding power sources.

The heating test defined in 7.1 and the **thermal protection** test defined in 8.5 shall be carried out at ambient temperature of $40\text{ }^{\circ}\text{C}$, see to lerances in 7.1.2 e), with the exception of engine-driven power sources and **fixed installation** equipment, which shall be tested in accordance with the manufacturer's specification.

Other tests shall be carried out at an ambient air temperature given in Clause 4 a).

Liquid-cooled welding power sources shall be tested with liquid conditions as specified by the manufacturer.

Unless otherwise specified, the equipment shall be supplied by a **rated supply voltage** with a tolerance of $\pm 5\text{ }%$.

5.2 Measuring instruments

The accuracy of measuring instruments shall be:

- a) electrical measuring instruments: class I ($\pm 1\text{ }%$ of full-scale reading), except for the measurement of insulation resistance and dielectric strength where the accuracy of the instruments is not specified, but shall be taken into account for the measurement;
- b) thermometer: $\pm 2\text{ K}$;
- c) tachometer: $\pm 1\text{ }%$ of full-scale reading.

5.3 Conformity of components

 Refer to Annex P for conformity of components. 

5.4 Type tests

Unless otherwise specified, the tests in this document are **type tests**.

The welding power source shall be tested with any ancillary equipment fitted that could affect the test results.

All **type tests** shall be carried out on the same welding power source except where it is specified that a test may be carried out on another welding power source.

As a condition of conformity, the **type tests** given below shall be carried out in the following sequence with no drying time between f), g) and h):

- a) general **visual inspection**, see 3.1.7;
- b) insulation resistance, see 6.1.4 (preliminary check);
- c) enclosure, see 14.2;
- d) handling means, see 14.3;
- e) drop withstand, see 14.4;
- f) protection provided by the enclosure, see 6.2.1;
- g) insulation resistance, see 6.1.4;
- h) dielectric strength, see 6.1.5;
- i) general **visual inspection**, see 3.1.7.

The other tests included in this document and not listed here shall be carried out, but may be completed in any convenient sequence.

5.5 Routine tests

All **routine tests** shall be carried out on each welding power source. The following sequence is recommended:

- a) **visual inspection** in accordance with manufacturer's specification;
- b) continuity of the **protective circuit**, see 10.5.1;
- c) dielectric strength, see 6.1.5;
- d) **no-load voltage**:
 - 1) **rated no-load voltage**, see 11.1 by measurement only; or
 - 2) if applicable, **rated reduced no-load voltage**, see 13.2; or
 - 3) if applicable, **rated switched no-load voltage**, see 13.3;
- e) test to ensure rated minimum and maximum output values in accordance with 15.4 b) and 15.4 c). The manufacturer may select **conventional load**, short circuit load or other test conditions.

NOTE 1 In short circuit and other test conditions, the output values can differ from **conventional load** values.

NOTE 2 If justified by the design, measured values can be compensated due to variations of the supply network.

6 Protection against electric shock

6.1 Insulation

6.1.1 General

The majority of welding power sources fall within the overvoltage category III in accordance with IEC 60664-1; mechanically powered welding power sources fall within overvoltage category II. All welding power sources shall be designed for use in environmental conditions of **pollution degree** 3 as a minimum.


Components or subassemblies with **clearances** or **creepage distances** corresponding to **pollution degree** 2 are permitted if the **micro-environment** of the component or subassembly is improved (by means such as filtering, coating, potting, moulding) so that only non-conductive pollution or occasional temporary conductivity caused by condensation occurs.

Components or subassemblies with **clearances** or **creepage distances** corresponding to **pollution degree** 1 are permitted, if they are completely coated, potted or moulded in accordance with IEC 60664-3.

See Table 2 for printed wiring material **creepage distances**.

Class I equipment intended to be connected to an earthed three-phase three-wire system shall be designed with insulation based on line to line voltage values. **Class I equipment** designed with insulation based on line to neutral voltage values shall be provided with a caution that such equipment shall only be used on a supply network that is either a three-phase, four-wire system with an earthed neutral or a single-phase, three-wire, system with an earthed neutral.

The application of insulation in many configurations is illustrated in Figure 1, but other configurations and solutions are possible. If a particular configuration is not represented in Figure 1, the required insulation shall be determined by considering the effect of a single fault.

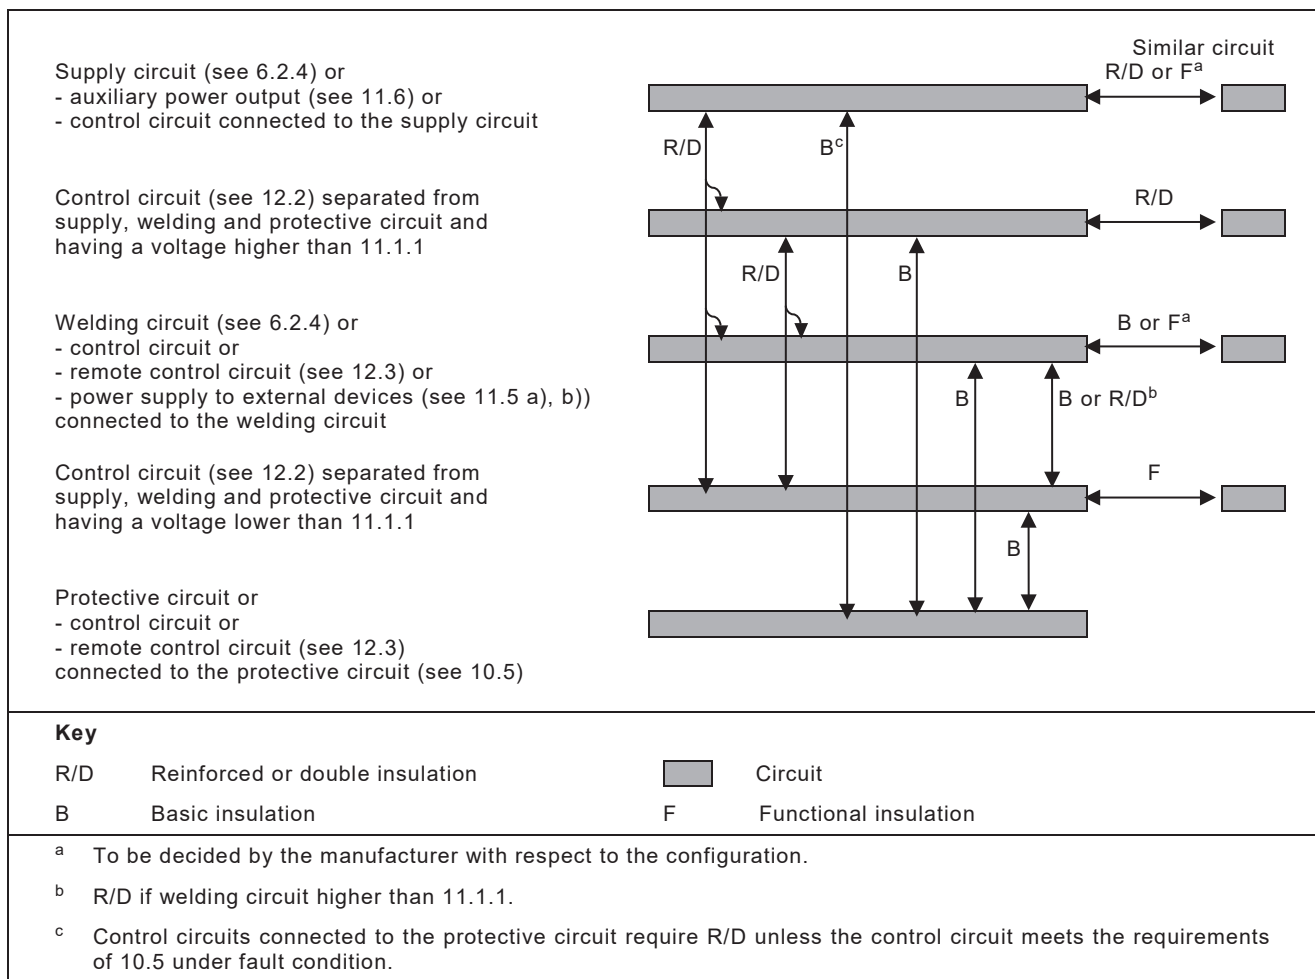

IEC

Figure 1 – Example of insulation configuration for Class I equipment

6.1.2 Clearances

For basic or **supplementary insulation**, and **reinforced insulation**, minimum **clearances** shall be in accordance with Table 1 for overvoltage category III. For other overvoltage categories, minimum **clearances** shall be in accordance with IEC 60664-1.

Table 1 – Minimum clearances for overvoltage category III

Voltage line to neutral derived from nominal voltages AC or DC up to and including ^a V r.m.s.	Basic or supplementary insulation					Reinforced insulation				
	Rated impulse Test voltage peak V	AC test voltage V r.m.s.	Pollution degree			Rated impulse test voltage peak V	AC test voltage V r.m.s.	Pollution degree		
			2	3	4			2	3	4
			Clearance mm					Clearance mm		
50	800	566	0,2	0,8	1,6	1 500	1 061	0,5	0,8	1,6
100	1 500	1 061	0,5			2 500	1 768	1,5		
150	2 500	1 768	1,5			4 000	2 828	3		
300	4 000	2 828	3			6 000	4 243	5,5		
600	6 000	4 243	5,5			8 000	5 657	8		
1 000	8 000	5 657	8			12 000	8 485	14		
NOTE 1 Values based on Tables F.1 and F.2 of IEC 60664-1:2007.										
NOTE 2 For other pollution degrees and overvoltage categories, see IEC 60664-1.										
NOTE 3 If an autotransformer is connected to the supply circuit and provided as a part of a welding power source, the supply voltage determines the clearances.										
^a See Annex A.										

For determining **clearances** as to accessible non-conductive surfaces, such surfaces shall be considered to be covered by metal foil wherever they can be touched by the standard test finger in accordance with IEC 60529.

Clearances shall not be interpolated.

For **supply circuit** terminals, see E.2.

Clearances between parts of the welding power source (for example electronic circuits or components) which are protected by an overvoltage limiting device (for example metal oxide varistor) may be rated in accordance with overvoltage category I (see IEC 60664-1).

The values of Table 1 shall also apply to the **welding circuit** within the welding power source and to **control circuits** when separated from the **supply circuit**, for example by a transformer.

If the **control circuit** is directly connected to the **supply circuit**, the values for the supply voltage shall apply.

Conformity shall be checked by measurement in accordance with 6.2 of IEC 60664-1:2007 or where this is not possible, by submitting the welding power source to an impulse test using the voltages given in Table 1.

For the impulse test, a minimum of three impulses of each polarity at the voltage given in Table 1 are applied with an interval of at least 1 s between impulses using a generator with an output waveform of 1,2/50 µs and an output impedance of less than 500 Ω.

Alternatively, either an AC test voltage as given in Table 1 may be applied for three cycles or a ripple free DC voltage, the value of which is equal to the impulse voltage, may be applied three times for 10 ms, for each polarity.

6.1.3 Creepage distances

Creepage distances for basic or **supplementary insulation**, shall be in accordance with Table 2.

Creepage distances for **double insulation** shall be the sum of the values for basic and **supplementary insulation** which form the **double insulation**.

Creepage distances for **reinforced insulation** shall be twice those determined for **basic insulation**.

For the purpose of dimensioning **creepage distances** to accessible non-conductive surfaces, such surfaces shall be considered to be covered by metal foil wherever they can be touched by the standard test finger in accordance with IEC 60529.

Creepage distances are given for the highest rated voltage of each line of Table 2. In the case of a lower rated voltage, interpolation is allowed.

For **supply circuit** terminals, see E.2.

The values of Table 2 shall also be applicable to the **welding circuit** within the welding power source and to **control circuits** when separated from the **supply circuit** by, for example, a transformer.

A **creepage distance** cannot be less than the associated **clearance**, so the shortest possible **creepage distance** is equal to the required **clearance**.

If the **control circuit** is connected directly to the **supply circuit**, the values for the supply voltage shall apply.

Conformity shall be checked by linear measurement in accordance with 6.2 of IEC 60664-1:2007.

Table 2 – Minimum creepage distances

Working voltage	Creepage distances in millimetres								
	Basic or supplementary insulation								
	Printed wiring material		Pollution degree						
	Pollution degree								
V r.m.s	1	2	1	2			3		
	a	b	a	Material group			Material group		
	mm	mm	mm	I mm	II mm	III mm	I mm	II mm	III mm
10	0,025	0,04	0,08	0,4	0,4	0,4	1	1	1
12,5	0,025	0,04	0,09	0,42	0,42	0,42	1,05	1,05	1,05
16	0,025	0,04	0,1	0,45	0,45	0,45	1,1	1,1	1,1
20	0,025	0,04	0,11	0,48	0,48	0,48	1,2	1,2	1,2
25	0,025	0,04	0,125	0,5	0,5	0,5	1,25	1,25	1,25
32	0,025	0,04	0,14	0,53	0,53	0,53	1,3	1,3	1,3
40	0,025	0,04	0,16	0,56	0,8	1,1	1,4	1,6	1,8
50	0,025	0,04	0,18	0,6	0,85	1,2	1,5	1,7	1,9
63	0,04	0,063	0,2	0,63	0,9	1,25	1,6	1,8	2
80	0,063	0,1	0,22	0,67	0,95	1,3	1,7	1,9	2,1
100	0,1	0,16	0,25	0,71	1	1,4	1,8	2	2,2
125	0,16	0,25	0,28	0,75	1,05	1,5	1,9	2,1	2,4
160	0,25	0,4	0,32	0,8	1,1	1,6	2	2,2	2,5
200	0,4	0,63	0,42	1	1,4	2	2,5	2,8	3,2
250	0,56	1	0,56	1,25	1,8	2,5	3,2	3,6	4
320	0,75	1,6	0,75	1,6	2,2	3,2	4	4,5	5
400	1	2	1	2	2,8	4	5	5,6	6,3
500	1,3	2,5	1,3	2,5	3,6	5	6,3	7,1	8
630	1,8	3,2	1,8	3,2	4,5	6,3	8	9	10
800	2,4	4	2,4	4	5,6	8	10	11	12,5
1 000	3,2	5	3,2	5	7,1	10	12,5	14	16
1 250			4,2	6,3	9	12,5	16	18	20
1 600			5,6	8	11	16	20	22	25
2 000			7,5	10	14	20	25	28	32
2 500			10	12,5	18	25	32	36	40
3 200			12,5	16	22	32	40	45	50
4 000			16	20	28	40	50	56	63
5 000			20	25	36	50	63	71	80
6 300			25	32	45	63	80	90	100
8 000			32	40	56	80	100	110	125
10 000			40	50	71	100	125	140	160

^a Material group I, II, IIIa and IIIb.

^b Material group I, II and IIIa.

NOTE In accordance with IEC 60664-1, the dimensions for creepage distance cannot be specified where permanently conductive pollution is present (Pollution degree 4).

6.1.4 Insulation resistance

The insulation resistance shall be not less than the values given in Table 3.

Table 3 – Insulation resistance

Measurement ^a			Resistance	Insulation
Supply circuit	to	welding circuit	5,0 MΩ	Double or reinforced
Welding circuit	to	protective circuit	2,5 MΩ	Basic
Supply circuit	to	protective circuit	2,5 MΩ	Basic
Supply circuit of Class II equipment	to	accessible surfaces ^b	5,0 MΩ	Double or reinforced
^a Control circuits are tested together with the circuit to which they are galvanically connected. Accessible control circuits separated from all other circuits are tested according to the manufacturer's specification. ^b For measurement to accessible non-conductive surfaces, such surfaces shall be considered to be covered by metal foil.				

Any control or auxiliary circuit connected to the protective conductor terminal shall be considered as an exposed conductive part for the purpose of this test.

Conformity shall be checked by the stabilized measurement of the insulation resistance by application of a DC voltage of 500 V at room temperature.

During the measurement, torches shall be disconnected, solid-state electronic components and their protective devices may be short-circuited and liquid cooling units shall be tested without liquid.

6.1.5 Dielectric strength

The insulation shall withstand the following test voltages without any flashover or breakdown:

- first test of a welding power source: test voltages given in Table 4;
- repetition of the test of the same welding power source: test voltage 80 % of the values given in Table 4.

Table 4 – Dielectric test voltages

Maximum rated voltage ^a V r.m.s.	AC dielectric test voltage V r.m.s.			
	All circuits to exposed conductive parts, supply circuit to all circuits except the welding circuit		All circuits except supply circuit to welding circuit	Supply circuit to welding circuit
	Class I equipment	Class II equipment		
Up to 50	500	1 000	500	1 000
220	1 100	2 200	1 100	2 200
450	1 875	3 750	1 875	3 750
700	2 500	5 000	2 500	5 000
1 000	2 750	5 500	2 750	5 500
NOTE 1 The maximum rated voltage is valid for earthed and unearthed systems.				
NOTE 2 In this document, the dielectric strength test of control circuits is limited to any circuit that enters or exits the enclosure apart from the supply circuit and the welding circuit.				
a For intermediate values, interpolation is allowed on all supply networks (supply circuit) operating outside the range of 220 V to 450 V and on all three-phase, three-wire earthed systems without voltage exemption (see Annex A).				
b For intermediate values, interpolation is allowed on welding and control circuits.				

The AC test voltage shall be of an approximate sine wave-form with a peak value not exceeding 1,45 times the r.m.s. value, having a frequency of approximately 50 Hz or 60 Hz.

The maximum permissible setting of the tripping current shall be 100 mA. The high voltage transformer shall deliver the prescribed voltage up to the tripping current. Tripping is regarded as a flashover or a breakdown.

NOTE For the operator's safety, the lowest setting of the tripping current (less than or equal to 10 mA) is typical.

Alternative test: A DC test voltage of 1,4 times the r.m.s. test voltage may be used.

Components or subassemblies shall not be disconnected or short-circuited unless the conditions of a), b) or c) below are met:

- The components or subassemblies are designed and tested to relevant standards that specify a voltage lower than the test voltage level of this document. These components or subassemblies are not connected between supply and **welding circuits** and their disconnection or short-circuiting does not prevent a part of that circuit from being tested. Example: fan motors and pump motors.
- The components or subassemblies are completely incorporated within either the supply or the **welding circuit** and their disconnection does not prevent a part of that circuit from being tested. Example: electronic circuits.
- Interference suppression networks or protection capacitors between the supply or **welding circuit** and any exposed conductive part conform to the relevant standards.

Control circuits connected to the protective conductor terminal shall not be disconnected during testing and they are then tested as exposed conductive parts.

At the discretion of the manufacturer, the test voltage may be slowly raised to the full value.

The test voltages between the **supply circuit**, the exposed conductive parts and the **welding circuit** may be applied simultaneously. An example is given in Annex B.

Engine-driven welding power sources shall undergo the same test.

Conformity shall be checked by application of the test voltage for

- a) 60 s (**type test**);
- b) 5 s (**routine test**);
- or
- c) 1 s (**routine test with the test voltage increased by 20 %**).

6.2 Protection against electric shock in normal service (direct contact)

6.2.1 Protection provided by the enclosure

Welding power sources specifically designed for indoor use shall have a minimum degree of protection of IP21S using IEC 60529 test procedures and conditions.

Welding power sources specifically designed for outdoor use shall have a minimum degree of protection of IP23S using IEC 60529 test procedures and conditions.

Welding power sources with degree of protection IP23S may be stored, but are not intended to be used outside during precipitation unless sheltered.

Adequate drainage shall be provided by the enclosure. Retained water shall not interfere with the operation of the equipment or impair safety. The quantity of water that may enter the enclosure is not limited.

Welding circuit connections shall be protected as specified in 11.4.1.

Remote controls for welding power sources shall have a minimum degree of protection of IP2X using IEC 60529 test procedures and conditions.

Conformity shall be checked by the following test:

A welding power source shall be subjected to the appropriate water test without being energized. Immediately after the test, the welding power source shall be moved to a safe environment and subjected to the insulation resistance test, listed in 5.4 g) and dielectric strength test, listed in 5.4 h).

6.2.2 Capacitors

Each capacitor provided as part of a welding power source and connected either across a **supply circuit** or across a winding of a transformer providing **welding current** shall

- a) not contain more than 1 l of flammable liquid;
- b) be designed not to leak during normal service;
- c) be contained within the welding power source enclosure or other enclosure which conforms to the relevant requirements of this document.

*Conformity shall be checked by **visual inspection**.*

Capacitors shall not cause the welding power source to exhibit hazardous electrical breakdown or present risk of fire in event of a failure.

Conformity shall be checked by the following test:

The welding power source is operated at no-load at its **rated supply voltage** and with a supply fuse or circuit-breaker rated up to but not more than 200 % of the **rated maximum supply current** with all or any of the capacitors shorted until:

- 1) any fuse or over-current device in the welding power source has operated; or
- 2) the **supply circuit** fuse or circuit-breaker has cleared; or
- 3) the **supply circuit** components of the welding power source reach a steady state temperature, not higher than that allowed in 7.3.

If any undue heating or melting becomes apparent, the welding power source shall conform to the requirements of items a), c) and d) of 9.1.

There shall be no leakage of liquid during any of the **type tests** required by this document.

For interference suppression capacitors or capacitors having internal fusing or a circuit-breaker, this test is not required.

6.2.3 Automatic discharge of supply circuit capacitors

Each capacitor shall be provided with a means of automatic discharge which shall reduce the voltage across the capacitor to 60 V or less within the time necessary to give access to any current carrying part connected to the capacitor or an appropriate warning label shall be used. For any plug which has a voltage due to a capacitor, the access time is considered to be 1 s.

Capacitors having a rated capacitance not exceeding 0,1 µF are not considered to present a risk of electric shock.

*Conformity shall be checked by **visual inspection** and by the following test.*

The welding power source is operated at the highest **rated supply voltage**. The welding power source is then disconnected from the supply network and the voltages are measured with instruments that do not significantly affect the values being measured.

6.2.4 Isolation of the welding circuit

The **welding circuit** shall be isolated from the **supply circuit** and from all other circuits having a voltage higher than the allowable **no-load voltage** in accordance with 11.1.1 (for example auxiliary power **supply circuits**) by reinforced or **double insulation** or equivalent means that meet the requirements of 6.1. If another circuit is connected to the **welding circuit**, the power of the other circuit shall be supplied by an isolating transformer or equivalent means.

The **welding circuit** shall not be connected internally to the connecting means for the external protective conductor, the enclosure, frame or core of the welding power source, except, if necessary, by an interference suppression network or protection capacitor.


Conformity shall be checked by tests given in 6.1.

6.2.5 Welding circuit touch current

The **touch current** between the **welding circuit** connections and the protective conductor terminal shall not exceed 14,1 mA peak.

*Conformity shall be checked by **visual inspection** and measurement of the **touch current** with a circuit as shown in Figure 2 at the **rated supply voltage(s)** and no-load condition.*

The measuring network specified in Figure N.1 shall be connected as shown in Figure 2.

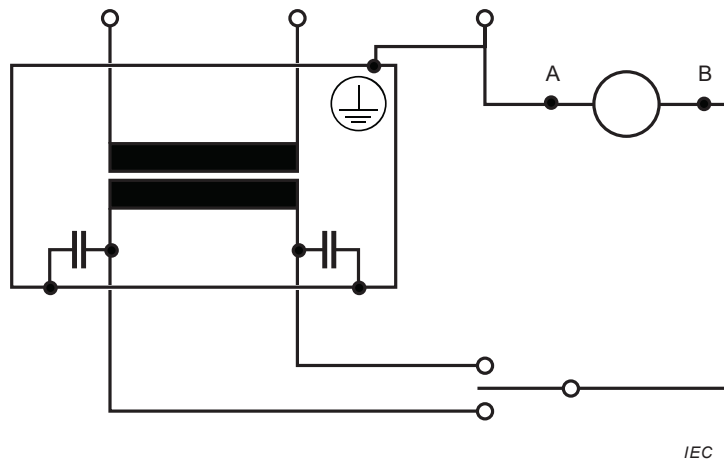**Key**

A, B Measuring network connections

NOTE For class II equipment, use the PE-terminal of earthed supply network.

Figure 2 – Measurement of welding circuit touch current

6.2.6 Touch current in normal condition

The **touch current** for accessible conductive surfaces, not connected to the **protective circuit**, shall not exceed 0,7 mA peak under normal conditions.

*Conformity shall be checked by measurement of the **touch current** with a circuit as shown in Figure 3, without simulating any fault and under the following conditions:*

- the welding power source is:
 - isolated from the ground plane;
 - supplied by the highest **rated supply voltage**;
- the **welding circuit** is in the no-load condition;
- interference suppression capacitors are not disconnected.

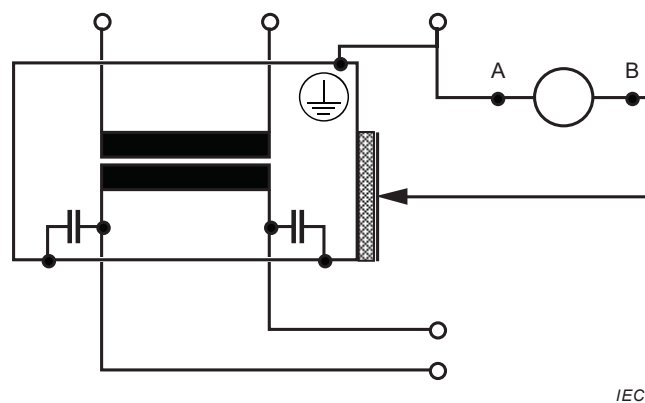


Figure 3 – Measurement of touch current in normal condition

6.3 Protection against electric shock in case of a fault condition (indirect contact)

6.3.1 Protective provisions

Welding power sources shall be **class I** or **class II equipment** in accordance with IEC 61140, with the exception of the **welding circuit**.

6.3.2 Isolation between windings of the supply circuit and the welding circuit

Windings of the **supply circuit** and the **welding circuit** shall be isolated by

- a) reinforced or **double insulation**
or
- b) **basic insulation** to a metal screen between them which is connected to the protective conductor.

Between the windings of the **supply circuit** and the **welding circuit**, there shall be insulation which conforms to the values given in Table 5. Alternatively, other means specified in IEC 61558-1 may be used provided that the complete requirements of IEC 61558-1 are satisfied.

Table 5 – Minimum distance through insulation

Rated supply voltage V r.m.s.	Minimum distance through insulation mm	
	Single layer	Total of three or more separate layers
up to 440	1,3	0,35
441 to 690	1,5	0,4
691 to 1 000	2,0	0,5

Where there is a metal screen between the windings, the thickness of the insulation between each winding and the screen shall be at least half the values given in Table 5.

*Conformity shall be checked by **visual inspection** and by measurement.*

6.3.3 Internal conductors and connections

Internal conductors and connections shall be secured or positioned to prevent accidental loosening, which could cause electrical connection between

- a) the **supply circuit** or any other circuit and the **welding circuit** so that the output voltage could become higher than the allowable **no-load voltage**;
- b) the protective conductor, enclosure, frame or core and the **welding circuit**.

Where insulated conductors pass through metallic parts, they shall be provided with bushings of insulating material or the openings shall be smoothly rounded with a radius of at least 1,5 mm.

Bare conductors shall be so fixed that the **clearance** and **creepage distance** from each other and from conductive parts is maintained (see 6.1.2 and 6.3.2).

Conductors of different circuits may be laid side by side, may occupy the same duct (for example conduit, cable trunking system), or may be in the same multiconductor cable provided that the arrangement does not impair the proper functioning of the respective circuits. Where those circuits operate at different voltages, the conductors shall be separated

by suitable barriers or shall be insulated for the highest voltage to which any conductor within the same duct can be subjected.

*Conformity shall be checked by **visual inspection** and by measurement.*

6.3.4 Additional requirements for plasma cutting systems

The plasma cutting torch, parts (e.g. parts typically replaced due to wear) and **plasma cutting power source**, recommended by the manufacturer, shall form a safe system.

Plasma tips, which for technical reasons cannot be protected against direct contact, shall be considered sufficiently protected for normal use and **single-fault condition** if the following requirements are fulfilled:

a) when no arc current is present:

the voltage between the plasma tip and the workpiece and/or earth is not higher than the values given in 11.1.1,

or

the **plasma cutting power source** is fitted with a **hazard reducing device** in accordance with Clause 13,

and

b) for manual systems, when an arc current is present:

the sides of a plasma tip cannot be touched by the standard test finger in accordance with IEC 60529 when it is placed on a flat surface with its centre line perpendicular to it,

or

the DC **load voltage** between the plasma tip and the workpiece and/or earth is not higher than values given in 11.1.1.

NOTE A single-fault is an abnormal condition resulting from the electrode being in contact with the plasma tip because of missing insulators, sticking of the plasma tip to the electrode, conductive material between plasma tip and electrode, wrong parts, loose parts, electrode abrasion, parts inserted incorrectly, excessive load or incorrect gas flow.

Conformity shall be tested in accordance with 11.1 and by simulating a torch fault and testing in accordance with Clause 13. The torch shall be tested in accordance with IEC 60974-7.

6.3.5 Movable coils and cores

If movable coils or cores are used to adjust the **welding current**, the construction shall be such that the prescribed **clearances** and **creepage distances** are maintained, taking into account electrical and mechanical stresses.

*Conformity shall be checked by operating the mechanism 500 times over its complete movement between minimum and maximum at the rate specified by the manufacturer and by **visual inspection**.*

6.3.6 Touch current in fault condition

For class I equipment, the weighted **touch current** in the case of an external protective conductor failure or disconnection shall not exceed 14,1 mA peak except for equipment with permanent connection by a reinforced protective conductor in accordance with IEC 61140.

Equipment for permanent connection with a reinforced protective conductor may have a leakage current up to 5 % of the **rated supply current** per phase.

Conformity shall be checked using the configurations as shown in Annex N under the following conditions:

- 1) the welding power source is:
 - isolated from the ground plane;
 - supplied by the highest **rated supply voltage**;
 - not connected to the protective earth except through measurement components;
- 2) the **welding circuit** is in the no-load condition;
- 3) interference suppression capacitors shall not be disconnected.

7 Thermal requirements

7.1 Heating test

7.1.1 Test conditions

When placing the measuring devices, the only access permitted shall be through openings with cover plates, inspection doors or easily removable panels provided by the manufacturer. The ventilation in the test area and the measuring devices used shall not interfere with the normal ventilation of the welding power source or cause abnormal transfer of heat to or from it.

The welding power source is operated at **rated supply voltage**, with constant current, at a cycle time of $(10 \pm 0,2)$ min:

- a) with the rated **welding current** (I_2) at 60 % and/or 100 % **duty cycle** as appropriate;
- b) with the **rated maximum welding current** (I_{2max}) at the corresponding **duty cycle**.

If it is known that neither a) nor b) gives maximum heating, then a test shall be made at the setting within the rated range which gives the maximum heating.

In the case of a welding power source rated for AC tungsten inert-gas welding, an unbalanced load could cause maximum heating. In this case, a test shall be carried out as given in Annex C.

The ambient temperature condition of 5.1 shall be fulfilled.

NOTE 1 This maximum heating is possible at the no-load condition.

NOTE 2 The tests, if relevant, follow each other without having the welding power source returned to the ambient air temperature.

7.1.2 Tolerances of the test parameters

During the last 60 min of the heating test in accordance with 7.1.3, the following tolerances shall be met:

- a) **load voltage**: $\begin{matrix} +10 \\ -2 \end{matrix}$ % of the appropriate **conventional load voltage**;
- b) **welding current**: $\begin{matrix} +10 \\ -2 \end{matrix}$ % of the appropriate **conventional welding current**;
- c) **supply voltage**: ± 5 % of the appropriate **rated supply voltage**;
- d) **engine speed**: ± 5 % of the appropriate rated speed;
- e) **temperature**: $\begin{matrix} +10 \\ -2 \end{matrix}$ K of the ambient temperature.