



NATIONAL AEROSPACE STANDARD

© COPYRIGHT 2012 AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC. ALL RIGHTS RESERVED



FED. SUPPLY CLASS

PACK


INACTIVE FOR DESIGN AFTER 30 NOVEMBER 2012. NO SUPERSEDING STANDARD. FOR DESCRIPTION OF STATUS NOTES SEE NAS380.

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC.
1000 WILSON BLVD.
ARLINGTON, VA 22209

THIS DRAWING SUPERSEDES ALL ANTECEDENT STANDARD DRAWINGS FOR THE SAME
PRODUCT AND SHALL BECOME EFFECTIVE NO LATER THAN SIX MONTHS FROM THE LAST
REVISION DATE.

FORM 09-01

ISSUE DATE: JUNE 1967
REVISION DATE: NOVEMBER 30, 2012

THIRD ANGLE PROJECTION		CUSTODIAN ENGINEERING MANAGEMENT COMMITTEE	REVISION 3
PROCUREMENT SPECIFICATION NONE	TITLE BOX, W/DESICCANT, BAG WATER-VAPORPROOF, BOX	CLASSIFICATION PACKAGING STANDARD NAS3444	SHEET 1 OF 2



NATIONAL AEROSPACE STANDARD

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC., 1725 DE SALES STREET, N.W., WASHINGTON, D. C. 20036

© COPYRIGHT 1983 AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC. ALL RIGHTS RESERVED

FED. SUP CLASS
PACK

1.0 SCOPE

This standard provides a method for the packaging of an item in a box-bag-box, with desiccant.

2.0 REFERENCE


2.1 General Packaging Standard NAS 850.

3.0 REQUIREMENTS

3.1 General

3.1.1 Requirements of NAS 850 are a part of this standard except as noted herein.

3.2 Unit Packaging

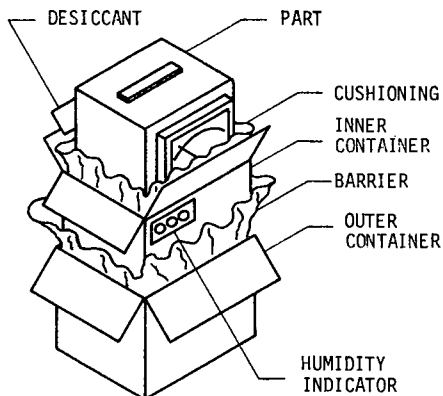

3.2.1 The quantity per unit package shall be as follows, unless otherwise specified in the procurement document.

One (1) each

3.2.2 Place the item in a paperboard or fiberboard box with adequate cushioning material to protect the item.

3.2.3 Determine the number of units of desiccant required and place in box so as not to directly contact the item. Determination of quantity of desiccant required may be obtained from any manufacturer of desiccant.

3.2.4 Place box in a water-vaporproof bag. Insert humidity indicator (e.g., three spot type, etc.) adjacent to bag opening. Accomplish bag closure by any approved method, maintaining minimum air volume. Allow sufficient material to accommodate at least two (2) additional reseals.

3.2.5 Place bagged inner box into an outer fiberboard box. Close box so that it may be opened and reclosed without damage to the box or contents.

3.3 Intermediate Packaging

3.3.1 Intermediate packaging shall be in accordance with the applicable requirements of NAS 850.

3.3.2 All containers shall be marked or labeled with the following:

"Packaged with Desiccant. Do Not Open Until Ready for Use or Inspection"

4.0 QUALITY ASSURANCE

Packages which do not conform to these requirements are subject to rejection and return to supplier at his expense.

NOTE: Callout of military specifications is deleted.

LIST OF CURRENT SHEETS

NO.	REV.
1	2

2 COMPLETELY REVISED

CUSTODIAN	MANUFACTURING COMMITTEE	THIRD ANGLE PROJECTION	
PROCUREMENT SPECIFICATION	TITLE	CLASSIFICATION	PACKAGING STANDARD
NONE	BOX, W/DESICCANT, BAG WATER-VAPORPROOF BOX	NAS 3444	Documents