



BSI Standards Publication

Industrial communication networks - Fieldbus specifications

Part 4-24: Data-link layer protocol specification - Type 24 elements

National foreword

This British Standard is the UK implementation of EN IEC 61158-4-24:2019. It is identical to IEC 61158-4-24:2019. It supersedes BS EN 61158-4-24:2014, which will be withdrawn on 23 May 2022.

The UK participation in its preparation was entrusted to Technical Committee GEL/65/3, Industrial communications: process measurement and control, including fieldbus.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2019
Published by BSI Standards Limited 2019

ISBN 978 0 539 04854 4

ICS 25.040.40; 35.100.20; 35.110

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 July 2019.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

English Version

Industrial communication networks - Fieldbus specifications -
Part 4-24: Data-link layer protocol specification - Type 24
elements
(IEC 61158-4-24:2019)

Réseaux de communication industriels - Spécifications des
bus de terrain - Partie 4-24: Spécification du protocole de la
couche liaison de données - Éléments de type 24
(IEC 61158-4-24:2019)

Industrielle Kommunikationsnetze - Feldbusse - Teil 4-24:
Protokollspezifikation des Data Link Layer
(Sicherheitsschicht) - Typ 24-Elemente
(IEC 61158-4-24:2019)

This European Standard was approved by CENELEC on 2019-05-23. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

European foreword

The text of document 65C/946/FDIS, future edition 2 of IEC 61158-4-24, prepared by SC 65C "Industrial networks" of IEC/TC 65 "Industrial-process measurement, control and automation" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN IEC 61158-4-24:2019.

The following dates are fixed:

- latest date by which the document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2020-02-23
- latest date by which the national standards conflicting with the document have to be withdrawn (dow) 2022-05-23

This document supersedes EN 61158-4-24:2014.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC shall not be held responsible for identifying any or all such patent rights.

Endorsement notice

The text of the International Standard IEC 61158-4-24:2019 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standards indicated:

IEC 61158-1 NOTE Harmonized as EN 61158-1
IEC 61784-1 NOTE Harmonized as EN 61784-1
IEC 61784-2 NOTE Harmonized as EN 61784-2

Annex ZA

(normative)

Normative references to international publications with their corresponding European publications

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 Where an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here: www.cenelec.eu.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 61158-2	-	Industrial communication networks Fieldbus specifications - Part 2: Physical layer specification and service definition	-EN 61158-2	-
IEC 61158-3-24	2014	Industrial communication networks Fieldbus specifications - Part 3-24: Data- link layer service definition - Type 24 elements	-EN 61158-3-24	2014
ISO/IEC 7498-1	-	Information technology - Open Systems- Interconnection - Basic reference model: The basic model		-
ISO/IEC 7498-3	-	Information technology - Open Systems- Interconnection - Basic reference model: Naming and addressing		-
ISO/IEC 9899	-	Information technology - Programming- languages - C		-
ISO/IEC 10731	-	Information technology - Open Systems- Interconnection - Basic Reference Model - Conventions for the definition of OSI services		-
ISO/IEC 13239	2002	Information technology -- Telecommunications and information exchange between systems - High-level data link control (HDLC) procedures		-
ISO/IEC 19501	2005	Information technology - Open Distributed- Processing - Unified Modeling Language (UML) Version 1.4.2		-
ISO/IEC/IEEE 8802-2017		Standard for Ethernet	-	-

This page deliberately left blank

CONTENTS

FOREWORD.....	6
INTRODUCTION.....	8
1 Scope.....	10
1.1 General.....	10
1.2 Specifications	10
1.3 Procedures	10
1.4 Applicability	11
1.5 Conformance	11
2 Normative references	11
3 Terms, definitions, symbols, abbreviations and conventions	12
3.1 Reference model terms and definitions	12
3.2 Service convention terms and definitions	13
3.3 Common terms and definitions	13
3.4 Symbols and abbreviations	16
3.5 Additional Type 24 symbols and abbreviations	17
3.6 Common Conventions	17
3.7 Additional Type 24 conventions	18
3.7.1 Primitive conventions.....	18
3.7.2 State machine conventions	18
4 Overview of DL-protocol	19
4.1 Characteristic feature of the DL-protocol	19
4.2 DL layer component.....	20
4.2.1 Cyclic transmission control (CTC).....	21
4.2.2 Send Receive Control (SRC)	21
4.2.3 DL-management	21
4.3 Timing sequence.....	21
4.3.1 Overview	21
4.3.2 Cyclic transmission mode	21
4.3.3 Acyclic transmission mode.....	29
4.4 Service assumed from the PhL	30
4.4.1 General requirement.....	30
4.4.2 DL_Symbols	30
4.4.3 Assumed primitives of the PhS	30
4.5 Local parameters, variables, counters, timers	30
4.5.1 Overview	30
4.5.2 Variables, parameters, counters and timers to support DLE function	31
5 DLPDU structure	35
5.1 Overview	35
5.1.1 Transfer syntax for bit sequences	35
5.1.2 Data type encodings	36
5.1.3 Frame format.....	36
5.2 Basic format DLPDU structure	36
5.2.1 General	36
5.2.2 Synchronous frame.....	40
5.2.3 Output data or Input data frame.....	40
5.2.4 Delay measurement start frame	41

5.2.5	Delay measurement frame	41
5.2.6	Message token frame	42
5.2.7	Status frame	42
5.2.8	Cycle Information frame	43
5.2.9	Message frame	44
5.3	Short format DLPDU structure	45
5.3.1	General	45
5.3.2	Synchronous frame	47
5.3.3	Output data or Input data frame	48
5.3.4	Message frame	49
6	DLE element procedure	49
6.1	Overview	49
6.2	Cyclic transmission control sublayer	49
6.2.1	General	49
6.2.2	DLS-user interface	49
6.2.3	Protocol machines in CTC	50
6.2.4	CTC-DLM interface	101
6.3	Send Receive Control	102
6.3.1	General	102
6.3.2	SRC-CTC interface	103
6.3.3	Detailed specification of SRC	104
6.3.4	SRC-DLM interface	108
7	DL-management layer (DLM)	109
7.1	Overview	109
7.2	Primitive definitions	109
7.2.1	Primitives exchanged between DLMS-user and DLM	109
7.2.2	Parameters used with DLM primitives	110
7.3	DLM protocol machine	110
7.3.1	C1 master	110
7.3.2	Slave and C2 master	115
7.4	Functions	119
	Bibliography	122
	Figure 1 – Data-link layer component	21
	Figure 2 – Timing chart of fixed-width time slot type cyclic communication	22
	Figure 3 – Timing chart of configurable time slot type cyclic communication	24
	Figure 4 – Schematic diagram of cyclic event occurrence	26
	Figure 5 – Timing relationship between cyclic transmission and data processing	29
	Figure 6 – Timing chart example of acyclic communication	29
	Figure 7 – Basic format DLPDU structure	37
	Figure 8 – Short format DLPDU structure	45
	Figure 9 – The state diagram of the C1 master for fixed-width time slot	51
	Figure 10 – The state diagram of the C2 master for fixed-width time slot	58
	Figure 11 – The state diagram of the slave for fixed-width time slot	62
	Figure 12 – The state diagram of the C1 master for configurable time slot	65
	Figure 13 – The state diagram of the C2 master for configurable time slot	74
	Figure 14 – The state diagram of slave for configurable time slot	77

Figure 15 – The state diagram of message initiator for basic format.....	82
Figure 16 – The state diagram of message responder for basic format	86
Figure 17 – The state diagram of message initiator for short format	90
Figure 18 – The state diagram of message responder for short format.....	94
Figure 19 – The state diagram of the acyclic transmission protocol machine.....	100
Figure 20 – Internal architecture of one-port SRC	104
Figure 21 – Internal architecture of multi-port SRC	104
Figure 22 – Internal architecture of serializer	105
Figure 23 – Internal architecture of deserializer	106
Figure 24 – State diagram of the C1 master DLM.....	111
Figure 25 – State diagram of the Slave and the C2 master DLM	116
Table 1 – State transition descriptions	18
Table 2 – Description of state machine elements	19
Table 3 – Conventions used in state machines	19
Table 4 – Characteristic features of the fieldbus data-link protocol.....	20
Table 5 – List of the values of the variable Cyc_sel	31
Table 6 – List of the values of the variable Tunit	32
Table 7 – List of the values of the variable PDUType	33
Table 8 – List of the values of the variable SlotType	34
Table 9 – Transfer syntax for bit sequences.....	36
Table 10 – Bit order	36
Table 11 – Destination and Source address format.....	37
Table 12 – Station address	37
Table 13 – Extended address	38
Table 14 – Message control field format (Information transfer format).....	38
Table 15 – Message control field format (Supervisory format).....	38
Table 16 – The list of Supervisory function bits.....	39
Table 17 – Frame type and data length format.....	39
Table 18 – The list of Frame type.....	39
Table 19 – Data format of the Synchronous frame	40
Table 20 – The field list of the Synchronous frame.....	40
Table 21 – Data format of the Output data or the Input data frame	40
Table 22 – The field list of the Output data or the Input data frame	41
Table 23 – Data format of Delay measurement start frame.....	41
Table 24 – The field list of Delay measurement start frame	41
Table 25 – Data format of Delay measurement frame.....	42
Table 26 – The field list of Delay measurement frame.....	42
Table 27 – Data format of Status frame.....	42
Table 28 – The field list of Status frame.....	43
Table 29 – The list of the DLE status	43
Table 30 – The list of Repeater status	43
Table 31 – Data format of Delay measurement frame.....	44

Table 32 – The field list of Cycle Information frame.....	44
Table 33 – Data format of Message frame	44
Table 34 – The field list of Message frame.....	45
Table 35 – Range of Station address field.....	46
Table 36 – Control field format (I/O data exchange format)	46
Table 37 – Control field format (Message format)	46
Table 38 – The field list of Message format.....	47
Table 39 – Data format of the Synchronous frame	47
Table 40 – The field list of the Synchronous frame.....	48
Table 41 – Data format of the Output data frame	48
Table 42 – The field list of the Output data frame.....	48
Table 43 – Data format of the Input data frame	48
Table 44 – The field list of the Input data frame	48
Table 45 – Primitives and parameters for the DLS-user interface issued by the DLS-user	49
Table 46 – Primitives and parameters for the DLS-user interface issued by the CTC	50
Table 47 – The state table of the C1 master for fixed-width time slot	52
Table 48 – The state table of the C2 master for fixed-width time slot	59
Table 49 – The state table of the slave for fixed-width time slot	63
Table 50 – The state table of the C1 master for configurable time slot	66
Table 51 – The state table of the C2 master for configurable time slot	75
Table 52 – The state table of slave for configurable time slot	78
Table 53 – The list of functions used by cyclic transmission machine.....	79
Table 54 – The state table of message initiator for basic format.....	82
Table 55 – The state table of message responder for basic format.....	86
Table 56 – The state table of message initiator for short format	90
Table 57 – The state table of message responder for short format	95
Table 58 – List of functions used by the message segmentation machine	99
Table 59 – The state table of the acyclic transmission protocol machine.....	101
Table 60 – The list of functions used acyclic transmission protocol machine	101
Table 61 – Primitives and parameters exchanged between CTC and DLM	102
Table 62 – Error event primitive and parameters.....	102
Table 63 – primitives and parameters for SRC-CTC interface	103
Table 64 – Send frame primitive and parameters	103
Table 65 – Receive frame primitives and parameters	104
Table 66 – Primitives and parameters exchanged between SRC and DLM.....	108
Table 67 – Get value primitive and parameters	109
Table 68 – Error event primitive and parameters.....	109
Table 69 – The list of primitives and parameters (DLMS-user source).....	110
Table 70 – The list of primitives and parameters (DLM source).....	110
Table 71 – State table of the C1 Master DLM.....	112
Table 72 – State table of the Slave and the C2 master DLM	117
Table 73 – The list of the functions used by DLM protocol machine	120

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**INDUSTRIAL COMMUNICATION NETWORKS –
FIELDBUS SPECIFICATIONS –****Part 4-24: Data-link layer protocol specification –
Type 24 elements**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

Attention is drawn to the fact that the use of the associated protocol type is restricted by its intellectual-property-right holders. In all cases, the commitment to limited release of intellectual-property-rights made by the holders of those rights permits a layer protocol type to be used with other layer protocols of the same type, or in other type combinations explicitly authorized by its intellectual-property-right holders.

NOTE Combinations of protocol types are specified in IEC 61784-1 and IEC 61784-2.

International Standard IEC 61158-4-24 has been prepared by subcommittee 65C: Industrial networks, of IEC technical committee 65: Industrial-process measurement, control and automation.

This second edition cancels and replaces the first edition published in 2014. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- patent declaration in the Introduction;
- corrections on transmission sequence of fixed-width time slot type in 4.3.2;
- technical extension for band sharing between I/O data exchange and message communication; and
- spelling and grammar.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
65C/946/FDIS	65C/955/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 61158 series, published under the general title *Industrial communication networks – Fieldbus specifications*, can be found on the IEC web site.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

This part of IEC 61158 is one of a series produced to facilitate the interconnection of automation system components. It is related to other standards in the set as defined by the “three-layer” fieldbus reference model described in IEC 61158-1.

The data-link protocol provides the data-link service by making use of the services available from the physical layer. The primary aim of this document is to provide a set of rules for communication expressed in terms of the procedures to be carried out by peer data-link entities (DLEs) at the time of communication. These rules for communication are intended to provide a sound basis for development in order to serve a variety of purposes:

- a) as a guide for implementers and designers;
- b) for use in the testing and procurement of equipment;
- c) as part of an agreement for the admittance of systems into the open systems environment;
- d) as a refinement to the understanding of time-critical communications within OSI.

This standard is concerned, in particular, with the communication and interworking of sensors, effectors and other automation devices. By using this document together with other standards positioned within the OSI or fieldbus reference models, otherwise incompatible systems may work together in any combination.

NOTE Use of some of the associated protocol types is restricted by their intellectual-property-right holders. In all cases, the commitment to limited release of intellectual-property-rights made by the holders of those rights permits a particular data-link layer protocol type to be used with physical layer and application layer protocols in Type combinations as specified explicitly in the profile series. Use of the various protocol types in other combinations may require permission from their respective intellectual-property-right holders.

The International Electrotechnical Commission (IEC) draws attention to the fact that it is claimed that compliance with this document may involve the use of patents as follows, where the [xx] notation indicates the holder of the patent right:

US 8223804	[YE]	COMMUNICATION DEVICE, SYNCHRONIZED
JP 4760978		SYSTEM, AND SYNCHRONIZED COMMUNICATION METHOD
CN 200880002225.3		
DE 602008046644.2		

US 7769935	[YE]	MASTER SLAVE COMMUNICATION SYSTEM AND MASTER
JP 4683346		SLAVE COMMUNICATION METHOD
US 8046512		
DE 602007041530.6		

JP 4356698	[YE]	COMMUNICATION DEVICE, SYNCHRONIZED COMMUNICATION
		SYSTEM, AND SYNCHRONIZED COMMUNICATION METHOD

IEC takes no position concerning the evidence, validity and scope of this patent right.

The holders of these patent rights have assured IEC that they are willing to negotiate licenses either free of charge or under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holders of these patent rights is registered with IEC. Information may be obtained from

[YE]	YASKAWA ELECTRIC CORPORATION
	2-1 Kurosakishiroishi, Yahatanishi-ku, Kitakyushu 806-0004, Japan
	Attention; Intellectual Property Rights Section.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those identified above. IEC shall not be held responsible for identifying any or all such patent rights.

ISO (www.iso.org/patents) and IEC (<http://patents.iec.ch>) maintain on-line data bases of patents relevant to their standards. Users are encouraged to consult the data bases for the most up to date information concerning patents.

INDUSTRIAL COMMUNICATION NETWORKS – FIELDBUS SPECIFICATIONS –

Part 4-24: Data-link layer protocol specification – Type 24 elements

1 Scope

1.1 General

The data-link layer provides basic time-critical messaging communications between devices in an automation environment.

This protocol provides communication opportunities to all participating data-link entities:

- a) in a synchronously-starting cyclic manner, according to a pre-established schedule, or
- b) in an acyclic manner, as requested by each of those data-link entities.

Thus this protocol can be characterized as one which provides cyclic and acyclic access asynchronously but with a synchronous restart of each cycle.

1.2 Specifications

This document specifies

- a) procedures for the timely transfer of data and control information from one data-link user entity to a peer user entity, and among the data-link entities forming the distributed datalink service provider;
- b) procedures for giving communications opportunities to all participating DL-entities (DLEs), sequentially and in a cyclic manner for deterministic and synchronized transfer at cyclic intervals up to 64 ms;
- c) procedures for giving communication opportunities available for time-critical data transmission together with non-time-critical data transmission without prejudice to the time-critical data transmission;
- d) procedures for giving cyclic and acyclic communication opportunities for time-critical data transmission with prioritized access;
- e) procedures for giving communication opportunities based on ISO/IEC/IEEE 8802-3 medium access control, with provisions for nodes to be added or removed during normal operation;
- f) the structure of the fieldbus DLPDUs used for the transfer of data and control information by the protocol of this document, and their representation as physical interface data units.

1.3 Procedures

The procedures are defined in terms of

- a) the interactions between peer DL-entities through the exchange of fieldbus DLPDUs;
- b) the interactions between a DL-service (DLS) provider and a DLS-user in the same system through the exchange of DLS primitives;
- c) the interactions between a DLS-provider and a Ph-service provider in the same system through the exchange of Ph-service primitives.

1.4 Applicability

These procedures are applicable to instances of communication between systems which support time-critical communications services within the data-link layer of the OSI or fieldbus reference models, and which require the ability to interconnect in an open systems interconnection environment.

Profiles provide a simple multi-attribute means of summarizing an implementation's capabilities, and thus its applicability to various time-critical communications needs.

1.5 Conformance

This document also specifies conformance requirements for systems implementing these procedures. This document does not contain tests to demonstrate compliance with such requirements.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE All parts of the IEC 61158 series, as well as IEC 61784-1 and IEC 61784-2 are maintained simultaneously. Cross-references to these documents within the text therefore refer to the editions as dated in this list of normative references.

IEC 61158-2, *Industrial communication networks – Fieldbus specifications – Part 2: Physical layer specification and service definition*

IEC 61158-3-24:2014, *Industrial communication networks – Fieldbus specifications – Part 3-24: Data-link layer service definition – Type 24 elements*

ISO/IEC 7498-1, *Information technology – Open Systems Interconnection – Basic Reference Model: The Basic Model*

ISO/IEC 7498-3, *Information technology – Open Systems Interconnection – Basic Reference Model: Naming and addressing*

ISO/IEC/IEEE 8802-3:2017, *Information technology – Telecommunications and information exchange between systems – Local and metropolitan area networks – Specific requirements – Part 3: Standard for Ethernet*

ISO/IEC 9899, *Information technology – Programming languages – C*

ISO/IEC 10731, *Information technology – Open Systems Interconnection – Basic Reference Model – Conventions for the definition of OSI services*

ISO/IEC 13239:2002, *Information technology – Telecommunications and information exchange between systems – High-level data link control (HDLC) procedures*

ISO/IEC 19501:2005, *Information technology – Open Distributed Processing – Unified Modelling Language (UML) Version 1.4.2*

3 Terms, definitions, symbols, abbreviations and conventions

For the purposes of this document, the following terms, definitions, symbols, abbreviations and conventions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1 Reference model terms and definitions

This document is based in part on the concepts developed in ISO/IEC 7498-1 and ISO/IEC 7498-3, and makes use of the following terms defined therein.

3.1.1	acknowledgement	[ISO/IEC 7498-1]
3.1.2	correspondent (N)-entities	[ISO/IEC 7498-1]
	correspondent DL-entities (N=2)	
	correspondent Ph-entities (N=1)	
3.1.3	DL-address	[ISO/IEC 7498-3]
3.1.4	DL-protocol	[ISO/IEC 7498-1]
3.1.5	DL-protocol-data-unit	[ISO/IEC 7498-1]
3.1.6	DL-service-data-unit	[ISO/IEC 7498-1]
3.1.7	DLS-user	[ISO/IEC 7498-1]
3.1.8	DLS-user-data	[ISO/IEC 7498-1]
3.1.9	Event	[ISO/IEC 19501]
3.1.10	layer-management	[ISO/IEC 7498-1]
3.1.11	primitive name	[ISO/IEC 7498-1]
3.1.12	Reset	[ISO/IEC 7498-1]
3.1.13	Segmenting	[ISO/IEC 7498-1]
3.1.14	State	[ISO/IEC 19501]
3.1.15	state machine	[ISO/IEC 19501]
3.1.16	systems-management	[ISO/IEC 7498-1]
3.1.17	Transition	[ISO/IEC 19501]
3.1.18	(N)-entity	[ISO/IEC 7498-1]
	DL-entity (N=2)	
	Ph-entity (N=1)	
3.1.19	(N)-layer	[ISO/IEC 7498-1]
	DL-layer (N=2)	

Ph-layer (N=1)

(N)-service

[ISO/IEC 7498-1]

DL-service (N=2)

Ph-service (N=1)

(N)-service-access-point

[ISO/IEC 7498-1]

DL-service-access-point (N=2)

Ph-service-access-point (N=1)

3.2 Service convention terms and definitions

This document also makes use of the following terms defined in ISO/IEC 10731 as they apply to the data-link layer:

3.2.1 confirm (primitive)

3.2.2 DL-service-primitive

3.2.3 DL-service-provider

3.2.4 DL-service-user

3.2.5 indication (primitive)

3.2.6 request (primitive)

3.2.7 requestor

3.2.8 response (primitive)

3.3 Common terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.3.1

acyclic transmission

non-periodic exchange of telegrams

3.3.2

C1 master

one of the station type that initiates and controls cyclic transmission

3.3.3

C1 message

message communication that C1 master operates as initiator to exchange messages with slave or C2 master

3.3.4

C2 master

one of the station type that has the function of monitoring all process data transmitted through the network and may initiate message communication

3.3.5

C2 message

message communication that C2 master operates as initiator to exchange messages with the slave or the C1 master

3.3.6

cyclic transmission

periodic exchange of telegrams

3.3.7

data

generic term used to refer to any information carried over a fieldbus

3.3.8

device

physical entity connected to the fieldbus composed of at least one communication element (the network element) and which may have a control element and/or a final element (transducer, actuator, etc.)

3.3.9

event driven mode

transmission mode for the application layer protocol of the communication Type 24 in which a transaction of command-response-exchanging arises as user's demands

3.3.10

frame

synonym for DLPDU

3.3.11

initiator

station that initiates the exchange of process data or message

3.3.12

interface

shared boundary between two functional units, defined by functional characteristics, signal characteristics, or other characteristics as appropriate

3.3.13

input data

process data sent by the slave and received by the C1 master

3.3.14

message

ordered series of octets intended to convey information

Note 1 to entry: Normally used to convey information between peers at the application layer.

3.3.15

monitor slave

slave that has the function of monitoring all process data transmitted through the network

3.3.16

network

set of nodes connected by some type of communication medium, including any intervening repeaters, bridges, routers and lower-layer gateways

3.3.17

node

<protocol> single DL-entity as it appears on one local link

3.3.18

node

<networking> end-point of a link in a network or a point at which two or more links meet

3.3.19**output data**

process data sent by the C1 master and received by the slaves

3.3.20**protocol**

convention about the data formats, time sequences, and error correction in the data exchange of communication systems

3.3.21**real-time communication**

transfer of data in real-time

3.3.22**receiving DLS-user**

DL-service user that acts as a recipient of DL-user-data

Note 1 to entry: A DL-service user may be concurrently both a sending and receiving DLS-user.

3.3.23**responder**

station that responds process data or message after it has been initiated by initiator

3.3.24**send data with acknowledge**

data transfer service with acknowledge of reception from corresponding DLE

3.3.25**send data without acknowledge**

data transfer service without acknowledge of reception from corresponding DLE

3.3.26**slave**

one of the station type that accesses the medium only after it has been initiated by C1 master or C2 master

3.3.27**sending DLS-user**

DL-service user that acts as a source of DL-user-data

3.3.28**station**

node

3.3.29**topology**

physical network architecture with respect to the connection between the stations of the communication system

3.3.30**transmission cycle**

fixed time period of cyclic transmission

3.3.31**time slot**

time period reserved so that initiator and responder may exchange one frame respectively

3.4 Symbols and abbreviations

3.4.1	DA	Destination address
3.4.2	DL-	Data-link layer (as a prefix)
3.4.3	DLE	DL-entity (the local active instance of the data-link layer)
3.4.4	DLL	DL-layer
3.4.5	DLM	DL-management
3.4.6	DLME	DL-management entity (the local active instance of DL-management)
3.4.7	DLMS	DL-management service
3.4.8	DLPDU	DL-protocol-data-unit
3.4.9	DLS	DL-service
3.4.10	DLSAP	DL-service-access-point
3.4.11	DLSDU	DL-service-data-unit
3.4.12	FIFO	First-in first-out (queuing method)
3.4.13	ID	Identifier
3.4.14	OSI	Open systems interconnection
3.4.15	PDU	Protocol data unit
3.4.16	Ph-	Physical layer (as a prefix)
3.4.17	PhE	Ph-entity (the local active instance of the physical layer)
3.4.18	PhL	Ph-layer
3.4.19	PHY	Physical layer device (specified in ISO/IEC/IEEE 8802-3)
3.4.20	QoS	Quality of service
3.4.21	RT	Real-time
3.4.22	SAP	Service access point
3.4.23	SDU	Service data unit

3.5 Additional Type 24 symbols and abbreviations

3.5.1	ACK	Acknowledge
3.5.2	C1MSG	C1 message
3.5.3	C2MSG	C2 message
3.5.4	I/O	Input and/or output
3.5.5	MSG	Message
3.5.6	Rx	Receive
3.5.7	SDA	Send data with acknowledge
3.5.8	SDN	Send data without acknowledge
3.5.9	SM	State machine
3.5.10	Tcycle	Transmission cycle
3.5.11	Tslot	Time slot
3.5.12	Tx	Transmit

3.6 Common Conventions

This document uses the descriptive conventions given in ISO/IEC 10731.

The service model, service primitives, and time-sequence diagrams used are entirely abstract descriptions; they do not represent a specification for implementation.

Service primitives, used to represent service user/service provider interactions (see ISO/IEC 10731), convey parameters that indicate information available in the user/provider interactions.

This document uses a tabular format to describe the component parameters of the DLS primitives. The parameters that apply to each group of DLS primitives are set out in tables throughout the remainder of this document. Each table consists of up to six columns, containing the name of the service parameter, and a column each for those primitives and parameter-transfer directions used by the DLS:

- the request primitive's input parameters;
- the indication primitive's output parameters;
- the response primitive's input parameters;
- the confirm primitive's output parameters.

NOTE The request, indication, response and confirm primitives are also known as requestor.submit, acceptor.deliver, acceptor.submit, and requestor.deliver primitives, respectively (see ISO/IEC 10731).

One parameter (or part of it) is listed in each row of each table. Under the appropriate service primitive columns, a code is used to specify the type of usage of the parameter on the primitive and parameter direction specified in the column:

M parameter is mandatory for the primitive.

U parameter is a User option, and may or may not be provided depending on the dynamic usage of the DLS-user. When not provided, a default value for the parameter is assumed.

C parameter is conditional upon other parameters or upon the environment of the DLS-user.

(blank) parameter is never present.

Some entries are further qualified by items in brackets. These may be a parameter-specific constraint:

(=) parameter is semantically equivalent to the parameter in the service primitive to its immediate left in the table.

In any particular interface, not all parameters need to be explicitly stated. Some may be implicitly associated with the primitive.

In the diagrams which illustrate these interfaces, dashed lines indicate cause-and-effect or time-sequence relationships, and wavy lines indicate that events are roughly contemporaneous.

3.7 Additional Type 24 conventions

3.7.1 Primitive conventions

The following notation, a shortened form of the primitive classes defined in 3.2, is used in the figures.

req request primitive
ind indication primitive
cnf confirm primitive (confirmation)

3.7.2 State machine conventions

The protocol sequences are described by means of state machines.

In state diagrams, states are represented as boxes and state transitions are shown as arrows.

Names of states and transitions of the state diagram correspond to the names in the state table. The textual listing of the state transitions is structured as shown in Table 1.

Table 1 – State transition descriptions

No.	Current state	Event /condition =>action	Next state

The description of state machine elements is shown in Table 2.

Table 2 – Description of state machine elements

Description element	Meaning
No	Number of the transition.
Current state, Next state	Names of the originating state and the target state of transition.
Event	Name or description of the trigger event that fires the transition.
/ conditions	Boolean expression, which shall be true for the transition to be fired.
=>action	List of assignments and service or function invocations. The action should be atomic. The preceding "=>" is not part of the action.
NOTE "/ conditions" can be omitted.	

The conventions used in the state machines are shown in Table 3.

Table 3 – Conventions used in state machines

Convention	Meaning
+ - * /	Arithmetic operators
:=	Value of an item on the left is replaced by value of an item on the right. If an item on the right is a parameter, it comes from the primitive shown as an input event.
=	A logical condition to indicate an item on the left is equal to the item on the right.
<	A logical condition to indicate an item on the left is less than the item on the right.
>	A logical condition to indicate an item on the left is greater than the item on the right.
<=	A logical condition to indicate an item on the left is less than or equal to the item on the right.
>=	A logical condition to indicate an item on the left is greater than or equal to the item on the right.
<>	A logical condition to indicate an item on the left is not equal to the item on the right.
&&	Logical "AND"
	Logical "OR"

4 Overview of DL-protocol

4.1 Characteristic feature of the DL-protocol

Table 4 shows the characteristic features of the DL protocol of Type 24.

Table 4 – Characteristic features of the fieldbus data-link protocol

Profiles	Description
Station type and max. stations	-C1 master (active station with bus access control, 1 station (mandatory)) -C2 master (active station with restricted bus access control, max.1 (optional)) -Slave (passive stations without bus access control, max.62)
Station addressing	1 to 255 (255 = global address for broad-cast messages), 8 bit-width address extension for integrated device
Transmission cycle	31,25 us to 64 ms
DLSDU size	8 to 64 octets
Transmission characteristic	-Cyclic data exchange and cyclic event, synchronized with accurate cycle time (jitter below 1 us) -Max 62 times (n times/1 station) retry within cycle time -Acyclic message transmission

There are three types of stations, the C1 master, the C2 master and the slave. Data exchange is executed between one master station (C1 master or C2 master) and N slave stations. This protocol supports 2 communication modes, cyclic transmission and acyclic transmission.

In the cyclic transmission mode, transmission is executed cyclically with an accurate period. The transmission cycle is set by the C1 master to a value within a range of 31,25 [µs] to 64 [ms]. Since the set value of the transmission cycle is specific to the transmission line, all of the connected slaves shall support that value. It is not permitted to set different transmission cycle values for the slaves connected in the same network.

The transmission cycle has the I/O data exchange band to transmit process data and the message communication band to transmit message. The protocol machine in the C1 master controls transmission sequence in the cyclic transmission mode. The time period for a master station to exchange with one slave station is called time slot. There are two types of communication sequence, one is “fixed-width time slot type” whose time slot is same width for all stations and the other is “configurable time slot type” whose time slot can be defined for each station. All stations shall use the same-data-length frame when fixed-width time slot type. The width of the time slot is static in both types, and the value is set by the DL-management during initialization. Once the cyclic communication starts, it shall not be changed.

The acyclic transmission mode is used by the DLS-user that operates in the event driven mode. In the acyclic transmission mode, transmissions are executed sporadically. The same transmission sequence and message communication may be executed in the acyclic transmission, as in the cyclic transmission mode without fixing the transmission cycle.

4.2 DL layer component

The DL layer is composed of three sublayers, the CTC (Cyclic transmission control), the SRC (Send Receive Control) and the DLM (Data-link management). The SRC is positioned at lower layer of the CTC and the DLM covers both the CTC sublayer and the SRC sublayer. The data-link layer component is show in Figure 1.

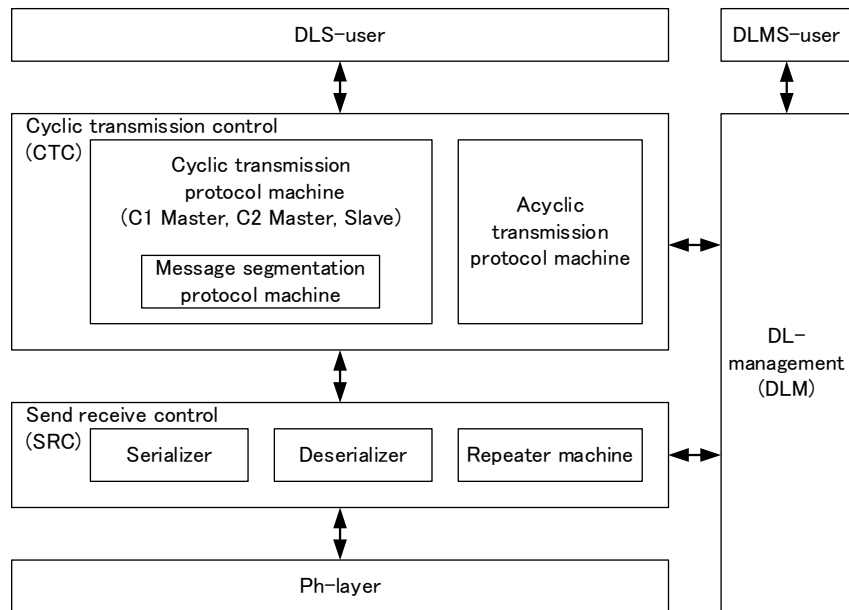


Figure 1 – Data-link layer component

4.2.1 Cyclic transmission control (CTC)

This is a sublayer that builds the DLPDU and executes a protocol machine. It has 2 communication modes, i.e. cyclic transmission mode and acyclic transmission mode. The CTC executes either of them according to a request from the DLMS user.

4.2.2 Send Receive Control (SRC)

The SRC sends or receives frames by request of the CTC sublayer. It is serialized or de-serialized according to corresponding PHY. When the SRC implements two or more PHY port, the SRC provides frame repeat function between the implemented PHY ports.

4.2.3 DL-management

This is a sublayer that configures the DLE operation by setting the internal variables and manages errors detected by each sublayer.

4.3 Timing sequence

4.3.1 Overview

There are two types of transmission mode, the cyclic transmission mode and the acyclic transmission mode. The cyclic transmission has two types, one is “fixed-width time slot type” whose time slot is same width for all stations and the other is “configurable time slot type” whose time slot can be defined for each station.

The width of the time slot is static for both types, and the value is set by the DL-management during initialization. Once cyclic communication starts, it shall not be changed.

4.3.2 Cyclic transmission mode

4.3.2.1 Fixed-width time slot type

4.3.2.1.1 Overview

Figure 2 shows the transmission sequence of fixed-width time slot type. In this type, the width of all time slots is the same.

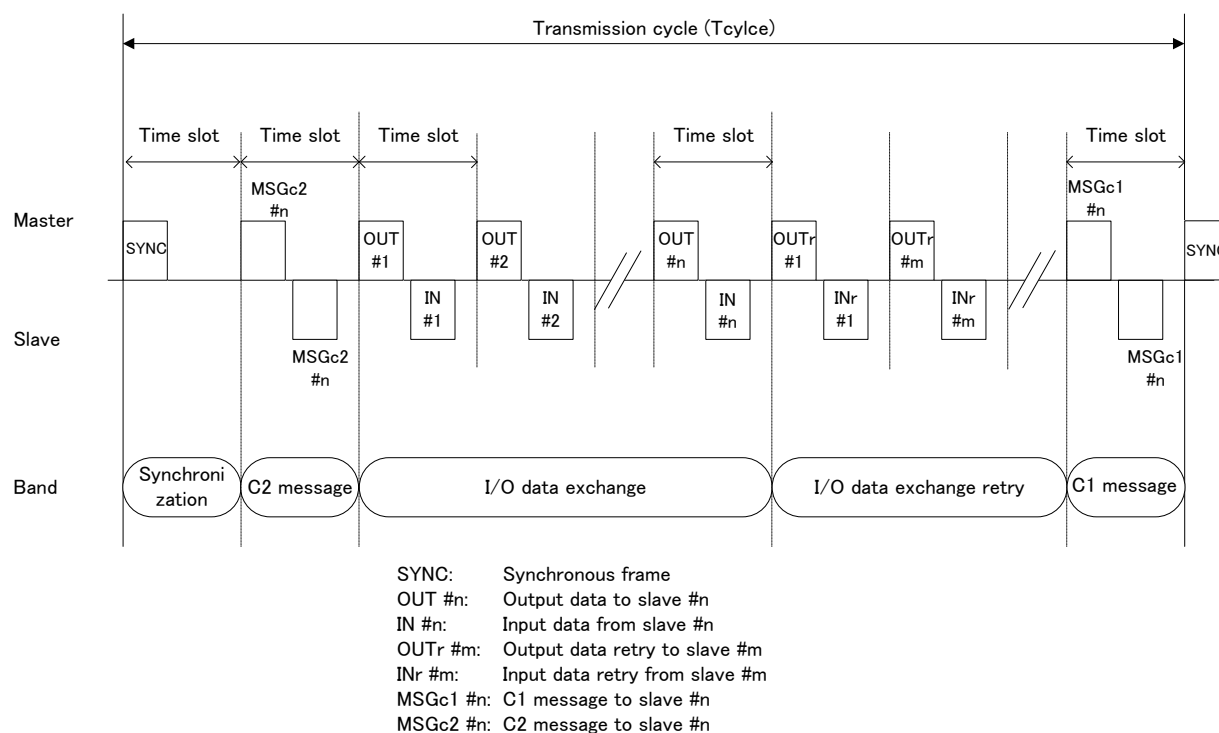


Figure 2 – Timing chart of fixed-width time slot type cyclic communication

4.3.2.1.2 Detailed description of communication band

4.3.2.1.2.1 Synchronization

This is the band through which the C1 master broadcasts a synchronous frame to the slave and the C2 master. One time slot shall be allocated to this band. Within this band, only the transition of the synchronous frame from the C1 master is allowed; the slave and the C2 master are prohibited from transmitting any frame.

4.3.2.1.2.2 C2 message

This is an optional band for a message transmission (C2 message transmission) where the C2 master is the client (primary station) and the C1 master or slave is the server (secondary station). One time slot may be allocated to this band, and request and response may be transmitted once, respectively.

4.3.2.1.2.3 I/O data exchange

This is the band in which the C1 master exchanges the I/O data with all the slaves that are connected to the network. The time slots of the number of slaves shall be allocated to this band. The C1 master and one slave shall execute the I/O data exchange once within one time slot.

The I/O data exchange retry band is optional. When the I/O data exchange retry band is configured in the transmission cycle, the C1 master shall create a retry list of the slave that failed the I/O data exchange.

4.3.2.1.2.4 I/O data exchange retry

The I/O data exchange retry band is an optional band where the C1 master retries the I/O data exchanges according to the retry list. The C1 master may re-execute the I/O exchange

with the retry target slave that has been registered into the retry list in the I/O data exchange band. In this band, some time slots are allocated before cyclic transmission starts.

The C1 master may retry according to the registered order of the retry list for up to the number of the allocated time slots. The DLE shall quit retry when it uses all allocated time slots even if a slave that is waiting for retry is registered in the retry list.

4.3.2.1.2.5 C1 message

This is an optional band for a message transmission (C1 message transmission) where the C1 master is the client (initiator) and the C2 master or the slave is the server (responder). One time slot may be configured in this band. This band may be configured to be shared with the I/O data exchange retry band. When this band is shared and used for the I/O data exchange retry, the C1 message transmission shall be postponed to the C1 message band of the next transmission cycle.

4.3.2.1.3 Estimation of cycle time

The transmission cycle of the fixed-width slot type T_{cycle} is calculated as the sum of the bandwidths described in 4.3.2.2.

$$T_{cycle} = T_{sync} + T_{C2msg} + T_{io} + T_{retry} + T_{C1msg} \quad (1)$$

where

- T_{sync} is the Sync band;
- T_{C2msg} is the C2 message band;
- T_{io} is the I/O data exchange band;
- T_{retry} is the I/O data exchange retry band;
- T_{C1msg} is the C1 message band.

The width of each band shall be allocated with an integral multiple of time slots. The formula shown above can be transformed by indicating the time slot with T_{slot} , the number of slave stations connected to the network with N , and the number of retry with N_r .

$$T_{cycle} = T_{slot} + T_{slot} + N \times T_{slot} + N_r \times T_{slot} + T_{slot} = (N + N_r + 3) \times T_{slot} \quad (2)$$

The I/O data exchange retry band and the C1 message band may be configured to be shared. When they are shared, the formula becomes:

$$T_{cycle} = (N + N_r + 2) \times T_{slot} \quad (3)$$

And, the I/O data exchange retry band, the C1 message band and the C2 message band are optional. When the configuration doesn't assign all of them, the transmission cycle is minimum and is calculated as shown in the following formula:

$$T_{cycle} = (N + 1) \times T_{slot} \quad (4)$$

Time slot T_{slot} can be calculated as shown in the following formula:

$$\begin{aligned}
 T_{slot} &= \max(T_{tr_c}(n) + T_{dly}(n) + T_{gap} + T_{tr_r}(n) + T_{dly}(n) + T_{gap}) \\
 &= 2 \times \max(T_{tr_c}(n) + T_{dly}(n) + T_{gap})
 \end{aligned}
 \quad (5)$$

where

$T_{tr_c}(n)$ is the output (command) transmission time from C1 master to the slave #n;

$T_{tr_r}(n)$ is the input (response) transmission time from slave #n to C1 master, it is equal to $T_{tr_c}(n)$ in case of the fixed-width time slot type;

T_{gap} is the gap between the frames;

$T_{dly}(n)$ is the frame transmission delay time between C1 master and slave #n.

4.3.2.2 Configurable time slot type

4.3.2.2.1 Overview

Figure 3 shows the transmission sequence of configurable time slot type. In this type, the width of time slots that are allocated to exchange the data one by one between the master and the slave is different for each slave. The DLE manages the residual time of the transmission cycle by using the width of the time slots configured for each slave by the DLMS user. Details of each transmission band are described in the following subclauses.

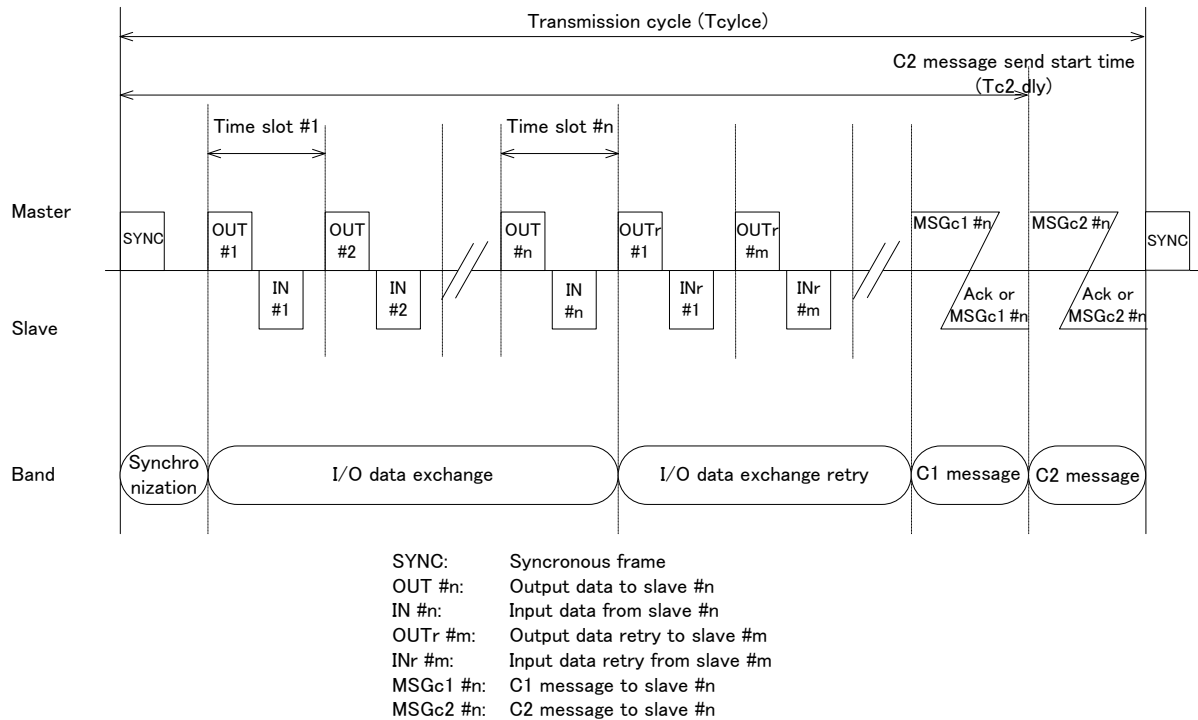


Figure 3 – Timing chart of configurable time slot type cyclic communication

4.3.2.2.2 Detailed description of communication phase

4.3.2.2.2.1 Synchronization

See 4.3.2.1.2.1.

4.3.2.2.2.2 IO data exchange

This is the band where the C1 master executes the I/O data exchange with all slaves connected to the network. The width of this band shall be set in the C1 master before starting cyclic transmission. The C1 master and one slave execute a I/O data exchange which consists of a pair of input and output for each other in each time slot.

When the I/O data exchange retry band which is optional is configured in the transmission cycle, the C1 master shall register the slaves that have failed the I/O data exchange within this band into the retry list as re-transmission targets within the succeeding the I/O data exchange retry band.

4.3.2.2.2.3 IO data exchange retry

This band is basically the same as the case of fixed-width time slot (see 4.3.2.1.2.4). Subclause 4.3.2.2.2.3 describes the differences.

The width of this band shall be set in the C1 master before starting the cyclic transmission. The C1 master may execute the retry for the slaves registered in the retry list in the order of registration, and when the retry succeeds, the C1 master clears the registration. Before executing retry, the C1 master shall compare the time required to complete the I/O data exchange with the slave and the residual time until the end of this band (until C2 message starts). If the residual time is longer than the required time, the C1 master shall execute the retry. If the residual time is equal to or shorter than the required time, the C1 master shall end this band.

When the retry that is executed for a registered the slave does not complete successfully, the C1 master shall clear the registration and then register the slave again at the end of the retry list. The C1 master may repeat retry for the same slaves within the residual time of the band. When the retries for all of the retry targets in the retry list are executed once, the C1 master may execute the retry according to the registered order of the retry list again. The C1 master shall end the band when all of the slaves are cleared from the retry list.

4.3.2.2.2.4 C1 message

This is an optional band for a message transmission (C1 message transmission) where the C1 master is the client (primary station) and the C2 master or the slave is the server (secondary station). The residual time from the end of the I/O data exchange retry band to the start of the C2 message transmission may be assigned to this band.

The C1 master may execute the C1 message transmission within the residual time. The C1 master may repeat the C1 message transmission that consists of one pair of request and response within this band. However, the C1 master shall not execute the C1 message transmission if there is no residual time enough for one pair of transmission.

This band may be configured to be shared with the I/O data exchange retry band. When this band is shared and used for the I/O data exchange retry, the C1 message transmission shall be postponed to the C1 message band of the next transmission cycle.

4.3.2.2.2.5 C2 message

This is an optional band for a message transmission (C2 message transmission) where the C2 master is the client (primary station) and the C1 master or the slave is the server (secondary station). The start time of this band shall be set both in the C1 master and the C2 master before starting cyclic transmission.

The C2 master may execute the C2 message transmission within the allocated bandwidth. The C2 master may repeat the C2 message transmission that consists of one pair of request

and response within this band. However, the C2 master shall not execute the C2 message transmission if there is no residual time enough for one pair of transmission.

This band may be configured to be shared with the I/O data exchange retry band and the C1 message band. When this band is shared and used for the I/O data exchange retry or the C1 message, the C2 message shall be postponed to the C2 message band of the next transmission cycle. When this band is shared and the C1 master has finished the I/O data exchange retry and the C1 message before the start time of this band, the C1 master shall send a message token to the C2 master. After the C2 master receives the message token, the C2 master may execute the C2 message transmission immediately.

4.3.2.2.3 Estimation of cycle time

In order for all multiple slaves to synchronize with the C1 master, the C1 master shall measure the transmission delay time of each slave during initialization. The measured delay time shall be locally retained by the C1 master and each slave.

Based on the measured transmission delay time, the C1 master can calculate the response monitoring time and the delay time of cyclic event for each slave to match cyclic event timing in the system.

The cyclic event delay time (T_{idly} in Figure 4) is delivered with the synchronous frame (SYN frame in the Figure 4). The C1 master and the each slave generate a cyclic event according to the cyclic event delay time and the transmission delay time retained locally. As a result, cyclic event occurs at the same time throughout the system.

By processing the output data and the input data simultaneously in the all slaves at the cycle event timing, the system can operate synchronously.

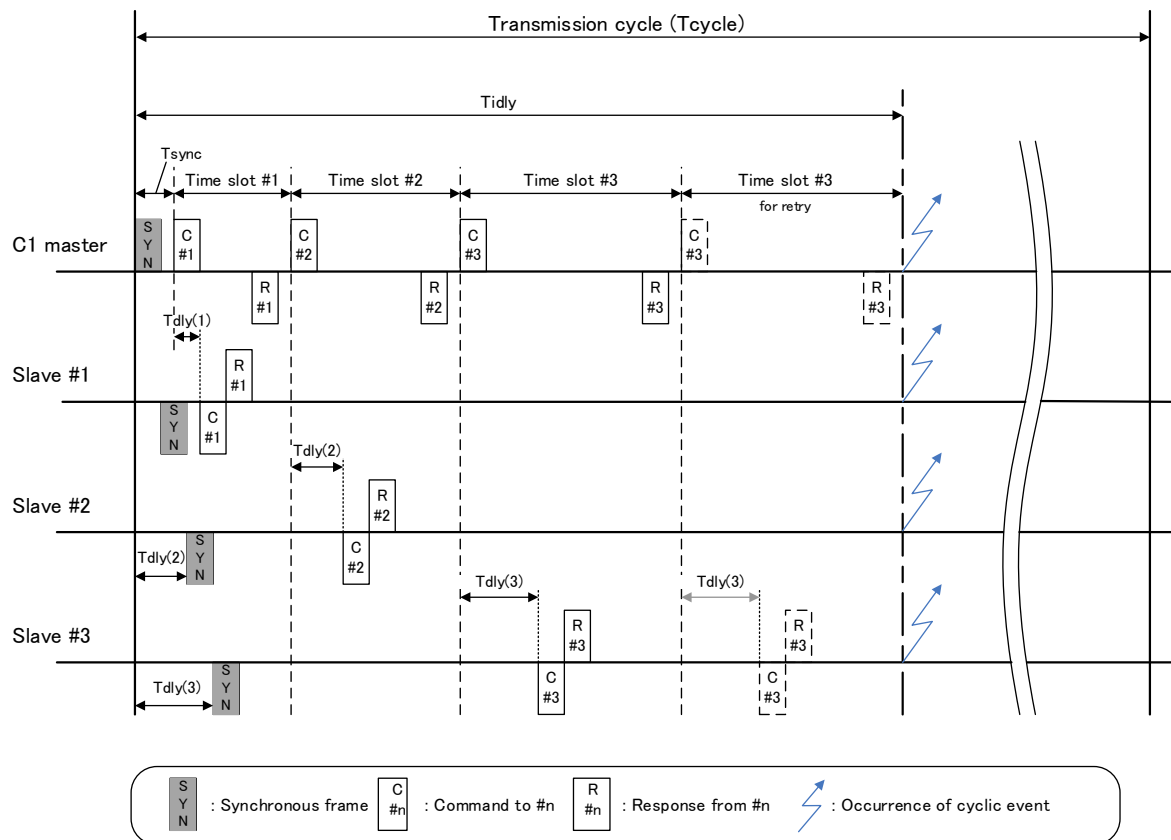


Figure 4 – Schematic diagram of cyclic event occurrence

The transmission cycle of the variable time slot type T_{cycle} is calculated as an aggregation of the band described in 4.3.2.3.2, as shown in the following formula:

$$T_{cycle} = T_{sync} + T_{io} + T_{retry} + T_{C1msg} + T_{C2msg} \quad (6)$$

where

T_{sync} is the Synchronization band;

T_{io} is the I/O data exchange band;

T_{retry} is the I/O data exchange retry band;

T_{C1msg} is the C1 message band;

T_{C2msg} is the C2 message band.

The I/O data exchange retry band and the C1 message band may be configured to be shared. When they are shared, the formula becomes:

$$T_{cycle} = T_{sync} + T_{io} + \max(T_{retry}, T_{C1msg}) + T_{C2msg} \quad (7)$$

And, the I/O data exchange retry band, the C1 message band and the C2 message band are optional. When the configuration doesn't assign all of them, the transmission cycle is minimum and is calculated as shown in the following formula:

$$T_{cycle} = T_{sync} + T_{io} \quad (8)$$

The calculation method for the bands mentioned above is shown in the following.

a) Synchronization band

The Sync band T_{sync} is calculated as follows: where T_{tr_s} is the transmission time of the synchronous frame, and T_{gap} is the gap between the frames:

$$T_{sync} = T_{tr_s} + T_{gap} \quad (9)$$

b) I/O data exchange band

The I/O data exchange band T_{io} is calculated as follows: where N is the number of slaves, $T_{tr_c}(n)$ is the output (command) transmission time from the C1 master to the slave #n, $T_{tr_r}(n)$ is the input (response) transmission time from the slave #n, $T_{dly}(n)$ is the frame transmission delay time between the C1 master and the slave #n, and T_{gap} is the inter-packet gap:

$$\begin{aligned} T_{io} &= \sum_{n=1}^N \{T_{tr_c}(n) + T_{dly}(n) + T_{gap} + T_{tr_r}(n) + T_{dly}(n) + T_{gap}\} \\ &= \sum_{n=1}^N \{T_{tr_c}(n) + T_{tr_r}(n) + 2 \times T_{dly}(n)\} + 2 \times N \times T_{gap} \end{aligned} \quad (10)$$

c) I/O data exchange retry band

The I/O data exchange retry band T_{retry} is calculated as follows: where N_r is the maximum number of the retry:

$$T_{retry} = \sum_{r=1}^{Nr} \{T_{tr_c}(r) + T_{dly}(r) + T_{gap} + T_{tr_r}(r) + T_{dly}(r) + T_{gap}\} \quad (11)$$

$$= \sum_{r=1}^{Nr} \{T_{tr_c}(r) + T_{tr_r}(r) + 2 \times T_{dly}(r)\} + 2 \times Nr \times T_{gap}$$

d) C1 message band

The C1 message band T_{c1msg} is calculated as follows: where $T_{tr_c1c}(m_1)$ is the request transmission time from the primary station (C1 master) to the secondary station m_1 (m_1 is the station number of slaves or the C2 master that becomes the secondary station), $T_{tr_c1r}(m_1)$ is the response transmission time from the secondary station to the primary station, $T_{dly}(m_1)$ is the transmission delay between the primary station and the secondary station, N_{c1msg} is the number of the C1 messages:

$$T_{C1msg} = N_{c1msg} \times \{T_{tr_c1c}(m_1) + T_{dly}(m_1) + T_{gap} + T_{tr_c1r}(m_1) + T_{dly}(m_1) + T_{gap}\} \quad (12)$$

$$= N_{c1msg} \times \{T_{tr_c1c}(m_1) + T_{tr_c1r}(m_1) + 2 \times T_{dly}(m_1) + 2 \times T_{gap}\}$$

e) C2 message band

The C2 message band T_{c2msg} is calculated as follows: where $T_{tr_c2c}(m_2)$ is the request transmission time from the primary station (C2 master) to the secondary station m_2 (m_2 is the station number of the slave or the C1 master that becomes the secondary station), $T_{tr_c2r}(m_2)$ is the response transmission time from the secondary station to the primary station, $T_{dly}(m_2)$ is the transmission delay between the primary station and the secondary station, N_{c2msg} is the number of the C2 messages:


$$T_{c2msg} = N_{c2msg} \times \{T_{tr_c2c}(m_2) + T_{dly}(m_2) + T_{gap} + T_{tr_c2r}(m_2) + T_{dly}(m_2) + T_{gap}\} \quad (13)$$

$$= N_{c2msg} \times \{T_{tr_c2c}(m_2) + T_{tr_c2r}(m_2) + 2 \times T_{dly}(m_2) + 2 \times T_{gap}\}$$

4.3.2.3 Timing relationship between cyclic transmission and data processing

Subclause 4.3.2.3 explains the timing relationship between the cyclic transmission and the data processing by using Figure 5. In cycle #1, the slaves latch input and make the input data to be sent. The input data that the each slave made is transmitted to the C1 master in cycle #2. Though it is received by the C1 master, it is not processed by the C1 master at this time. The C1 master starts to process it at the top of the cycle #3. Therefore, the delay from the timing of the slave's latched input to the timing of the master processing it is two transmission cycles.

Similarly, the output data that the C1 master made at cycle #3 is transmitted to all the slaves, slave by slave, in cycle #4. Though it is received by each slave in cycle #4, it is not processed by the slave at this time. All the slaves start to process it all together at the top of cycle #5. Therefore, the delay from the timing of the master's making the output data to the timing of the slave processing it is two transmission cycles, that is same as the input data.

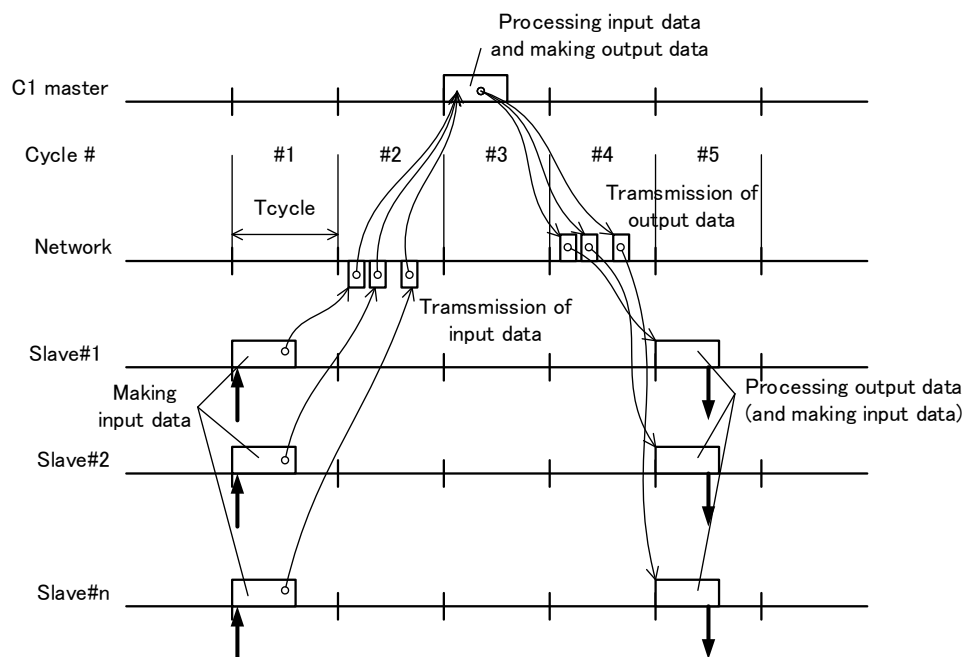

NOTE Output data and input data are transmitted in every cycle, but these drawings are omitted in this figure to explain easily. Data processing by C1 master and slaves in every cycle are also omitted.

Figure 5 – Timing relationship between cyclic transmission and data processing

4.3.3 Acyclic transmission mode

The acyclic transmission may be used in a system that does not require real-time communication or cyclical data exchange. In the acyclic transmission mode, it is possible to execute the same transmission sequence as a cyclic transmission mode without fixing the transmission cycle. Although the C2 message communication is also possible, the DLS-user shall execute the arbitration of the transmission timing. In the acyclic transmission mode, the data length is fixed at 64 octets.

Since the acyclic transmission may not use the synchronous frame, slaves execute processing of the output data sent by the master and processing of the data to send the input data at its own timing. The slaves do not operate simultaneously.

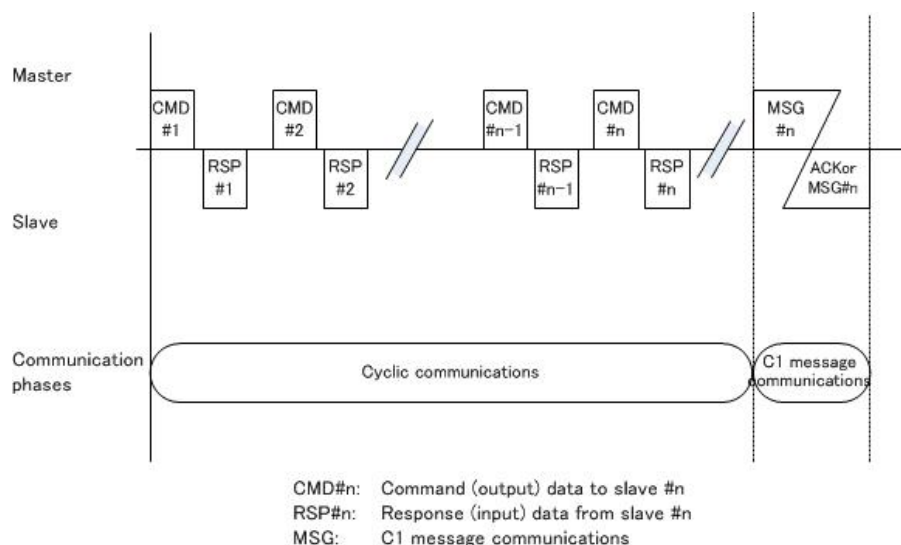


Figure 6 – Timing chart example of acyclic communication

4.4 Service assumed from the PhL

4.4.1 General requirement

There are two types of Ph-service which DLE requires. One is defined in IEC 61158-2, Type 24 and the other is defined in ISO/IEC/IEEE 8802-3:2017, Clause 6.

Both types require the following interface elements:

- Transmit Machine,
- Receive Machine,
- Serializer,
- Deserializer.

4.4.2 DL_Symbols

The PhL Interface Data Units present at the DLL-PhL interface shall be the DL_symbols. The DL_symbol shall have one of the following values:

- a) ZERO corresponds to a binary "0";
- b) ONE corresponds to a binary "1".

4.4.3 Assumed primitives of the PhS

The PhS is assumed to provide the following two categories of primitives to the Type 24 DL-protocol.

- a) Service primitives for transmitting and receiving frames to / from other peer DLEs.
- b) Service primitives that provide information needed by the local DLE to perform the media access functions.

The assumed primitives of the PhS are grouped into these two categories:

- c) Transfer of Data to the corresponding DLE
 - 1) PLS_DATA request
 - 2) PLS_DATA indication
- d) Indication from the local PhL
 - 3) PLS_CARRIER indication
 - 4) PLS_SIGNAL indication
 - 5) PLS_DATA_VALID indication

4.5 Local parameters, variables, counters, timers

4.5.1 Overview

This specification uses the DLS-user request parameters P(...) and local variables V(...) as a means of clarifying the effect of certain actions and the conditions under which those actions are valid, local timers T(...) as a means of monitoring actions of the distributed DLS-provider and of ensuring a local DLE response to the absence of those actions. It also uses local queues Q(...) as a means of ordering certain activities, of clarifying the effects of certain actions, and of clarifying the conditions under which those activities are valid.

Unless otherwise specified, at the moment of their creation or of DLE activation:

- a) all variables shall be initialized to their default value, or to their minimum permitted value if no default is specified;
- b) all timers shall be initialized to inactive;

c) all queues shall be initialized to empty.

DL-management may change the values of configuration variables.

4.5.2 Variables, parameters, counters and timers to support DLE function

4.5.2.1 V(MA), P(MA)

This variable is used by the CTC to record station address of this station. This variable shall be implemented by all stations. Its range is 1 to $2^{16}-1$. When the station adopts short format of the DLPDU, the lower 8 bits of this variable is effective.

4.5.2.2 V(Tcycle), P(Tcycle)

This variable is used by the CTC to record transmission period of cyclic communication. This variable shall be implemented by all stations. The value of time depends on V(Tunit). Its range is 1 000 to 64 000.

4.5.2.3 V(Nmax_slaves), P(Nmax_slaves)

This variable is used by the CTC to record the number of connectable slave stations. Its range is 1 to 62.

4.5.2.4 V(Cyc_sel), P(Cyc_sel)

This variable is used by the DLM to record the selection of transmission mode, which is cyclic or acyclic. The value is listed at Table 5.

Table 5 – List of the values of the variable Cyc_sel

Value	Symbol	Description
0	CMode_Cyclic	Cyclic transmission mode
1	CMode_Acyclic	Acyclic transmission mode

4.5.2.5 V(Nmax_dly_cnt), P(Nmax_dly_cnt)

This variable is used by the DLM to record maximum-measurement-count, which limits the number of delay measurement execution. This variable is implemented only by the C1 master adopts configurable time slot. Its default value is 2. Its range is 2 to 31.

4.5.2.6 V(IO_sz), P(IO_sz)

This variable is used by the CTC to hold and designate the data size of send and receive frame, which is transferred in the I/O data exchange band. Its range is 8 to 64. When the CTC adopts fixed-width time slot, its value shall be same for all stations.

4.5.2.7 V(Pkt_sz), P(Pkt_sz)

This variable is used by message segmentation machine to record the message packet size of the cyclic transmission. Its range is 4 to 500. When CTC adopts fixed-width time slot, its value shall be equal to V(IO_sz).

4.5.2.8 V(Nmax_retry), P(Nmax_retry)

This variable is used by the CTC to record maximum-retry-count, which limits the number of retries in the I/O data exchange retry band. This variable is implemented only by the C1 master. Its default value is 0, meaning retry are not permitted. Its range is 0 to 62.

4.5.2.9 V(Tslot), P(Tslot)

This variable is used by the CTC to hold and designate the value of the timeout time for the I/O data exchange to each station. This variable shall be implemented by the C1 master and the C2 master. Its range is 0 to less than V(Tcycle). The time that a set value indicates depends on V(Tunit). When the CTC adopts fixed-width time slot, its value shall be same for all stations.

4.5.2.10 V(Tunit), P(Tunit)

This variable is used by the CTC to record the unit of a set value of the variable concerning time, when the CTC adopts configurable time slot. Table 6 shows its range. This variable shall be implemented only by the CTC which adopts configurable time slot. The CTC which adopts fixed-width time slot shall not this variable, and shall use 250 ns as time unit for all variables concerning time.

Table 6 – List of the values of the variable Tunit

Value	Definition	Tcycle
0	10 ns	31,25 μ s to 500 μ s
1	100 ns	More than 500 μ s to 4 ms
2	1 μ s	More than 4 ms to 64 ms
NOTE Value 0 is default.		

4.5.2.11 V(Tidly), P(Tidly)

This variable is used by the CTC to record the timing of event, which is issued periodically to synchronize the DLS-user. This variable shall be implemented by all stations, which adopt configurable time slot. The value is delay time from the start of cyclic transmission. Its range is 0 to less than V(Tcycle). The time that a set value indicates depends on V(Tunit).

4.5.2.12 V(Tc2_dly), P(Tc2_dly)

This variable is used by the CTC to record the timing to start the C2 message communication. This variable shall be implemented by the C1 master and the C2 master, which adopt configurable time slot. The value is delay time from the end of cyclic transmission. Its range is 0 to less than V(Tcycle). The time that a set value indicates depends on V(Tunit).

4.5.2.13 V(Tmsg), P(Tmsg)

This variable is used by the CTC to record the time period for message communication. This variable shall be implemented by the C1 master and the C2 master. Its range is 0 to less than V(Tcycle). The time that a set value indicates depends on V(Tunit). When the CTC adopts fixed-width time slot, its value shall be same for all stations.

4.5.2.14 V(Twrpt)

This variable is used by the SRC to record the time period for transmission delay measurement. This variable shall be implemented by the C2 master and the slave. Its range is V(Tslot) x 3 to less than 64 ms. The default value is 500 μ s. The time that a set value indicates depends on V(Tunit).

4.5.2.15 V(IO_MAP), P(IO_MAP)

This variable is used by the DLM and the CTC to record the information of the slaves and the C2 master which to be connected in the network. See IEC 61158-3-24, 5.3.2.2.13 for the details.

4.5.2.16 V(Sts_STI), P(Sts_STI)

This variable is used by the DLM to hold the connection status of the stations which to be connected in the network. See IEC 61158-3-24, 5.3.3.2.2.1 for the details.

4.5.2.17 V(Sts_Err), P(Sts_Err)

This variable is used by the DLM to hold the error factor which occurred in the DLE.

4.5.2.18 V(Fc2msg)

This variable is used by the CTC to hold the presence of the C2 message communication band in cyclic transmission mode. This variable shall be implemented by the C1 master and the C2 master. Its value is 0 or 1. The value shall be set to 1 when the C2 message communication band is assigned, and set to 0 when it is not assigned.

4.5.2.19 V(Nslave)

This variable is used by the CTC to hold and designate slave number, which is being processed in the current time slot. This variable shall be implemented by the C1 master and the C2 master. Its range is 0 to V(Nmax_slaves). The value is reset to zero at the start of each cycle of the cyclic transmission. And it is incremented when the I/O data exchange to a slave is executed.

4.5.2.20 V(Nretry)

This variable is used by the CTC to hold and designate the element of retry list, which is being processed in the current time slot. The value is reset to zero at the beginning of the each transmission cycle. And it is incremented when the I/O data exchange to a slave is fault, and decremented when the I/O data exchange retry is executed.

4.5.2.21 V(Nrest_slot)

This variable is used by the CTC to hold and designate the number of rest time slot for retry within the end of this cycle. Its range is 0 to V(Nmax_retry). This variable shall be implemented by the C1 master. The value is decremented in the range of V(Nmax_retry) to 0.

4.5.2.22 V(Ndly_cnt)

This variable is used by the DLM to hold and designate the count of executed delay measurement. This variable shall be implemented by the C1 master, which adopt configurable time slot. The value is reset to zero at the start of each cycle of cyclic transmission, and incremented when delay measurement is executed. Its range is 0 to V(Nmax_dly_cnt).

4.5.2.23 V(PDUType)

This variable is used by the CTC and the DLM to hold and designate the selection of the DLPDU type, which is basic format of the DLPDU or short format of the DLPDU. When the DLE adopts each of them, it may not implement this variable. The value is listed at Table 7.

Table 7 – List of the values of the variable PDUType

Value	Symbol	Description
0	PDUBasic	Basic format DLPDU
1	PDUShort	Short format DLPDU

4.5.2.24 V(SlotType)

This variable is used by the CTC and the DLM to hold and designate the selection of time slot type, which is fixed-width or configurable. When the DLE adopts each of them, it may not implement this variable. The value is listed at Table 8.

Table 8 – List of the values of the variable SlotType

Value	Symbol	Description
0	TSFixed	Fixed-width time slot
1	TSConfig	Configurable time slot

4.5.2.25 V(Nms_1), V(Nms_2)

This variable is used by the CTC to hold the number of segmentations to be sent in the message communication using basic format of the DLPDU. The suffix “_1” and “_2” show the band of the message communication, and indicate the C1 message communication and the C2 message communication respectively. This variable shall be implemented by all stations which execute message communication. The value is reset to zero at the first segment of each message and it is incremented by one every time CTC received acknowledge of one segment normally from peer station. Its range is 0 to 127.

4.5.2.26 V(Nmr_1), V(Nmr_2)

This variable is used by the CTC to hold the number of segments to be received in message communication using basic format of the DLPDU. The suffix “_1” and “_2” show the band of the message communication, and indicate the C1 message communication and the C2 message communication respectively. This variable shall be implemented by all stations which execute message communication. The value is reset to zero at the first segment of each message. And it is incremented when one segment is received from peer station. Its range is 0 to 127.

4.5.2.27 V(Fmp_1), V(Fmp_2)

This variable is used by the CTC to hold and designate the flag of the polling request in message communication using basic format of the DLPDU. The suffix “_1” and “_2” show the band of the message communication, and indicate the C1 message communication and the C2 message communication respectively. This variable shall be implemented by all stations which execute message communication. Its range is 0 or 1. The value 1 means the polling request and 0 (default) means the other.

4.5.2.28 V(Fmf_1), V(Fmf_2)

This variable is used by the CTC to hold and designate the flag of the last segment in message communication using basic format of the DLPDU. The suffix “_1” and “_2” show the band of message communication, and indicate the C1 message communication and the C2 message communication respectively. This variable shall be implemented by all stations, which execute the message communication. Its range is 0 or 1. The value is reset to zero at the first segment of each message, and set one when the last segment of the message is sent or received.

4.5.2.29 V(Ten)

This variable is used by the DLM to hold the timestamp of delay measurement end when the DLE adopts configurable time slot. The DLE shall implement this variable only when the DLE adopts configurable time slot.