



BSI Standards Publication

Fibre optic sensors

Part 7-3: Voltage measurement — Polarimetric method

National foreword

This British Standard is the UK implementation of EN IEC 61757-7-3:2024. It is identical to IEC 61757-7-3:2024.

The UK participation in its preparation was entrusted to Technical Committee GEL/86/3, Fibre optic systems and active devices.

A list of organizations represented on this committee can be obtained on request to its committee manager.

Contractual and legal considerations

This publication has been prepared in good faith, however no representation, warranty, assurance or undertaking (express or implied) is or will be made, and no responsibility or liability is or will be accepted by BSI in relation to the adequacy, accuracy, completeness or reasonableness of this publication. All and any such responsibility and liability is expressly disclaimed to the full extent permitted by the law.

This publication is provided as is, and is to be used at the recipient's own risk.

The recipient is advised to consider seeking professional guidance with respect to its use of this publication.

This publication is not intended to constitute a contract. Users are responsible for its correct application.

© The British Standards Institution 2024
Published by BSI Standards Limited 2024

ISBN 978 0 539 25763 2
ICS 33.180.99

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 June 2024.

Amendments/corrigenda issued since publication

Date	Text affected
<hr/>	

English Version

Fibre optic sensors - Part 7-3: Voltage measurement -
Polarimetric method
(IEC 61757-7-3:2024)

Capteurs fibroniques - Partie 7-3: Mesure de tension -
Méthode polarimétrique
(IEC 61757-7-3:2024)

Lichtwellenleiter-Sensoren - Teil 7-3: Spannungsmessung -
Polarimetrisches Verfahren
(IEC 61757-7-3:2024)

This European Standard was approved by CENELEC on 2024-05-24. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and the United Kingdom.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

European foreword

The text of document 86C/1873/CDV, future edition 1 of IEC 61757-7-3, prepared by SC 86C "Fibre optic systems and active devices" of IEC/TC 86 "Fibre optics" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN IEC 61757-7-3:2024.

The following dates are fixed:

- latest date by which the document has to be implemented at national (dop) 2025-02-24 level by publication of an identical national standard or by endorsement
- latest date by which the national standards conflicting with the (dow) 2027-05-24 document have to be withdrawn

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC shall not be held responsible for identifying any or all such patent rights.

Any feedback and questions on this document should be directed to the users' national committee. A complete listing of these bodies can be found on the CENELEC website.

Endorsement notice

The text of the International Standard IEC 61757-7-3:2024 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standard indicated:

IEC 61300-2-1	NOTE	Approved as EN IEC 61300-2-1
IEC 61300-2-9	NOTE	Approved as EN 61300-2-9

Annex ZA
(normative)

**Normative references to international publications
with their corresponding European publications**

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 Where an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here: www.cenelec.eu.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 61757	-	Fibre optic sensors - Generic specification	EN IEC 61757	-

CONTENTS

FOREWORD.....	4
INTRODUCTION.....	6
1 Scope.....	7
2 Normative references	7
3 Terms and definitions	7
4 Components of optical voltage sensor using polarimetric method	9
4.1 General description.....	9
4.2 Classification of Pockels cells	10
5 Characteristic tests.....	11
5.1 General information	11
5.2 Input-to-output characteristics.....	11
5.2.1 General	11
5.2.2 Test methods.....	12
5.2.3 Test procedure	14
5.2.4 Evaluation	16
5.3 Warm-up time	17
5.3.1 General	17
5.3.2 Test method	17
5.3.3 Evaluation	17
5.4 Voltage conditions for obtaining characteristic parameters	17
5.5 Input parameter dependency.....	18
5.5.1 Frequency characteristics.....	18
5.5.2 Transient characteristics.....	19
5.6 External environment dependency	21
5.6.1 Test of the steady state temperature characteristics	21
5.6.2 Test of the transient temperature characteristics	23
5.6.3 Shock and vibration test	26
Annex A (informative) Principle of optical voltage sensor	27
A.1 Outline	27
A.2 Pockels effect	27
A.3 Voltage detection method	29
A.3.1 General	29
A.3.2 Examples of voltage detection method.....	30
Annex B (informative) Features of optical voltage sensor technology	32
Annex C (informative) Design considerations	33
C.1 General information	33
C.2 Performance restricting factors	33
C.3 Procedure for determining the specifications of the equipment.....	34
Annex D (informative) Measurement parameter performance table	36
D.1 General.....	36
D.2 I/O characteristics	36
D.3 Frequency characteristics	37
D.4 Transient characteristics	38
D.5 Steady state temperature characteristics	39
D.6 Transient temperature characteristics	40
D.7 Shock test.....	41

Bibliography	42
Figure 1 – Measurement system using optical voltage sensor	10
Figure 2 – I/O characteristics of a fibre optic voltage sensor	12
Figure 3 – Measurement setup for the waveform comparison method	13
Figure 4 – Measurement setup for the AC bridge method.....	14
Figure 5 – Transient characteristics of sensors for AC measurements	20
Figure 6 – Transient characteristics of sensors for AC/DC measurements.....	21
Figure 7 – Configuration example for evaluating the steady temperature and transient temperature characteristics of the sensor part	22
Figure 8 – Example of a temperature profile.....	23
Figure 9 – Birefringence change during temperature change.....	24
Figure 10 – Example of temperature program	25
Figure A.1 – Pockels effect	28
Figure A.2 – Configuration of a voltage detection system using the Pockels effect.....	29
Figure A.3 – Basic configuration of an optical voltage sensor using the intensity modulation method	30
Figure A.4 – Basic configuration of an optical voltage sensor using the interferometric method	31
Figure D.1 – Example of the transient characteristic	38
Figure D.2 – Example of the temperature characteristics at voltage 0	39
Figure D.3 – Example of the temperature characteristics at rated voltage	39
Figure D.4 – Example of the transient temperature characteristics at input voltage 0	40
Figure D.5 – Example of the transient temperature characteristics at rated voltage	40
Figure D.6 – Example of the shock test at voltage 0.....	41
Figure D.7 – Example of the shock test at rated voltage.....	41
Table 1 – List of parameters to be obtained	11
Table 2 – Test methods	13
Table 3 – Voltage conditions for obtaining characteristic parameters	18
Table A.1 – Direction of electric field with sensitivity	29
Table D.1 – I/O characteristics.....	36
Table D.2 – Frequency characteristics	37

INTERNATIONAL ELECTROTECHNICAL COMMISSION

FIBRE OPTIC SENSORS –

Part 7-3: Voltage measurement – Polarimetric method

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at <https://patents.iec.ch>. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 61757-7-3 has been prepared by subcommittee SC 86C: Fibre optic systems and active devices, of IEC technical committee TC 86: Fibre optics. It is an International Standard.

The text of this International Standard is based on the following documents:

Draft	Report on voting
86C/1873/CDV	86C/1893/RVC

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

A list of all parts in the IEC 61757 series, published under the general title *Fibre optic sensors*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn, or
- revised.

INTRODUCTION

This document is part of the IEC 61757 series, which is dedicated to fibre optic sensors. Generic specifications for fibre optic sensors are defined in IEC 61757.

The individual parts of the IEC 61757 series are numbered as IEC 61757-*M-T*, where *M* denotes the measure and *T* the technology of the fibre optic sensor. The IEC 61757-7-*T* series is concerned with voltage measurements.

Voltage measuring techniques are essential for controlling and diagnosing apparatus that support industry and society. Optical voltage sensors based on electro-optic effects have been developed to serve as voltage measuring devices. These sensors enable advanced voltage measurements without encountering the issues related to conventional electrical voltage sensors. Hence, they have been applied in various fields including power systems.

Given the expected potential of this new fibre optic voltage sensing technology, several kinds of optical voltage sensors covering a wide range of applications have been developed by various manufacturers. The design of these voltage sensors depends on the specific application, which determines the target voltage to be measured, the configuration of the sensor, the signal processing method, and the installation method. When developing a new optical voltage sensor, the sensor performance and characteristics have to be specified and evaluated.

To facilitate the use of fibre optic voltage sensors, it is important to define terms that characterize the performance and functionality of these sensors. It is also important to clearly specify how these specifications can be evaluated. Clearly defined terms and evaluation procedures help to develop more efficient sensors and to smoothly transfer this new sensor technology from the suppliers to the users. This document defines a set of methods for evaluating the performance and characteristics of fibre optic voltage sensors. However, this document does not quantify any performance targets, because these depend on the specific application of the sensor. It is nevertheless expected that this document helps to define specific quantitative targets for the sensor performance when a fibre optic voltage sensor is developed for a given practical application.

This document is based on the standard OITDA FS 02 [1]¹ published by the Optoelectronic Industry and Technology Development Association (OITDA). All the figures and tables in this document are identical to those in OITDA FS 02 except for the translation from Japanese to English.

¹ Numbers in square brackets refer to the Bibliography.

FIBRE OPTIC SENSORS –

Part 7-3: Voltage measurement – Polarimetric method

1 Scope

This part of IEC 61757 defines the terminology, structure, and performance characteristics of fibre optic voltage sensors using a polarimetric measurement method. The document specifies test methods and procedures for measuring key performance parameters of these sensors. It addresses only the voltage sensing element and not the additional devices that are unique to each application.

The document does not specify the required performance values of optical polarimetric fibre optic voltage sensors, because these specifications depend on the designated application of the sensor and are typically defined by the user of the sensor. The required performance values are usually defined when designing a sensor for a specific application.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61757, *Fibre optic sensors – Generic specification*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 61757 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

3.1

electro-optic effect

change in the optical characteristics of a material under the influence of an electric field

Note 1 to entry: Pockels and Kerr effects are examples of electro-optic effects.

Note 2 to entry: Electro-optic is often erroneously used as a synonym for opto-electronic.

Note 3 to entry: The most common effect results in a change in refractive index.

[SOURCE: IEC 60050-731:1991, 731-01-42]

3.2

intensity modulation method

method of converting birefringence information into light intensity by passing light through a wave plate, a Pockels cell, and a polarization separation element in this order, and creating an optical signal corresponding to the measured voltage

3.3

interferometric method

method in which two orthogonal linearly polarized light components are passed through a Pockels cell and then converted into the same polarization state, so that they interfere with each other and are converted into light intensity to create an optical signal corresponding to the measured voltage

3.4

maximum measurable frequency

highest frequency of voltage variations that can be measured by an optical voltage sensor

3.5

maximum measurable voltage

largest voltage that can be measured by an optical voltage sensor

3.6

minimum measurable frequency

lowest frequency of voltage variations that can be measured by an optical voltage sensor

3.7

operating temperature range

range of temperature within which an optical voltage sensor shall satisfy the defined performance

3.8

optical activity

property of rotating the plane of polarization

3.9

optical part

part consisting of lens, prism, mirror, and optical element, like a phase modulator, in an optical voltage sensor

Note 1 to entry: While the term "sensor part" focuses on the component position (see Clause 4), the term "optical part" focuses on the component materials.

3.10

optical voltage sensor

component, module, subassembly, assembly, or device that can detect voltage using the Pockels effect

Note 1 to entry: The optical voltage sensor consists of a sensor unit, an optical transmission unit, and a signal processing unit (see Clause 4).

3.11

photo-conductivity

photo-electric effect characterized by a variation of electrical conductivity

[SOURCE: IEC 60050-731:1991, 731-01-62]

3.12

piezoelectric effect

generation of an electric field in response to an applied mechanical stress or generation of a stress in response to an applied electric field

Note 1 to entry: A more complete definition is given in IEC 60050-121:1998, 121-12-86.

3.13**Pockels coefficient**

coefficient that indicates the difference in the refractive indexes of the birefringence that occurs in response to the electric field applied to the substance

Note 1 to entry: See Annex A for details.

3.14**Pockels effect**

electro-optic effect in which an applied electric field makes an optically isotropic substance birefringent, the difference of refractive indexes being proportional to the magnitude of the electric field strength

[SOURCE: IEC 60050-121:1998, 121-12-94]

3.15**rated voltage**

rated value of the voltage assigned by the manufacturer to a component, device, or equipment and to which operation and performance characteristics are referred

3.16**required specifications**

list of specifications an optical voltage sensor shall satisfy

3.17**transient characteristics**

phenomena of changing the voltage value that is output from an optical voltage sensor when the voltage to be measured deviates from the defined voltage value over a short period of time

3.18**voltage divider**

device comprising resistors, inductors, capacitors, or a combination of these components such that, between two points of the device, a desired fraction of the voltage applied to the device can be obtained

Note 1 to entry: A voltage divider acquires part of the voltage applied to the entire device between two points of the device.

[SOURCE: IEC 60050-312:2001, 312-02-32, modified – Removed "transformer(s)" from definition and added Note 1 to entry]

3.19**warm-up time**

duration between the instant after which the power supply is energized and the instant when the measuring instrument may be used, as specified by the manufacturer


[SOURCE: IEC 60050-311:2001, 311-03-18]

4 Components of optical voltage sensor using polarimetric method

4.1 General description

Figure 1 shows a schematic diagram of the various elements of which an optical voltage sensor is composed. In this document, the optical voltage sensor is divided into three parts: a sensor part, an optical transmission part, and a signal processing part. Each of these parts can be exposed to different physical environments.

The sensor part of the optical voltage sensor contains a Pockels cell that is connected to two electric conductors whose voltage difference is to be measured. It is connected via two optical fibres to the signal processing part, which calculates the voltage measured by the sensor part. While the sensor part is placed adjacent to the electric conductors, the signal processing part is generally placed in a remote location and thus exposed to a different environment than the sensor part.

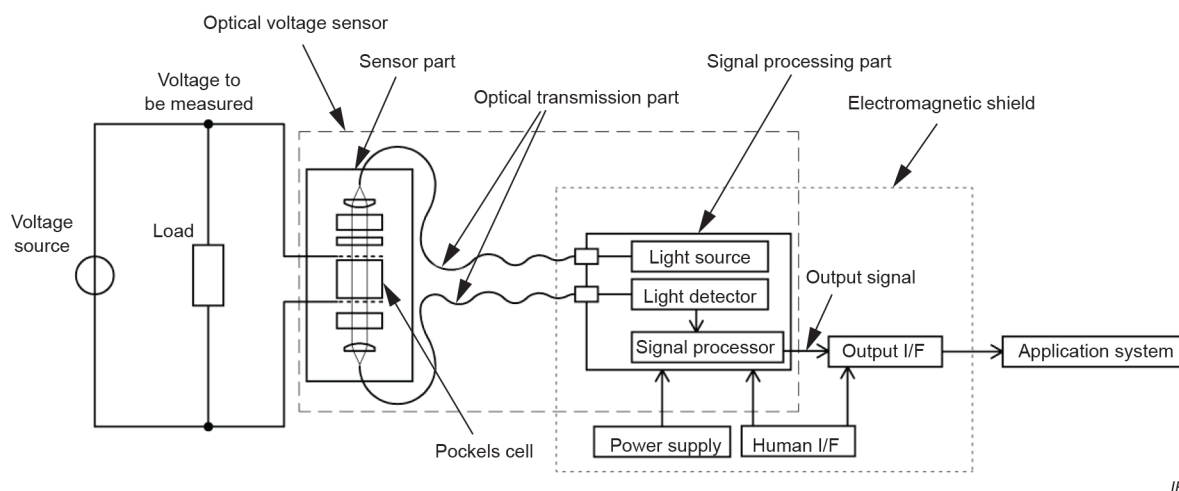

Source: OITDA FS 02 [1], reproduced with the permission of the Optoelectronic Industry and Technology Development Association (OITDA).

Figure 1 – Measurement system using optical voltage sensor

The optical fibres that connect the sensor part to the signal processing part is called the optical transmission part.

The light source for generating the optical signal transmitted to the sensor part via optical fibre is typically included in the signal processing part. Likewise, the light detector for receiving the optical signal transmitted from the sensor part via optical fibre is included in the signal processing part, which also contains the power supplies.

More details on the specific functions of each part can be found in Annex A.

NOTE The sensor part can include elements for controlling polarization and phase of the optical signal, and a voltage divider for adjusting the voltage applied to the Pockels cell. The signal processing part can have elements for controlling polarization and phase of the optical signal, in addition to the light source, power supply, and light detector.

A component, module, subassembly, assembly, or device that comprises a sensor part with a Pockels cell, an optical transmission part, and a signal processing part is called an optical voltage sensor.

See Annex B for more details on the specific features of polarimetric fibre optic voltage sensors and Annex C for design considerations and performance specifications.

4.2 Classification of Pockels cells

Pockels cells can be divided into two classes. Some Pockels cells have longitudinal modulation elements in which the light transmission direction and the voltage application direction are parallel, whereas other Pockels cells have transverse modulation elements in which the light transmission direction and the voltage application direction are orthogonal to each other.

More details on the operation of Pockels cells can be found in Annex A.

5 Characteristic tests

5.1 General information

Clause 5 specifies a characteristic test method for the optical voltage sensor. The input-to-output (I/O) characteristics are described in 5.2 and are the basis of the test. Subclause 5.3 describes the warm-up time, which is not considered in conventional voltage sensors. Subclause 5.5 defines the input parameter dependency for each test method and 5.6 the external environment dependency.

Subclause 5.4 describes the voltage conditions for obtaining characteristic parameters. The parameters to be obtained are listed in Table 1, which specifies for each parameter whether tests are required or optional. The measurement results are summarized in an inspection report (see Annex D) and shown to the user.

Table 1 – List of parameters to be obtained

No.	Parameters			Required or optional
1	I/O characteristics			Required
2	Warm-up time			Required
3	Parameter dependency	Input parameter dependency	Frequency characteristic	Required for type test
			Transient characteristic	Required for type test
		External environment dependency	Steady state temperature characteristic	Required for type test Optional for routine test for outdoor use sensors
			Transient temperature characteristic	Required for type test Optional for routine test for outdoor use sensor
			Shock and vibration	Optional

5.2 Input-to-output characteristics

5.2.1 General

The I/O characteristics are the most basic performance parameters of optical voltage sensors. Figure 2 shows the I/O characteristics of a typical fibre optic voltage sensor. Ideally, the voltage to be measured is the same as the output voltage reported by the sensor. In practice, the output voltage can deviate from the voltage to be measured, thus resulting in a measurement error. These errors are caused by the following three factors:

- a) noise,
- b) sensitivity change,
- c) non-linearity.

There are two types of noise. In some cases, the noise is correlated with the voltage to be measured, and in other cases it is not. Therefore, these two types of noise shall be characterized separately. DC offsets in the output voltage should be distinguished from noise.

Sensitivity change is a variation in the proportionality between reported output voltage and the voltage to be measured.

Non-linearity is the phenomenon that the sensitivity of the voltage sensor changes as a function of voltage to be measured, so that the relationship between the reported output voltage and the voltage to be measured deviates from a straight line.