



BSI Standards Publication

Audio/video, information and communication technology equipment

Part 1: Safety requirements

National foreword

This British Standard is the UK implementation of EN IEC 62368-1:2020 and EN IEC 62368-1:2020+A11:2020. It is derived from IEC 62368-1:2018. It supersedes BS EN 62368-1:2014+A11:2017, BS EN 60950-23:2006 and BS EN 60950-22:2017, which will be withdrawn on 6 January 2023.

The start and finish of text introduced or altered by amendment is indicated in the text by tags. Tags indicating changes to text carry the number of the CENELEC amendment. For example, text altered by CENELEC amendment A11 is indicated by A11 A11.

The UK participation in its preparation was entrusted to Technical Committee EPL/108, Safety of electronic equipment within the field of audio/video, information technology and communication technology.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2020
Published by BSI Standards Limited 2020

ISBN 978 0 580 95496 2

ICS 29.020; 33.160.01; 35.020

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 March 2020.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

English Version

**Audio/video, information and communication technology
equipment - Part 1: Safety requirements
(IEC 62368-1:2018)**

Équipements des technologies de l'audio/vidéo, de
l'information et de la communication - Partie 1: Exigences
de sécurité
(IEC 62368-1:2018)

Einrichtungen für Audio/Video-, Informations- und
Kommunikationstechnik - Teil 1: Sicherheitsanforderungen
(IEC 62368-1:2018)

This European Standard was approved by CENELEC on 2020-01-06. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

European foreword

This document (EN IEC 62368-1:2020) consists of the text of IEC 62368-1:2018 prepared by IEC/TC 108 "Safety of electronic equipment within the field of audio/video, information technology and communication technology".

The following dates are fixed:

- latest date by which this document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2021-01-06
- latest date by which the national standards conflicting with this document have to be withdrawn (dow) 2023-01-06

This document supersedes EN 60950-22:2017, EN 60950-23:2006 and EN 62368-1:2014 and all of its amendments and corrigenda (if any).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC shall not be held responsible for identifying any or all such patent rights.

Endorsement notice

The text of the International Standard IEC 62368-1:2018 was approved by CENELEC as a European Standard without any modification.

European foreword to amendment A11

This document (EN IEC 62368-1:2020/A11:2020) has been prepared by CLC/TC 108X "Safety of electronic equipment within the fields of Audio/Video, Information Technology and Communication Technology".

This document amends EN IEC 62368-1:2020.

The following dates are fixed:

- latest date by which this document has to (dop) 2021-01-06
be implemented at national level by
publication of an identical national
standard or by endorsement
- latest date by which the national (dow) 2023-01-06
standards conflicting with this document
have to be withdrawn

Clauses, subclauses, notes, tables, figures and annexes which are additional to those in IEC 62368-1:2018 are prefixed "Z".

Annex ZA (normative)

Normative references to international publications with their corresponding European publications

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 When an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here: www.cenelec.eu.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 60027-1	-	Letters symbols to be used in electrical technology - Part 1: General	EN 60027-1	-
IEC 60065	-	Audio, video and similar electronic apparatus - Safety requirements	EN 60065	-
IEC 60068-2-6	-	Environmental testing - Part 2-6: Tests - Test Fc: Vibration (sinusoidal)	EN 60068-2-6	-
IEC 60068-2-11	-	Basic environmental testing procedures - Part 2-11: Tests - Test Ka: Salt mist	EN 60068-2-11	-
IEC 60068-2-78	-	Environmental testing - Part 2-78: Tests - Test Cab: Damp heat, steady state	EN 60068-2-78	-
IEC 60073	-	Basic and safety principles for man-machine interface, marking and identification - Coding principles for indicators and actuators	EN 60073	-
IEC 60076-14	-	Power transformers - Part 14: Liquid-immersed power transformers using high-temperature insulation materials	EN 60076-14	-
IEC/TR 60083	-	Plugs and socket-outlets for domestic and similar general use standardized in member countries of IEC	-	-
IEC 60085	-	Electrical insulation - Thermal evaluation and designation	EN 60085	-
IEC 60086-4	-	Primary batteries - Part 4: Safety of lithium batteries	EN 60086-4	-
IEC 60086-5	-	Primary batteries - Part 5: Safety of batteries with aqueous electrolyte	EN 60086-5	-
IEC 60107-1	1997	Methods of measurement on receivers for television broadcast transmissions - Part 1: General considerations - Measurements at radio and video frequencies	EN 60107-1	1997
IEC 60112	-	Method for the determination of the proof and the comparative tracking indices of solid insulating materials	EN 60112	-
IEC 60127	series	Miniature fuses	EN 60127	series
IEC 60227-1	-	Polyvinyl chloride insulated cables of rated voltages up to and including 450/750 V - Part 1: General requirements	-	-
IEC 60227-2 + A1	1997 2003	Polyvinyl chloride insulated cables of rated voltages up to and including 450/750 V - Part 2: Test methods	-	-
IEC 60245-1	-	Rubber insulated cables - Rated voltages up to and including 450/750 V -- Part 1: General requirements	-	-

IEC 60296	-	Fluids for electrotechnical applications - Unused mineral insulating oils for transformers and switchgear	EN 60296	-
IEC 60309	series	Plugs, socket-outlets and couplers for industrial purposes	EN 60309	series
IEC 60317	series	Specifications for particular types of winding wires	EN 60317	series
IEC 60317-0-7	2017	Specifications for particular types of winding wires - Part 0-7: General requirements - Fully insulated (FIW) zero-defect enamelled round copper wire	EN 60317-0-7	2017
IEC 60317-43	-	Specifications for particular types of winding wires - Part 43: Aromatic polyimide tape wrapped round copper wire, class 240	EN 60317-43	-
IEC 60317-56	-	Specifications for particular types of winding wires - Part 56: Solderable fully insulated (FIW) zero-defect polyurethane enamelled round copper wire, class 180	EN 60317-56	-
IEC 60320	series	Appliance couplers for household and similar general purposes	EN 60320	series
IEC 60320-1	-	Appliance couplers for household and similar general purposes - Part 1: General requirements	EN 60320-1	-
IEC 60332-1-2	-	Tests on electric and optical fibre cables under fire conditions - Part 1-2: Test for vertical flame propagation for a single insulated wire or cable - Procedure for 1 kW pre-mixed flame	EN 60332-1-2	-
IEC 60332-1-3	-	Tests on electric and optical fibre cables under fire conditions - Part 1-3: Test for vertical flame propagation for a single insulated wire or cable - Procedure for determination of flaming droplets/particles	EN 60332-1-3	-
IEC 60332-2-2	-	Tests on electric and optical fibre cables under fire conditions - Part 2-2: Test for vertical flame propagation for a single small insulated wire or cable - Procedure for diffusion flame	EN 60332-2-2	-
IEC 60384-14	-	Fixed capacitors for use in electronic equipment - Part 14: Sectional specification - Fixed capacitors for electromagnetic interference suppression and connection to the supply mains	EN 60384-14	-
IEC 60417	Data-base	Graphical symbols for use on equipment	-	-
IEC 60529	-	Degrees of protection provided by enclosures (IP Code)	EN 60529	-
IEC 60664-1	2007	Insulation coordination for equipment within low-voltage systems - Part 1: Principles, requirements and tests	EN 60664-1	2007
IEC 60664-3	-	Insulation coordination for equipment within low-voltage systems - Part 3: Use of coating, potting or moulding for protection against pollution	EN 60664-3	-
IEC 60691	2015	Thermal-links - Requirements and application guide	EN 60691	2016

IEC 60695-2-11	-	Fire hazard testing - Part 2-11: Glowing/hot-wire based test methods - Glow-wire flammability test method for end-products (GWEPT)	EN 60695-2-11	-
IEC 60695-10-2	-	Fire hazard testing - Part 10-2: Abnormal heat - Ball pressure test method	EN 60695-10-2	-
IEC 60695-10-3	-	Fire hazard testing - Part 10-3: Abnormal heat - Mould stress relief distortion test	EN 60695-10-3	-
IEC 60695-11-5	2016	Fire hazard testing - Part 11-5: Test flames - Needle-flame test method - Apparatus, confirmatory test arrangement and guidance	EN 60695-11-5	2017
IEC 60695-11-10	-	Fire hazard testing - Part 11-10: Test flames - 50 W horizontal and vertical flame test methods	EN 60695-11-10	-
IEC 60695-11-20	2015	Fire hazard testing - Part 11-20: Test flames - 500 W flame test method	EN 60695-11-20	2015
IEC/TS 60695-11-21	-	Fire hazard testing - Part 11-21: Test flames - 500 W vertical flame test method for tubular polymeric materials	-	-
IEC 60728-11	2016	Cable networks for television signals, sound signals and interactive services - Part 11: Safety	EN 60728-11	2017
-	-		+ A11	2018
IEC 60730	series	Automatic electrical controls	EN 60730	series
IEC 60730-1 (mod)	2013	Automatic electrical controls - Part 1: General requirements	EN 60730-1	2016
IEC 60738-1	2006	Thermistors - Directly heated positive temperature coefficient - Part 1: Generic specification	EN 60738-1	2006
IEC 60747-5-5	2007	Semiconductor devices - Discrete devices - Part 5-5: Optoelectronic devices - Photocouplers	EN 60747-5-5	2011
+ A1	2013		+ A1	2015
IEC 60825-1	-	Safety of laser products - Part 1: Equipment classification and requirements	EN 60825-1	-
IEC 60825-2	-	Safety of laser products - Part 2: Safety of optical fibre communication systems (OFCS)	EN 60825-2	-
IEC 60825-12	-	Safety of laser products - Part 12: Safety of free space optical communication systems used for transmission of information	EN 60825-12	-
IEC 60836	-	Specifications for unused silicone insulating liquids for electrotechnical purposes	EN 60836	-
IEC 60851-3	2009	Winding wires - Test methods - Part 3: Mechanical properties	EN 60851-3	2009
+ A1	2013		+ A1	2013
IEC 60851-5	2008	Winding wires - Test methods - Part 5: Electrical properties	EN 60851-5	2008
+ A1	2011		+ A1	2011
IEC 60884-1	-	Plugs and socket-outlets for household and similar purposes -- Part 1: General requirements	-	-
IEC 60896-11	-	Stationary lead-acid batteries - Part 11: Vented types - General requirements and methods of tests	EN 60896-11	-
IEC 60896-21	2004	Stationary lead-acid batteries - Part 21: Valve regulated types - Methods of test	EN 60896-21	2004

IEC 60896-22	-	Stationary lead-acid batteries - Part 22: Valve regulated types - Requirements	EN 60896-22	-
IEC 60906-1	-	IEC system of plugs and socket-outlets for household and similar purposes - Part 1: Plugs and socket-outlets 16 A 250 V a.c.		-
IEC 60906-2	-	IEC system of plugs and socket-outlets for household and similar purposes - Part 2: Plugs and socket-outlets 15 A 125 V a.c. and 20 A 125 V a.c.		-
IEC 60947-1	-	Low-voltage switchgear and controlgear - Part 1: General rules	EN 60947-1	-
IEC 60947-5-5	-	Low-voltage switchgear and controlgear - Part 5-5: Control circuit devices and switching elements - Electrical emergency stop device with mechanical latching function	EN 60947-5-5	-
IEC 60950-1	-	Information technology equipment - Safety - Part 1: General requirements	EN 60950-1	-
IEC 60990	2016	Methods of measurement of touch current and protective conductor current	EN 60990	2016
IEC 60998-1	-	Connecting devices for low-voltage circuits for household and similar purposes - Part 1: General requirements	EN 60998-1	-
IEC 60999-1	-	Connecting devices - Electrical copper conductors - Safety requirements for screw-type and screwless-type clamping units - Part 1: General requirements and particular requirements for clamping units for conductors from 0,2 mm ² up to 35 mm ² (included)	EN 60999-1	-
IEC 60999-2	-	Connecting devices - Electrical copper conductors - Safety requirements for screw-type and screwless-type clamping units - Part 2: Particular requirements for clamping units for conductors above 35 mm ² up to 300 mm ² (included)	EN 60999-2	-
IEC 61039	-	Classification of insulating liquids	EN 61039	-
IEC 61051-1	-	Varistors for use in electronic equipment - Part 1: Generic specification	-	-
IEC 61051-2	1991	Varistors for use in electronic equipment - Part 2: Sectional specification for surge suppression varistors	-	-
+A1	2009			
IEC 61056-1	-	General purpose lead-acid batteries (valve-regulated types) - Part 1: General requirements, functional characteristics - Methods of test	EN 61056-1	-
IEC 61056-2	-	General purpose lead-acid batteries (valve-regulated types) - Part 2: Dimensions, terminals and marking	EN 61056-2	-
IEC 61058-1	2016	Switches for appliances - Part 1: General requirements	EN IEC 61058-1	2018
IEC 61099	-	Insulating liquids - Specifications for unused synthetic organic esters for electrical purposes	EN 61099	-
IEC 61204-7	-	Low-voltage switch mode power supplies - Part 7: Safety requirements	EN IEC 61204-7	-
IEC 61293	-	Marking of electrical equipment with ratings related to electrical supply - Safety requirements	EN 61293	-

IEC 61427	series	Secondary cells and batteries for renewable energy storage - General requirements and methods of test	EN 61427	series
IEC/TS 61430	-	Secondary cells and batteries - Test methods for checking the performance of devices designed for reducing explosion hazards - Lead-acid starter batteries	-	-
IEC 61434	-	Secondary cells and batteries containing alkaline or other non-acid electrolytes - Guide to designation of current in alkaline secondary cell and battery standards	EN 61434	-
IEC 61558-1	2017	Safety of transformers, reactors, power supply units and combinations thereof - Part 1: General requirements and tests	FprEN 61558-1	2017
IEC 61558-2-16	-	Safety of transformers, reactors, power supply units and similar products for supply voltages up to 1 100 V - Part 2-16: Particular requirements and tests for switch mode power supply units and transformers for switch mode power supply units	EN 61558-2-16	-
IEC 61643-11 (mod)	2011	Low-voltage surge protective devices - Part 11: Surge protective devices connected to low-voltage power systems - Requirements and test methods	EN 61643-11	2012
-	-		+ A11	2018
IEC 61643-331	2017	Components for low-voltage surge protection - Part 331: Performance requirements and test methods for metal oxide varistors (MOV)	EN IEC 61643-331	2018
IEC 61810-1	2015	Electromechanical elementary relays - Part 1: General and safety requirements	EN 61810-1	2015
IEC 61959	-	Secondary cells and batteries containing alkaline or other non-acid electrolytes - Mechanical tests for sealed portable secondary cells and batteries	EN 61959	-
IEC 61965	-	Mechanical safety of cathode ray tubes	EN 61965	-
IEC 61984	-	Connectors - Safety requirements and tests	EN 61984	-
IEC 62133	series	Secondary cells and batteries containing alkaline or other non-acid electrolytes - Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications	EN 62133	series
IEC 62133-1	-	Secondary cells and batteries containing alkaline or other non-acid electrolytes - Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications - Part 1: Nickel systems	EN 62133-1	-
IEC 62133-2	-	Secondary cells and batteries containing alkaline or other non-acid electrolytes - Safety requirements for portable sealed secondary lithium cells, and for batteries made from them, for use in portable applications - Part 2: Lithium systems	EN 62133-2	-
IEC 62281	-	Safety of primary and secondary lithium cells and batteries during transport	EN 62281	-

IEC/TS 62332-1	-	Electrical insulation systems (EIS) - Thermal evaluation of combined liquid and solid components - Part 1: General requirements	-	-
IEC 62440	2008	Electric cables with a rated voltage not exceeding 450/750 V - Guide to use	-	-
IEC 62471 (mod)	2006	Photobiological safety of lamps and lamp systems	EN 62471	2008
IEC 62471-5	2015	Photobiological safety of lamps and lamp systems - Part 5: Image projectors	EN 62471-5	2015
IEC 62485-2	-	Safety requirements for secondary batteries and battery installations - Part 2: Stationary batteries	EN IEC 62485-2	-
IEC 62619	-	Secondary cells and batteries containing alkaline or other non-acid electrolytes - Safety requirements for secondary lithium cells and batteries, for use in industrial applications	EN 62619	-
ISO 37	-	Rubber, vulcanized or thermoplastic - Determination of tensile stress-strain properties	-	-
ISO 178	-	Plastics - Determination of flexural properties	EN ISO 178	-
ISO 179-1	-	Plastics - Determination of Charpy impact properties - Part 1: Non-instrumented impact test	EN ISO 179-1	-
ISO 180	-	Plastics - Determination of Izod impact strength	EN ISO 180	-
ISO 306	-	Plastics - Thermoplastic materials - Determination of Vicat softening temperature (VST)	EN ISO 306	-
ISO 527	series	Plastics - Determination of tensile properties	EN ISO 527	series
ISO 871	-	Plastics - Determination of ignition temperature using a hot-air furnace	-	-
ISO 1798	-	Flexible cellular polymeric materials - Determination of tensile strength and elongation at break	EN ISO 1798	-
ISO 1817	2015	Rubber, vulcanized or thermoplastic - Determination of the effect of liquids	-	-
ISO 2719	-	Determination of flash point - Pensky-Martens closed cup method	EN ISO 2719	-
ISO 3231	-	Paints and varnishes - Determination of resistance to humid atmospheres containing sulfur dioxide	EN ISO 3231	-
ISO 3679	-	Determination of flash no-flash and flash point - Rapid equilibrium closed cup method	EN ISO 3679	-
ISO 3864	series	Graphical symbols - Safety colours and safety signs	-	-
ISO 3864-2	-	Graphical symbols - Safety colours and safety signs - Part 2: Design principles for product safety labels	-	-
ISO 4892-1	-	Plastics - Methods of exposure to laboratory light sources - Part 1: General guidance	EN ISO 4892-1	-
ISO 4892-2	-	Plastics - Methods of exposure to laboratory light sources - Part 2: Xenon-arc lamps	EN ISO 4892-2	-

ISO 4892-4	-	Plastics - Methods of exposure to laboratory light sources - Part 4: Open-flame carbon-arc lamps	-	-
ISO 7000	-	Graphical symbols for use on equipment - Registered symbols	-	-
ISO 7010	-	Graphical symbols - Safety colours and safety signs - Registered safety signs	EN ISO 7010	-
ISO 8256	-	Plastics - Determination of tensile-impact strength	EN ISO 8256	-
ISO 9772	-	Cellular plastics -- Determination of horizontal burning characteristics of small specimens subjected to a small flame	-	-
ISO 9773	-	Plastics - Determination of burning behaviour of thin flexible vertical specimens in contact with a small-flame ignition source	EN ISO 9773	-
ISO 14993	-	Corrosion of metals and alloys - Accelerated testing involving cyclic exposure to salt mist, dry and wet conditions	-	-
ISO 21207	-	Corrosion tests in artificial atmospheres - Accelerated corrosion tests involving alternate exposure to corrosion-promoting gases, neutral salt-spray and drying	-	-
ASTM D3574	-	Standard Test Methods for Flexible Cellular Materials - Slab, Bonded, and Molded Urethane Foams	-	-
ASTM D412	-	Standard Test Methods for Vulcanized Rubber and Thermoplastic Elastomers - Tension	-	-
ASTM 471-98	-	Standard Test Method for Rubber Property - Effect of Liquids	-	-
-	-	Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 1: General method for "one package equipment"	EN 50332-1	2013
-	-	Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 2: Matching of sets with headphones if either or both are offered separately	EN 50332-2	-
-	-	Sound system equipment: Headphones and earphones associated with personal music players - maximum sound pressure level measurement methodology - Part 3: Measurement method for sound dose management	EN 50332-3	-

Annex ZB

(normative)

Special National Conditions

Special national condition: National characteristic or practice that cannot be changed even over a long period, e.g. climatic conditions, electrical earthing conditions.

NOTE If it affects harmonisation, it forms part of the European Standard.

For the countries in which the relevant special national apply these provisions are normative, for other countries they are informative.

Clause	Special national condition
4.1.15	<p>Denmark, Finland, Norway and Sweden</p> <p>To the end of the subclause the following is added:</p> <p>Class I pluggable equipment type A intended for connection to other equipment or a network shall, if safety relies on connection to reliable earthing or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment shall be connected to an earthed mains socket-outlet.</p> <p>The marking text in the applicable countries shall be as follows:</p> <p>In Denmark: "Apparatets stikprop skal tilsluttes en stikkontakt med jord som giver forbindelse til stikproppens jord."</p> <p>In Finland: "Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan"</p> <p>In Norway: "Apparatet må tilkoples jordet stikkontakt"</p> <p>In Sweden: "Apparaten skall anslutas till jordat uttag"</p>
4.7.3	<p>United Kingdom</p> <p>To the end of the subclause the following is added:</p> <p>The torque test is performed using a socket-outlet complying with BS 1363, and the plug part shall be assessed to the relevant clauses of BS 1363. Also see Annex G.4.2 of this annex</p>
5.2.2.2	<p>Denmark</p> <p>After the 2nd paragraph add the following:</p> <p>A warning (marking safeguard) for high touch current is required if the touch current exceeds the limits of 3,5 mA a.c. or 10 mA d.c.</p>

Clause	Special national condition
5.4.11.1 and Annex G	<p>Finland and Sweden</p> <p>To the end of the subclause the following is added:</p> <p>For separation of the telecommunication network from earth the following is applicable:</p> <p>If this insulation is solid, including insulation forming part of a component, it shall at least consist of either</p> <ul style="list-style-type: none"> • two layers of thin sheet material, each of which shall pass the electric strength test below, or • one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. <p>If this insulation forms part of a semiconductor component (e.g. an optocoupler), there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that clearances and creepage distances do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition</p> <ul style="list-style-type: none"> • passes the tests and inspection criteria of 5.4.8 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 5.4.9 shall be performed using 1,5 kV), and • is subject to routine testing for electric strength during manufacturing, using a test voltage of 1,5 kV. <p>It is permitted to bridge this insulation with a capacitor complying with EN 60384-14, subclass Y2.</p> <p>A capacitor classified Y3 according to EN 60384-14, may bridge this insulation under the following conditions:</p> <ul style="list-style-type: none"> • the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 60384-14, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in 5.4.10; • the additional testing shall be performed on all the test specimens as described in EN 60384-14; <p>the impulse test of 2,5 kV is to be performed before the endurance test in EN 60384-14, in the sequence of tests as described in EN 60384-14.</p>
5.5.2.1	<p>Norway</p> <p>After the 3rd paragraph the following is added:</p> <p>Due to the IT power system used, capacitors are required to be rated for the applicable line-to-line voltage (230 V).</p>

Clause	Special national condition
5.5.6	<p>Finland, Norway and Sweden</p> <p>To the end of the subclause the following is added:</p> <p>Resistors used as basic safeguard or bridging basic insulation in class I pluggable equipment type A shall comply with G.10.1 and the test of G.10.2.</p>
5.6.1	<p>Denmark</p> <p>Add to the end of the subclause</p> <p>Due to many existing installations where the socket-outlets can be protected with fuses with higher rating than the rating of the socket-outlets the protection for pluggable equipment type A shall be an integral part of the equipment.</p> <p><i>Justification:</i></p> <p>In Denmark an existing 13 A socket outlet can be protected by a 20 A fuse.</p>
5.6.4.2.1	<p>Ireland and United Kingdom</p> <p>After the indent for pluggable equipment type A, the following is added:</p> <ul style="list-style-type: none"> – the protective current rating is taken to be 13 A, this being the largest rating of fuse used in the mains plug.
5.6.4.2.1	<p>France</p> <p>After the indent for pluggable equipment type A, the following is added:</p> <ul style="list-style-type: none"> – in certain cases, the protective current rating of the circuit supplied from the mains is taken as 20 A instead of 16 A.
5.6.5.1	<p>To the second paragraph the following is added:</p> <p>The range of conductor sizes of flexible cords to be accepted by terminals for equipment with a rated current over 10 A and up to and including 13 A is:</p> <p>1,25 mm² to 1,5 mm² in cross-sectional area.</p>
5.6.8	<p>Norway</p> <p>To the end of the subclause the following is added:</p> <p>Equipment connected with an earthed mains plug is classified as class I equipment. See the Norway marking requirement in 4.1.15. The symbol IEC 60417-6092, as specified in F.3.6.2, is accepted.</p>

Clause	Special national condition
5.7.6	<p>Denmark</p> <p>To the end of the subclause the following is added:</p> <p>The installation instruction shall be affixed to the equipment if the protective conductor current exceeds the limits of 3,5 mA a.c. or 10 mA d.c.</p>
5.7.7.1	<p>Norway and Sweden</p> <p>To the end of the subclause the following is added:</p> <p>The screen of the television distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation needs to be isolated from the screen of a cable distribution system.</p> <p>It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by a retailer, for example.</p> <p>The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in:</p> <p>“Apparatus connected to the protective earthing of the building installation through the mains connection or through other apparatus with a connection to protective earthing – and to a television distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a television distribution system therefore has to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11)”</p> <p>NOTE In Norway, due to regulation for CATV-installations, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min.</p> <p>Translation to Norwegian (the Swedish text will also be accepted in Norway):</p> <p>“Apparater som er koplet til beskyttelsesjord via nettplugg og/eller via annet jordtilkoplet utstyr – og er tilkoplet et koaksialbasert kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av apparater til kabel-TV nett installeres en galvanisk isolator mellom apparatet og kabel-TV nettet.”</p> <p>Translation to Swedish:</p> <p>“Apparater som är kopplad till skyddsjord via jordat vägguttag och/eller via annan utrustning och samtidigt är kopplad till kabel-TV nät kan i vissa fall medföra risk för brand. För att undvika detta skall vid anslutning av apparaten till kabel-TV nät galvanisk isolator finnas mellan apparaten och kabel-TV nätet.”</p>

Clause	Special national condition
5.7.6.2	<p>Denmark</p> <p>To the end of the subclause the following is added:</p> <p>The warning (marking safeguard) for high touch current is required if the touch current or the protective current exceed the limits of 3,5 mA .</p>
8.5.4.2.3	<p>United Kingdom</p> <p>Add the following after the 2nd dash bullet in 3rd paragraph:</p> <p>An emergency stop system complying with the requirements of IEC 60204-1 and ISO 13850 is required where there is a risk of personal injury.</p>
B.3.1 and B.4	<p>Ireland and United Kingdom</p> <p>The following is applicable:</p> <p>To protect against excessive currents and short-circuits in the primary circuit of direct plug-in equipment, tests according to Annexes B.3.1 and B.4 shall be conducted using an external miniature circuit breaker complying with EN 60898-1, Type B, rated 32 A. If the equipment does not pass these tests, suitable protective devices shall be included as an integral part of the direct plug-in equipment, until the requirements of Annexes B.3.1 and B.4 are met</p>

Clause	Special national condition
G.4.2	<p>Denmark</p> <p>To the end of the subclause the following is added:</p> <p>Supply cords of single phase appliances having a rated current not exceeding 13 A shall be provided with a plug according to DS 60884-2-D1:2011.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.</p> <p>If a single-phase equipment having a RATED CURRENT exceeding 13 A or if a poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2.</p> <p>Mains socket outlets intended for providing power to Class II apparatus with a rated current of 2,5 A shall be in accordance DS 60884-2-D1:2011 standard sheet DKA 1-4a.</p> <p>Other current rating socket outlets shall be in compliance with Standard Sheet DKA 1-3a or DKA 1-1c.</p> <p>Mains socket-outlets with earth shall be in compliance with DS 60884-2-D1:2011 Standard Sheet DK 1-3a, DK 1-1c, DK1-1d, DK 1-5a or DK 1-7a</p> <p><i>Justification:</i> Heavy Current Regulations, Section 6c</p>
G.4.2	<p>United Kingdom</p> <p>To the end of the subclause the following is added:</p> <p>The plug part of direct plug-in equipment shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16, and 12.17, except that the test of 12.17 is performed at not less than 125 °C. Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.</p>
G.7.1	<p>United Kingdom</p> <p>To the first paragraph the following is added:</p> <p>Equipment which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord shall be fitted with a 'standard plug' in accordance with the Plugs and Sockets etc (Safety) Regulations 1994, Statutory Instrument 1994 No. 1768, unless exempted by those regulations.</p> <p>NOTE "Standard plug" is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.</p>

Clause	Special national condition
G.7.1	Ireland To the first paragraph the following is added: Apparatus which is fitted with a flexible cable or cord shall be provided with a plug in accordance with Statutory Instrument 525: 1997, "13 A Plugs and Conversion Adapters for Domestic Use Regulations: 1997. S.I. 525 provides for the recognition of a standard of another Member State which is equivalent to the relevant Irish Standard
G.7.2	Ireland and United Kingdom To the first paragraph the following is added: A power supply cord with a conductor of 1,25 mm ² is allowed for equipment which is rated over 10 A and up to and including 13 A.

Annex ZC (informative)

A-deviations

A-deviation: National deviation due to regulations, the alteration of which is for the time being outside the competence of the CEN/CENELEC national member.

This European Standard falls under Directives 2014/35/EU and 2014/53/EU.

NOTE (from CEN/CENELEC IR Part 2:2011, 2.17): Where standards fall under EU Directives, it is the view of the Commission of the European Communities (OJ No C 59; 1982-03-09) that the effect of the decision of the Court of Justice in case 815/79 Cremonini/Vrankovich (European Court Reports 1980, p. 3583) is that compliance with A-deviations is no longer mandatory and that the free movement of products complying with such a standard should not be restricted except under the safeguard procedure provided for in the relevant Directive.

A-deviations in an EFTA-country are **valid instead** of the relevant provisions of the European Standard in that country until they have been removed.

Add the following A-deviations:

Clause	National deviation
10.5.2	<p>Germany</p> <p>The following requirement applies:</p> <p>For the operation of any cathode ray tube intended for the display of visual images operating at an acceleration voltage exceeding 40 kV, authorization is required, or application of type approval (Bauartzulassung) and marking.</p> <p><i>Justification:</i></p> <p>German ministerial decree against ionizing radiation (Röntgenverordnung), in force since 2002-07-01, implementing the European Directive 96/29/EURATOM.</p> <p>NOTE Contact address: Physikalisch-Technische Bundesanstalt, Bundesallee 100, D-38116 Braunschweig, Tel.: Int+49-531-592-6320, Internet: http://www.ptb.de</p>

Annex ZD

(informative)

IEC and CENELEC code designations for flexible cords

Type of flexible cord	Code designations	
	IEC	CENELEC
PVC insulated cords		
Flat twin tinsel cord	60227 IEC 41	H03VH-Y
Light polyvinyl chloride sheathed flexible cord	60227 IEC 52	H03VV-F H03VVH2-F
Ordinary polyvinyl chloride sheathed flexible cord	60227 IEC 53	H05VV-F H05VVH2-F
Rubber insulated cords		
Braided cord	60245 IEC 51	H03RT-F
Ordinary tough rubber sheathed flexible cord	60245 IEC 53	H05RR-F
Ordinary polychloroprene sheathed flexible cord	60245 IEC 57	H05RN-F
Heavy polychloroprene sheathed flexible cord	60245 IEC 66	H07RN-F
Cords having high flexibility		
Rubber insulated and sheathed cord	60245 IEC 86	H03RR-H
Rubber insulated, crosslinked PVC sheathed cord	60245 IEC 87	H03RV4-H
Crosslinked PVC insulated and sheathed cord	60245 IEC 88	H03V4V4-H
Cords insulated and sheathed with halogen-free thermoplastic compounds		
Light halogen-free thermoplastic insulated and sheathed flexible cords		H03Z1Z1-F H03Z1Z1H2-F
Ordinary halogen-free thermoplastic insulated and sheathed flexible cords		H05Z1Z1-F H05Z1Z1H2-F

This page deliberately left blank

CONTENTS

FOREWORD.....	20
INTRODUCTION.....	23
0 Principles of this product safety standard	23
0.1 Objective	23
0.2 Persons	23
0.2.1 General	23
0.2.2 Ordinary person	23
0.2.3 Instructed person	23
0.2.4 Skilled person	23
0.3 Model for pain and injury	24
0.4 Energy sources	24
0.5 Safeguards	25
0.5.1 General	25
0.5.2 Equipment safeguard	26
0.5.3 Installation safeguard	26
0.5.4 Personal safeguard	26
0.5.5 Behavioural safeguards	27
0.5.6 Safeguards during ordinary or instructed person service conditions	28
0.5.7 Equipment safeguards during skilled person service conditions	28
0.5.8 Examples of safeguard characteristics	28
0.6 Electrically-caused pain or injury (electric shock)	29
0.6.1 Models for electrically-caused pain or injury	29
0.6.2 Models for protection against electrically-caused pain or injury	30
0.7 Electrically-caused fire	31
0.7.1 Models for electrically-caused fire	31
0.7.2 Models for protection against electrically-caused fire	31
0.8 Injury caused by hazardous substances	32
0.9 Mechanically-caused injury	32
0.10 Thermally-caused injury (skin burn)	33
0.10.1 Models for thermally-caused injury	33
0.10.2 Models for protection against thermally-caused pain or injury	34
0.11 Radiation-caused injury	35
1 Scope	36
2 Normative references	37
3 Terms, definitions and abbreviated terms	44
3.1 Energy source abbreviations	44
3.2 Other abbreviations	45
3.3 Terms and definitions	46
3.3.1 Circuit terms	49
3.3.2 Enclosure terms	49
3.3.3 Equipment terms	50
3.3.4 Flammability terms	51
3.3.5 Electrical insulation	53
3.3.6 Miscellaneous	53
3.3.7 Operating and fault conditions	55
3.3.8 Persons	56

3.3.9	Potential ignition sources	57
3.3.10	Ratings	57
3.3.11	Safeguards	58
3.3.12	Spacings.....	60
3.3.13	Temperature controls	60
3.3.14	Voltages and currents	60
3.3.15	Classes of equipment with respect to protection from electric shock.....	61
3.3.16	Chemical terms	62
3.3.17	Batteries	62
3.3.18	FIW terms.....	63
3.3.19	Sound exposure	63
4	General requirements	64
4.1	General.....	64
4.1.1	Application of requirements and acceptance of materials, components and subassemblies	64
4.1.2	Use of components	65
4.1.3	Equipment design and construction	65
4.1.4	Equipment installation	65
4.1.5	Constructions and components not specifically covered	66
4.1.6	Orientation during transport and use.....	66
4.1.7	Choice of criteria.....	66
4.1.8	Liquids and liquid filled components (LFC).....	66
4.1.9	Electrical measuring instruments	67
4.1.10	Temperature measurements.....	67
4.1.11	Steady state conditions	67
4.1.12	Hierarchy of safeguards	67
4.1.13	Examples mentioned in this document	67
4.1.14	Tests on parts or samples separate from the end-product	67
4.1.15	Markings and instructions.....	67
4.2	Energy source classifications	68
4.2.1	Class 1 energy source.....	68
4.2.2	Class 2 energy source.....	68
4.2.3	Class 3 energy source.....	68
4.2.4	Energy source classification by declaration.....	68
4.3	Protection against energy sources	68
4.3.1	General	68
4.3.2	Safeguards for protection of an ordinary person.....	68
4.3.3	Safeguards for protection of an instructed person	70
4.3.4	Safeguards for protection of a skilled person	71
4.3.5	Safeguards in a restricted access area	72
4.4	Safeguards	72
4.4.1	Equivalent materials or components	72
4.4.2	Composition of a safeguard.....	72
4.4.3	Safeguard robustness	72
4.4.4	Displacement of a safeguard by an insulating liquid	74
4.4.5	Safety interlocks	75
4.5	Explosion.....	75
4.5.1	General	75
4.5.2	Requirements	75

4.6	Fixing of conductors	76
4.6.1	Requirements	76
4.6.2	Compliance criteria	76
4.7	Equipment for direct insertion into mains socket-outlets	76
4.7.1	General	76
4.7.2	Requirements	76
4.7.3	Compliance criteria	76
4.8	Equipment containing coin / button cell batteries.....	77
4.8.1	General	77
4.8.2	Instructional safeguard.....	77
4.8.3	Construction	77
4.8.4	Tests	77
4.8.5	Compliance criteria	78
4.9	Likelihood of fire or shock due to entry of conductive objects	79
4.10	Components requirements.....	79
4.10.1	Disconnect device	79
4.10.2	Switches and relays	79
5	Electrically-caused injury	79
5.1	General.....	79
5.2	Classification and limits of electrical energy sources	80
5.2.1	Electrical energy source classifications.....	80
5.2.2	Electrical energy source ES1 and ES2 limits.....	80
5.3	Protection against electrical energy sources	86
5.3.1	General	86
5.3.2	Accessibility to electrical energy sources and safeguards	86
5.4	Insulation materials and requirements.....	89
5.4.1	General	89
5.4.2	Clearances	94
5.4.3	Creepage distances	104
5.4.4	Solid insulation	108
5.4.5	Antenna terminal insulation	117
5.4.6	Insulation of internal wire as a part of a supplementary safeguard.....	117
5.4.7	Tests for semiconductor components and for cemented joints	118
5.4.8	Humidity conditioning.....	118
5.4.9	Electric strength test	119
5.4.10	Safeguards against transient voltages from external circuits	122
5.4.11	Separation between external circuits and earth.....	124
5.4.12	Insulating liquid.....	125
5.5	Components as safeguards	126
5.5.1	General	126
5.5.2	Capacitors and RC units.....	126
5.5.3	Transformers	127
5.5.4	Optocouplers	127
5.5.5	Relays	127
5.5.6	Resistors	128
5.5.7	SPDs	128
5.5.8	Insulation between the mains and an external circuit consisting of a coaxial cable.....	129
5.5.9	Safeguards for socket-outlets in outdoor equipment.....	129

5.6	Protective conductor	130
5.6.1	General	130
5.6.2	Requirements for protective conductors	130
5.6.3	Requirements for protective earthing conductors	131
5.6.4	Requirements for protective bonding conductors	131
5.6.5	Terminals for protective conductors	134
5.6.6	Resistance of the protective bonding system	135
5.6.7	Reliable connection of a protective earthing conductor	137
5.6.8	Functional earthing	137
5.7	Prospective touch voltage, touch current and protective conductor current	137
5.7.1	General	137
5.7.2	Measuring devices and networks	138
5.7.3	Equipment set-up, supply connections and earth connections	138
5.7.4	Unearthed accessible parts	138
5.7.5	Earthed accessible conductive parts	139
5.7.6	Requirements when touch current exceeds ES2 limits	139
5.7.7	Prospective touch voltage and touch current associated with external circuits	139
5.7.8	Summation of touch currents from external circuits	141
5.8	Backfeed safeguard in battery backed up supplies	143
6	Electrically-caused fire	143
6.1	General	143
6.2	Classification of power sources (PS) and potential ignition sources (PIS)	143
6.2.1	General	143
6.2.2	Power source circuit classifications	144
6.2.3	Classification of potential ignition sources	147
6.3	Safeguards against fire under normal operating conditions and abnormal operating conditions	148
6.3.1	Requirements	148
6.3.2	Compliance criteria	149
6.4	Safeguards against fire under single fault conditions	149
6.4.1	General	149
6.4.2	Reduction of the likelihood of ignition under single fault conditions in PS1 circuits	149
6.4.3	Reduction of the likelihood of ignition under single fault conditions in PS2 circuits and PS3 circuits	149
6.4.4	Control of fire spread in PS1 circuits	151
6.4.5	Control of fire spread in PS2 circuits	151
6.4.6	Control of fire spread in a PS3 circuit	152
6.4.7	Separation of combustible materials from a PIS	152
6.4.8	Fire enclosures and fire barriers	155
6.4.9	Flammability of an insulating liquid	160
6.5	Internal and external wiring	161
6.5.1	General requirements	161
6.5.2	Requirements for interconnection to building wiring.	161
6.5.3	Internal wiring for socket-outlets	161
6.6	Safeguards against fire due to the connection of additional equipment	162
7	Injury caused by hazardous substances	162
7.1	General	162
7.2	Reduction of exposure to hazardous substances	162

7.3	Ozone exposure	162
7.4	Use of personal safeguards or personal protective equipment (PPE)	162
7.5	Use of instructional safeguards and instructions	163
7.6	Batteries and their protection circuits	163
8	Mechanically-caused injury	163
8.1	General	163
8.2	Mechanical energy source classifications	163
8.2.1	General classification	163
8.2.2	MS1	165
8.2.3	MS2	166
8.2.4	MS3	166
8.3	Safeguards against mechanical energy sources	166
8.4	Safeguards against parts with sharp edges and corners	166
8.4.1	Requirements	166
8.4.2	Compliance criteria	166
8.5	Safeguards against moving parts	167
8.5.1	Requirements	167
8.5.2	Instructional safeguard requirements	168
8.5.3	Compliance criteria	168
8.5.4	Special categories of equipment containing moving parts	168
8.5.5	High pressure lamps	173
8.6	Stability of equipment	174
8.6.1	Requirements	174
8.6.2	Static stability	176
8.6.3	Relocation stability	177
8.6.4	Glass slide test	178
8.6.5	Horizontal force test and compliance criteria	178
8.7	Equipment mounted to a wall, ceiling or other structure	178
8.7.1	Requirements	178
8.7.2	Test methods	178
8.7.3	Compliance criteria	180
8.8	Handle strength	180
8.8.1	General	180
8.8.2	Test method	180
8.9	Wheels or casters attachment requirements	181
8.9.1	General	181
8.9.2	Test method	181
8.10	Carts, stands, and similar carriers	181
8.10.1	General	181
8.10.2	Marking and instructions	181
8.10.3	Cart, stand or carrier loading test and compliance criteria	182
8.10.4	Cart, stand or carrier impact test	183
8.10.5	Mechanical stability	183
8.10.6	Thermoplastic temperature stability	183
8.11	Mounting means for slide-rail mounted equipment (SRME)	183
8.11.1	General	183
8.11.2	Requirements	184
8.11.3	Mechanical strength test	184
8.11.4	Compliance criteria	184

8.12	Telescoping or rod antennas	185
9	Thermal burn injury.....	185
9.1	General.....	185
9.2	Thermal energy source classifications	186
9.2.1	TS1	186
9.2.2	TS2	186
9.2.3	TS3	186
9.3	Touch temperature limits	186
9.3.1	Requirements	186
9.3.2	Test method and compliance criteria	186
9.4	Safeguards against thermal energy sources.....	187
9.5	Requirements for safeguards.....	188
9.5.1	Equipment safeguard	188
9.5.2	Instructional safeguard.....	188
9.6	Requirements for wireless power transmitters	188
9.6.1	General	188
9.6.2	Specification of the foreign objects	189
9.6.3	Test method and compliance criteria	191
10	Radiation.....	192
10.1	General.....	192
10.2	Radiation energy source classifications	192
10.2.1	General classification	192
10.2.2	RS1	193
10.2.3	RS2	194
10.2.4	RS3	194
10.3	Safeguards against laser radiation.....	194
10.4	Safeguards against optical radiation from lamps and lamp systems (including LED types)	194
10.4.1	General requirements.....	194
10.4.2	Requirements for enclosures	196
10.4.3	Instructional safeguard.....	196
10.4.4	Compliance criteria	198
10.5	Safeguards against X-radiation.....	198
10.5.1	Requirements	198
10.5.2	Compliance criteria	198
10.5.3	Test method.....	198
10.6	Safeguards against acoustic energy sources	199
10.6.1	General	199
10.6.2	A11 Classification of devices without the capacity to estimate sound dose A11	200
10.6.3	A11 Classification of devices (new) A11	201
10.6.4	A11 Requirements for maximum sound exposure A11	201
10.6.5	A11 Requirements for dose-based systems A11	202
10.6.6	Requirements for listening devices (headphones, earphones, etc.).....	202
Annex A (informative)	Examples of equipment within the scope of this document	204
Annex B (normative)	Normal operating condition tests, abnormal operating condition tests and single fault condition tests	205
B.1	General.....	205
B.1.1	Test applicability	205
B.1.2	Type of test.....	205

B.1.3	Test samples	205
B.1.4	Compliance by inspection of relevant data	205
B.1.5	Temperature measurement conditions	205
B.2	Normal operating conditions	206
B.2.1	General	206
B.2.2	Supply frequency	206
B.2.3	Supply voltage	206
B.2.4	Normal operating voltages.....	206
B.2.5	Input test	207
B.2.6	Operating temperature measurement conditions	208
B.2.7	Battery charging and discharging under normal operating conditions	208
B.3	Simulated abnormal operating conditions.....	208
B.3.1	General	208
B.3.2	Covering of ventilation openings.....	209
B.3.3	DC mains polarity test.....	210
B.3.4	Setting of voltage selector	210
B.3.5	Maximum load at output terminals	210
B.3.6	Reverse battery polarity	210
B.3.7	Audio amplifier abnormal operating conditions	210
B.3.8	Compliance criteria during and after abnormal operating conditions	210
B.4	Simulated single fault conditions.....	210
B.4.1	General	210
B.4.2	Temperature controlling device.....	211
B.4.3	Motor tests.....	211
B.4.4	Functional insulation	211
B.4.5	Short-circuit and interruption of electrodes in tubes and semiconductors	212
B.4.6	Short-circuit or disconnection of passive components	212
B.4.7	Continuous operation of components.....	212
B.4.8	Compliance criteria during and after single fault conditions	213
B.4.9	Battery charging and discharging under single fault conditions	213
Annex C (normative)	UV radiation	214
C.1	Protection of materials in equipment from UV radiation	214
C.1.1	General	214
C.1.2	Requirements	214
C.1.3	Test method and compliance criteria	214
C.2	UV light conditioning test.....	215
C.2.1	Test apparatus.....	215
C.2.2	Mounting of test samples.....	215
C.2.3	Carbon-arc light-exposure test	215
C.2.4	Xenon-arc light-exposure test.....	215
Annex D (normative)	Test generators	216
D.1	Impulse test generators	216
D.2	Antenna interface test generator.....	216
D.3	Electronic pulse generator.....	217
Annex E (normative)	Test conditions for equipment containing audio amplifiers.....	218
E.1	Electrical energy source classification for audio signals	218
E.2	Audio amplifier normal operating conditions	218
E.3	Audio amplifier abnormal operating conditions	219
Annex F (normative)	Equipment markings, instructions, and instructional safeguards	220

F.1	General.....	220
F.2	Letter symbols and graphical symbols	220
F.2.1	Letter symbols	220
F.2.2	Graphical symbols	220
F.2.3	Compliance criteria	220
F.3	Equipment markings.....	220
F.3.1	Equipment marking locations.....	220
F.3.2	Equipment identification markings	221
F.3.3	Equipment rating markings	221
F.3.4	Voltage setting device	223
F.3.5	Markings on terminals and operating devices.....	223
F.3.6	Equipment markings related to equipment classification	225
F.3.7	Equipment IP rating marking	225
F.3.8	External power supply output marking	226
F.3.9	Durability, legibility and permanence of markings.....	226
F.3.10	Test for the permanence of markings.....	226
F.4	Instructions	226
F.5	Instructional safeguards	227
Annex G (normative)	Components.....	230
G.1	Switches	230
G.1.1	General	230
G.1.2	Requirements	230
G.1.3	Test method and compliance criteria	231
G.2	Relays	231
G.2.1	Requirements	231
G.2.2	Overload test	232
G.2.3	Relay controlling connectors supplying power to other equipment	232
G.2.4	Test method and compliance criteria	232
G.3	Protective devices	232
G.3.1	Thermal cut-offs.....	232
G.3.2	Thermal links	233
G.3.3	PTC thermistors	234
G.3.4	Overcurrent protective devices	235
G.3.5	Safeguard components not mentioned in G.3.1 to G.3.4.....	235
G.4	Connectors	235
G.4.1	Clearance and creepage distance requirements.....	235
G.4.2	Mains connectors	235
G.4.3	Connectors other than mains connectors	236
G.5	Wound components.....	236
G.5.1	Wire insulation in wound components	236
G.5.2	Endurance test.....	236
G.5.3	Transformers	238
G.5.4	Motors	246
G.6	Wire insulation	250
G.6.1	General	250
G.6.2	Enamelled winding wire insulation	251
G.7	Mains supply cords	251
G.7.1	General	251
G.7.2	Cross sectional area	252

G.7.3	Cord anchorages and strain relief for non-detachable power supply cords	254
G.7.4	Cord entry.....	255
G.7.5	Non-detachable cord bend protection	255
G.7.6	Supply wiring space	256
G.8	Varistors	257
G.8.1	General	257
G.8.2	Safeguards against fire	258
G.9	Integrated circuit (IC) current limiters.....	260
G.9.1	Requirements	260
G.9.2	Test program	260
G.9.3	Compliance criteria	261
G.10	Resistors	261
G.10.1	General	261
G.10.2	Conditioning	261
G.10.3	Resistor test	262
G.10.4	Voltage surge test.....	262
G.10.5	Impulse test	262
G.10.6	Overload test	262
G.11	Capacitors and RC units.....	262
G.11.1	General	262
G.11.2	Conditioning of capacitors and RC units	262
G.11.3	Rules for selecting capacitors.....	263
G.12	Optocouplers	263
G.13	Printed boards	264
G.13.1	General	264
G.13.2	Uncoated printed boards	264
G.13.3	Coated printed boards.....	264
G.13.4	Insulation between conductors on the same inner surface	265
G.13.5	Insulation between conductors on different surfaces	266
G.13.6	Tests on coated printed boards	266
G.14	Coatings on component terminals.....	268
G.14.1	Requirements	268
G.14.2	Test method and compliance criteria	268
G.15	Pressurized liquid filled components.....	269
G.15.1	Requirements	269
G.15.2	Test methods and compliance criteria.....	269
G.15.3	Compliance criteria	270
G.16	IC that includes a capacitor discharge function (ICX)	270
G.16.1	Requirements	270
G.16.2	Tests	270
G.16.3	Compliance criteria	271
Annex H (normative)	Criteria for telephone ringing signals	272
H.1	General.....	272
H.2	Method A	272
H.3	Method B	275
H.3.1	Ringing signal	275
H.3.2	Tripping device and monitoring voltage.....	275

Annex I (informative) Overvoltage categories (see IEC 60364-4-44).....	277
Annex J (normative) Insulated winding wires for use without interleaved insulation.....	278
J.1 General.....	278
J.2 Type tests.....	278
J.2.1 General	278
J.2.2 Electric strength.....	278
J.2.3 Flexibility and adherence.....	279
J.2.4 Heat shock.....	279
J.2.5 Retention of electric strength after bending.....	280
J.3 Testing during manufacturing	280
J.3.1 General	280
J.3.2 Spark test	280
J.3.3 Sampling test.....	280
Annex K (normative) Safety interlocks	281
K.1 General.....	281
K.1.1 General requirements.....	281
K.1.2 Test method and compliance criteria	281
K.2 Components of the safety interlock safeguard mechanism.....	281
K.3 Inadvertent change of operating mode	282
K.4 Interlock safeguard override	282
K.5 Fail-safe	282
K.5.1 Requirement	282
K.5.2 Test method and compliance criteria	282
K.6 Mechanically operated safety interlocks.....	283
K.6.1 Endurance requirement.....	283
K.6.2 Test method and compliance criteria	283
K.7 Interlock circuit isolation	283
K.7.1 Separation distances for contact gaps and interlock circuit elements	283
K.7.2 Overload test	284
K.7.3 Endurance test.....	284
K.7.4 Electric strength test	284
Annex L (normative) Disconnect devices	285
L.1 General requirements.....	285
L.2 Permanently connected equipment	285
L.3 Parts that remain energized.....	285
L.4 Single-phase equipment.....	285
L.5 Three-phase equipment.....	286
L.6 Switches as disconnect devices.....	286
L.7 Plugs as disconnect devices.....	286
L.8 Multiple power sources.....	286
L.9 Compliance criteria	287
Annex M (normative) Equipment containing batteries and their protection circuits	288
M.1 General requirements.....	288
M.2 Safety of batteries and their cells.....	288
M.2.1 Requirements	288
M.2.2 Compliance criteria	288
M.3 Protection circuits for batteries provided within the equipment.....	288
M.3.1 Requirements	288

M.3.2	Test method.....	289
M.3.3	Compliance criteria	290
M.4	Additional safeguards for equipment containing a portable secondary lithium battery	290
M.4.1	General	290
M.4.2	Charging safeguards	290
M.4.3	Fire enclosure	291
M.4.4	Drop test of equipment containing a secondary lithium battery	291
M.5	Risk of burn due to short-circuit during carrying	292
M.5.1	Requirements	292
M.5.2	Test method and compliance criteria	293
M.6	Safeguards against short-circuits	293
M.6.1	Requirements	293
M.6.2	Compliance criteria	293
M.7	Risk of explosion from lead acid and NiCd batteries	293
M.7.1	Ventilation preventing an explosive gas concentration	293
M.7.2	Test method and compliance criteria	294
M.7.3	Ventilation tests	297
M.7.4	Marking requirement	298
M.8	Protection against internal ignition from external spark sources of batteries with aqueous electrolyte	298
M.8.1	General	298
M.8.2	Test method	298
M.9	Preventing electrolyte spillage	301
M.9.1	Protection from electrolyte spillage	301
M.9.2	Tray for preventing electrolyte spillage	301
M.10	Instructions to prevent reasonably foreseeable misuse	301
Annex N (normative)	Electrochemical potentials (V)	303
Annex O (normative)	Measurement of creepage distances and clearances	304
Annex P (normative)	Safeguards against conductive objects	311
P.1	General	311
P.2	Safeguards against entry or consequences of entry of a foreign object	311
P.2.1	General	311
P.2.2	Safeguards against entry of a foreign object	311
P.2.3	Safeguards against the consequences of entry of a foreign object	312
P.3	Safeguards against spillage of internal liquids	314
P.3.1	General	314
P.3.2	Determination of spillage consequences	314
P.3.3	Spillage safeguards	314
P.3.4	Compliance criteria	315
P.4	Metallized coatings and adhesives securing parts	315
P.4.1	General	315
P.4.2	Tests	315
Annex Q (normative)	Circuits intended for interconnection with building wiring	317
Q.1	Limited power source	317
Q.1.1	Requirements	317
Q.1.2	Test method and compliance criteria	317
Q.2	Test for external circuits – paired conductor cable	318
Annex R (normative)	Limited short-circuit test	319

R.1	General.....	319
R.2	Test setup.....	319
R.3	Test method.....	319
R.4	Compliance criteria	320
Annex S	(normative) Tests for resistance to heat and fire	321
S.1	Flammability test for fire enclosure and fire barrier materials of equipment where the steady state power does not exceed 4 000 W	321
S.2	Flammability test for fire enclosure and fire barrier integrity.....	322
S.3	Flammability tests for the bottom of a fire enclosure.....	323
S.3.1	Mounting of samples	323
S.3.2	Test method and compliance criteria	323
S.4	Flammability classification of materials	324
S.5	Flammability test for fire enclosure materials of equipment with a steady state power exceeding 4 000 W	325
Annex T	(normative) Mechanical strength tests.....	327
T.1	General.....	327
T.2	Steady force test, 10 N.....	327
T.3	Steady force test, 30 N.....	327
T.4	Steady force test, 100 N.....	327
T.5	Steady force test, 250 N.....	327
T.6	Enclosure impact test.....	327
T.7	Drop test.....	328
T.8	Stress relief test.....	328
T.9	Glass impact test	329
T.10	Glass fragmentation test.....	329
T.11	Test for telescoping or rod antennas.....	330
Annex U	(normative) Mechanical strength of CRTs and protection against the effects of implosion	331
U.1	General.....	331
U.2	Test method and compliance criteria for non-intrinsically protected CRTs	332
U.3	Protective screen	332
Annex V	(normative) Determination of accessible parts.....	333
V.1	Accessible parts of equipment	333
V.1.1	General	333
V.1.2	Test method 1 – Surfaces and openings tested with jointed test probes.....	333
V.1.3	Test method 2 – Openings tested with straight unjointed test probes.....	333
V.1.4	Test method 3 – Plugs, jacks, connectors	336
V.1.5	Test method 4 – Slot openings	336
V.1.6	Test method 5 – Terminals intended to be used by an ordinary person	337
V.2	Accessible part criterion	338
Annex W	(informative) Comparison of terms introduced in this document.....	339
W.1	General.....	339
W.2	Comparison of terms	339
Annex X	(normative) Alternative method for determining clearances for insulation in circuits connected to an AC mains not exceeding 420 V peak (300 V RMS).....	356
Annex Y	(normative) Construction requirements for outdoor enclosures	358
Y.1	General.....	358
Y.2	Resistance to UV radiation	358
Y.3	Resistance to corrosion	358

Y.3.1	General	358
Y.3.2	Test apparatus.....	359
Y.3.3	Water – saturated sulphur dioxide atmosphere	359
Y.3.4	Test procedure.....	359
Y.3.5	Compliance criteria	360
Y.4	Gaskets	360
Y.4.1	General	360
Y.4.2	Gasket tests.....	360
Y.4.3	Tensile strength and elongation tests	360
Y.4.4	Compression test.....	361
Y.4.5	Oil resistance.....	362
Y.4.6	Securing means	362
Y.5	Protection of equipment within an outdoor enclosure.....	363
Y.5.1	General	363
Y.5.2	Protection from moisture	363
Y.5.3	Water spray test.....	364
Y.5.4	Protection from plants and vermin	366
Y.5.5	Protection from excessive dust.....	367
Y.6	Mechanical strength of enclosures.....	367
Y.6.1	General	367
Y.6.2	Impact test.....	368
	Bibliography	369
	Figure 1 – Three block model for pain and injury	24
	Figure 2 – Three block model for safety.....	25
	Figure 3 – Schematic and model for electrically-caused pain or injury	30
	Figure 4 – Model for protection against electrically-caused pain or injury	30
	Figure 5 – Model for electrically-caused fire	31
	Figure 6 – Models for protection against fire	32
	Figure 7 – Schematic and model for thermally-caused injury	34
	Figure 8 – Model for protection against thermally-caused injury	34
	Figure 9 – Model for protection of an ordinary person against a class 1 energy source	69
	Figure 10 – Model for protection of an ordinary person against a class 2 energy source	69
	Figure 11 – Model for protection of an ordinary person against a class 2 energy source during ordinary person servicing conditions	69
	Figure 12 – Model for protection of an ordinary person against a class 3 energy source	70
	Figure 13 – Model for protection of an instructed person against a class 1 energy source	70
	Figure 14 – Model for protection of an instructed person against a class 2 energy source	70
	Figure 15 – Model for protection of an instructed person against a class 3 energy source	71
	Figure 16 – Model for protection of a skilled person against a class 1 energy source.....	71
	Figure 17 – Model for protection of a skilled person against a class 2 energy source.....	71
	Figure 18 – Model for protection of a skilled person against a class 3 energy source.....	71

Figure 19 – Model for protection of a skilled person against class 3 energy sources during equipment servicing conditions	72
Figure 20 – Test hook	79
Figure 21 – Illustration showing ES limits for voltage and current	81
Figure 22 – Maximum values for combined AC current and DC current	83
Figure 23 – Maximum values for combined AC voltage and DC voltage	83
Figure 24 – Contact requirements to bare internal conductive parts	87
Figure 25 – Mandrel	112
Figure 26 – Initial position of mandrel	113
Figure 27 – Final position of mandrel	113
Figure 28 – Position of metal foil on insulating material	113
Figure 29 – Example of electric strength test instrument for solid insulation	121
Figure 30 – Application points of test voltage	122
Figure 31 – Test for separation between an external circuit and earth	125
Figure 32 – Test circuit for touch current of single-phase equipment	141
Figure 33 – Test circuit for touch current of three-phase equipment	141
Figure 34 – Power measurement for worst-case fault	145
Figure 35 – Power measurement for worst-case power source fault	146
Figure 36 – Illustration of power source classification	147
Figure 37 – Minimum separation requirements from a PIS	153
Figure 38 – Extended separation requirements from a PIS	153
Figure 39 – Deflected separation requirements from a PIS when a fire barrier is used	154
Figure 40 – Determination of top, bottom and side openings	156
Figure 41 – Top openings	157
Figure 42 – Bottom openings	158
Figure 43 – Baffle plate construction	158
Figure 44 – PIS trajectory downwards	159
Figure 45 – Limits for moving fan blades made of non-plastic materials	165
Figure 46 – Limits for moving fan blades made of plastic materials	165
Figure 47 – Steel disc	189
Figure 48 – Aluminium ring	190
Figure 49 – Aluminium foil	191
Figure 50 – Example of a warning label for a lamp with multiple hazard spectral regions	198
Figure D.1 – 1,2/50 μ s and 10/700 μ s voltage impulse generator	216
Figure D.2 – Antenna interface test generator circuit	217
Figure D.3 – Example of an electronic pulse generator	217
Figure E.1 – Band-pass filter for wide-band noise measurement	219
Figure F.1 – Example of an instructional safeguard	228
Figure G.1 – Determination of arithmetic average temperature	241
Figure G.2 – Test voltages	246
Figure G.3 – Thermal ageing time	267
Figure G.4 – Abrasion resistance test for coating layers	268
Figure H.1 – Definition of ringing period and cadence cycle	273

Figure H.2 – I_{TS1} limit curve for cadenced ringing signal.....	274
Figure H.3 – Peak and peak-to-peak currents.....	274
Figure H.4 – Ringing voltage trip criteria.....	276
Figure M.1 – Distance d as a function of the rated capacity for various charge currents I (mA/Ah).....	301
Figure O.1 – Narrow groove.....	304
Figure O.2 – Wide groove.....	305
Figure O.3 – V-shaped groove.....	305
Figure O.4 – Intervening unconnected conductive part.....	305
Figure O.5 – Rib.....	305
Figure O.6 – Uncemented joint with narrow groove.....	306
Figure O.7 – Uncemented joint with wide groove.....	306
Figure O.8 – Uncemented joint with narrow and wide grooves.....	306
Figure O.9 – Narrow recess.....	307
Figure O.10 – Wide recess.....	307
Figure O.11 – Coating around terminals.....	308
Figure O.12 – Coating over printed wiring.....	308
Figure O.13 – Example of measurements in an enclosure of insulating material.....	309
Figure O.14 – Cemented joints in multi-layer printed boards.....	309
Figure O.15 – Device filled with insulating compound.....	310
Figure O.16 – Partitioned bobbin.....	310
Figure P.1 – Examples of cross-sections of designs of top openings which prevent vertical entry.....	312
Figure P.2 – Examples of cross-sections of designs of side opening louvres which prevent vertical entry.....	312
Figure P.3 – Internal volume locus for foreign object entry.....	313
Figure S.1 – Top openings / surface of fire enclosure or fire barrier.....	323
Figure T.1 – Impact test using sphere.....	328
Figure V.1 – Jointed test probe for equipment likely to be accessible to children.....	334
Figure V.2 – Jointed test probe for equipment not likely to be accessible to children.....	335
Figure V.3 – Blunt probe.....	336
Figure V.4 – Wedge probe.....	337
Figure V.5 – Terminal probe.....	338
Figure Y.1 – Gasket test.....	362
Figure Y.2 – Water-spray test spray-head piping.....	365
Figure Y.3 – Water-spray test spray head.....	366
Table 1 – Response to energy class.....	24
Table 2 – Examples of body response or property damage related to energy sources.....	25
Table 3 – Examples of safeguard characteristics.....	29
Table 4 – Electrical energy source limits for steady state ES1 and ES2.....	82
Table 5 – Electrical energy source limits for a charged capacitor.....	84
Table 6 – Voltage limits for single pulses.....	85
Table 7 – Current limits for single pulses.....	85

Table 8 – Minimum air gap distance	88
Table 9 – Temperature limits for materials, components and systems	90
Table 10 – Minimum clearances for voltages with frequencies up to 30 kHz	96
Table 11 – Minimum clearances for voltages with frequencies above 30 kHz	97
Table 12 – Mains transient voltages	98
Table 13 – External circuit transient voltages	100
Table 14 – Minimum clearances using required withstand voltage	102
Table 15 – Electric strength test voltages	103
Table 16 – Multiplication factors for clearances and test voltages	104
Table 17 – Minimum creepage distances for basic insulation and supplementary insulation in mm	107
Table 18 – Minimum values of creepage distances (in mm) for frequencies higher than 30 kHz and up to 400 kHz	108
Table 19 – Tests for insulation in non-separable layers	111
Table 20 – Electric field strength E_P for some commonly used materials	115
Table 21 – Reduction factors for the value of breakdown electric field strength E_P at higher frequencies	116
Table 22 – Reduction factors for the value of breakdown electric field strength E_P at higher frequencies for thin materials	116
Table 23 – Values for insulation resistance	117
Table 24 – Distance through insulation of internal wiring	118
Table 25 – Test voltages for electric strength tests based on transient voltages	120
Table 26 – Test voltages for electric strength tests based on the peak of the working voltages and recurring peak voltages	120
Table 27 – Test voltages for electric strength tests based on temporary overvoltages	120
Table 28 – Test values for electric strength tests	123
Table 29 – Overview of tests for resistor applications	128
Table 30 – Protective earthing conductor sizes for reinforced safeguards for permanently connected equipment	131
Table 31 – Minimum protective bonding conductor size of copper conductors	133
Table 32 – Sizes of terminals for protective conductors	135
Table 33 – Test duration, mains connected equipment	136
Table 34 – List of applicable IEC standards regarding insulating liquids	160
Table 35 – Classification for various categories of mechanical energy sources	164
Table 36 – Overview of requirements and tests	175
Table 37 – Torque to be applied to screws	180
Table 38 – Touch temperature limits for accessible parts	187
Table 39 – Radiation energy source classifications	192
Table 40 – Allowable radiation level according to IEC 62471 (all parts) for each hazard type	195
Table 41 – Hazard-related risk group marking of equipment	197
Table 42 – Explanation of marking information and guidance on control measures	197
Table C.1 – Minimum property retention limits after UV exposure	214
Table D.1 – Component values for Figure D.1 and Figure D.2	217
Table E.1 – Audio signal electrical energy source classes and safeguards	218

Table F.1 – Instructional safeguard element description and examples.....	228
Table F.2 – Examples of markings, instructions, and instructional safeguards	229
Table G.1 – Peak surge current.....	231
Table G.2 – Test temperature and testing time (days) per cycle	237
Table G.3 – Temperature limits for transformer windings and for motor windings (except for the motor running overload test)	240
Table G.4 – Test voltages for electric strength tests based on the peak of the working voltages.....	242
Table G.5 – Values of FIW wires with maximum overall diameter and minimum test voltages according to the enamel increase	245
Table G.6 – Temperature limits for running overload tests	247
Table G.7 – Sizes of conductors.....	253
Table G.8 – Strain relief test force.....	254
Table G.9 – Range of conductor sizes to be accepted by terminals	256
Table G.10 – Varistor overload and temporary overvoltage test.....	259
Table G.11 – Performance test program for integrated circuit (IC) current limiters	261
Table G.12 – Capacitor ratings according to IEC 60384-14	263
Table G.13 – Minimum separation distances for coated printed boards	265
Table G.14 – Insulation in printed boards	266
Table I.1 – Overvoltage categories.....	277
Table J.1 – Mandrel diameter.....	279
Table J.2 – Oven temperature	280
Table M.1 – Values for current I_{float} and I_{boost} , factors f_g and f_s , and voltages U_{float} and U_{boost}	296
Table O.1 – Value of X	304
Table Q.1 – Limits for inherently limited power sources	317
Table Q.2 – Limits for power sources not inherently limited (overcurrent protective device required).....	318
Table S.1 – Foamed materials.....	324
Table S.2 – Rigid materials	324
Table S.3 – Very thin materials	324
Table T.1 – Impact force	329
Table T.2 – Torque values for end-piece test.....	330
Table W.1 – Comparison of terms and definitions in IEC 60664-1:2007 and IEC 62368-1	340
Table W.2 – Comparison of terms and definitions in IEC 61140:2016 and IEC 62368-1	342
Table W.3 – Comparison of terms and definitions in IEC 60950-1:2005 and IEC 62368-1	345
Table W.4 – Comparison of terms and definitions in IEC 60728-11:2016 and IEC 62368-1	349
Table W.5 – Comparison of terms and definitions in IEC 62151:2000 and IEC 62368-1	351
Table W.6 – Comparison of terms and definitions in IEC 60065:2014 and IEC 62368-1	353
Table X.1 – Alternative minimum clearances for insulation in circuits connected to ac mains not exceeding 420 V peak (300 V RMS)	356
Table X.2 – Additional clearances for insulation in circuits connected to ac mains not exceeding 420 V peak (300 V RMS)	357

Table Y.1 – Examples of the provision of pollution degree environments	363
--	-----

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**AUDIO/VIDEO, INFORMATION AND
COMMUNICATION TECHNOLOGY EQUIPMENT –****Part 1: Safety requirements****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62368-1 has been prepared by TC 108: Safety of electronic equipment within the field of audio/video, information technology and communication technology.

This third edition cancels and replaces the second edition published in 2014. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- addition of requirements for outdoor equipment;
- new requirements for optical radiation;
- addition of requirements for insulating liquids;
- addition of requirements for work cells;

- addition of requirements for wireless power transmitters;
- addition of requirements for fully insulated winding wire (FIW);
- alternative method for determination of top, bottom and side openings for fire enclosures;
- alternative requirements for sound pressure.

The text of this document is based on the following documents:

FDIS	Report on voting
108/701/FDIS	108/707/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 62368 series, published under the general title *Audio/video, information and communication technology equipment*, can be found on the IEC website.

The “in some countries” notes regarding differing national practices are contained in the following clauses, subclauses and tables:

0.2.1, Clause 1, 3.3.8.1, 3.3.8.3, 4.1.15, 4.7.3, 5.2.2.2, 5.4.2.3.2.4, 5.4.2.5, 5.4.5.1, 5.4.10.2.1, 5.4.10.2.2, 5.4.10.2.3, 5.5.2.1, 5.5.6, 5.6.4.2.1, 5.6.8, 5.7.6, 5.7.7.1, 8.5.4.2.3, 10.5.3, 10.6.1, F.3.3.6, Y.4.1, Y.4.5, Table 12, Table 13 and Table 39.

In this document, the following print types or formats are used:

- requirements proper and normative annexes: in roman type;
- compliance statements and test specifications: *in italic type*;
- notes/explanatory matter: in smaller roman type;
- normative conditions within tables: in smaller roman type;
- terms that are defined in 3.3: **bold**.

In figures and tables, if colour is available:

- green colour denotes a class 1 energy source;
- yellow colour denotes a class 2 energy source;
- red colour denotes a class 3 energy source.

A comparison of terms introduced in this document that are different from other existing IEC documents is given in Annex W.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

NOTE Explanatory information related to IEC 62368-1 is contained in IEC TR 62368-2. It provides rationale together with explanatory information related to this document.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

0 Principles of this product safety standard

0.1 Objective

This part of IEC 62368 is a product safety standard that classifies energy sources, prescribes **safeguards** against those energy sources, and provides guidance on the application of, and requirements for, those **safeguards**.

The prescribed **safeguards** are intended to reduce the likelihood of pain, injury and, in the case of fire, property damage.

The objective of the INTRODUCTION is to help designers to understand the underlying principles of safety in order to design safe equipment. These principles are informative and not an alternative to the detailed requirements of this document.

0.2 Persons

0.2.1 General

This document describes **safeguards** for the protection of three kinds of persons: the **ordinary person**, the **instructed person**, and the **skilled person**. Unless otherwise specified, the requirements for an **ordinary person** apply. This document assumes that a person will not intentionally create conditions or situations that could cause pain or injury.

 Text deleted 

0.2.2 Ordinary person

Ordinary person is the term applied to all persons other than **instructed persons** and **skilled persons**. **Ordinary persons** include not only users of the equipment, but also all persons who may have access to the equipment or who may be in the vicinity of the equipment. Under **normal operating conditions** or **abnormal operating conditions**, **ordinary persons** should not be exposed to parts comprising energy sources capable of causing pain or injury. Under a **single fault condition**, **ordinary persons** should not be exposed to parts comprising energy sources capable of causing injury.

0.2.3 Instructed person

Instructed person is a term applied to persons who have been instructed and trained by a **skilled person**, or who are supervised by a **skilled person**, to identify energy sources that may cause pain (see Table 1) and to take precautions to avoid unintentional contact with or exposure to those energy sources. Under **normal operating conditions**, **abnormal operating conditions** or **single fault conditions**, **instructed persons** should not be exposed to parts comprising energy sources capable of causing injury.

0.2.4 Skilled person

Skilled person is a term applied to persons who have training or experience in the equipment technology, particularly in knowing the various energies and energy magnitudes used in the equipment. **Skilled persons** are expected to use their training and experience to recognize energy sources capable of causing pain or injury and to take action for protection from injury from those energies. **Skilled persons** should also be protected against unintentional contact or exposure to energy sources capable of causing injury.

0.3 Model for pain and injury

An energy source that causes pain or injury does so through the transfer of some form of energy to or from a body part.

This concept is represented by a three-block model (see Figure 1).

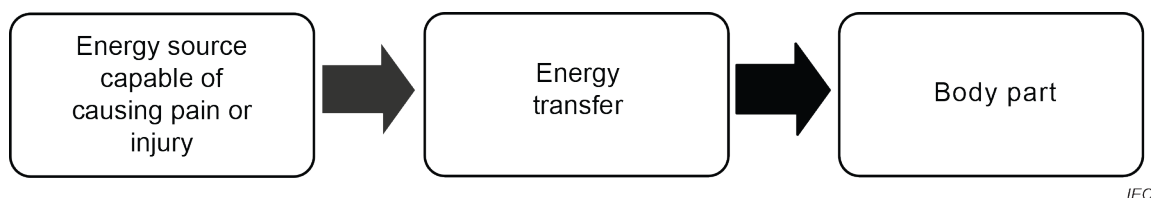


Figure 1 – Three block model for pain and injury

This safety standard specifies three classes of energy sources defined by magnitudes and durations of source parameters relative to the body responses to those electrical and thermal energy sources (see Table 1). Source parameters relative to responses to **combustible material**, mechanical energy sources and radiation energy sources are specified based on experience and basic safety standards.

Table 1 – Response to energy class

Energy source	Effect on the body	Effect on combustible materials
Class 1	Not painful, but may be detectable	Ignition not likely
Class 2	Painful, but not an injury	Ignition possible, but limited growth and spread of fire
Class 3	Injury	Ignition likely, rapid growth and spread of fire

The energy threshold for pain or injury is not constant throughout the population. For example, for some energy sources, the threshold is a function of body mass; the lower the mass, the lower the threshold, and vice-versa. Other body variables include age, state of health, state of emotions, effect of drugs, skin characteristics, etc. Furthermore, even where outward appearances otherwise appear equal, individuals differ in their thresholds of susceptibility to the same energy source.

The effect of duration of energy transfer is a function of the specific energy form. For example, pain or injury from thermal energy can be very short (1 s) for high skin temperature, or very long (several hours) for low skin temperature.

Furthermore, the pain or injury may occur some considerable time after the transfer of energy to a body part. For example, pain or injury from some chemical or physiological reaction may not be manifested for days, weeks, months, or years.

0.4 Energy sources

Energy sources are addressed by this document, together with the pain or injury that results from a transfer of that energy to the body, and the likelihood of property damage that results from fire escaping the equipment.

An electrical product is connected to an electrical energy source (for example, the **mains**), an external power supply, or a **battery**. An electrical product uses the electrical energy to perform its intended functions.

In the process of using electrical energy, the product transforms the electrical energy into other forms of energy (for example, thermal energy, kinetic energy, optical energy, audio energy, electromagnetic energy, etc.). Some energy transformations may be a deliberate part of the product function (for example, moving parts of a printer, images on a visual display unit, sound from a speaker, etc.). Some energy transformations may be a by-product of the product function (for example, heat dissipated by functional circuits, X-radiation from a cathode-ray tube, etc.).

Some products may use energy sources that are non-electrical energy sources such as moving parts or chemicals. The energy in these other sources may be transferred to or from a body part, or may be transformed into other energy forms (for example, chemical energy may be converted to electrical energy through a **battery**, or a moving body part transfers its kinetic energy to a sharp edge).

Examples of the types of energy forms and the associated injuries and property damage addressed in this document are in Table 2.

Table 2 – Examples of body response or property damage related to energy sources

Forms of energy	Examples of body response or property damage	Clause
Electrical energy (for example, energized conductive parts)	Pain, fibrillation, cardiac arrest, respiratory arrest, skin burn, or internal organ burn	5
Thermal energy (for example, electrical ignition and spread of fire)	Electrically-caused fire leading to burn-related pain or injury, or property damage	6
Chemical reaction (for example, electrolyte, poison)	Skin damage, organ damage, or poisoning	7
Kinetic energy (for example, moving parts of equipment, or a moving body part against an equipment part)	Laceration, puncture, abrasion, contusion, crush, amputation, or loss of a limb, eye, ear, etc.	8
Thermal energy (for example, hot accessible parts)	Skin burn	9
Radiated energy (for example, electromagnetic energy, optical energy, acoustic energy)	Loss of sight, skin burn, or loss of hearing	10

0.5 Safeguards

0.5.1 General

Many products necessarily use energy capable of causing pain or injury. Product design cannot eliminate such energy use. Consequently, such products should use a scheme that reduces the likelihood of such energy being transferred to a body part. The scheme that reduces the likelihood of energy transfer to a body part is a **safeguard** (see Figure 2).



IEC

Figure 2 – Three block model for safety

A **safeguard** is a device or scheme or system that:

- is interposed between an energy source capable of causing pain or injury and a body part, and
- reduces the likelihood of transfer of energy capable of causing pain or injury to a body part.

NOTE **Safeguard** mechanisms against transfer of energy capable of causing pain or injury include:

- attenuating the energy (reduces the value of the energy); or
- impeding the energy (slows the rate of energy transfer); or
- diverting the energy (changes the energy direction); or
- disconnecting, interrupting, or disabling the energy source; or
- enveloping the energy source (reduces the likelihood of the energy from escaping); or
- interposing a barrier between a body part and the energy source.

A **safeguard** can be applied to the equipment, to the local installation, to a person or can be a learned or directed behaviour (for example, resulting from an **instructional safeguard**) intended to reduce the likelihood of transfer of energy capable of causing pain or injury. A **safeguard** may be a single element or may be a set of elements.

Generally, this document uses an order of preference for providing **safeguards** based on the requirements given in ISO/IEC Guide 51 as follows:

- **equipment safeguards** are always useful, since they do not require any knowledge or actions by persons coming into contact with the equipment;
- **installation safeguards** are useful when a safety characteristic can only be provided after installation (for example, the equipment has to be bolted to the floor to provide stability);
- behavioural **safeguards** are useful when the equipment requires an energy source to be **accessible**.

In practice, **safeguard** selection accounts for the nature of the energy source, the intended user, the functional requirements of the equipment, and similar considerations.

0.5.2 Equipment safeguard

An **equipment safeguard** may be a **basic safeguard**, a **supplementary safeguard**, a **double safeguard**, or a **reinforced safeguard**.

0.5.3 Installation safeguard

Installation safeguards are not controlled by the equipment manufacturer, although in some cases, **installation safeguards** may be specified in the equipment installation instructions.

Generally, with respect to equipment, an **installation safeguard** is a **supplementary safeguard**.

NOTE For example, the **supplementary safeguard** providing **protective earthing** is located partly in the equipment and partly in the installation. The **supplementary safeguard** providing **protective earthing** is not effective until the equipment is connected to the **protective earthing** of the installation.

Requirements for **installation safeguards** are not addressed in this document. However, this document does assume some **installation safeguards**, such as **protective earthing**, are in place and are effective.

0.5.4 Personal safeguard

A **personal safeguard** may be a **basic safeguard**, a **supplementary safeguard**, or a **reinforced safeguard**.

Requirements for **personal safeguards** are not addressed in this document. However, this document does assume that **personal safeguards** are available for use as specified by the manufacturer.

0.5.5 Behavioural safeguards

0.5.5.1 Introduction to behavioural safeguards

In the absence of an **equipment**, **installation**, or **personal safeguard**, a person may use a specific behaviour as a **safeguard** to avoid energy transfer and consequent injury. A behavioural **safeguard** is a voluntary or instructed behaviour intended to reduce the likelihood of transfer of energy to a body part.

Three kinds of behavioural **safeguards** are specified in this document. Each kind of behavioural **safeguard** is associated with a specific kind of person. An **instructional safeguard** is usually addressed to an **ordinary person**, but may also be addressed to an **instructed person** or a **skilled person**. A **precautionary safeguard** is used by an **instructed person**. A **skill safeguard** is used by a **skilled person**.

0.5.5.2 Instructional safeguard

An **instructional safeguard** is a means of providing information, describing the existence and location of an energy source capable of causing pain or injury, and is intended to invoke a specific behaviour on the part of a person to reduce the likelihood of transfer of energy to a body part (see Annex F).

An **instructional safeguard** may be a visual indicator (symbols or words or both) or an audible message, as applicable to the expected use of the product.

When accessing locations where the equipment needs to be energized to perform a service activity, an **instructional safeguard** may be considered acceptable protection to bypass an **equipment safeguard** such that the person is made aware of how to avoid contact with a class 2 or class 3 energy source.

If **equipment safeguards** would interfere with or prohibit the equipment function, an **instructional safeguard** may replace an **equipment safeguard**.

If exposure to an energy source capable of causing pain or injury is essential to the correct functioning of equipment, an **instructional safeguard** may be used to ensure protection of persons instead of another **safeguard**. Consideration should be given as to whether the **instructional safeguard** should require the use of a **personal safeguard**.

Provision of an **instructional safeguard** does not result in an **ordinary person** becoming an **instructed person** (see 0.5.5.3).

0.5.5.3 Precautionary safeguard (used by an instructed person)

A **precautionary safeguard** is the training and experience or supervision of an **instructed person** by a **skilled person** to use precautions to protect the **instructed person** against class 2 energy sources. **Precautionary safeguards** are not specifically prescribed in this document but are assumed to be effective when the term **instructed person** is used.

During equipment servicing, an **instructed person** may need to remove or defeat an **equipment safeguard**. In this case, an **instructed person** is expected to then apply precaution as a **safeguard** to avoid exposure to class 2 energy sources.

0.5.5.4 Skill safeguard (used by a skilled person)

A **skill safeguard** is the education, training, knowledge and experience of the **skilled person** that is used to protect the **skilled person** against class 2 or class 3 energy sources. **Skill safeguards** are not specifically prescribed in this document but are assumed to be effective when the term **skilled person** is used.

During equipment servicing, a **skilled person** may need to remove or defeat an **equipment safeguard**. In this case, a **skilled person** is expected to then apply skill as a **safeguard** to avoid injury.

0.5.6 Safeguards during ordinary or instructed person service conditions

During **ordinary person** or **instructed person** service conditions, **safeguards** for such persons may be necessary. Such **safeguards** can be **equipment safeguards**, **personal safeguards**, or **instructional safeguards**.

0.5.7 Equipment safeguards during skilled person service conditions

During **skilled person** service conditions, **equipment safeguards** should be provided to protect against the effects of a body's involuntary reaction (for example, startle) that might cause unintentional contact with a class 3 energy source located outside the view of the **skilled person**.

NOTE This **safeguard** typically applies in large equipment, where the **skilled person** needs to partially or wholly enter between two or more class 3 energy source locations while servicing.

0.5.8 Examples of safeguard characteristics

Table 3 lists some examples of **safeguard** characteristics.

Table 3 – Examples of safeguard characteristics

Safeguard	Basic safeguard	Supplementary safeguard	Reinforced safeguard
Equipment safeguard: a physical part of an equipment	Effective under normal operating conditions	Effective in the event of failure of the basic safeguard	Effective under normal operating conditions and in the event of a single fault condition elsewhere in the equipment
	Example: basic insulation	Example: supplementary insulation	Example: reinforced insulation
	Example: normal temperatures below ignition temperatures	Example: fire enclosure	Not applicable
Installation safeguard: a physical part of a man-made installation	Effective under normal operating conditions	Effective in the event of failure of an equipment basic safeguard	Effective under normal operating conditions and in the event of a single fault condition elsewhere in the equipment
	Example: wire size	Example: overcurrent protective device	Example: socket outlet
Personal safeguard: a physical device worn on the body	In the absence of any equipment safeguard , effective under normal operating conditions	Effective in the event of failure of an equipment basic safeguard	In the absence of any equipment safeguard , effective under normal operating conditions and in the event of a single fault condition elsewhere in the equipment
	Example: gloves	Example: insulating floor mat	Example: electrically-insulated glove for handling live conductors
Instructional safeguard: a voluntary or instructed behaviour intended to reduce the likelihood of transfer of energy to a body part	In the absence of any equipment safeguard , effective under normal operating conditions	Effective in the event of failure of an equipment basic safeguard	Only effective on an exceptional basis, when providing all appropriate safeguards would prevent the intended functioning of the equipment
	Example: instructional safeguard to disconnect telecommunication cable before opening the cover	Example: after opening a door, an instructional safeguard against hot parts	Example: instructional safeguard of hot parts in an office photocopier, or a continuous roll paper cutter on a commercial printer

0.6 Electrically-caused pain or injury (electric shock)

0.6.1 Models for electrically-caused pain or injury

Electrically-caused pain or injury may occur when electrical energy capable of causing pain or injury is transferred to a body part (see Figure 3).

Electrical energy transfer occurs when there are two or more electrical contacts to the body:

- the first electrical contact is between a body part and a conductive part of the equipment;
- the second electrical contact is between another body part and
 - earth, or
 - another conductive part of the equipment.