



BSI Standards Publication

Safety requirements for power electronic converter systems and equipment

Part 1: General

National foreword

This British Standard is the UK implementation of EN IEC 62477-1:2023. It is identical to IEC 62477-1:2022, incorporating corrigendum April 2024. It supersedes BS EN 62477-1:2012+A12:2021, which is withdrawn.

The start and finish of text introduced or altered by corrigendum is indicated in the text by tags. Text altered by IEC corrigendum April 2024 is indicated in the text by AC1 AC1.

The UK participation in its preparation was entrusted to Technical Committee PEL/22, Power electronics.

A list of organizations represented on this committee can be obtained on request to its committee manager.

Contractual and legal considerations

This publication has been prepared in good faith, however no representation, warranty, assurance or undertaking (express or implied) is or will be made, and no responsibility or liability is or will be accepted by BSI in relation to the adequacy, accuracy, completeness or reasonableness of this publication. All and any such responsibility and liability is expressly disclaimed to the full extent permitted by the law.

This publication is provided as is, and is to be used at the recipient's own risk.

The recipient is advised to consider seeking professional guidance with respect to its use of this publication.

This publication is not intended to constitute a contract. Users are responsible for its correct application.

© The British Standards Institution 2024
Published by BSI Standards Limited 2024

ISBN 978 0 539 31625 4

ICS 29.200

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 October 2023.

Amendments/corrigenda issued since publication

Date	Text affected
31 May 2024	Implementation of IEC corrigendum April 2024

English Version

Safety requirements for power electronic converter systems and equipment - Part 1: General
(IEC 62477-1:2022)

Exigences de sécurité applicables aux systèmes et matériels électroniques de conversion de puissance -
Partie 1: Généralités
(IEC 62477-1:2022)

Sicherheitsanforderungen an Leistungselektronik-Umrichtersysteme und -betriebsmittel - Teil 1: Allgemeines
(IEC 62477-1:2022)

This European Standard was approved by CENELEC on 2023-08-09. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and the United Kingdom.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

European foreword

The text of document 22/355/FDIS, future edition 2 of IEC 62477-1, prepared by IEC/TC 22 "Power electronic systems and equipment" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN IEC 62477-1:2023.

The following dates are fixed:

- latest date by which the document has to be implemented at national (dop) 2024-05-09 level by publication of an identical national standard or by endorsement
- latest date by which the national standards conflicting with the (dow) 2026-08-09 document have to be withdrawn

This document supersedes EN 62477-1:2012 and all of its amendments and corrigenda (if any).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC shall not be held responsible for identifying any or all such patent rights.

Any feedback and questions on this document should be directed to the users' national committee. A complete listing of these bodies can be found on the CENELEC website.

Endorsement notice

The text of the International Standard IEC 62477-1:2022 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standard indicated:

IEC 60068-1:2013	NOTE Approved as EN 60068-1:2014 (not modified)
IEC 60068-2-14	NOTE Approved as EN IEC 60068-2-14
IEC 60068-2-31:2008	NOTE Approved as EN 60068-2-31:2008 (not modified)
IEC 60073:2002	NOTE Approved as EN 60073:2002 (not modified)
IEC 60085	NOTE Approved as EN 60085
IEC 60112:2020	NOTE Approved as EN IEC 60112:2020 (not modified)
IEC 60204-1:2016	NOTE Approved as EN 60204-1:2018
IEC 60216 (series)	NOTE Approved as EN 60216 (series)
IEC 60320-1:2015	NOTE Approved as EN 60320-1:2015 (not modified)
IEC 60332-1-2:2004	NOTE Approved as EN 60332-1-2:2004 (not modified) + A11:2016
IEC 60332-1-2:2004/A1:2015	NOTE Approved as EN 60332-1-2:2004/A1:2015 (not modified)
IEC 60332-1-3:2004	NOTE Approved as EN 60332-1-3:2004 (not modified)
IEC 60332-1-3:2004/A1:2015	NOTE Approved as EN 60332-1-3:2004/A1:2015 (not modified)
IEC 60332-2-2:2004	NOTE Approved as EN 60332-2-2:2004 (not modified)

IEC 60364-1:2005	NOTE Approved as HD 60364-1:2008 + A11:2017
IEC 60364-4-44:2007	NOTE Approved as HD 60364-4-444:2010
IEC 60364-4-44:2007/A1:2015	NOTE Approved as HD 60364-4-443:2016
IEC 60364-5-52:2009	NOTE Approved as HD 60364-5-52:2011 + A11:2017
IEC 60445:2021	NOTE Approved as EN IEC 60445:2021 (not modified)
IEC 60695-10-3:2016	NOTE Approved as EN 60695-10-3:2016 (not modified)
IEC 60695-11-5:2016	NOTE Approved as EN 60695-11-5:2017 (not modified)
IEC 60695-11-10:2013	NOTE Approved as EN 60695-11-10:2013 (not modified)
IEC 60721 (series)	NOTE Approved as EN 60721 (series)
IEC 60865 (series)	NOTE Approved as EN 60865 (series)
IEC 60865-1	NOTE Approved as EN 60865-1
IEC 60909 (series)	NOTE Approved as EN 60909 (series)
IEC 60909-0:2016	NOTE Approved as EN 60909-0:2016 (not modified)
IEC 60947 (series)	NOTE Approved as EN IEC 60947 (series)
IEC 60947-1:2020	NOTE Approved as EN IEC 60947-1:2021 (not modified)
IEC 60947-2:2016	NOTE Approved as EN 60947-2:2017 (not modified)
IEC 60947-2:2016/A1:2019	NOTE Approved as EN 60947-2:2017/A1:2020 (not modified)
IEC 60947-6-1:2021	NOTE Approved as EN IEC 60947-6-1:2023 (not modified)
IEC 60691	NOTE Approved as EN 60691
IEC 61082-1	NOTE Approved as EN 61082-1
IEC 61084 (series)	NOTE Approved as EN IEC 61084 (series)
IEC 61140:2016	NOTE Approved as EN 61140:2016 (not modified)
IEC 61148:2011	NOTE Approved as EN 61148:2012 (not modified)
IEC 61386 (series)	NOTE Approved as EN 61386 (series)
IEC 61439-1:2020	NOTE Approved as EN IEC 61439-1:2021 (not modified)
IEC 61508 (series)	NOTE Approved as EN 61508 (series)
IEC 61558 (series)	NOTE Approved as EN 61558 (series)
IEC 61643-11:2011	NOTE Approved as EN 61643-11:2012 + A11:2018
IEC 61643-12	NOTE Approved as CLC/TS 61643-12
IEC 62311:2019	NOTE Approved as EN IEC 62311:2020 (not modified)
IEC/IEEE 82079-1:2019	NOTE Approved as EN IEC/IEEE 82079-1:2020 (not modified)
ISO 9773:1998	NOTE Approved as EN ISO 9773:1998 (not modified)
IEC 60127 (series)	NOTE Approved as EN IEC 60127 (series)
IEC 60309-1	NOTE Approved as EN IEC 60309-1

EN IEC 62477-1:2023 (E)

IEC 60317 (series)	NOTE Approved as EN IEC 60317 (series)
IEC 60730 (series)	NOTE Approved as EN IEC 60730 (series)
IEC 60931 (series)	NOTE Approved as EN 60931 (series)
IEC 60940	NOTE Approved as EN 60940
IEC 60947 (series)	NOTE Approved as EN IEC 60947 (series)
IEC 60691	NOTE Approved as EN 60691
IEC 61008 (series)	NOTE Approved as EN 61008 (series)
IEC 61009 (series)	NOTE Approved as EN 61009 (series)
IEC 61010-1	NOTE Approved as EN 61010-1
IEC 61051-2	NOTE Approved as EN IEC 61051-2
IEC 61058-1	NOTE Approved as EN IEC 61058-1
IEC 61071	NOTE Approved as EN 61071
IEC 61439 (series)	NOTE Approved as EN IEC 61439 (series)
IEC 61558-2-16	NOTE Approved as EN IEC 61558-2-16
IEC 61810-1	NOTE Approved as EN 61810-1
IEC 61984	NOTE Approved as EN 61984
IEC 62368-1:2018	NOTE Approved as EN IEC 62368-1:2020 (not modified) + A11:2020
IEC 62423	NOTE Approved as EN 62423

Annex ZA (normative)

Normative references to international publications with their corresponding European publications

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 Where an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here: www.cencenelec.eu.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 60050-112	-	International Electrotechnical Vocabulary - Part 112: Quantities and units	-	-
IEC 60050-113	-	International Electrotechnical Vocabulary - Part 113: Physics for electrotechnology	-	-
IEC 60050-114	-	International Electrotechnical Vocabulary - Part 114: Electrochemistry	-	-
IEC 60050-151	-	International Electrotechnical Vocabulary - Part 151: Electrical and magnetic devices	-	-
IEC 60050-161	-	International Electrotechnical Vocabulary. Chapter 161: Electromagnetic compatibility	-	-
IEC 60050-192	-	International electrotechnical vocabulary - Part 192: Dependability	-	-
IEC 60050-426	-	International Electrotechnical Vocabulary (IEV) - Part 426: Explosive atmospheres	-	-
IEC 60050-441	-	International Electrotechnical Vocabulary. Switchgear, controlgear and fuses	-	-
IEC 60050-442	-	International Electrotechnical Vocabulary - Part 442: Electrical accessories	-	-
IEC 60050-551	-	International Electrotechnical Vocabulary - Part 551: Power electronics	-	-
IEC 60050-601	-	International Electrotechnical Vocabulary. Chapter 601: Generation, transmission and distribution of electricity - General	-	-
IEC 60050-826	-	International Electrotechnical Vocabulary - Part 826: Electrical installations	-	-
IEC 60068-2-2	2007	Environmental testing - Part 2-2: Tests - Test B: Dry heat	EN 60068-2-2	2007
IEC 60068-2-6	2007	Environmental testing - Part 2-6: Tests - Test Fc: Vibration (sinusoidal)	EN 60068-2-6	2008

EN IEC 62477-1:2023 (E)

Publication	Year	Title	EN/HD	Year
IEC 60068-2-52	2017	Environmental testing - Part 2-52: Tests - Test Kb: Salt mist, cyclic (sodium chloride solution)	EN IEC 60068-2-52	2018
IEC 60068-2-68	1994	Environmental testing - Part 2-68: Tests - Test L: Dust and sand	EN 60068-2-68	1996
IEC 60068-2-78	2012	Environmental testing - Part 2-78: Tests - Test Cab: Damp heat, steady state	EN 60068-2-78	2013
IEC 60320	series	Appliance couplers for household and similar general purposes	-	-
IEC 60364	series	Low-voltage electrical installations	HD 60364	series
IEC 60364-4-41 (mod)	2005	Low-voltage electrical installations - Part 4-41: Protection for safety - Protection against electric shock	HD 60364-4-41	2017
+ A1	2017			
-	-		+ A11	2017
-	-		+ A12	2019
IEC 60364-5-54	2011	Low-voltage electrical installations - Part 5-54: Selection and erection of electrical equipment - Earthing arrangements and protective conductors	HD 60364-5-54	2011
-	-		+ A11	2017
+ A1	2021		+ A1	2022
IEC 60384-14	2013	Fixed capacitors for use in electronic equipment - Part 14: Sectional specification - Fixed capacitors for electromagnetic interference suppression and connection to the supply mains	EN 60384-14	2013
IEC 60417	-	Graphical symbols for use on equipment. Index, survey and compilation of the single sheets.	-	-
IEC 60529	1989	Degrees of protection provided by enclosures (IP Code)	EN 60529	1991
-	-		+ corrigendum May	1993
+ A1	1999		+ A1	2000
+ A2	2013		+ A2	2013
IEC 60617	-	Standard data element types with associated classification scheme for electric components - Part 4: IEC reference collection of standard data element types and component classes	-	-
IEC 60664-1	2020	Insulation coordination for equipment within low-voltage supply systems - Part 1: Principles, requirements and tests	EN IEC 60664-1	2020
IEC 60664-3	2016	Insulation coordination for equipment within low-voltage systems - Part 3: Use of coating, potting or moulding for protection against pollution	EN 60664-3	2017

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 60664-4	2005	Insulation coordination for equipment within low-voltage systems - Part 4: Consideration of high-frequency voltage stress	EN 60664-4	2006
-	-		+ corrigendum Oct.	2006
IEC 60695-2-10	2013	Fire hazard testing - Part 2-10: Glowing/hot-wire based test methods - Glow-wire apparatus and common test procedure	EN 60695-2-10	2013
IEC 60695-2-11	2021	Fire hazard testing - Part 2-11: Glowing/hot-wire based test methods - Glow-wire flammability test method for end products (GWEPT)	EN IEC 60695-2-11	2021
IEC 60695-2-13	2010	Fire hazard testing - Part 2-13: Glowing/hot-wire based test methods - Glow-wire ignition temperature (GWIT) test method for materials	EN 60695-2-13	2010
+ A1	2014		+ A1	2014
IEC 60695-10-2	2014	Fire hazard testing - Part 10-2: Abnormal heat - Ball pressure test method	EN 60695-10-2	2014
IEC 60695-11-20	2015	Fire hazard testing - Part 11-20: Test flames - 500 W flame test method	EN 60695-11-20	2015
+ A1	1995		-	-
+ A2	1996		-	-
IEC 60721-3-3	1994	Classification of environmental conditions - Part 3: Classification of groups of environmental parameters and their severities - Section 3: Stationary use at weatherprotected locations	-	-
+ A1	1995		-	-
+ A2	1996		-	-
IEC 60721-3-4	1995	Classification of environmental conditions – Part 3: Classification of groups of environmental parameters and their severities – Section 4: Stationary use at non-weatherprotected locations	-	-
+ A1	1996		-	-
IEC 60730-1 (mod)	2013	Automatic electrical controls – Part 1: General requirements	EN 60730-1	2016
+ A1	2015		+ A1	2019
+ A2	2020		+ A2	2022
IEC 60738-1-1	2008	Thermistors – Directly heated positive step-function temperature coefficient – Part 1-1: Blank detail specification – Current limiting application – Assessment level EZ	EN 60738-1-1	2008
IEC 60755	2017	General safety requirements for residual current operated protective devices	-	-
IEC 60799	2018	Electrical accessories – Cord sets and interconnection cord sets	EN IEC 60799	2021

EN IEC 62477-1:2023 (E)

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 60947-7	series	Low-voltage switchgear and controlgear	EN 60947-7	series
IEC 60949	1988	Calculation of thermally permissible short-circuit currents, taking into account non-adiabatic heating effects	-	-
+ A1	2008		-	-
IEC 60990	2016	Methods of measurement of touch current and protective conductor current	EN 60990	2016
IEC 61032	1997	Protection of persons and equipment by enclosures - Probes for verification	EN 61032	1998
IEC 61180	2016	High-voltage test techniques for low-voltage equipment - Definitions, test and procedure requirements, test equipment	EN 61180	2016
IEC 61189-3	2007	Test methods for electrical materials, printed boards and other interconnection structures and assemblies - Part 3: Test methods for interconnection structures (printed boards)	EN 61189-3	2008
IEC 61204-7	2016	Low-voltage switch mode power supplies - Part 7: Safety requirements	EN IEC 61204-7	2018
IEC 61558-1	2017	Safety of transformers, reactors, power supply units and combinations thereof - Part 1: General requirements and tests	EN IEC 61558-1	2019
IEC 62109-1	2010	Safety of power converters for use in photovoltaic power systems - Part 1: General requirements	-	-
ISO/IEC Guide 51	2014	Safety aspects - Guidelines for their inclusion in standards	-	-
IEC Guide 104	2019	The preparation of safety publications and the use of basic safety publications and group safety publications	-	-
IEC Guide 116	2018	Guidelines for safety related risk assessment and risk reduction for low voltage equipment	-	-
ISO 3746	2010	Acoustics - Determination of sound power levels and sound energy levels of noise sources using sound pressure - Survey method using an enveloping measurement surface over a reflecting plane	EN ISO 3746	2010
ISO 3864	series	Safety colours and safety signs	-	-
ISO 3864-1	2011	Graphical symbols - Safety colours and safety signs - Part 1: Design principles for safety signs and safety markings	-	-
ISO 7000	-	Graphical symbols for use on equipment - Registered symbols	-	-
ISO 7010	-	Graphical symbols - Safety colours and safety signs - Registered safety signs	-	-
ISO 9614-1	1993	Acoustics - Determination of sound power levels of noise sources using sound intensity - Part 1: Measurement at discrete points	EN ISO 9614-1	2009

CONTENTS

FOREWORD.....	11
INTRODUCTION.....	14
1 Scope.....	16
2 Normative references	17
3 Terms and definitions	20
4 Protection against hazards	33
4.1 General.....	33
4.2 <i>Single fault conditions and abnormal operating conditions</i>	33
4.3 Short-circuit and overload protection.....	34
4.3.1 General	34
4.3.2 Input short-circuit withstand strength and <i>output short-circuit current</i> ability.....	36
4.3.3 Short-circuit coordination (backup protection)	37
4.3.4 Protection by several devices	37
4.4 Protection against electric shock.....	37
4.4.1 General	37
4.4.2 <i>Decisive voltage class</i>	40
4.4.3 Means for <i>basic protection</i> (protection against direct contact)	44
4.4.4 Means for <i>fault protection</i> (protection against indirect contact)	45
4.4.5 Means for <i>enhanced protection</i>	55
4.4.6 Protective means for equipment classes	56
4.4.7 <i>Insulation</i>	58
4.4.8 Compatibility with residual current-operated protective devices (RCD).....	75
4.4.9 Capacitor discharge.....	76
4.5 Protection against electrical energy hazards	76
4.5.1 <i>General access areas</i>	76
4.5.2 <i>Service access areas</i>	77
4.6 Protection against fire and thermal hazards	77
4.6.1 Circuits representing a fire hazard	77
4.6.2 <i>Components</i> representing a fire hazard	77
4.6.3 <i>Fire enclosures</i>	79
4.6.4 Temperature limits	83
4.6.5 Limited power sources	86
4.7 Protection against mechanical hazards	87
4.7.1 General	87
4.7.2 Specific requirements for liquid cooled <i>PECS</i>	88
4.7.3 Mechanical hazards from rotating parts	89
4.7.4 Sharp edges	90
4.8 <i>PECS</i> with multiple sources of supply	90
4.9 Protection against environmental stresses	91
4.10 Protection against excessive acoustic noise hazards	92
4.11 Wiring and connections.....	93
4.11.1 General	93
4.11.2 <i>Insulation</i> of conductors.....	93
4.11.3 Stranded wire	95
4.11.4 Routing and clamping	95
4.11.5 Identification of conductors and terminals	95

4.11.6	Splices and connections	96
4.11.7	<i>Accessible connections</i>	96
4.11.8	Interconnections between parts of the <i>PECS</i>	97
4.11.9	Supply connections	97
4.11.10	<i>Field wiring terminals</i> and internal terminals	99
4.11.11	Means for shield connection of shielded wire or shielded cable	101
4.12	<i>Enclosures</i>	101
4.12.1	General	101
4.12.2	Handles and manual controls	102
4.12.3	Cast metal	102
4.12.4	Sheet metal	103
4.12.5	Stability requirement for <i>enclosure</i>	105
4.12.6	Strain relief	106
4.12.7	Polymeric <i>enclosure</i> stress relief	106
4.12.8	Polymeric <i>enclosure</i> UV resistance	106
4.13	<i>Components</i>	106
4.13.1	General	106
4.13.2	PTC thermistors	107
4.13.3	<i>Mains supply cords</i>	107
4.13.4	Capacitors and RC units bridging <i>insulation</i>	107
4.13.5	Wound components	107
4.13.6	Plug and socket-outlets	108
4.14	Protection against electromagnetic fields	108
5	Test requirements	108
5.1	General	108
5.1.1	Test objectives and classification	108
5.1.2	Selection of test samples	108
5.1.3	Sequence of tests	108
5.1.4	Earthing conditions	109
5.1.5	General conditions for tests	109
5.1.6	Compliance	110
5.1.7	Test overview	110
5.2	Test specifications	112
5.2.1	<i>Visual inspection (type test and routine test)</i>	112
5.2.2	Mechanical tests	112
5.2.3	Electrical tests	121
5.2.4	<i>Abnormal operation</i> and simulated faults tests	141
5.2.5	Material tests	148
5.2.6	Environmental tests (<i>type tests</i>)	153
5.2.7	Hydrostatic pressure test (<i>type test, routine test</i>)	157
5.2.8	Electromagnetic fields (EMF)	158
6	Information and marking requirements	158
6.1	General	158
6.2	Information for selection	160
6.2.1	General	160
6.2.2	Instructions and markings pertaining to <i>accessories</i>	162
6.3	Information for installation and commissioning	162
6.3.1	General	162
6.3.2	Mechanical considerations	162

6.3.3	Environment	162
6.3.4	Handling and mounting	162
6.3.5	<i>Enclosure</i> temperature	163
6.3.6	<i>Open type PECS</i>	163
6.3.7	Connections	163
6.3.8	Commissioning	165
6.3.9	Protection requirements	165
6.4	Information for intended use	167
6.4.1	General	167
6.4.2	Adjustment	167
6.4.3	Labels, signs, symbols and signals	168
6.4.4	Hot surfaces	170
6.4.5	Control and device marking	170
6.5	Supplementary information	170
6.5.1	Maintenance	170
6.5.2	Capacitor discharge	171
6.5.3	Auto restart/bypass connection	171
6.5.4	Other hazards	171
6.5.5	<i>PECS</i> with multiple sources of supply	171
6.5.6	Replaceable fuses in neutral of single-phase <i>PECS</i>	171
Annex A (normative)	Additional information for protection against electric shock	173
A.1	General	173
A.2	Protection by means of <i>DVC As</i>	173
A.3	Protection by means of <i>protective impedance</i>	173
A.4	Protection by using limited voltages	174
A.5	Evaluation of the <i>working voltage</i> of circuits	175
A.5.1	General	175
A.5.2	Classification of the <i>working voltage</i>	175
A.5.3	<i>AC working voltage</i>	176
A.5.4	<i>DC working voltage</i>	176
A.5.5	<i>Pulsating working voltage</i>	177
A.6	The concept of protective means according to 4.4	178
A.6.1	General	178
A.6.2	Examples of the use of elements of protective means	178
Annex B (informative)	Considerations for the reduction of the <i>pollution degree</i>	180
B.1	General	180
B.2	Factors influencing the <i>pollution degree</i>	180
B.3	Reduction of influencing factors	180
Annex C (informative)	Symbols referred to in this document	181
C.1	Symbols used	181
C.2	Determination of contrast	182
Annex D (normative)	Evaluation of <i>clearance</i> and <i>creepage distances</i>	184
D.1	Measurement	184
D.2	Relationship of measurement to <i>pollution degree</i>	184
D.3	Examples	185
Annex E (normative)	Altitude correction for <i>clearances</i>	191
E.1	Correction factor for <i>clearances</i> at altitudes above 2 000 m	191
E.2	Test voltages for verifying <i>clearances</i> at different altitudes	191

Annex F (normative) <i>Clearance and creepage distance</i> determination for frequencies greater than 30 kHz	193
F.1 General influence of the frequency on the withstand characteristics	193
F.2 <i>Clearance</i>	193
F.2.1 General	193
F.2.2 <i>Clearance</i> for inhomogenous fields	194
F.2.3 <i>Clearance</i> for approximately homogenous fields	195
F.3 <i>Creepage distance</i>	196
F.4 <i>Solid insulation</i>	197
F.4.1 General	197
F.4.2 Approximately uniform field distribution without air gaps or voids	197
F.4.3 Other cases	198
Annex G (informative) Cross-sections of round conductors	199
Annex H (informative) Guidelines for RCD compatibility	200
H.1 Selection of RCD type	200
H.2 Fault current waveforms	201
Annex I (informative) Examples of <i>overvoltage category</i> reduction	204
I.1 General	204
I.2 Protection to the surroundings (see 4.4.7.2)	204
I.2.1 Circuits connected to <i>mains supply</i> (see 4.4.7.2.3)	204
I.2.2 Circuits connected to the <i>non-mains supply</i> (see 4.4.7.2.4)	207
I.2.3 Protection between circuits (see 4.4.7.2.7)	207
I.3 <i>Functional insulation</i> (see 4.4.7.3)	208
I.4 Further examples	208
I.5 Circuits with multiple supplies (see 4.4.7.2.1)	209
Annex J (informative) Burn thresholds for touchable surfaces	210
J.1 General	210
J.2 Burn thresholds	210
Annex K (informative) Table of electrochemical potentials	214
Annex L (informative) Measuring instrument for <i>touch current</i> measurements	215
L.1 Measuring instrument 1	215
L.2 Measuring instrument 2	215
L.3 Measuring instrument 3	216
Annex M (normative) Test probes for determining access	217
Annex N (informative) Guidance regarding short-circuit current	220
N.1 General	220
N.2 Coordination of short-circuit current	221
N.2.1 General	221
N.2.2 <i>Conditional short-circuit current</i> (I_{CC}) and <i>minimum required prospective short-circuit current</i> ($I_{CP, mr}$)	221
N.2.3 <i>Short-time withstand current</i> (I_{CW})	223
N.3 Guidance for specification of short-circuit current and <i>short-circuit protective device</i>	224
N.3.1 General	224
N.3.2 Example 1: Two or more <i>PECS</i> with different ratings	225
N.3.3 Specification of I_{CC}	226
N.3.4 Specification of I_{CW}	226

N.3.5	Example 2: One <i>PECS</i> with more than one rating	227
N.3.6	Additional explanation on terms, definitions and specifications	228
N.4	Short-circuit rating and <i>single fault conditions</i> testing	229
N.4.1	General	229
N.4.2	Exemption from <i>short-time withstand current</i> testing	231
N.5	Guideline for short-circuit analysis	231
Annex O (informative) Guidelines for determination of <i>clearance</i> and <i>creepage distances</i>		232
O.1	Guideline for determination of <i>clearances</i>	232
O.2	Guideline for determination of <i>creepage distances</i>	233
O.3	Minimum spacings within <i>solid insulation</i> or similar	233
Annex P (informative) Protection of persons against electromagnetic fields for frequencies from 0 Hz up to 300 GHz		235
P.1	General influence of electromagnetic fields to persons	235
P.1.1	General	235
P.1.2	Low-frequency electric fields effects (1 Hz to 100 kHz)	235
P.1.3	Low-frequency magnetic fields effects (1 Hz to 100 kHz)	235
P.1.4	Low-frequency electric and magnetic fields effects	235
P.1.5	High-frequency electromagnetic fields effects (100 kHz to 300 GHz)	235
P.1.6	Current knowledge on low-level effects	236
P.1.7	Biological effects versus adverse health effects	236
P.1.8	Influence of EMF on passive and active medical implants	236
P.2	Requirements from ICNIRP LF guidelines against exposure to EMF	236
P.2.1	Adoption of exposure limits from ICNIRP	236
P.2.2	Limits of EMF exposure for transportation and storage	238
P.3	Protection of persons against exposure of EMF	238
P.3.1	General	238
P.3.2	EMF requirements for general public access areas	239
P.3.3	EMF requirements for <i>general access areas</i> , <i>service access areas</i> and <i>restricted access areas</i>	239
P.3.4	EMF requirements for transportation and storage	239
P.4	Electromagnetic fields (EMF) test (<i>type test</i>)	240
P.4.1	General test set up for EMF	240
P.4.2	EMF test (<i>type test</i>)	240
P.5	Electromagnetic fields (EMF) marking	240
Annex Q (informative) Maximum disconnection times		241
Annex R (informative) Risk assessment according to IEC Guide 116		242
R.1	General	242
R.2	Risk assessment	242
Annex S (informative) Guidance to product technical committees		244
Bibliography		245

Figure 1 – Protective means for protection against electric shock considering *Class I equipment* and *Class II equipment* 39

Figure 2 – Protective means for protection against electric shock considering *Class III equipment* or *accessible circuits* of *DVC As* 40

Figure 3 – Example of a *PECS* assembly and its associated *protective equipotential bonding*..... 47

Figure 4 – Example of a <i>PECS</i> assembly and its associated <i>protective equipotential bonding</i> through direct metallic contact.....	48
Figure 5 – Time-voltage zones for <i>accessible circuits</i> of <i>DVC As</i> and <i>DVC B</i> – DC during <i>single fault conditions</i>	52
Figure 6 – Time-voltage zones for <i>accessible circuits</i> of <i>DVC As</i> and <i>DVC B</i> – AC peak during <i>single fault conditions</i>	53
Figure 7 – Time-voltage zones for conductive <i>accessible parts</i> during <i>single fault conditions</i>	54
Figure 8 – <i>Fire enclosure</i> bottom openings below an unenclosed or partially enclosed fire-hazardous <i>component</i>	81
Figure 9 – <i>Fire enclosure</i> baffle construction.....	82
Figure 10 – Example for interconnections within <i>permanently connected PECS</i> and between parts of them	93
Figure 11 – Example of cable as an arrangement of insulated conductors.....	94
Figure 12 – Detachable <i>mains supply</i> cords and connections.....	98
Figure 13 – Example for evaluation of wire bending space	101
Figure 14 – Supported and unsupported <i>enclosure</i> parts	103
Figure 15 – Impact test using a steel ball	118
Figure 16 – Voltage test procedures	127
Figure 17 – Partial discharge test procedure.....	129
Figure 18 – <i>Protective equipotential bonding</i> impedance test for separate <i>PECS</i> with power fed from the <i>PECS</i> with protection for the power cable	134
Figure 19 – <i>Protective equipotential bonding</i> impedance test for sub-assembly with <i>accessible parts</i> and with power fed from the <i>PECS</i>	135
Figure 20 – Electric strength test instrument	138
Figure 21 – Mandrel.....	139
Figure 22 – Initial position of mandrel	139
Figure 23 – Final position of mandrel	139
Figure 24 – Position of metal foil on insulating material.....	140
Figure 25 – Circuit for high-current arcing test	148
Figure 26 – Test fixture for hot-wire ignition test	150
Figure A.1 – Protection by <i>DVC As</i> with <i>enhanced protection</i>	173
Figure A.2 – Protection by means of <i>protective impedance</i>	174
Figure A.3 – Protection by using limited voltages	174
Figure A.4 – Typical waveform for <i>AC working voltage</i>	176
Figure A.5 – Typical waveform for <i>DC working voltage</i>	176
Figure A.6 – Typical waveform for pulsating <i>working voltage</i>	177
Figure D.1 – Example of measurements including a groove	185
Figure D.2 – Example of measurements including a groove	185
Figure D.3 – Example of measurements including a groove	185
Figure D.4 – Example of measurements including a rib.....	186
Figure D.5 – Example of measurements providing protection of type 2.....	186
Figure D.6 – Example of measurements providing protection of type 1.....	186
Figure D.7 – Example of measurements providing protection of type 1.....	187
Figure D.8 – Example of measurements providing protection of type 1.....	187
Figure D.9 – Example of measurements including a barrier (cemented joint).....	187

Figure D.10 – Example of measurements including a barrier	188
Figure D.11 – Example of measurements including a gap	188
Figure D.12 – Example of measurements including a gap	189
Figure D.13 – Example of measurements including an isolated conductive part	189
Figure D.14 – Example of measurements in inner layer of PWB	189
Figure D.15 – Example of measurements on <i>enclosure</i> of insulating material to a part inside.....	190
Figure F.1 – Diagram for dimensioning of <i>clearances</i>	194
Figure F.2 – Diagram for dimensioning of <i>creepage distances</i>	196
Figure F.3 – Permissible field strength for dimensioning of <i>solid insulation</i> according to Formula (F.1).....	198
Figure H.1 – Flow chart leading to selection of the RCD type upstream of a <i>PECS</i>	200
Figure H.2 – Symbols for marking depending on the type of RCD	201
Figure H.3 – Fault current waveforms in connections with <i>power electronic converter</i> devices	203
Figure I.1 – <i>Basic protection</i> evaluation for circuits connected to the origin of the <i>installation mains supply</i>	204
Figure I.2 – <i>Basic protection</i> evaluation for circuits connected to the <i>mains supply</i>	205
Figure I.3 – <i>Basic protection</i> evaluation for single and three phase <i>PECS</i> not <i>permanently connected</i> to the <i>mains supply</i>	205
Figure I.4 – <i>Basic protection</i> evaluation for circuits connected to the origin of the <i>installation mains supply</i> where internal <i>SPDs</i> are used.....	205
Figure I.5 – <i>Basic protection</i> evaluation for circuits connected to the <i>mains supply</i> where internal <i>SPDs</i> are used.....	206
Figure I.6 – Example of <i>enhanced protection</i> evaluation for circuits connected to the <i>mains supply</i> where internal <i>SPDs</i> are used	206
Figure I.7 – Example of <i>enhanced protection</i> evaluation for circuits connected to the <i>mains supply</i> where internal <i>SPDs</i> are used	206
Figure I.8 –Example of <i>enhanced protection</i> evaluation for circuits connected to the <i>mains supply</i> where internal <i>SPDs</i> are used	207
Figure I.9 – <i>Basic protection</i> evaluation for circuits connected to the <i>non-mains supply</i>	207
Figure I.10 – <i>Basic protection</i> evaluation for circuits connected to the the origin of the <i>installation non-mains supply</i>	207
Figure I.11 – <i>Functional insulation</i> evaluation within circuits affected by external transients.....	208
Figure I.12 – <i>Basic protection</i> evaluation for circuits connected to the <i>mains supply</i>	208
Figure I.13 – <i>Insulation</i> evaluation for <i>accessible circuit</i> of <i>DVC As</i>	208
Figure I.14 – <i>PEC</i> with <i>mains supply</i> and <i>non-mains supply</i> without galvanic isolation	209
Figure I.15 – Transformer (basic protected) <i>PEC</i> inverter with <i>SPD</i> and transformer to reduce impulse voltage for functional and <i>basic protection</i>	209
Figure J.1 – Burn threshold spread when the skin is in contact with a hot smooth surface made of bare (uncoated) metal.....	210
Figure J.2 – Rise in the burn threshold spread from Figure J.1 for metals which are coated by shellac varnish.....	211
Figure J.3 – Rise in the burn threshold spread from Figure J.1 for metals coated with the specific materials	211
Figure J.4 – Burn threshold spread when the skin is in contact with a hot smooth surface made of ceramics, glass and stone materials	212

Figure J.5 – Burn threshold spread when the skin is in contact with a hot smooth surface made of plastics	213
Figure L.1 – Measuring instrument 1	215
Figure L.2 – Measuring instrument 2	215
Figure M.1 – Sphere 50 mm probe according to IEC 61032:1997, test probe A	217
Figure M.2 – Jointed test finger according to IEC 61032:1997, test probe B	218
Figure M.3 – Test rod 2,5 mm according to IEC 61032:1997, test probe C	219
Figure M.4 – Sphere 12,5 mm test probe according to IEC 61032:1997, test probe 2	219
Figure N.1 – Example of short-circuit current curve under specification of I_{CC}	222
Figure N.2 – Example of tripping characteristic of a circuit breaker	223
Figure N.3 – Example of tripping characteristic of a current-limiting fuse	223
Figure N.4 – Example of short-circuit current curve under specification of I_{CW}	224
Figure N.5 – Two PECS with different specifications	225
Figure N.6 – One PECS with different specification for each input <i>mains supply port</i>	227
Figure N.7 – Flowchart for classification of I_{CC} or I_{CW}	230
Figure O.1 – Flowchart for determination of <i>clearance</i>	232
Figure O.2 – Flowchart for determination of <i>creepage distance</i>	233
Table 1 – Alphabetical list of terms	20
Table 2 – Voltage limits for the <i>decisive voltage classes DVC</i>	42
Table 3 – Minimum protection requirements for circuit under consideration	43
Table 4 – <i>PE conductor</i> cross-sectional area	49
Table 5 – Limits for access of <i>touch current</i>	56
Table 6 – Definitions of <i>pollution degrees</i>	59
Table 7 – <i>Impulse withstand voltage</i> and <i>temporary overvoltage</i> versus <i>system voltage</i>	61
Table 8 – <i>Clearances</i> for <i>functional insulation</i> , <i>basic insulation</i> or <i>supplementary insulation</i> for inhomogeneous fields	66
Table 9 – <i>Creepage distances</i>	69
Table 10 – Generic materials for the direct support of uninsulated <i>live parts</i>	71
Table 11 – Thin sheet material thickness through <i>insulation</i> requirements	72
Table 12 – Flammability classes and classification standards	78
Table 13 – Permitted openings in <i>fire enclosure</i> bottoms	82
Table 14 – Maximum measured temperatures for internal materials and <i>components</i>	84
Table 15 – Maximum measured temperatures for <i>accessible parts</i> of the PECS	86
Table 16 – Limits for sources without an <i>overcurrent protective device</i>	87
Table 17 – Limits for power sources with an <i>overcurrent protective device</i>	87
Table 18 – Environmental service conditions	92
Table 19 – Wire bending space from terminals to <i>enclosure</i>	100
Table 20 – Thickness of sheet metal for <i>enclosures</i> : carbon steel or stainless steel	104
Table 21 – Thickness of sheet metal for <i>enclosures</i> : aluminium, copper or brass	105
Table 22 – Environmental conditions for tests	109
Table 23 – Test overview	110
Table 24 – Pull values for handles and manual control securement	120

Table 25 – Values for physical tests on strain relief of <i>enclosure</i>	120
Table 26 – <i>Impulse withstand voltage</i> test procedure	122
Table 27 – <i>Impulse withstand voltage test</i>	123
Table 28 – AC or DC test voltage for circuits connected directly to <i>mains supply</i>	125
Table 29 – AC or DC test voltage for circuits connected to <i>non-mains supply</i> without <i>temporary overvoltages</i>	125
Table 30 – Partial discharge test.....	129
Table 31 – Test duration for <i>protective equipotential bonding</i> test.....	136
Table 32 – AC <i>short-time withstand current</i> test, minimum <i>PECS</i> requirements	145
Table 33 – Environmental tests	153
Table 34 – Dry heat test (steady state)	154
Table 35 – Damp heat test (steady state).....	155
Table 36 – Vibration test	156
Table 37 – Salt mist test	156
Table 38 – Dust test.....	157
Table 39 – Sand test.....	157
Table 40 – Marking location	159
Table A.1 – Examples for protection against electric shock	179
Table C.1 – Symbols used	181
Table D.1 – Width of grooves by <i>pollution degree</i>	184
Table E.1 – Correction factor for <i>clearances</i> at altitudes between 2 000 m and 20 000 m	191
Table E.2 – Test voltages for verifying <i>clearances</i> at different altitudes	192
Table F.1 – Minimum values of <i>clearances</i> in air at atmospheric pressure for inhomogeneous field conditions	195
Table F.2 – Multiplication factors for <i>clearances</i> in air at atmospheric pressure for approximately homogeneous field conditions	195
Table F.3 – Minimum values of <i>creepage distances</i> for different frequency ranges	197
Table G.1 – Standard cross-sections of round conductors.....	199
Table K.1 – Table of electrochemical potentials	214
Table O.1 – Minimum spacings within <i>solid insulation</i> or similar.....	234
Table P.1 – Limits of EMF for general public exposure.....	237
Table P.2 – Limits of EMF for occupational exposure.....	238
Table P.3 – Limits for magnetic flux density of static magnetic fields (2013/35/EU).....	238
Table P.4 – EMF test overview	240
Table 41.1 – Maximum disconnection times	241
Table R.1 – Risk assessment.....	242

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**SAFETY REQUIREMENTS FOR POWER ELECTRONIC
CONVERTER SYSTEMS AND EQUIPMENT –****Part 1: General****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 62477-1 has been prepared by IEC technical committee 22: Power electronic systems and equipment. It is an International Standard.

This document is developed according to the intent of ISO/IEC Guide 51 and IEC Guide 116.

It has the status of a group safety publication in accordance with IEC Guide 104.

This second edition cancels and replaces the first edition published in 2012 and Amendment 1:2016. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) PECS emitting or receiving radio waves added in the Scope;
- b) simplification of the concept of DVC As including the voltage-time-zones;

- c) improved consistency of the concept "protection" versus "insulation" according to IEC 61140;
- d) limits for touch current updated and limits for PE conductor currents added;
- e) thin sheet of tape materials reworked and tests added;
- f) inner layers of multi-layer printed wiring boards added;
- g) mechanical hazards updated;
- h) requirements for enclosures updated;
- i) requirements for wiring and connections updated;
- j) polymeric enclosure requirements updated;
- k) requirements for components added;
- l) several test added (e.g. UV, working voltage, SPD, preconditioning);
- m) information and marking requirements updated;
- n) requirements for the contrast of symbols added;
- o) several annexes updated.

The text of this International Standard is based on the following documents:

Draft	Report on voting
22/355/FDIS	22/356/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

A list of all the parts in the IEC 62477 series, published under the general title *Safety requirements for power electronic converter systems and equipment*, can be found on the IEC website.

In this document, terms in *italic* are defined in Clause 3.

NOTE Due to the requirement in ISO/IEC Directive Part 2, the defined term is in singular. In this document, also the plural is in *italic*.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

The contents of the corrigendum 1 (2024-04) have been included in this copy.

INTRODUCTION

This document relates to products that include *power electronic converters*, with a rated *system voltage* not exceeding 1 000 V AC or 1 500 V DC. It specifies requirements to reduce risks of fire, electric shock, thermal, energy and mechanical hazards, except functional safety as defined in IEC 61508 (all parts). The objectives of this document are to establish a common terminology and basis for the safety requirements of products that contain *power electronic converters* across several IEC technical committees.

During the update of the document, feedback from technical committees which used the IEC 62477-1 as reference document has been taken into consideration.

Modifications have been made to 4.4.2 and Annex A considering the safe to touch voltage *DVC As* under normal operating conditions and *single fault conditions*. On request from TCs using this document as a reference document, the determination of *DVC As* has been simplified. The determination of *DVC As* in IEC 62477-1:2012 and IEC 62477-1:2012/AMD1:2016 was developed based on IEC TS 60479-1:2005¹ and IEC TR 60479-5:2007 and in details taking different environmental condition, size of body contact area and body reaction into consideration. This change also included time-voltage zones in Annex A for relevant body reactions, environmental conditions and contact area.

NOTE See IEC 60479-1:2018 for further information about effects of current on human beings and livestock.

This document follows the simplified concepts of the basic safety standard IEC 61140:2016, 5.2.6, considering two situations in Table 2 of this document:

- a) dry and large contact areas;
- b) all other cases.

For the temporary increase of voltage during *single fault conditions*, it was decided to use the more simplified approach to limit the voltage to the maximum voltage of *DVC B* which is also used by other committees.

This document has been developed with the intention

- to be used as a reference document for product committees inside TC 22 in the development of product standards for *power electronic converter systems* and equipment,
- to replace IEC 62103² as a product family standard providing minimum requirements for safety aspects of *power electronic converter systems* and equipment in apparatus for which no product standard exists, and

NOTE The scope of IEC 62103 contains reliability and electromagnetic compatibility aspects, which are not covered by this document.

- to be used as a reference document for product committees outside TC 22 in the development of product standards of *power electronic converter systems* and equipment intended renewable energy sources. TC 82, TC 88, TC 105 and TC 114, in particular, have been identified as relevant technical committees at the time of publication.

Technical committees using this document should carefully consider the relevance of each paragraph in this document for the product under consideration and reference, add, replace or modify requirement as relevant. Product specific topics not covered by this document are in the responsibility of the technical committees using this document as reference document.

¹ This publication has been withdrawn.

² This publication has been withdrawn.

This group safety standard will not take precedence over any product specific standard according to IEC Guide 104. IEC Guide 104 provides information about the responsibility of product committees to use group safety standards for the development of their own product standards.

SAFETY REQUIREMENTS FOR POWER ELECTRONIC CONVERTER SYSTEMS AND EQUIPMENT –

Part 1: General

1 Scope

This part of IEC 62477 applies to *power electronic converter systems (PECS)*, any specified *accessories*, and their *components* for *electronic power conversion* and electronic power switching, including the means for their control, protection, monitoring and measurement, such as with the main purpose of converting electric power, with rated system *voltages* not exceeding 1 000 V AC or 1 500 V DC.

This document also applies to *PECS* which intentionally emit or receive radio waves for the purpose of radio communication.

This document can also be used as a reference standard for product committees producing product standards for:

- adjustable speed electric power drive systems (PDS);
- standalone uninterruptible power systems (UPS);
- *low voltage* stabilized DC power supplies;
- bidirectional power converters.

For *PECS* and their specified *accessories* for which no product standard exists, this document provides minimum requirements for safety aspects.

This document has the status of a group safety publication in accordance with IEC Guide 104 for *power electronic converter systems* for solar, wind, tidal, wave, fuel cell or similar energy sources.

According to IEC Guide 104, one of the responsibilities of technical committees is, wherever applicable, to make use of basic safety publications and/or group safety publications in the preparation of their product standards.

Guidance for use of this group safety publication for product committees is given in Annex S.

This document

- establishes a common terminology for safety aspects relating to *PECS*,
- establishes minimum requirements for the coordination of safety aspects of interrelated parts within a *PECS*,
- establishes a common basis for minimum safety requirements for the *PECS* portion of products that contain *PECS*,
- specifies requirements to reduce risks of fire, electric shock, thermal, energy and mechanical hazards, during use and operation and, where specifically stated, during service and maintenance, and
- specifies minimum requirements to reduce risks with respect to *PECS* designed as pluggable and *permanently connected equipment*, whether it consists of a system of interconnected units or independent units, subject to installing, operating and maintaining the *PECS* in the manner prescribed by the manufacturer.

This document does not cover

- telecommunications apparatus other than power supplies to such apparatus,
- functional safety aspects as covered by, for example, IEC 61508 (all parts), and
- electrical equipment and systems for railways applications and electric vehicles.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-112, *International Electrotechnical Vocabulary (IEV) – Part 112: Quantities and units* (available at www.electropedia.org)

IEC 60050-113, *International Electrotechnical Vocabulary (IEV) – Part 113: Physics for electrotechnology* (available at www.electropedia.org)

IEC 60050-114, *International Electrotechnical Vocabulary (IEV) – Part 114: Electrochemistry* (available at www.electropedia.org)

IEC 60050-151, *International Electrotechnical Vocabulary (IEV) – Part 151: Electrical and magnetic devices* (available at www.electropedia.org)

IEC 60050-161, *International Electrotechnical Vocabulary (IEV) – Part 161: Electromagnetic compatibility* (available at www.electropedia.org)

IEC 60050-192, *International Electrotechnical Vocabulary (IEV) – Part 192: Dependability* (available at www.electropedia.org)

IEC 60050-426, *International Electrotechnical Vocabulary (IEV) – Part 426: Explosive atmospheres* (available at www.electropedia.org)

IEC 60050-441, *International Electrotechnical Vocabulary (IEV) – Part 441: Switchgear, controlgear and fuses* (available at www.electropedia.org)

IEC 60050-442, *International Electrotechnical Vocabulary (IEV) – Part 442: Electrical accessories* (available at www.electropedia.org)

IEC 60050-551, *International Electrotechnical Vocabulary (IEV) – Part 551: Power electronics* (available at www.electropedia.org)

IEC 60050-601, *International Electrotechnical Vocabulary (IEV) – Part 601: Generation, transmission and distribution of electricity – General* (available at www.electropedia.org)

IEC 60050-826, *International Electrotechnical Vocabulary (IEV) – Part 826: Electrical installations* (available at www.electropedia.org)

IEC 60068-2-2:2007, *Environmental testing – Part 2-2: Tests – Test B: Dry heat*

IEC 60068-2-6:2007, *Environmental testing – Part 2-6: Tests – Test Fc: Vibration (sinusoidal)*

IEC 60068-2-52:2017, *Environmental testing – Part 2-52: Tests – Test Kb: Salt mist, cyclic (sodium chloride solution)*

IEC 60068-2-68:1994, *Environmental testing – Part 2-68: Tests – Test L: Dust and sand*

IEC 60068-2-78:2012, *Environmental testing – Part 2-78: Tests – Test Cab: Damp heat, steady state*

IEC 60320 (all parts), *Appliance couplers for household and similar general purposes*

IEC 60364 (all parts). *Low-voltage electrical installations*

IEC 60364-4-41:2005, *Low-voltage electrical installations – Part 4-41: Protection for safety – Protection against electric shock*

IEC 60364-4-41:2005/AMD1:2017

IEC 60364-5-54:2011, *Low voltage electrical installations – Part 5-54: Selection and erection of electrical equipment – Earthing arrangements and protective conductors*

IEC 60364-5-54:2011/AMD1:2021

IEC 60384-14:2013, *Fixed capacitors for use in electronic equipment – Part 14: Sectional specification – Fixed capacitors for electromagnetic interference suppression and connection to the supply mains*

IEC 60417, *Graphical symbols for use on equipment* (available at <http://www.graphical-symbols.info/equipment>)

IEC 60529:1989, *Degrees of protection provided by enclosures (IP Code)*

IEC 60529:1989/AMD1:1999

IEC 60529:1989/AMD2:2013

IEC 60617, *Graphical symbols for diagrams* (available from <http://std.iec.ch/iec60617>)

IEC 60664-1:2020, *Insulation coordination for equipment within low-voltage systems – Part 1: Principles, requirements and tests*

IEC 60664-3:2016, *Insulation coordination for equipment within low-voltage systems – Part 3: Use of coating, potting or moulding for protection against pollution*

IEC 60664-4:2005, *Insulation coordination for equipment within low-voltage systems – Part 4: Consideration of high-frequency voltage stress*

IEC 60695-2-10:2013, *Fire hazard testing – Part 2-10: Glowing/hot-wire based test methods – Glow-wire apparatus and common test procedure*

IEC 60695-2-11:2021, *Fire hazard testing – Part 2-11: Glowing/hot-wire based test methods – Glow-wire flammability test method for end-products (GWEPT)*

IEC 60695-2-13:2010, *Fire hazard testing – Part 2-13: Glowing/hot-wire based test methods – Glow-wire ignition temperature (GWIT) test method for materials*

IEC 60695-2-13:2010/AMD1:2014

IEC 60695-10-2:2014, *Fire hazard testing – Part 10-2: Abnormal heat – Ball pressure test*

IEC 60695-11-20:2015, *Fire hazard testing – Part 11-20: Test flames – 500 W flame test methods*

IEC 60721-3-3:1994, *Classification of environmental conditions – Part 3-3: Classification of groups of environmental parameters and their severities – Stationary use at weatherprotected locations*

IEC 60721-3-3:1994/AMD1:1995

IEC 60721-3-3:1994/AMD2:1996

IEC 60721-3-4:1995, *Classification of environmental conditions – Part 3: Classification of groups of environmental parameters and their severities – Stationary use at non-weatherprotected locations*

IEC 60721-3-4:1995/AMD1:1996

IEC 60730-1:2013, *Automatic electrical controls – Part 1: General requirements*

IEC 60730-1:2013/AMD1:2015

IEC 60730-1:2013/AMD2:2020

IEC 60738-1-1:2008, *Thermistors – Directly heated positive step-function temperature coefficient – Part 1-1: Blank detail specification – Current limiting application – Assessment level EZ*

IEC 60755:2017, *General safety requirements for residual current operated protective devices*

IEC 60799:2018, *Electrical accessories – Cord sets and interconnection cord sets*

IEC 60947-7 (all parts), *Low-voltage switchgear and controlgear – Part 7: Ancillary equipment*

IEC 60949:1988, *Calculation of thermally permissible short-circuit currents, taking into account non-adiabatic heating effects*

IEC 60949:1988/AMD1:2008

IEC 60990:2016, *Methods of measurement of touch current and protective conductor current*

IEC 61032:1997, *Protection of persons and equipment by enclosures – Probes for verification*

IEC 61180:2016, *High-voltage test techniques for low-voltage equipment – Definitions, test and procedure requirements, test equipment*

IEC 61189-3:2007, *Test methods for electrical materials, printed boards and other interconnection structures and assemblies – Part 3: Test methods for interconnection structures (printed boards)*

IEC 61204-7:2016, *Low-voltage switch mode power supplies – Part 7: Safety requirements*

IEC 61558-1:2017, *Safety of transformers, reactors, power supply units and combinations thereof – Part 1: General requirements and tests*

IEC 62109-1:2010, *Safety of power converters for use in photovoltaic power systems – Part 1: General requirements*

ISO/IEC Guide 51:2014, *Safety aspects – Guidelines for their inclusion in standards*

IEC Guide 104:2019, *The preparation of safety publications and the use of basic safety publications and group safety publications*

IEC Guide 116:2018, *Guidelines for safety related risk assessment and risk reduction for low voltage equipment*

ISO 3746:2010, *Acoustics – Determination of sound power levels and sound energy levels of noise sources using sound pressure – Survey method using an enveloping measurement surface over a reflecting plane*

ISO 3864 (all parts), *Graphical symbols – Safety colours and safety signs*

ISO 3864-1:2011, *Graphical symbols – Safety colours and safety signs – Part 1: Design principles for safety signs and safety markings*

ISO 7000, *Graphical symbols for use on equipment – Registered symbols* (available from <http://www.graphical-symbols.info/equipment>)

ISO 7010, *Graphical symbols – Safety colours and safety signs – Registered safety signs* (available at <https://www.iso.org/obp>)

ISO 9614-1:1993, *Acoustics – Determination of sound power levels of noise sources using sound intensity – Part 1: Measurement at discrete points*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60050-112:2010, IEC 60050-113:2011, IEC 60050-114:2014, IEC 60050-426:2020, IEC 60050-151:2001, IEC 60050-161:1990, IEC 60050-192:2015, IEC 60050-441:1984, IEC 60050-442:1998, IEC 60050-551:1998, IEC 60050-601:1985, IEC 60050-826:2004, IEC 60664-1:2020, and the following apply.

Table 1 provides an alphabetical cross-reference listing of terms.

Table 1 – Alphabetical list of terms

Term	Term number	Term	Term number	Term	Term number
abnormal operating condition abnormal operation	3.1	fire enclosure	3.29	power semiconductor device	3.57
accessible	3.2	functional insulation	3.30	prospective short-circuit current (I_{cp})	3.58
accessory	3.3	hand-held equipment	3.31	protective equipotential bonding	3.59
adjacent circuit	3.4	hazardous live part	3.32	protective impedance	3.60
basic insulation	3.5	installation	3.33	electrically protective screening protective screening	3.61
basic protection	3.6	impulse withstand voltage	3.34	reinforced insulation	3.62
class I equipment	3.7	live part	3.35	restricted access area	3.63
class II equipment	3.8	low voltage (LV)	3.36	routine test	3.64
class III equipment	3.9	mains supply	3.37	sample test	3.65
clearance	3.10	minimum required prospective short-circuit current ($I_{cp,mr}$)	3.38	service access area	3.66
commissioning test	3.11	movable equipment	3.39	short-circuit backup protection	3.67
component	3.12	non-mains supply	3.40	short-circuit protective device (SCPD)	3.68

Term	Term number	Term	Term number	Term	Term number
conditional short-circuit current (I_{cc})	3.13	open type PECS	3.41	short-time withstand current (I_{cw})	3.69
creepage distance	3.14	general access area	3.42	single fault condition	3.70
decisive voltage class (DVC)	3.15	ordinary person	3.43	skilled person	3.71
de-energized	3.16	output short-circuit current	3.44	solid insulation	3.72
double insulation	3.17	overcurrent protective device (OCPD)	3.45	supplementary insulation	3.73
direct plug-in equipment	3.18	overvoltage category (OVC)	3.46	surge protective device (SPD)	3.74
DVC As	3.19	PE	3.47	system	3.75
DVC B	3.20	peak withstand current (I_{pk})	3.48	system voltage	3.76
DVC C	3.21	PE conductor	3.49	temporary overvoltage	3.77
electric breakdown	3.22	permanently connected equipment	3.50	touch current	3.78
electrical insulation insulation	3.23	pluggable equipment type A	3.51	type test	3.79
electronic power conversion	3.24	pluggable equipment type B	3.52	ventricular fibrillation	3.80
enclosure	3.25	pollution degree	3.53	visual inspection	3.81
enhanced protection	3.26	port	3.54	working voltage	3.82
fault protection	3.27	power electronic converter (PEC)	3.55	zone of equipotential bonding	3.83
field wiring terminal	3.28	power electronic converter system (PECS)	3.56		

3.1

abnormal operating condition

abnormal operation

temporary operating condition that is not a normal operating condition and is not a *single fault condition* of the equipment itself

Note 1 to entry: An *abnormal operating condition* may be introduced by the equipment or by a person and may result in a failure of a *component*, a device or *insulation*.

[SOURCE: IEC 62368-1:2018, 3.3.7.1, modified – Note 1 to entry has been removed, and Notes 2 and 3 to entry have been grouped and rephrased.]

3.2

accessible

able to be touched by means of the standard test finger

Note 1 to entry: For standard test finger, refer to Figure M.2.

Note 2 to entry: The term "accessible" is used to refer to an accessible circuit, an accessible connection, an accessible part or an accessible surface.

3.3

accessory

additional part, component or equipment intended to expand capabilities and/or functionality of the *PECS*

Note 1 to entry: Some examples are:

- external filter,
- communication, control or input/output interface kits,
- external SPD for reduction of transient.
- additional enclosure parts or kits,
- additional ventilation kits,
- mechanical bonding or cable support kits, or
- additional measuring device, instrument etc.

Note 2 to entry: Expanded capabilities is considered to be electrical, mechanical, thermal or acoustic characteristics of the *PECS* when installed and operating as intended.

Note 3 to entry: *Accessories* and *accessory* kits might be factory or field installed.

3.4

adjacent circuit

circuit having a requirement to be protected from the circuit under consideration

3.5

basic insulation

insulation applied to *hazardous live parts* to provide *basic protection* against electric shock

[SOURCE: IEC 60050-826:2004, 826-12-14, modified – The definition has been reformulated.]

3.6

basic protection

protection against electric shock under fault-free conditions through the use of *insulation* or distance or a combination of both

Note 1 to entry: For more information, refer to 4.4.3.

[SOURCE: IEC 60050-195:2021, 195-06-01, modified – The words " under fault-free conditions through the use of *insulation* or distance or a combination of both" have been added, as well as the note to entry.]

3.7

class I equipment

PECS in which protection against electric shock does not rely on *basic protection* only, but which includes an additional safety precaution in such a way that means are provided for the connection of conductive *accessible parts* to the *protective (earthing) conductor* in the fixed wiring of the *installation*, so that conductive *accessible parts* cannot become live in the event of a failure

3.8

class II equipment

PECS in which protection against electric shock does not rely on *basic protection* only, but in which additional safety precautions are provided, there being no means of connection for the *PE conductor* or reliance upon *installation* conditions

Note 1 to entry: *Supplementary insulation* or *reinforced insulation* are additional safety precautions.

3.9**class III equipment**

PECS in which protection against electric shock relies on supply at *DVC* As and in which voltages higher than those of *DVC* As are not generated and there is no means for protective earthing

3.10**clearance**

shortest distance in air between two conductive parts

Note 1 to entry: This distance can be measured along a string stretched the shortest way between these conductive parts.

[SOURCE: IEC 60664-1:2020, 3.1.4, modified – The note to entry has been added.]

3.11**commissioning test**

test on a device or *PECS* performed on site, to prove the correctness of *installation* and operation

[SOURCE: IEC 60050-411:1996, 411-53-06, modified – The word "machine" has been replaced by "device" and "equipment" with "*PECS*".]

3.12**component**

part of a *PEC* or *PECS*, which cannot be physically divided into smaller parts without losing its particular function

[SOURCE: IEC 60050-151:2001, 151-11-21, modified – The words "constituent part of a device" have been replaced by "part of a *PEC* or *PECS*".]

3.13**conditional short-circuit current**

I_{cc}

RMS value of a *prospective short-circuit current* available from a source, under conditions specified by the *PECS* manufacturer, using a specific type of *short-circuit protective device*

Note 1 to entry: See also Figure N.1.

Note 2 to entry: The source might be a mains supply or non-mains supply.

Note 3 to entry: The declared I_{cc} is the minimum current value used for calibration of the supply source.

3.14**creepage distance**

shortest distance along the surface of a solid insulating material between two conductive parts

[SOURCE: IEC 60664-1:2020, 3.1.5]

3.15**decisive voltage class****DVC**

classification of voltage range used to determine the protective means against electric shock and the requirements of protection between circuits

3.16**de-energized**

free from all potential energy hazards

3.17

double insulation

insulation comprising both *basic insulation* and *supplementary insulation*

[SOURCE: IEC 60050-826:2004, 826-12-16]

3.18

direct plug-in equipment

PECS in which the *mains supply* plug forms an integral part of the *PECS enclosure* so that the *PECS* is supported by the *mains supply* socket-outlet

[SOURCE: IEC 60050-903:2014, 903-04-07, modified – "Equipment" replaced by "*PECS*" and "mains" by "mains supply".]

3.19

DVC As

voltage classification of a circuit providing only safe to touch voltage, under normal operating conditions and *single fault condition*, and limited overvoltages

Note 1 to entry: See 4.4.2.2 and Table 2.

3.20

DVC B

voltage classification of a *circuit* which stays within the voltage limits between *DVC As* and *DVC B* under normal operating conditions and *single fault conditions*

Note 1 to entry: See 4.4.2.3 and Table 2.

3.21

DVC C

voltage classification of any circuit not meeting the protection requirements or voltage limits for *DVC B* or *DVC As*

Note 1 to entry: See 4.4.2.4 and Table 2.

3.22

electric breakdown

failure of *insulation* under electric stress when the discharge completely bridges the *insulation*, thus reducing the voltage between the electrodes almost to zero

[SOURCE: IEC 60664-1:2020, 3.1.44]

3.23

electrical insulation insulation

electrical protection between circuits or conductive parts provided by *clearance* or *creepage distance* or *solid insulation* or combinations of them

Note 1 to entry: For the protection against electric shock, insulation types like clearance, creepage distances and solid insulation are used as means for basic protection, fault protection and enhanced protection. Further means for basic protection, fault protection and enhanced protection are specified in 4.4.3, 4.4.4 and 4.4.5.

3.24

electronic power conversion

change of one or more of the characteristics of an electric power *system* essentially without appreciable loss of power by means of *power semiconductor devices*

Note 1 to entry: Characteristics are, for example, voltage, number of phases and frequency, including zero frequency.

[SOURCE: IEC 60050-551:1998, 551-11-02, modified – The words "electronic valve devices" have been replaced by "*power semiconductor devices*".]

3.25 enclosure

housing affording the type and degree of protection suitable for the intended application

Note 1 to entry: This document provides requirements for the *enclosure* according to IEC 60529:1989, IEC 60529:1989/AMD1:1999 and IEC 60529:1989/AMD2:2013 as well as additional requirements for mechanical and environmental impact. The purpose of the additional requirements is to ensure the ability of an *enclosure* to provide *basic protection* under the environmental conditions specified by the manufacturer.

[SOURCE: IEC 60050-151:2001, 151-13-08, modified – Note 1 to entry has been added.]

3.26 enhanced protection

protective means having a reliability of protection not less than that provided by two independent protective means

Note 1 to entry: *Enhanced protection* can be realized through the use of insulation or distance or a combination of both. For more information, refer to 4.4.5.

[SOURCE: IEC 61140:2016, 3.19, modified – The words "protective provision" has been replaced by "protection" in the term, and "provision" by "means" in the definition.]

3.27 fault protection

protection against electric shock under *single fault conditions*

Note 1 to entry: For low-voltage *installations, systems* and equipment, *fault protection* generally corresponds to protection against indirect contact as used in IEC 60364-4-41:2005 and IEC 60364-4-41:2005/AMD1:2017, mainly with regard to failure.

Note 2 to entry: For more information, refer to 4.4.4.

[SOURCE: IEC 60050-195:2021, 195-06-02, modified – The notes to entry have been added.]

3.28 field wiring terminal

terminal provided for connection of external conductors to the *PECS*

3.29 fire enclosure

part of the *PECS* intended to minimize the spread of fire or flames from within the *enclosure* to outside the *enclosure*

3.30 functional insulation

insulation between conductive parts within a circuit that is necessary for the proper functioning of the circuit, but which does not provide protection against electric shock

Note 1 to entry: *Functional insulation* may, however, reduce the likelihood of ignition and fire.

3.31 hand-held equipment

PECS intended to be held in the hand during normal use

[SOURCE: IEC 60050-195:2004, 826-16-05, modified – The words "electric equipment" have been replaced by "*PECS*".]

3.32

hazardous live part

live part which can give a harmful electric shock

Note 1 to entry: In this document a *hazardous live part* does not meet the requirements of *DVC* As in 4.4.2.2.

[SOURCE: IEC 60050-195:2021, 195-06-05, modified – The hyphens have been deleted from the term, the words "under certain conditions" have been deleted from the definition and the note to entry added.]

3.33

AC1 (electrical) installation

assembly of electrical equipment to fulfil specific purposes AC1

Note 1 to entry: The word "installation" is also used in this document to denote the process of installing a *PECS*. In these cases, the word does not appear in italics.

AC1 [SOURCE: IEC 60050-826:2022, 826-10-01, modified – the note to entry has been added.] AC1

3.34

impulse withstand voltage

highest peak value of impulse voltage of prescribed form and polarity which does not cause breakdown of *insulation* under specified conditions

[SOURCE: IEC 60050-442:2014, 442-09-18]

3.35

live part

conductor or conductive part intended to be energized in normal operating conditions, including a neutral conductor, but by convention not a *PE conductor* or *protective earth* neutral

Note 1 to entry: This concept does not necessarily imply a risk of electric shock.

[SOURCE: IEC 60050-195:2021, 195-02-19, modified – The words "and mid-point conductor, but excluding the PEN conductor, PEM conductor and PEL conductor" have been replaced by "but by convention not a *PE conductor* or *protective earth* neutral".]

3.36

low voltage

AC1 **LV** AC1

set of voltage levels used for the distribution of electricity and whose upper limit is generally accepted to be 1 000 V AC or 1 500 V DC

[SOURCE: IEC 60050-601:1985, 601-01-26, modified – The words "for alternating current" have been replaced by "AC", and the words "or 1 500 V DC" have been added.]

3.37

mains supply

low voltage AC or DC power distribution *system* for supplying power to AC or DC *PECS*

Note 1 to entry: In the USA and Canada, the term "*mains supply*" is called "utilities".

3.38

minimum required prospective short-circuit current

$I_{cp, mr}$

RMS value of a minimum *prospective short-circuit current*, which shall be available from the source to ensure operation of the specific type of *short-circuit protective device*

3.39**movable equipment**

PECS that is either

- 18 kg or less in mass and not fixed in place, or
- provided with wheels, casters, or other means to facilitate movement by an *ordinary person* as required to perform its intended use

3.40**non-mains supply**

low voltage AC or DC power network that is not energized directly from the *AC mains supply* or *DC mains supply*

Note 1 to entry: Examples of *non-mains supplies* are those which are isolated by a transformer or supplied by a battery, generator, solar arrays, wind generator, tidal *systems*, wave, fuel cell or similar sources not directly connected to the AC or DC power distribution *system*.

3.41**open type PECS**

PECS intended for incorporation within an *enclosure* or assembly that will provide protection against hazards

3.42**general access area**

area of the *PECS* to which both *ordinary persons* and *skilled persons* are permitted access

Note 1 to entry: *General access areas* do not require the use of a tool or key.

3.43**ordinary person**

person who is not a *skilled person*

Note 1 to entry: *Ordinary person* is the term applied to all persons other than *skilled persons*. *Ordinary persons* include not only users of the equipment, but also all persons who may have access to the equipment or who may be in the adjacency of the equipment. Under normal operating conditions or *abnormal operating conditions*, *ordinary persons* should not be exposed to parts comprising energy sources capable of causing pain or injury. Under a *single fault condition*, *ordinary persons* should not be exposed to parts comprising energy sources capable of causing injury.

Note 2 to entry: Instructed person is not used in this document.

[SOURCE: IEC 60050-826:2004, 826-18-03, modified – Instructed person deleted, notes to entry added.]

3.44**output short-circuit current**

available current that flows at the output *port* of the *PECS* when a short-circuit is applied

3.45**overcurrent protective device****OCPD**

device provided to interrupt an electric circuit in case the current in the electric circuit exceeds a predetermined value for a specified duration

[SOURCE: IEC 60050-826:2004, 826-14-14, modified – The abbreviated term "OCPD" has been added, and the word "conductor" have been deleted from "conductor current".]

3.46**overvoltage category****OVC**

numeral defining a transient overvoltage condition

Note 1 to entry: *Overvoltage categories* I, II, III and IV are used. See 4.4.7.1.4 for information.

[SOURCE: IEC 60664-1:2020, 3.1.20, modified – The abbreviated term "OVC" has been added, and the reference has been updated in the note to entry.]

3.47

PE

earthing of a point in a *system*, or equipment, for protection against electric shock in case of a fault

Note 1 to entry: In the USA and Canada, the term "ground" is used instead of "earth".

3.48

peak withstand current

I_{pk}

value of peak short-circuit current, declared by the *PECS* manufacturer, which can flow under specified conditions

Note 1 to entry: For the purpose of this document, I_{pk} refers to the initial asymmetric peak value of the prospective test current.

[SOURCE: IEC 61439-1:2020, 3.8.10.2, modified – The definition is modified for *PECS* application.]

3.49

PE conductor

conductor in the building *installation* wiring, or in the power supply cord, connecting a main protective earthing terminal in the equipment to an earth point in the building *installation* for safety purposes

3.50

permanently connected equipment

PECS that can only be connected to or disconnected from the electric power system by the use of a tool

Note 1 to entry: In this document, electric power system is considered as either *mains supply* or *non-mains supply*.

[SOURCE: IEC 60050-151:2014, 151-11-29, modified – "Equipment" replaced by "*PECS*" and note to entry added.]

3.51

pluggable equipment type A

PECS that is intended for connection to the *mains supply* via a non-industrial plug and socket-outlet or via a non-industrial appliance coupler, or both

Note 1 to entry: For non-industrial plug and socket-outlets, see IEC TR 60083:2015 or a national equivalent. For non-industrial appliance couplers, see IEC 60320-1.

[SOURCE: IEC 60050-903:2014, 903-04-08, modified – The word "equipment" has been replaced by "*PECS*" and "mains" by "*mains supply*".]

3.52

pluggable equipment type B

PECS that is intended for connection to the *mains supply* via an industrial plug and socket-outlet or an appliance coupler, or both

Note 1 to entry: For industrial plug and socket-outlets, see IEC 60309-1 or a national equivalent. For non-industrial appliance couplers, see IEC 60320-1.

[SOURCE: IEC 60050-903:2014, 903-04-09, modified – The word "equipment" has been replaced by "*PECS*" and "mains" by "*mains supply*".]

3.53**pollution degree**

numeral characterizing the expected pollution of the micro-environment.

Note 1 to entry: Pollution degrees 1, 2, 3 and 4 are used in this document. See 4.4.7.1.3 for information.

[SOURCE: IEC 60664-1:2020, 3.1.25, modified – Note to entry added.]

3.54**port**

access to a device or network where electromagnetic energy or signals may be supplied or received or where the device or network variables may be observed or measured

[SOURCE: IEC 60050-131:2002, 131-12-60, modified – The note has been deleted.]

3.55**power electronic converter****PEC**

device or part thereof for the purpose of *electronic power conversion*, including signalling, measurement, control circuitries and other parts, if essential for the *power conversion* function

3.56**power electronic converter system****PECS**

system consisting of *power electronic converter(s)* intended to work together with other equipment

3.57**power semiconductor device**

semiconductor device used for *electronic power conversion*

3.58**prospective short-circuit current**

I_{cp}

RMS value of the current which would flow if the supply conductors to the circuit are short-circuited by a conductor of negligible impedance located as near as practicable to the supply terminals of the *PECS*

[SOURCE: IEC 61439-1:2020, 3.8.7, modified – The word "current" has been replaced by "RMS value of the current", and "assembly" by "*PECS*" and Note to entry deleted.]

3.59**protective equipotential bonding**

equipotential bonding for the purposes of safety

EXAMPLE Protection against electric shock

[SOURCE: IEC 60050-195:2021, 195-01-15, modified – The hyphens have been removed from the term, and the example has been added.]

3.60**protective impedance**

impedance connected between *hazardous live parts* and conductive *accessible parts*, of such value that the current, in intended use and under *single fault conditions*, is limited to a safe value, and which is so constructed that its ability is maintained throughout the life of the *PECS*

3.61

electrically protective screening **protective screening**

separation of electric circuits and/or conductors from *hazardous live parts* by an electrically protective screen connected to the *protective equipotential bonding system* and intended to provide protection against electric shock

[SOURCE: IEC 60050-195:2021, 195-06-18, modified – The word "electrically" has been added to "protective screening", and the term "protective shielding" has been deleted.]

3.62

reinforced insulation

insulation of hazardous live parts which provides a degree of protection against electric shock equivalent to *double insulation*

Note 1 to entry: *Reinforced insulation* may comprise several layers which cannot be tested separately as *basic insulation* or *supplementary insulation*.

[SOURCE: IEC 60664-1:2020, 3.1.33]

3.63

restricted access area

area to which only electrically skilled persons with the proper authorization have access

[SOURCE: IEC 60050-195:2021, 195-04-04, modified – The words "and electrically instructed persons" have been removed.]

3.64

routine test

test to which each individual device is subjected during or after manufacture to ascertain whether it complies with certain criteria

[SOURCE: IEC 60050-411:1996, 411-53-02, modified – The word "machine" has been replaced by "device".]

3.65

sample test

test on a number of devices taken at random from a batch

3.66

service access area

enclosed electrical area intended for service, maintenance and commissioning while the *PECS* is energized and to which only *skilled persons* are permitted access

Note 1 to entry: *Service access areas* require the use of a tool or key.

3.67

short-circuit backup protection

protection that is intended to operate when other protective means within a *system* or equipment fail to clear a fault

3.68

short-circuit protective device

AC₁ SCPD AC₁

device intended to protect a circuit or parts of a circuit against short-circuit currents by interrupting them

Note 1 to entry: A *short-circuit protective device* is suitable for protection against short-circuit only, not for protection against overload. An *OCPD* may also incorporate the function of a *SCPD*.

[SOURCE: IEC 61439-1:2020, 3.1.11, modified – The note to entry has been added.]

3.69 short-time withstand current

I_{cw}

RMS value of short-time current, declared by the *PECS* manufacturer, which can flow under specified conditions, defined in terms of current and time

[SOURCE: IEC 61439-1:2020, 3.8.10.3, modified – The word "rated" has been removed from the term, the words "AC or mean value of DC" have been removed from the definition, "assembly" has been replaced by "*PECS*", and "that can be withstood" by "which can flow".]

3.70 single fault condition

condition in which one failure is present which could cause a hazard covered by this document

Note 1 to entry: If a *single fault condition* results in other subsequent failures, the set of failures is considered as one *single fault condition*.

Note 2 to entry: Examples of hazards include, but are not limited to, electric shock, fire, energy, mechanical, sound pressure etc.

3.71 skilled person

person with relevant education and experience to enable him or her to perceive risks and to avoid hazards which the equipment can create

Note 1 to entry: *Skilled person* is a term applied to persons who have training or experience in the equipment technology, particularly in knowing the various energies and energy magnitudes used in the equipment. *Skilled persons* are expected to use their training and experience to recognize energy sources capable of causing pain or injury and to take action for protection from injury from those energies. *Skilled persons* should also be protected against unintentional contact or exposure to energy sources capable of causing injury.

Note 2 to entry: It has not been considered necessary to differentiate between the safety means applicable for *skilled persons* and instructed (trained) persons as defined in IEC 61140:2016. The same safety means apply for both.

[SOURCE: IEC 60050-826:2004, 826-18-01, modified – The adverb "electrically" has been removed from the term, the word "electricity" has been replaced by "the equipment", and the note to entry has been added.]

3.72 solid insulation

solid insulating material or a combination of solid insulating materials, placed between two conductive parts or between a conductive part and a body part

[SOURCE: IEC 60664-1:2020, 3.1.6]

3.73 supplementary insulation

independent insulation applied in addition to *basic insulation* for *fault protection*

Note 1 to entry: *Basic insulation* and *supplementary insulation* are separate, each designed for *basic protection* against electric shock.

[SOURCE: IEC 60664-1: 2020, 3.1.31, modified – The note to entry has been added.]

3.74

surge protective device

AC1 SPD AC1

device that contains at least one non-linear *component* that is intended to limit surge voltages and divert surge currents

[SOURCE: IEC 61643-11:2011, 3.1.1, modified – The note to entry has been removed.]

3.75

system

set of interrelated and/or interconnected independent elements

Note 1 to entry: A *system* is generally defined with the view of achieving a given objective, for example by performing a definite function.

3.76

system voltage

voltage used to determine *insulation* requirements

Note 1 to entry: See 4.4.7.1.7 for further consideration of *system voltage*.

3.77

temporary overvoltage

overvoltage at power frequency of relatively long duration

[SOURCE: IEC 60664-1:2020, 3.1.12]

3.78

touch current

electric current passing through a human body or through an animal body when it touches one or more *accessible parts* of an electrical *installation* or electrical equipment

[SOURCE: IEC 60050-826:2004, 826-11-12]

3.79

type test

test of one or more devices made to a certain design to show that the design meets certain specifications

3.80

ventricular fibrillation

cardiac fibrillation, limited to the ventricles, leading to ineffective circulation and then to heart failure

Note 1 to entry: *Ventricular fibrillation* stops blood circulation.

[SOURCE: IEC 60050-891:1998, 891-01-16]

3.81

visual inspection

scrutiny by eye of an item carried out either without dismantling, or with the addition of partial dismantling as required in order to arrive at a reliable conclusion as to the condition of an item

[SOURCE: IEC 60050-426:2020, 426-14-02, modified – The adjective "visual" has been deleted from the term, and the definition has been rephrased.]

3.82**working voltage**

AC or DC voltage, at rated supply conditions (without tolerances) and worst case operating conditions, including RMS, recurring peak and mean values that occurs by design in a circuit or across protection means

3.83**zone of equipotential bonding**

zone where all simultaneously conductive *accessible parts* are electrically connected to prevent hazardous voltages appearing between them

Note 1 to entry: For equipotential bonding, it is not necessary for the parts to be earthed.

4 Protection against hazards**4.1 General**

Clause 4 defines the minimum requirements for the design and construction of a *PECS* and specified *accessories* for the intended use, to ensure its safety during installation, normal operating conditions and maintenance for the expected life cycle of the *PECS*. Consideration is also given to minimize hazards resulting from reasonably foreseeable misuse.

Information about the intended use, normal operating conditions and specified *accessories* shall be stated in the documentation.

Protection against hazards shall be maintained under normal, abnormal and *single fault conditions*, as specified in this document.

Clause 4 provides safety means for protection against hazards for *ordinary persons*. This document also considers relaxed safety means for *skilled persons* considering installation and maintenance of the *PECS*.

NOTE It has not been considered necessary to differentiate between the safety means applicable for *skilled persons* and instructed persons as defined in IEC 61140:2016. The same safety means apply for both.

Where the *PECS* is intended to be used together with specified *accessories*, the safety evaluation and test shall include these, unless it can be shown that it does not affect the safety of either equipment.

Risk assessment of the *PECS* might show hazards which are not covered by this document. For information, refer to Annex R.

For marking, see 6.2.

4.2 Single fault conditions and abnormal operating conditions

The *PECS* and specified *accessories* shall be designed to avoid operating modes or sequences that can cause a *single fault condition* or *component* failure leading to a hazard, unless other means to prevent the hazard are provided by the *installation* and are described in the *installation* information provided with the *PECS*, see Clause 6. The requirements in 4.2 also apply to *abnormal operating conditions* as applicable.

An analysis shall be performed to identify potential hazards.

This analysis shall include situations where a *single fault condition* in any *component*, *basic protection*, *fault protection* or *port* would result in:

- electrically induced mechanical force and thermal hazard according to 4.3;

- an impact on the decisive voltage determination according to 4.4.2;
- a risk of electric shock due to:
 - degradation of the *basic protection* according to 4.4.3, or
 - degradation of the *fault protection* according to 4.4.4;
- a risk of energy hazard according to 4.5;
- a risk of degradation due to emission of flame, burning particles, molten metal or fire according to 4.6;
- a risk of thermal hazard due to high temperature according to 4.6; or
- a risk of mechanical hazard according to 4.7.

NOTE This document does not provide any requirement to protect against chemical hazard.

The analysis and testing shall include the effect of short-circuit and open-circuit conditions of the *component*. Testing is necessary unless analysis can conclusively show that no hazard will result from failure of the *component*. Compliance shall be checked by test of 5.2.4.6.

The effect of other identified *abnormal operating condition* and *single fault condition* shall be tested according to the applicable test in 5.2.4.

The evaluation of *components* (see 4.13) shall be based on the expected stress occurring in the life cycle of the *PECS* including, but not limited to:

- specified climatic and mechanical conditions according to 4.9 (temperature, humidity, vibration, etc.);
- electrical characteristics according to 4.4.7.1 (expected impulse voltage, *working voltage*, *temporary overvoltage*, etc.); or
- micro-environment according to 4.4.7 (*pollution degree*, humidity, etc.).

Components evaluated according to relevant product standards in 4.13 are considered to meet these requirements and do not need any further investigation, if tested under conditions that fulfill the conditions for which the *PECS* is designed.

Clearance and *creepage distances* for *supplementary insulation*, *double insulation* and *reinforced insulation*, designed according to 4.4.7.4 and 4.4.7.5, are considered to meet these requirements and do not need any further investigation.

Functional insulation on printed wiring boards (PWB) and between legs of *components* assembled on PWBs not fulfilling the requirements for *clearance* and *creepage distance* in 4.4.7.4 and 4.4.7.5 shall meet the requirement of 4.4.7.7.

Consideration shall be given to potential safety hazards associated with major *component* parts of the *PECS*, such as flammability of transformer and capacitor fluids.

4.3 Short-circuit and overload protection

4.3.1 General

The *PECS* shall not present a hazard under short-circuit or overload conditions at any *port*, including phase to phase, phase to earth and phase to neutral. Adequate information shall be provided in the documentation to allow proper selection of external wiring and protective devices (see 6.3.9.6) taking into account the automatic disconnection of supply in 4.4.4.4.

To ensure proper coordination with *short-circuit protective devices (SCPD)* and the available *prospective short-circuit current*, the *PECS* manufacturer shall specify and test for each *mains supply port* of the *PECS*:

- *conditional short-circuit current* (I_{cc}) according to 4.3.2.2; or
- *short-time withstand current* (I_{cw}) according to 4.3.2.3.

Individual *mains supply ports* of a *PECS* shall have specific short-circuit ratings of either I_{cc} or I_{cw} , or of both.

Only in case where compliance does not rely on the current limiting characteristic of *SCPD*, the I_{cw} in 4.3.2.3 can apply.

In case an output *port* is connected or intended to be connected to the input *mains supply port*, the output *port* shall also be specified with an I_{cc} or I_{cw} rating (e.g. bypass between input *mains supply port* and output *port*).

AC1 For marking, see 6.2.1.4. **AC1**

See Annex N for further information.

Protective *systems* or devices shall be provided or specified in sufficient quantity and location so as to detect and/or interrupt or limit the current flowing in any possible fault current path, caused by any internal or external faults.

NOTE 1 In this document, the term "overcurrent" covers both short-circuit and overload.

NOTE 2 Local *installation* codes will still usually require provision of such protection for the purposes of protecting the input wiring in the *installation*.

If the *PECS* complies with all normal, abnormal and *single fault conditions* in this document without such protection provided, specification of overcurrent protection for input circuits is not necessary for the protection of the *PECS*.

No protection is required against overcurrent to earth on *ports* that either

- has no connection to earth; or
- has *double insulation* or *reinforced insulation* between *live parts* and all parts connected to earth.

NOTE 3 Under a *single fault condition* in an IT *system*, no short-circuit current or a limited short-circuit current will flow. The interruption of the short-circuit current in an IT *system* (see 4.4.7.1.5) is done when a second fault occurs. Typically, only detection is done after the first fault in an IT *system*.

NOTE 4 Where *double insulation* or *reinforced insulation* is provided, a short-circuit to earth would be considered to be two faults.

For *PECS* designed as *pluggable equipment type A*, the protective device is provided in the *installation* and shall not require any specific characteristics other than that required in local *installation* codes.

For *PECS* designed as *pluggable equipment type B* or *permanently connected equipment*, this protection may be provided by devices external to the *PECS*, in which case the documentation shall state the need for the protection to be provided in the *installation* and shall include the specifications for the required short-circuit and/or overload protection (see 6.3.9.6).

NOTE 5 IEC 60364 (all parts) provides requirements for short-circuit and overload protection of the input wiring in the *installation*. The above requirement ensures that the user is informed about any special characteristics of the protective devices for the protection of the *PECS*, in addition to the requirements in IEC 60364 (all parts) or other local *installation* codes.

If a protective device interrupts the neutral conductor, it shall also simultaneously interrupt all other supply conductors of the same circuit. It is permissible for the protective device to interrupt the neutral conductor after the other supply conductors of the same circuit are interrupted.

For *PECS* that can not deliver *short-circuit currents* which are able to open *SCPD*, the output short-circuit test 5.2.4.4 may be omitted.

Compliance shall be checked by analysis of *single fault conditions* according to 4.2 and by the tests of 5.2.4.4 and 5.2.4.5.

4.3.2 Input short-circuit withstand strength and *output short-circuit current ability*

4.3.2.1 General

The interrupting capability of the *overcurrent protective device* shall be equal or greater than the *prospective short-circuit current* of the *mains supply* or *non-mains supply*.

Protective devices provided or specified shall have adequate breaking capability to interrupt the maximum *prospective short-circuit current* specified for the *port* to which they are connected.

If the result of one test is representative of the worst case, less severe combinations need not be tested.

4.3.2.2 Conditional short-circuit current (I_{cc}) on input ports

In case where the *PECS* manufacturer selects the conditional short-circuit current (I_{cc}) rating according to 4.3.1, the following shall be specified:

- *conditional short-circuit current* (I_{cc});
- characteristics of the *short-circuit protective device*; and
- *minimum required prospective short-circuit current* ($I_{cp,mr}$).

Compliance is shown through evaluation according to 4.2, to determine the appropriate combination of testing according to 5.2.4.4, 5.2.4.6 and 5.2.3.11.3 in order to evaluate *single fault conditions* and *abnormal operating conditions*.

4.3.2.3 Short-time withstand current (I_{cw}) on input ports

When the *PECS* manufacturer selects the *short-time withstand current* (I_{cw}) rating according to 4.3.1, the following shall be specified:

- *short-time withstand current* (I_{cw});
- associated duration; and
- *peak withstand current* (I_{pk}).

Compliance is shown through evaluation according to 4.2 to determine the appropriate combination of testing according to 5.2.3.11.3 and 5.2.4.4.3 in order to evaluate *single fault conditions* and *abnormal operating conditions*.

4.3.2.4 Output short-circuit current ability

The ability of the *PECS* to deliver a current, in the event of a short-circuit at the output, shall be defined in amperes and time.

NOTE The specification of current and time is to ensure sufficient information selecting the protective downstream device for the final application.

Compliance is verified by test in 5.2.4.4.

For marking, refer to 6.2.

4.3.2.5 Combined input and output ports

For *ports* which are both input and output *ports*, the applicable requirements of both 4.3.2.1 and 4.3.2.4 apply.

4.3.3 Short-circuit coordination (backup protection)

Protective devices provided or specified shall have adequate breaking capability to interrupt the *prospective short-circuit current* specified for the *port* to which they are connected.

For *PECS* designed as *pluggable equipment type A*, either the *PECS* shall be designed so that the building *installation* provides *short-circuit backup protection*, or additional *short-circuit backup protection* shall be provided as part of the *PECS*.

For *PECS* designed as *pluggable equipment type B* or *permanently connected* equipment, it is permitted for *short-circuit backup protection* to be in the building installation.

If internal protection of the *PECS* is not rated for the *prospective short-circuit current*, the documentation shall specify an upstream protective device, rated for this *prospective short-circuit current* of that *port*. Analysis shall ensure the protection coordination so that the external protection opens before the internal protection.

NOTE IEC 60364 provides requirements for upstream protective devices of the backup protection in the *installation*. The above requirement ensures that the user is informed about any special characteristics of the upstream protective devices for the backup protection of the *PECS*, in addition to the requirements in IEC 60364 or other local *installation* codes.

 Compliance shall be checked by

- visual inspection in 5.2.1, and
- simulation or tests of 5.2.4.4 and 5.2.4.5 

For marking, refer to 6.3.9.6.

4.3.4 Protection by several devices

Where protective devices that require manual replacement or resetting are used in more than one pole of a supply to a given load, those devices shall be located together. It is permitted to combine two or more protective devices in one *component*.

Compliance shall be checked by *visual inspection* in 5.2.1.

For marking, see 6.5.6.

4.4 Protection against electric shock

4.4.1 General

Protection against electric shock depends on the *decisive voltage class* from 4.4.2 and protection requirements from 4.4.2.7 and shall be provided by at least one of the following means:

- *basic protection* from 4.4.3 in combination with *fault protection* from 4.4.4; or
- *enhanced protection* from 4.4.5.

Protection under normal operating conditions is provided by *basic protection*, and protection under *single fault conditions* is provided by *fault protection*.

Enhanced protection provides protection under both normal operating conditions and *single fault conditions*.

For the use of means of *basic protection* in combination with *fault protection* and *enhanced protection*, see 4.4.6 for different constructions.

Basic protection, *fault protection* and *enhanced protection* may be achieved by means of

- *clearance* and *creepage distances* (4.4.7.4 and 4.4.7.5);
- *solid insulation* (4.4.7.8);
- *protection* by means of *enclosure* and barriers (4.4.3.3); or
- a combination of those means.

Figure 1 and Figure 2 provide an overview of the fundamental concept for protection against electric shock according to IEC 61140:2016.

Where not stated otherwise in this document, protection against electric shock is based on the body reaction *ventricular fibrillation*.

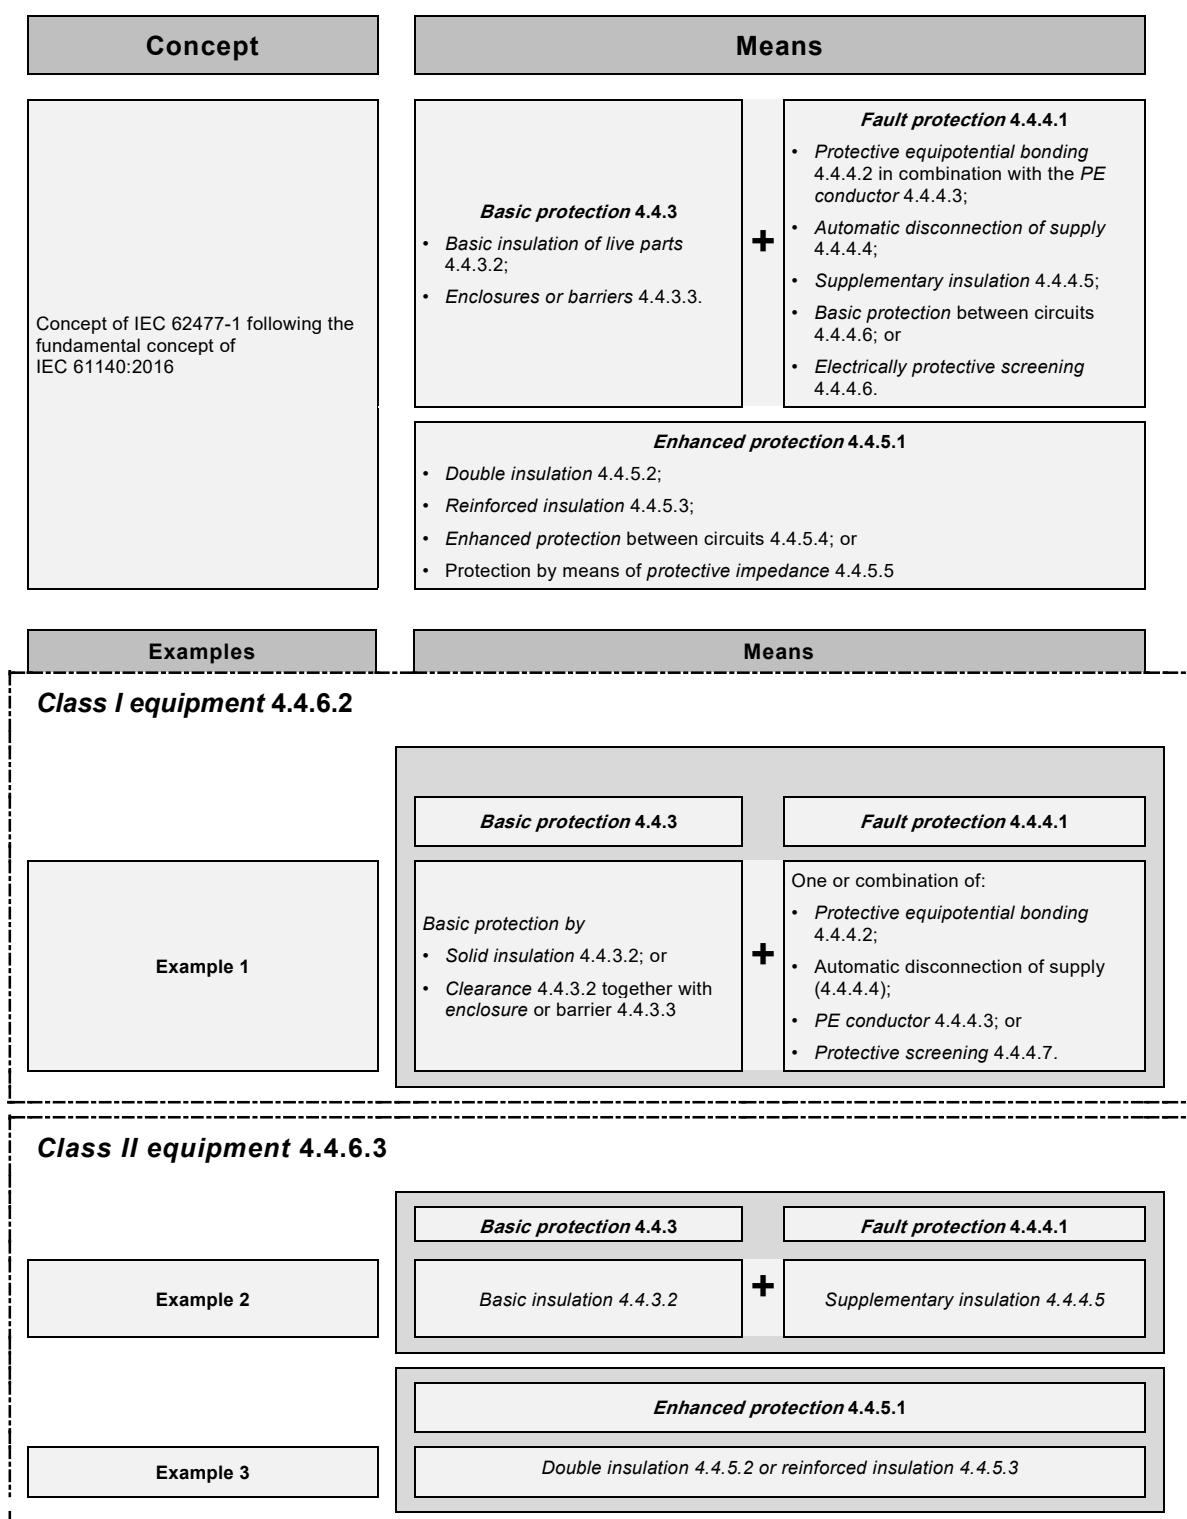


Figure 1 – Protective means for protection against electric shock considering *Class I equipment* and *Class II equipment*

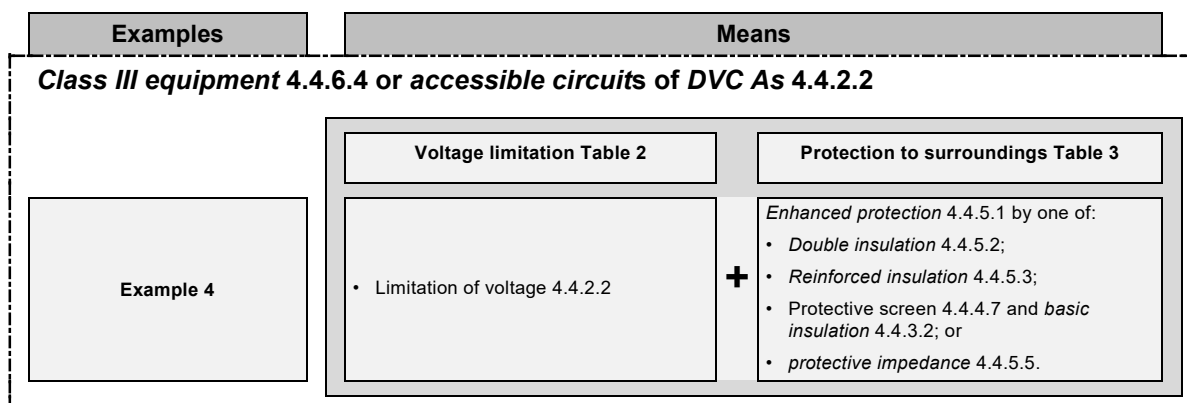


Figure 2 – Protective means for protection against electric shock considering Class III equipment or accessible circuits of DVC As

Additional protection according to IEC 61140:2016 can be provided by residual current-operated protective devices (RCD). For further information, see 4.4.8.

NOTE In this document, 4.4.1 to 4.4.6 have been harmonized with the concepts of the horizontal standard IEC 61140:2016 for protection against electric shock. *Basic protection, fault protection, enhanced protection* and the combination of those means have been implemented.

4.4.2 Decisive voltage class

4.4.2.1 General

This document considers three different types of circuits for the protection against electric shock: *DVC As*, *DVC B* and *DVC C*.

The determination of a *decisive voltage class* includes the following considerations:

- environmental conditions (dry, wet or salt-water-wet) for *DVC As*;
- normal operating conditions and *single fault conditions* for *DVC As*;
- size of body contact surface area for *DVC As*;
- maximum *working voltage* (AC RMS, AC peak and DC) (see Table 2);
- protection requirement between circuits and between circuits and surroundings (see Table 3); and
- *impulse withstand voltage* (see Table 2 and Table 7).

The manufacturer defines the *DVC* for the individual output circuits and provides this information with the documentation (see 6.2).

Input/output circuits with rated voltages within the limits of *DVC As* shall be investigated as *DVC As* circuits. Only circuits which are classified as *DVC As* shall be *accessible* to *ordinary person*.

For marking, see 6.2.1.3.

The probability of electric shock increases with voltage level, surface area of the conductive *accessible part* or circuit in contact with the skin and the humidity condition of skin. To reduce the likelihood of electric shock, it is important to determine the safe *decisive voltage class* (*DVC As*).

For the selection of the relevant *decisive voltage class* for *accessible circuits*, the following apply:

- the reaction of the body (perception, pain, let-go, ventricular fibrillation);
- the area of the *accessible part* of the *PECS* in relation to the area of the part of the body that may contact the *accessible part*; and
- the humidity condition of the body skin (dry, water-wet, saltwater-wet).

The values in Table 2 are based on a current path from the contact area hand to feet with the person in standing position, unless otherwise noted.

NOTE 1 For further information about body reactions, contact areas and humidity skin condition, see IEC 60479-1:2018.

NOTE 2 The design of a safe to touch *DVC As* circuit is simplified in this document. A more complex approach considering the body reaction, contact area and humidity skin condition as described in IEC 60479-1:2018 for the determination of *DVC As* can be used in a risk assessment (see IEC Guide 116) to show that an equivalent protection against electric shock is achieved.

4.4.2.2 *DVC As*

Under normal operating conditions, *abnormal operating conditions* and *single fault conditions*, the *DVC As* circuit shall meet the minimum requirements of:

- the voltage limits according to Table 2; and
- the protection requirement to the surroundings and *adjacent circuits* according to Table 3.

See Clause A.2, Clause A.3 and Clause A.4 for examples of these means.

NOTE Within the *PECS*, this document allows more than one *DVC As* circuit with different levels of *DVC As*.

4.4.2.3 *DVC B*

DVC B circuit shall meet the requirements of:

- the voltage limits according to Table 2;
- the protection requirement to the surroundings and *adjacent circuits* according to Table 3; and
- an *impulse withstand voltage* according to Table 7 determined by the requirement of 4.4.7.2.4.

4.4.2.4 *DVC C*

DVC C circuit shall meet the requirements of:

- the voltage limits according to Table 2;
- protection of persons and protection to the surroundings and *adjacent circuits* according to Table 3; and
- an *impulse withstand voltage* and *temporary overvoltage* according to Table 7 determined by the requirements of 4.4.7.1 to 4.4.7.4.

The protection requirements to other *DVC C* circuits shall be based on the consequence of a *single fault condition* (see 4.2). The protection shall be based on the highest *working voltage* and *impulse withstand voltage*.

4.4.2.5 Interconnection of external SELV/PELV to *DVC As* circuits

External SELV/PELV circuits intended to be connected to the *PECS* shall be investigated per their rated voltage at the point of interconnection according to *DVC As* or *DVC B* as defined in Table 2.