


FED. SUPPLY CLASS

5355

Ø.125
(WHITE)


.012 MAX
DEPRESSED
WHITE LINE
.031 ± .010 WIDE




HEAD MARKING VIEW
(FOR NAS539-1A)

.012 MAX
DEPRESSED
WHITE LINE
.031 ± .010 WIDE



.250

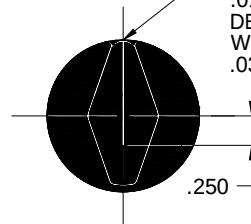


HEAD MARKING VIEW
(FOR NAS539-1B & NAS539-1C)

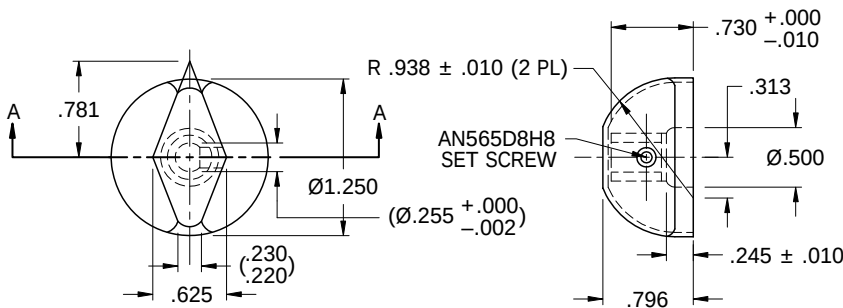

-1A KNOB ASSEMBLY, FUEL FLOW, FLATTED SHAFT

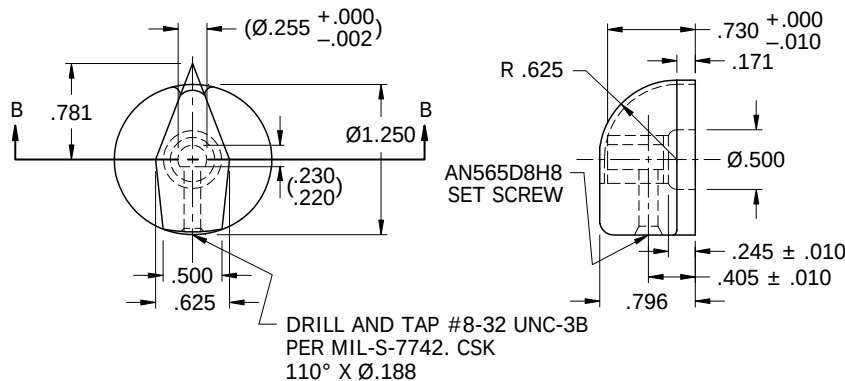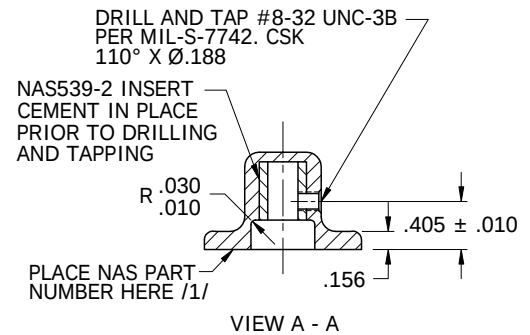

-1B KNOB ASSEMBLY, POINTER, FLATTED SHAFT

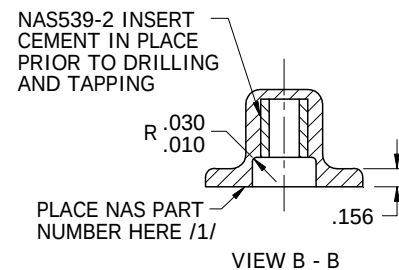


⑤ COMPLETELY REVISED


THIRD ANGLE PROJECTION	CUSTODIAN NATIONAL AEROSPACE STANDARDS COMMITTEE	REVISION 5
PROCUREMENT SPECIFICATION NONE	TITLE KNOB ASSEMBLY, TRANSILLUMINATED POINTER	CLASSIFICATION PART STANDARD NAS539 SHEET 1 OF 3



Documents
SHEET 1 OF 3
Document Sharing Hub

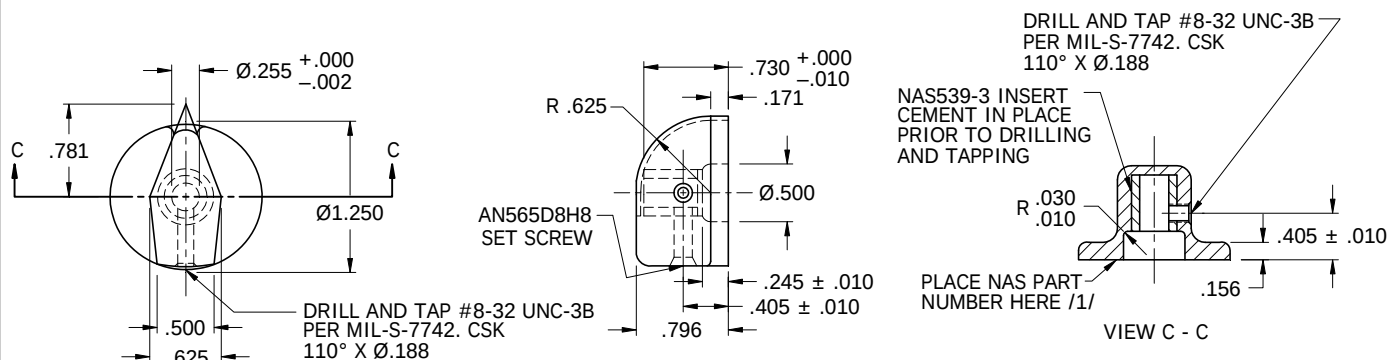

-1C KNOB ASSEMBLY, POINTER, ROUND SHAFT

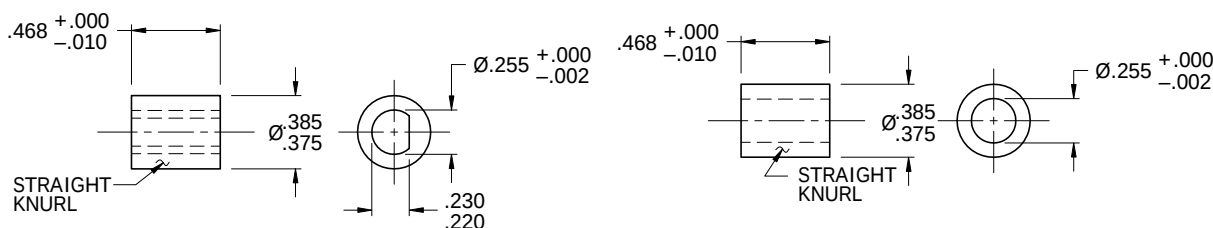

-2 INSERT

-3 INSERT

TABLE I – PART ASSEMBLY NUMBERS AND WEIGHTS

PART	NAS ASSEMBLY NUMBER	WEIGHT (LBS)
KNOB ASSEMBLY, FUEL FLOW (FLATTED SHAFT)	NAS539-1A	.026
KNOB ASSEMBLY, POINTER (FLATTED SHAFT)	NAS539-1B	.028
KNOB ASSEMBLY, POINTER (ROUND SHAFT)	NAS539-1C	.026
INSERT	NAS539-2	.009
INSERT	NAS539-3	.009

MATERIAL:

NAS539-1A, NAS539-1B & NAS539-1C: ~~TRANSPARENT PLASTIC MOLDING MATERIAL PER AMS3620, OR CLEAR TRANSPARENT CAST POLYESTER.~~

NAS539-2 & NAS539-3: COMMERCIAL BRASS PER ASTM B36/B36M, ASTM B121/B121M, HALF HARD.

FINISH:

NAS539-1A, NAS539-1B & NAS539-1C: INSTRUMENT DULL BLACK OVER WHITE EXCEPT AS NOTED.

NAS539-2 & NAS539-3: ZINC PLATE PER QQ-Z-325, TYPE I, CLASS 2 ASTM B633, TYPE I, SC 3.

⑤ COMPLETELY REVISED

REVISION

5

NAS539
SHEET 2



Document Sharing Hub