

BS ISO/IEC 14443-3:2011+A6:2014



BSI Standards Publication

Identification cards
— Contactless integrated
circuit cards
— Proximity cards
Part 3: Initialization and anticollision

bsi.

...making excellence a habit.
AVA **Documents**
Document Sharing Hub

National foreword

This British Standard is the UK implementation of ISO/IEC 14443-3:2011+A6:2014. It supersedes BS ISO/IEC 14443-3:2011+A3:2014, which will be withdrawn on 31 May 2016.

The start and finish of text introduced or altered by amendment is indicated in the text by tags. Tags indicating changes to ISO/IEC text carry the number of the ISO/IEC amendment. For example, text altered by ISO/IEC amendment 1 is indicated by A1 A1.

The UK participation in its preparation was entrusted to Technical Committee IST/17, Cards and personal identification.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2014.
Published by BSI Standards Limited 2014

ISBN 978 0 580 76124 9

ICS 35.240.15

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 May 2011.

Amendments/corrigenda issued since publication

Date	Text affected
29 February 2012	Implementation of ISO/IEC amendment 1:2011
31 January 2013	Implementation of ISO/IEC amendment 2:2012
31 May 2014	Implementation of ISO/IEC amendment 3:2014
30 September 2014	Implementation of ISO/IEC amendment 6:2014

**Identification cards — Contactless
integrated circuit cards — Proximity
cards**

**Part 3:
Initialization and anticollision**

*Cartes d'identification — Cartes à circuit(s) intégré(s) sans contact —
Cartes de proximité*

Partie 3: Initialisation et anticollision



Reference number
ISO/IEC 14443-3:2011(E)

AVA Documents
Document Sharing Hub
© ISO/IEC 2011



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2011

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	v
Introduction.....	vi
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Symbols, abbreviated terms and notation	2
 5 Initial dialogs 	5
 5.1 Alternating PICC and PCD support (PXD) 	5
 5.2  Alternating between Type A and Type B commands.....	5
 5.2.1  Polling.....	5
 5.2.2  Influence of Type A commands on PICC Type B operation.....	6
 5.2.3  Influence of Type B commands on PICC Type A operation.....	6
 5.2.4  Transition to POWER-OFF state.....	6
6 Type A – Initialization and anticollision	6
 6.1 etu 	6
6.2 Frame format and timing	7
6.2.1 Frame delay time	7
6.2.2 Request Guard Time	9
6.2.3 Frame formats.....	9
6.2.4 CRC_A	11
6.3 PICC states.....	12
6.3.1 POWER-OFF state	13
6.3.2 IDLE state	14
6.3.3 READY state.....	14
6.3.4 ACTIVE state	14
6.3.5 HALT state.....	14
6.3.6 READY* state	14
6.3.7 ACTIVE* state.....	15
6.3.8 PROTOCOL state.....	15
6.4 Command set.....	15
6.4.1 REQA and WUPA commands.....	15
6.4.2 ANTICOLLISION and SELECT commands.....	16
6.4.3 HLTA command	16
6.5 Select sequence	16
6.5.1 Select sequence flowchart	17
6.5.2 ATQA - Answer To Request	17
6.5.3 Anticollision and Select.....	19
6.5.4 UID contents and cascade levels.....	22
7 Type B – Initialization and anticollision	24
7.1 Character, frame format and timing	24
7.1.1 Character transmission format.....	24
7.1.2 Character separation.....	25
7.1.3 Frame format.....	25
7.1.4 SOF	26
7.1.5 EOF	27
7.1.6 Timing before the PICC SOF	28
7.1.7 Timing before the PCD SOF	28
7.2 CRC_B	29
7.3 Anticollision sequence	29
7.4 PICC states description	29

7.4.1	Initialization and anticollision flowchart	32
7.4.2	General statement for state description and transitions.....	32
7.4.3	POWER-OFF state.....	33
7.4.4	IDLE state	33
7.4.5	READY-REQUESTED sub-state.....	33
7.4.6	READY-DECLARED sub-state	34
7.4.7	PROTOCOL state	34
7.4.8	HALT state	34
7.5	Command set	34
7.6	Anticollision response rules.....	35
7.6.1	PICC with initialization only	35
7.7	REQB/WUPB command	35
7.7.1	REQB/WUPB command format	35
7.7.2	Coding of Anticollision Prefix byte APf.....	35
7.7.3	Coding of AFI	36
7.7.4	Coding of PARAM	37
7.8	Slot-MARKER command	38
7.8.1	Slot-MARKER command format.....	38
7.8.2	Coding of anticollision prefix byte APn	38
7.9	ATQB Response.....	38
7.9.1	ATQB response format	38
7.9.2	PUPI (Pseudo-Unique PICC Identifier).....	39
7.9.3	Application Data.....	39
7.9.4	Protocol Info.....	40
7.10	ATTRIB command.....	43
7.10.1	ATTRIB command format	43
7.10.2	Identifier	44
7.10.3	Coding of Param 1	44
7.10.4	Coding of Param 2	45
7.10.5	Coding of Param 3	46
7.10.6	Coding of Param 4	46
7.10.7	Higher layer INF	47
7.11	Answer to ATTRIB command	47
7.12	HLTB command and Answer	48
8	Electromagnetic disturbance handling	48
8.1	General	48
8.2	EMD handling timing constraints	49
8.3	Recommendations for a PCD EMD handling algorithm	49
Annex A (informative)	Communication example Type A	51
Annex B (informative)	CRC_A and CRC_B encoding.....	53
Annex C (informative)	Type A timeslot – Initialization and anticollision.....	57
Annex D (informative)	Example of Type B Anticollision Sequence	61
 Annex E (normative)	Bit rates of $3fc/4$, fc , $3fc/2$ and $2fc$ from PCD to PICC 	63
Bibliography		65

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

ISO/IEC 14443-3 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 17, *Cards and personal identification*.

This second edition cancels and replaces the first edition (ISO/IEC 14443-3:2001), which has been technically revised.

It also incorporates the Amendments ISO/IEC 14443-3:2001/Amd.1:2005 and ISO/IEC 14443-3:2001/Amd.3:2006, and the Technical Corrigendum ISO/IEC 14443-3:2001/Amd.1:2005/Cor.1:2006.

ISO/IEC 14443 consists of the following parts, under the general title *Identification cards — Contactless integrated circuit cards — Proximity cards*:

- *Part 1: Physical characteristics*
- *Part 2: Radio frequency power and signal interface*
- *Part 3: Initialization and anticollision*
- *Part 4: Transmission protocol*

Introduction

ISO/IEC 14443 is one of a series of International Standards describing the parameters for identification cards as defined in ISO/IEC 7810, and the use of such cards for international interchange.

This part of ISO/IEC 14443 describes polling for proximity cards entering the field of a proximity coupling device, the byte format and framing, the initial Request and Answer to Request command content, methods to detect and communicate with one proximity card among several proximity cards (anticollision) and other parameters required to initialize communications between a proximity card and a proximity coupling device. Protocols and commands used by higher layers and by applications and which are used after the initial phase are described in ISO/IEC 14443-4.

ISO/IEC 14443 is intended to allow operation of proximity cards in the presence of other contactless cards conforming to ISO/IEC 10536 and ISO/IEC 15693.

The International Organization for Standardization (ISO) and International Electrotechnical Commission (IEC) draw attention to the fact that it is claimed that compliance with this document may involve the use of patents.

ISO and IEC take no position concerning the evidence, validity and scope of these patent rights.

The holders of these patent rights have assured ISO and IEC that they are willing to negotiate licences under reasonable and non discriminatory terms and conditions with applicants throughout the world. In this respect, the statements of the holders of these patent rights are registered with the ISO and IEC. Information may be obtained from:

Patent holder	Details
FRANCE TELECOM Orange Labs 38-40 rue de Général Leclerc 92794 Issy-les-Moulineaux France	US Patent US5359323
INNOVOTRON 1 Rue Danton 75006 Paris France	WO 9936877A1 Europe 0 901 670 French Patent App 97.02501 Int Pat App PCT/FR98/00132 Innovatron Electronique / RATP subclause 7.3, 7.6 and 7.7 French Patent App 98.00383 Int Pat App PCT/FR99/00079 Innovatron Electronique / RATP subclause 7.3, 7.4.5, 7.6, 7.7, 7.8
MOTOROLA Motorola ESG Now: Freescale Semiconductor Inc. 6501 William Cannon Drive West Austin, Texas 78735 USA	Details not available.

PHILIPS

Philips Intellectual Property & Standards
High Tech Campus 44
5656 AE Eindhoven
The Netherlands

PHO 94.520
EP-PS 066 9591
(BE,CH,DE,DK,ES,FR,GB,IT,NL,SE)
AT-PS 401 127
Related to “anticollision” as specified in
ISO/IEC 14443-3

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those identified above. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

This page deliberately left blank

Identification cards — Contactless integrated circuit cards — Proximity cards

Part 3: Initialization and anticollision

1 Scope

This part of ISO/IEC 14443 describes:

- polling for proximity cards or objects (PICCs) entering the field of a proximity coupling device (PCD);
 - the byte format, the frames and timing used during the initial phase of communication between PCDs and PICCs;
 - the initial Request and Answer to Request command content;
 - methods to detect and communicate with one PICC among several PICCs (anticollision);
 - other parameters required to initialize communications between a PICC and PCD;
 - optional means to ease and speed up the selection of one PICC among several PICCs based on application criteria.
- A3** — optional capability to allow a device to alternate between the functions of a PICC and a PCD to communicate with a PCD or a PICC, respectively. A device which implements this capability is called a PXD and shall comply with all PXD requirements in this standard. **A3**

Protocol and commands used by higher layers and by applications and which are used after the initial phase are described in ISO/IEC 14443-4.

- A3** This part of ISO/IEC 14443 is applicable to PICCs of Type A and of Type B and PCDs (as described in ISO/IEC 14443-2) and to PXDs. **A3**

NOTE 1 Part of the timing of data communication is defined in ISO/IEC 14443-2.

NOTE 2 Test methods for this International Standard are defined in ISO/IEC 10373-6.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 13239, *Information technology — Telecommunications and information exchange between systems — High-level data link control (HDLC) procedures*

ISO/IEC 7816-4:2005, *Identification cards — Integrated circuit cards — Part 4: Organization, security and commands for interchange*

ISO/IEC 7816-6, *Identification cards — Integrated circuit cards — Part 6: Interindustry data elements for interchange*

ISO/IEC 14443-2, *Identification cards — Contactless integrated circuit cards — Proximity cards — Part 2: Radio frequency power and signal interface*

ISO/IEC 14443-4, *Identification cards — Contactless integrated circuit cards — Proximity cards — Part 4: Transmission protocol*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 14443-2 and the following apply.

3.1 anticollision loop

algorithm used to prepare for dialogue between PCD and one or more PICCs out of the total number of PICCs responding to a request command

3.2 byte

byte consisting of 8 bits of data designated b8 to b1, from the most significant bit (MSB, b8) to the least significant bit (LSB, b1)

3.3 collision

transmission by two PICCs in the same PCD energizing field and during the same time period, such that the PCD is unable to distinguish from which PICC the data originated

3.4 frame

sequence of data bits and optional error detection bits, with frame delimiters at start and end

3.5 higher layer protocol

protocol layer (not described in this part of ISO/IEC 14443) that makes use of the protocol layer defined in this part of ISO/IEC 14443 to transfer information belonging to the application or higher layers of protocol not described in this part of ISO/IEC 14443

3.6 PCD Mode

Mode in which a PXD operates as a PCD 

3.7 PICC Mode

Mode in which a PXD operates as a PICC 

3.8 request command

command requesting PICCs of the appropriate type to respond if they are available for initialization

4 Symbols, abbreviated terms and notation

For the purposes of this document, the following symbols, abbreviated terms and notation apply.

ADC	Application Data Coding, Type B
AFI	Application Family Identifier, card preselection criteria by application, Type B
APf	Anticollision Prefix f, used in REQB/WUPB, Type B
APn	Anticollision Prefix n, used in Slot-MARKER command, Type B

ATQA	Answer To reQuest, Type A
ATQB	Answer To reQuest, Type B
ATTRIB	PICC selection command, Type B
BCC	Block Check Character (UID CL n check byte), Type A
CID	Card IDentifier
CL n	Cascade Level n , Type A
CT	Cascade Tag, Type A
CRC_A	Cyclic Redundancy Check error detection code, Type A
CRC_B	Cyclic Redundancy Check error detection code, Type B
D	Divisor
E	End of communication, Type A
EGT	Extra Guard Time, Type B
EOF	End Of Frame, Type B
etu	elementary time unit
FDT	Frame Delay Time PCD to PICC, Type A
f_c	carrier frequency
FO	Frame Option, Type B
f_s	subcarrier frequency
FWI	Frame Waiting time Integer
FWT	Frame Waiting Time
HLTA	HaLT command, Type A
HLTB	HaLT command, Type B
ID	IDentification number, Type A
INF	INFormation field belonging to higher layer, Type B
LSB	Least Significant Bit
MBL	Maximum Buffer Length, Type B
MBLI	Maximum Buffer Length Index, Type B
MSB	Most Significant Bit
N	Number of anticollision slots, Type B
n	Variable integer value as defined in the specific clause
NAD	Node ADdress

NVB	Number of Valid Bits, Type A
P	Odd Parity bit, Type A
PCD	Proximity Coupling Device
PICC	Proximity Card or object
PUPI	Pseudo-Unique PICC Identifier, Type B
 PXD	Proximity eXtended Device 
R	Slot number chosen by the PICC during the anticollision sequence, Type B
REQA	REQuest command, Type A
REQB	REQuest command, Type B
RFU	Reserved for Future Use by ISO/IEC
S	Start of communication, Type A
SAK	Select Acknowledge, Type A
SEL	SElect code, Type A
SELECT	SELECT command, Type A
SFGI	Start-up Frame Guard time Integer
SFGT	Start-up Frame Guard Time
SOF	Start Of Frame, Type B
 t_{cyc}	maximum automatic mode alternation cycle time
t_{diff}	minimum time difference of PICC Mode durations 
 $t_{\text{E,PICC}}$	Low EMD time, PICC
$t_{\text{E,PCD}}$	Low EMD time, PCD 
TR0	Guard Time as defined in ISO/IEC 14443-2, Type B
TR1	Synchronization Time as defined in ISO/IEC 14443-2, Type B
TR2	Frame delay Time PICC to PCD, Type B
UID	Unique IDentifier, Type A
UID CL n	Unique IDentifier of CL n , Type A
uid n	Byte number n of Unique IDentifier, $n \geq 0$
WUPA	Wake-UP command, Type A
WUPB	Wake-UP command, Type B

For the purposes of this document, the following notation applies:

- (xxxxx)b Data bit representation;
- 'XY' Hexadecimal notation, equal to XY to the base 16.

5 Initial dialogs

5.1 Alternating PICC and PCD support (PXD)

A proximity extended device (PXD) shall alternately support PICC requirements (PICC Mode) and PCD requirements (PCD Mode).

The alternation between the PICC Mode and the PCD Mode may be either automatic or a Mode (PICC Mode or PCD Mode) may be explicitly selected by the user.

The PICC Mode and the PCD Mode are defined as PICC and PCD in ISO/IEC 14443.

The automatic alternation is defined as follows:

- the PXD shall alternate between the PICC Mode and the PCD Mode with maximum cycle time $t_{cyc} = 1$ s and shall stay in PICC Mode (ready for receiving REQA/WUPA or REQB/WUPB commands, except for the first 5 ms) longer than in PCD Mode (generating operating field), until a communication to either a PICC, a PCD or another PXD is established,
- the PXD shall randomly set the PICC Mode duration for each cycle to a value chosen from a set of at least 2 different values differing by at least $t_{diff} = 5$ ms between each of them,
- in PICC Mode, after reception of a valid REQA/WUPA or REQB/WUPB command, the PXD shall not go in PCD Mode before a POWER-OFF state,
- when leaving the PCD Mode after processing of a PICC (or a PXD in PICC mode), the PXD shall resume its automatic mode alternation with the PICC Mode first.

NOTE 1 The PXD may check the presence of external operating field to decide not to enter PCD Mode, i.e. to stay in PICC Mode for a further random PICC Mode duration.

NOTE 2 The detection of the removal of a PICC (or PXD in PICC Mode) should be done by a PICC presence check method without switching off the operating field to keep the same UID/PUPI and to avoid PXD entering the PCD Mode. 

5.2 Alternating between Type A and Type B commands

5.2.1 Polling

In order to detect PICCs which are in the operating field, a PCD shall send repeated Request commands. The PCD shall send REQA (or WUPA) and REQB (or WUPB) in any sequence using an equal or configurable duty cycle when polling Type A and Type B. In addition the PCD may send other commands as described in Annex C.

When a PICC is exposed to an unmodulated operating field (see ISO/IEC 14443-2) it shall be able to accept a request within 5 ms.

EXAMPLE 1 When a PICC Type A receives any Type B command it shall be able to accept a REQA (or WUPA) within 5 ms of unmodulated operating field.

EXAMPLE 2 When a PICC Type B receives any Type A command it shall be able to accept a REQB (or WUPB) within 5 ms of unmodulated operating field.

EXAMPLE 3 When a PICC Type A is exposed to field activation it shall be able to accept a REQA (or WUPA) within 5 ms of unmodulated operating field.

EXAMPLE 4 When a PICC Type B is exposed to field activation it shall be able to accept a REQB (or WUPB) within 5 ms of unmodulated operating field.

^{A3} EXAMPLE 5 When a PICC supporting Type A and Type B is exposed to field activation it shall be able to accept a REQA (or WUPA) within 5 ms of unmodulated operating field.

EXAMPLE 6 When a PICC supporting Type A and Type B is exposed to field activation it shall be able to accept a REQB (or WUPB) within 5 ms of unmodulated operating field. ^{A3}

NOTE 1 In order to detect PICCs requiring 5 ms, PCDs should periodically present an unmodulated field of at least 5,1 ms duration (prior to both Type A and Type B Request commands), but may poll more rapidly because PICCs may react faster.

^{A3} If the PICC supports Type A and Type B, then it shall be locked in the type of the first processed request command (after Answer to Request of one type, the other type is disabled until the PICC enters POWEROFF state).

NOTE 2 PCDs may need to adapt their polling cycles if they want to detect such a PICC in the disabled type. ^{A3}

^{A3} 5.2.2 ^{A3} Influence of Type A commands on PICC Type B operation

A PICC Type B shall either go to IDLE state (be able to accept a REQB) or be able to continue a transaction in progress after receiving any Type A command.

^{A3} 5.2.3 ^{A3} Influence of Type B commands on PICC Type A operation

A PICC Type A shall either go to IDLE state (be able to accept a REQA) or be able to continue a transaction in progress after receiving any Type B command.

^{A3} 5.2.4 ^{A3} Transition to POWER-OFF state

The PICC shall be in the POWER-OFF state no later than 5 ms after the operating field is switched off.

6 Type A – Initialization and anticollision

This section describes the initialization and anticollision sequence applicable for PICCs of Type A.

A PICC or PCD sending RFU bits shall set these bits to the value indicated herein or to (0)b if no value is given. A PICC or PCD receiving RFU bits shall disregard the value of these bits and shall maintain and not change its function, unless explicitly stated otherwise.

^{A2} 6.1 etu

The value of the etu for each bit rate is defined in Table 1. ^{A2}

Table 1 — *etu*

Bit rates	<i>etu</i>
$fc/128$ (~ 106 kbit/s)	$128/fc$ (~ 9,4 μ s)
$fc/64$ (~ 212 kbit/s)	$128/2fc$ (~ 4,7 μ s)
$fc/32$ (~ 424 kbit/s)	$128/4fc$ (~ 2,4 μ s)
$fc/16$ (~ 848 kbit/s)	$128/8fc$ (~ 1,2 μ s)
$fc/8$ (~ 1,70 Mbit/s)	$128/16fc$ (~ 0,59 μ s)
$fc/4$ (~ 3,39 Mbit/s)	$128/32fc$ (~ 0,29 μ s)
$fc/2$ (~ 6,78 Mbit/s)	$128/64fc$ (~ 0,15 μ s)

(A2)

(A6) For bit rates of $3fc/4$, fc , $3fc/2$ and $2fc$ see E.1. (A6)

6.2 Frame format and timing

This section defines the frame format and timing used during communication initialization and anticollision. For bit representation and coding refer to ISO/IEC 14443-2.

Frames shall be transferred in pairs, PCD to PICC followed by PICC to PCD, using the sequence:

- PCD frame:
 - PCD start of communication
 - information and, where required, error detection bits sent by the PCD
 - PCD end of communication
- Frame delay time PCD to PICC
- PICC frame:
 - PICC start of communication
 - information and, where required, error detection bits sent by the PICC
 - PICC end of communication
- Frame delay time PICC to PCD

NOTE The frame delay time (FDT) from PCD to PICC overlaps the PCD end of communication.

6.2.1 Frame delay time

The frame delay time is defined as the time between two frames transmitted in opposite directions.


6.2.1.1 Frame delay time PCD to PICC

This is the time between the end of the last pause transmitted by the PCD and the first modulation edge within the start bit transmitted by the PICC and shall respect the timing defined in Figure 1 and Table 2 where n is an integer value.

(A2) For bit rates of $fc/8$, $fc/4$ and $fc/2$ the FDT starts at the end of the last modulation transmitted by the PCD. (A2)

(A6) For bit rates of $3fc/4$, fc , $3fc/2$ and $2fc$ see E.2.1.1. (A6)

Table 2 defines values for n and FDT depending on the command type and the logic state of the last transmitted data bit in this command.

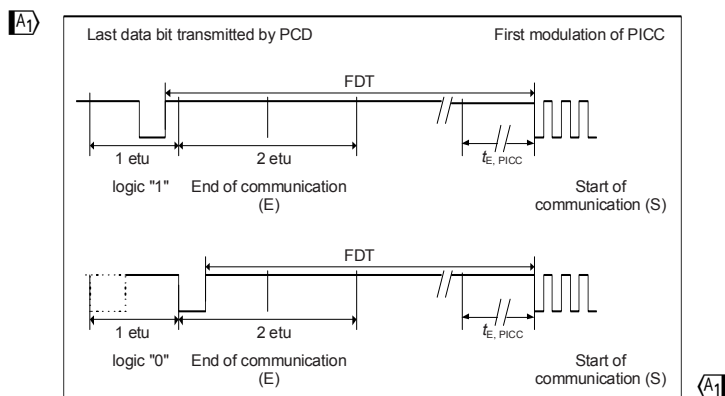

NOTE $t_{E, PICC}$ is specified in Clause 8.

A2 Figure 1 — Frame delay time PCD to PICC for bit rates up to $fc/16$ **A2**

Table 2 — Frame delay time PCD to PICC

Command type		n (integer value)	FDT	
			last bit = (1)b	last bit = (0)b
REQA command WUPA command ANTICOLLISION command SELECT command		9	$(n \times 128 + 84) / fc$ [= 1236 / fc]	$(n \times 128 + 20) / fc$ [= 1172 / fc]
All other commands at bit rates				
PCD to PICC	PICC to PCD			
$fc / 128$	$fc / 128$	≥ 9	$(n \times 128 + 84) / fc$	$(n \times 128 + 20) / fc$
$fc / 64$		≥ 8	$(n \times 128 + 148) / fc$	$(n \times 128 + 116) / fc$
$fc / 32$		≥ 8	$(n \times 128 + 116) / fc$	$(n \times 128 + 100) / fc$
$fc / 16$		≥ 8	$(n \times 128 + 100) / fc$	$(n \times 128 + 92) / fc$
A2 $fc/128$ or $fc/64$ or $fc/32$ or $fc/16$ or $fc/8$ or $fc/4$ or $fc/2$ A6 or $3fc/4$ or fc or $3fc/2$ or $2fc$ A6	$fc/64$ or $fc/32$ or $fc/16$ or $fc/8$ or $fc/4$ or $fc/2$ A6 or $3fc/4$ or fc or $3fc/2$ or $2fc$ A6	Not applicable	$\geq 1116/fc$	$\geq 1116/fc$
For anticollision, all PICCs in the field shall respond in a synchronous way to the commands: REQA, WUPA, ANTICOLLISION and SELECT.				

A2

A2 NOTE If a bit rate higher than $fc/16$ is selected for PCD to PICC communication, then a bit rate of $fc/128$ is not allowed for PICC to PCD communication, see ISO/IEC 14443-4:2008/Amd.2. This restriction is required because the necessary precise FDT is not defined for PCD NRZ coding which is used for bit rates higher than $fc/16$.

The FDT measurement starts at the beginning of the rising edge as specified and illustrated with small circles in the following figures of ISO/IEC 14443-2:

- Figure 3 for bit rate of $fc/128$,
- Figure 6 for bit rates of $fc/64$, $fc/32$ and $fc/16$,
- Figure 12 for bit rates of $fc/8$, $fc/4$ and $fc/2$. **A2**

The FDT measurement starts at the beginning of the rising edge as specified in ISO/IEC 14443-2 and illustrated with small circles in Figure 3 for $fc / 128$ and Figure 6 for other bit rates.

The measured FDT shall be between the value given in Table 2 and the value given in Table 2 + 0,4 μs .

NOTE The PCD should accept a response with a FDT tolerance of $-1 / fc$ to $(+0,4 \mu s + 1 / fc)$.

6.2.1.2 Frame delay time PICC to PCD

This is the time between the last modulation transmitted by the PICC and the first A_2 modulation A_2 transmitted by the PCD and shall be at least $1172 / f_c$.

NOTE To enhance interoperability it is recommended that an additional waiting time of $10 / f_c$ is incorporated in the PCD operation.

6.2.2 Request Guard Time

The Request Guard Time is defined as the minimum time between the start bits of two consecutive REQA or WUPA commands. It has the value $7000 / f_c$.

NOTE To enhance interoperability it is recommended that an additional waiting time of $100 / f_c$ is incorporated in the PCD operation.

6.2.3 Frame formats

The following frame types are defined:

- short frames;
- standard frames;
- bit oriented anticollision frame.

A_2 — PCD standard frames for bit rates of $f_c/8$, $f_c/4$ and $f_c/2$. A_2

6.2.3.1 Short frame

A short frame is used to initiate communication and consists of, in the following order as illustrated in Figure 2:

- start of communication;
- 7 data bits transmitted LSB first (for coding see Table 3);
- end of communication.

No parity bit is added.

	LSB							MSB	
S	b1	b2	b3	b4	b5	b6	b7	E	

Figure 2 — Short frame

6.2.3.2 Standard frame

A_2 6.2.3.2.1 PCD standard frame for bit rates of $f_c/128$, $f_c/64$, $f_c/32$ and $f_c/16$ and PICC standard frame A_2

Standard frames are used for data exchange and consist of, in the following order:

- start of communication;
- $n \times (8 \text{ data bits} + \text{odd parity bit})$, with $n \geq 1$. The LSB of each byte is transmitted first. Each byte is followed by an odd parity bit. The parity bit P is set such that the number of 1s is odd in (b1 to b8, P);
- end of communication.

A_2 The PCD standard frame for bit rates of $f_c/128$, $f_c/64$, $f_c/32$ and $f_c/16$ is illustrated in Figure 3. A_2

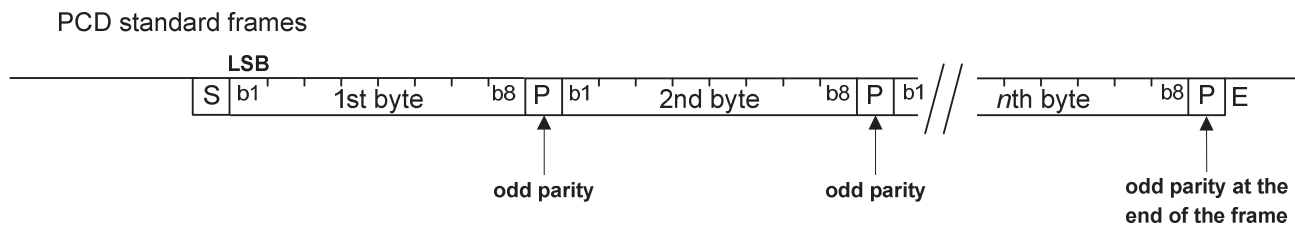


Figure 3 — PCD standard frame for bit rates of $fc/128$, $fc/64$, $fc/32$ and $fc/16$

As an exception the last parity bit of a PICC standard frame shall be inverted if this frame is transmitted with bit rate higher than $fc/128$. PICC standard frames are illustrated in Figure 4.

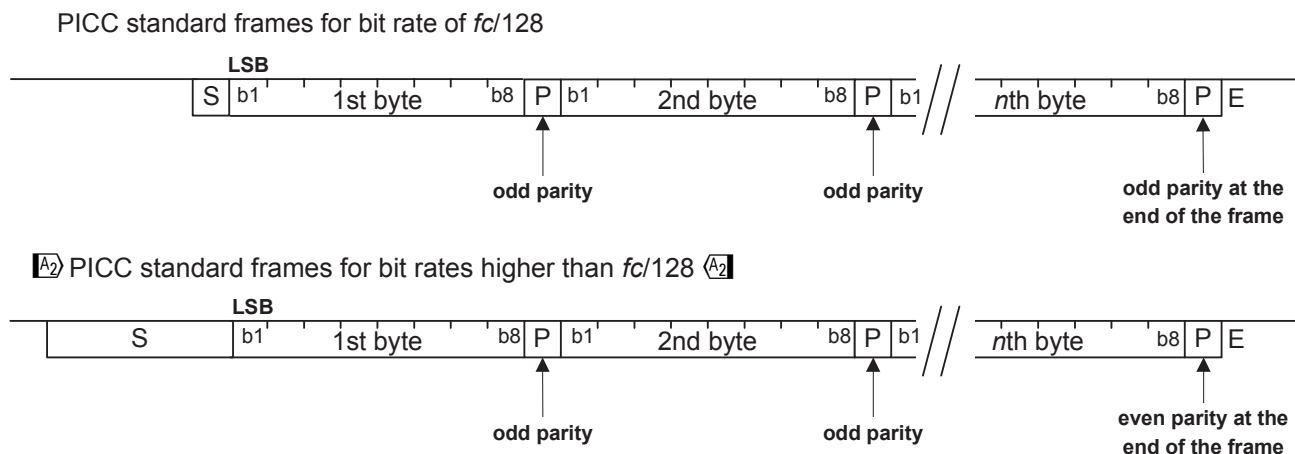


Figure 4 — PICC standard frames for bit rates higher than $fc/128$

6.2.3.2.2 PCD standard frame for bit rates of $fc/8$, $fc/4$ and $fc/2$

The character transmission format and character separation as defined in 7.1.1 and 7.1.2, respectively, shall be used.

The frame format is defined in 7.1.3.

6.2.3.2.3 PCD standard frame for bit rates of $3fc/4$, fc , $3fc/2$ and $2fc$

See E.2.2.1.

6.2.3.3 Bit oriented anticollision frame

The PCD shall be designed to detect a collision that occurs when at least two PICCs simultaneously transmit bit patterns with one or more bit positions in which at least two PICCs transmit complementary values. In this case the bit patterns merge and the carrier is modulated with the subcarrier for the whole (100%) bit duration (see ISO/IEC 14443-2, 8.2.5.1).

Bit oriented anticollision frames shall only be used during bit frame anticollision loops and are standard frames with a length of 7 bytes, split into two parts:

- part 1 for transmission from PCD to PICC;
- part 2 for transmission from PICC to PCD.

For the length of part 1 and part 2, the following rules shall apply:

- rule 1: The sum of data bits shall be 56;
- rule 2: The minimum length of part 1 shall be 16 data bits;
- rule 3: The maximum length of part 1 shall be 48 data bits.

Consequently, the minimum length of part 2 shall be 8 data bit and the maximum length shall be 40 data bits.

Since the split can occur at any bit position within a byte, two cases are defined:

- case FULL BYTE: Split after a complete byte. A parity bit is added after the last data bit of part 1;
- case SPLIT BYTE: Split within a byte. No parity bit is added after the last data bit of part 1.

The Block Check Character (BCC) is calculated as exclusive-or over the 4 previous bytes.

The following examples for case FULL BYTE and case SPLIT BYTE define the bit organization and order of bit transmission, illustrated in Figures 5 and 6.

NOTE These examples include proper values for NVB and BCC.

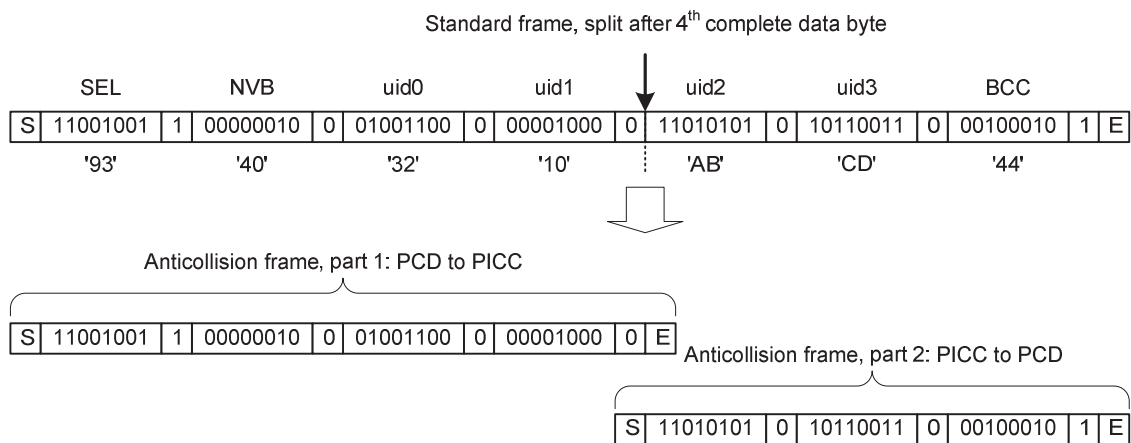


Figure 5 —Bit organization and transmission of bit oriented anticollision frame, case FULL BYTE

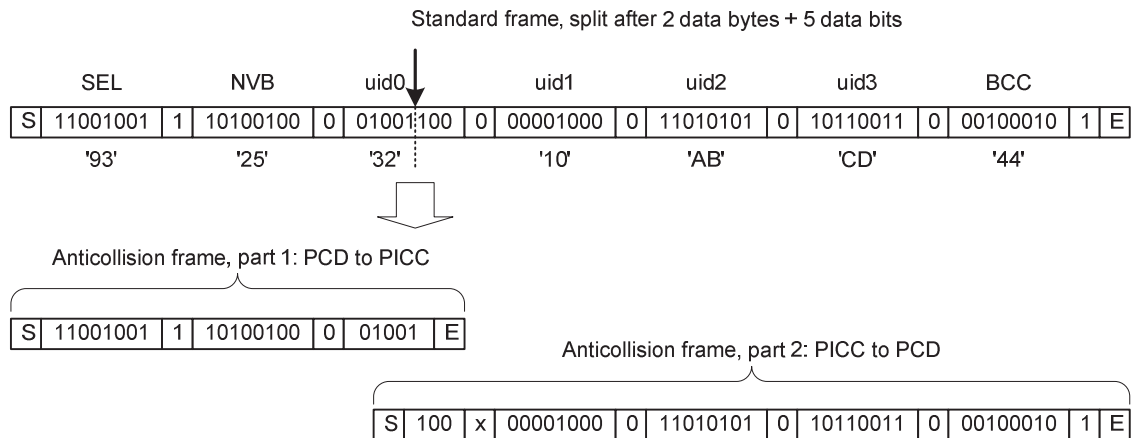


Figure 6 — Bit organization and transmission of bit oriented anticollision frame, case SPLIT BYTE

For a SPLIT BYTE, the first parity bit of part 2 shall be ignored by the PCD.

6.2.4 CRC_A

A frame that includes CRC_A shall only be considered correct if it is received with a valid CRC_A value.

The frame CRC_A is a function of k data bits, which consist of all the data bits in the frame, excluding parity bits, S and E, and the CRC_A itself. Since data is encoded in bytes, the number of bits k is a multiple of 8.

For error checking, the two CRC_A bytes are sent in the standard frame, after the bytes and before the E. The CRC_A is as defined in ISO/IEC 13239, but the initial register content shall be '6363' and the register content shall not be inverted after calculation.

For examples refer to Annex B.

6.3 PICC states

The following sections provide descriptions of the states for a PICC of Type A specific to the anticollision sequence.

The following state diagram in Figure 7 specifies all possible state transitions caused by commands of this part of ISO/IEC 14443. PICCs shall react to valid received frames only. No response shall be sent when transmission errors are detected except for PICCs in ACTIVE or ACTIVE* state.

The following symbols apply for the state diagram shown in Figure 7.

AC	ANTICOLLISION command (matched UID)
nAC	ANTICOLLISION command (not matched UID)
SELECT	SELECT command (matched UID)
nSELECT	SELECT command (not matched UID)
RATS	RATS command, defined in ISO/IEC 14443-4
DESELECT	DESELECT command, defined in ISO/IEC 14443-4
Error	transmission error detected or unexpected frame

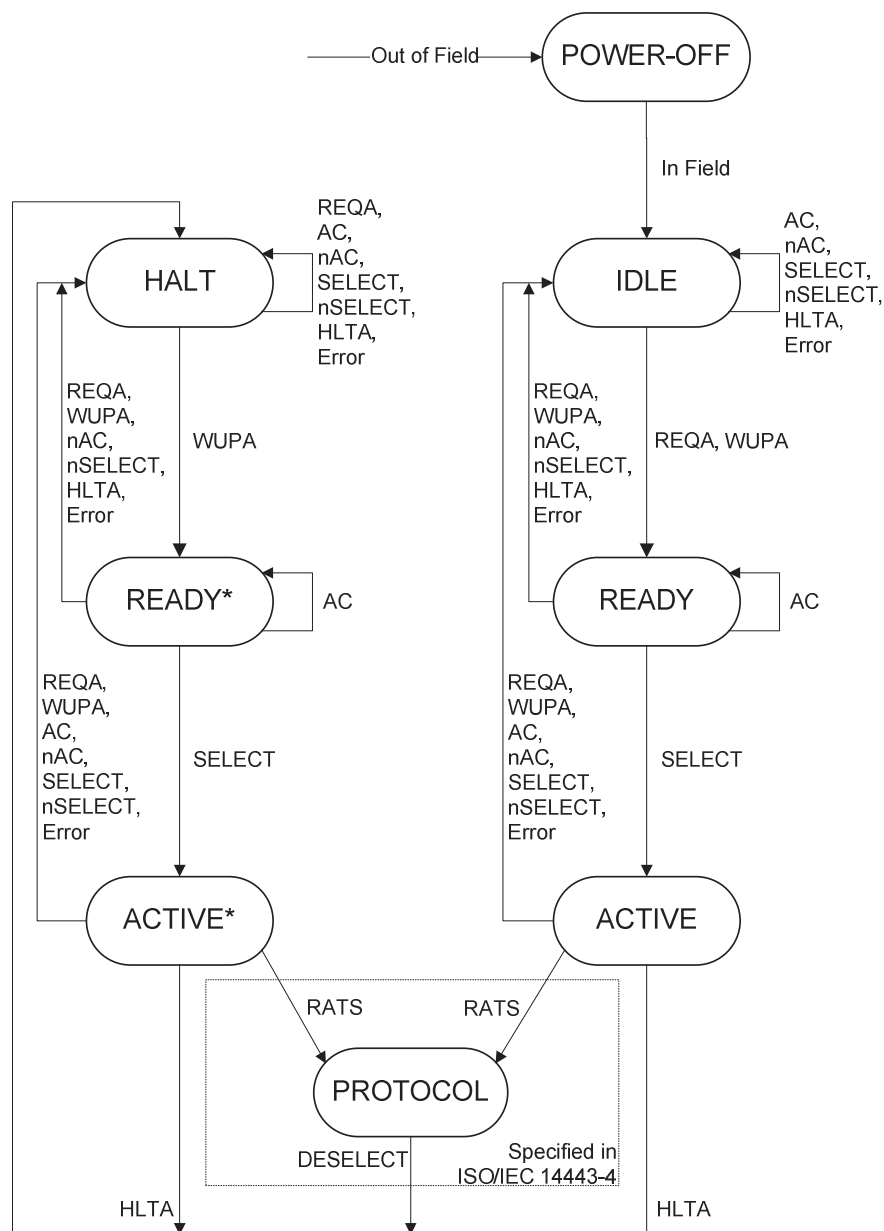


Figure 7 — PICC Type A state diagram

PICCs being compliant with ISO/IEC 14443-3 but not selected with RATS from ISO/IEC 14443-4 may leave the ACTIVE or ACTIVE* state by proprietary commands.

6.3.1 POWER-OFF state

Description:

In the POWER-OFF state, the PICC is not powered by a PCD operating field.

State exit conditions and transitions:

If the PICC is in an energizing magnetic field greater than $H_{\min}$ (see ISO/IEC 14443-2), it shall enter its IDLE state within a delay not greater than defined in Clause 5.

6.3.2 IDLE state

Description:

In the IDLE state, the PICC is powered. It listens for commands and shall recognize REQA and WUPA commands.

State exit conditions and transitions:

The PICC enters the READY state after it has received a valid REQA or WUPA command and transmitted its ATQA.

6.3.3 READY state

Description:

In the READY state, the bit frame anticollision method shall be applied. Cascade levels are handled inside this state to get the complete UID.

State exit conditions and transitions:

The PICC enters the ACTIVE state when it is selected with its complete UID.

6.3.4 ACTIVE state

Description:

If the PICC complies with ISO/IEC 14443-4 then the PICC shall be ready to accept the protocol activation command (RATS) as specified in ISO/IEC 14443-4, else it may proceed with non ISO/IEC 14443-4 protocol.

State exit conditions and transitions:

The PICC enters the HALT state when a valid HLTA command is received.

NOTE In the higher layer protocol, specific commands may be defined to return the PICC to its HALT state.

6.3.5 HALT state

Description:

In the HALT state, the PICC shall respond only to a WUPA command.

State exit conditions and transitions:

The PICC enters the READY* state after it has received a valid WUPA command and transmitted its ATQA.

6.3.6 READY* state

Description:

The READY* state is similar to the READY state. The differences are the transitions specified in Figure 7. The bit frame anticollision method shall be applied. Cascade levels are handled inside this state to get complete UID.

State exit conditions and transitions:

The PICC enters the ACTIVE* state when it is selected with its complete UID.