

FED. SUPPLY CLASS

5325

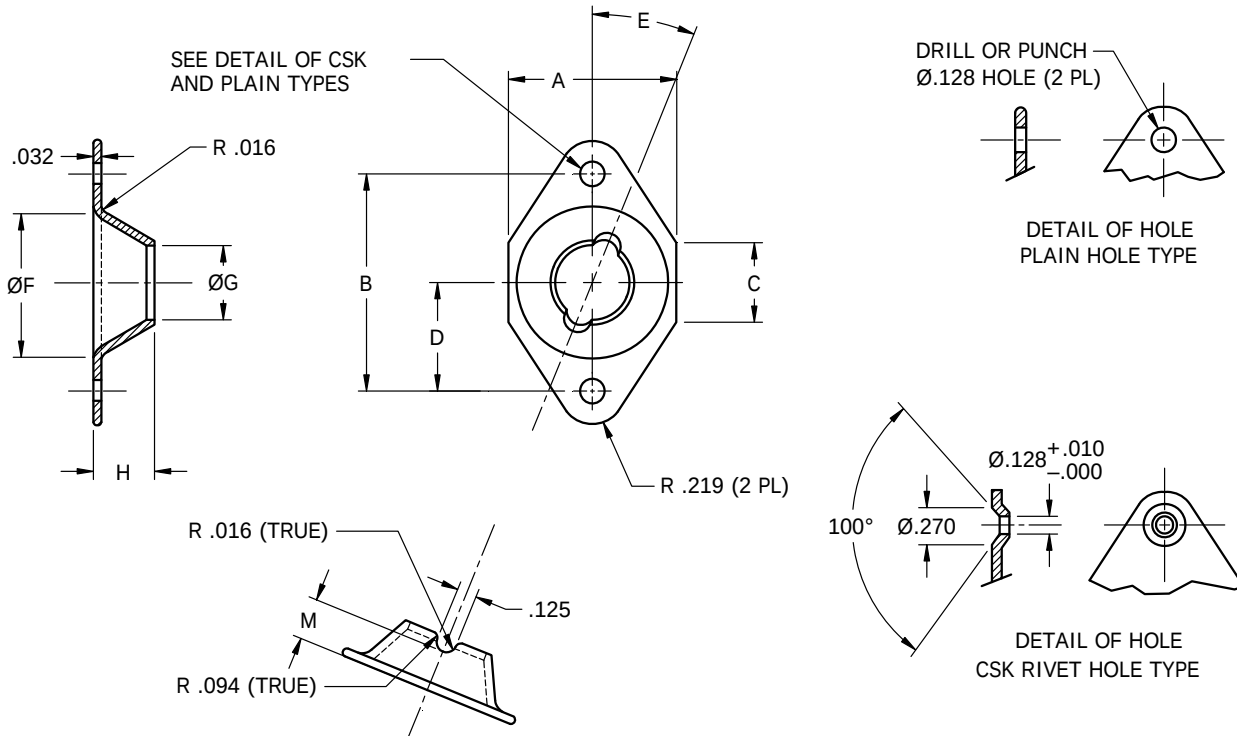


TABLE I – DIMENSIONS

NAS PART NUMBER	A	B	C	D	E	ØF	ØG	H	M
NAS67	1.062	1.375	.562	.687	23°	.875	.562	.375	.187
NAS67-1	.875	1.375	.562 .875	.687	23°	.875	.562	.375	.187
NAS67-2	.750	1.000	.406	.500	23°	.625	.423	.250	.156

MATERIAL:

STEEL, QQ-S-698 DRAWING QUALITY.

FINISH:

CADMIUM PLATING PER AMS-QQ-P-416, TYPE II, CLASS 2. PARTS WITH CLASS 3 PLATING MAY BE FURNISHED FROM SUPPLIER'S STOCK UNTIL 15 SEPTEMBER 1975.

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC.
1000 WILSON BLVD.
ARLINGTON, VA 22209

THIS DRAWING SUPERSEDES ALL ANTECEDENT STANDARD DRAWINGS FOR THE SAME
PRODUCT AND SHALL BECOME EFFECTIVE NO LATER THAN SIX MONTHS FROM THE LAST
REVISION DATE.

REVISION DATE: NOVEMBER 21, 2014

ISSUE DATE: DECEMBER 1941

FORM 12-01	THIRD ANGLE PROJECTION	CUSTODIAN NATIONAL AEROSPACE STANDARDS COMMITTEE	REVISION 6
	PROCUREMENT SPECIFICATION	TITLE GUIDE, FASTENER, LOW FORM, COWL, DZUS TYPE	CLASSIFICATION PART STANDARD
	NONE		NAS67 SHEET 1 OF 2

CODE:

"C" AFTER DASH NUMBER INDICATES CSK RIVET HOLE TYPE.
NO LETTER INDICATES PLAIN RIVET HOLE TYPE.

EXAMPLE OF PART NUMBER:

NAS67-1C = FASTENER GUIDE WITH CSK RIVET HOLES.
NAS67-1 = FASTENER GUIDE WITH PLAIN RIVET HOLES.

NOTES:

- (1) ALL DIMENSIONS IN INCHES AND APPLY AFTER FINISH UNLESS OTHERWISE SPECIFIED.
- (2) TOLERANCES UNLESS OTHERWISE SPECIFIED: DECIMALS ± 0.010 , ANGLES $\pm 1/2^\circ$.
- (3) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
- (4) UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.
- ⑥ (5) UNLESS OTHERWISE SPECIFIED HEREIN, REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF MANUFACTURE. HOWEVER, EXISTING MATERIAL INVENTORY CERTIFIED TO A PREVIOUS REVISION OF THE APPLICABLE MATERIAL SPECIFICATION(S) IS ACCEPTABLE FOR USE UNTIL DEPLETION.
- (6) DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.

REVISION

6

NAS67
SHEET 2



Documents
Document Sharing Hub