

FED. SUPPLY CLASS

5320

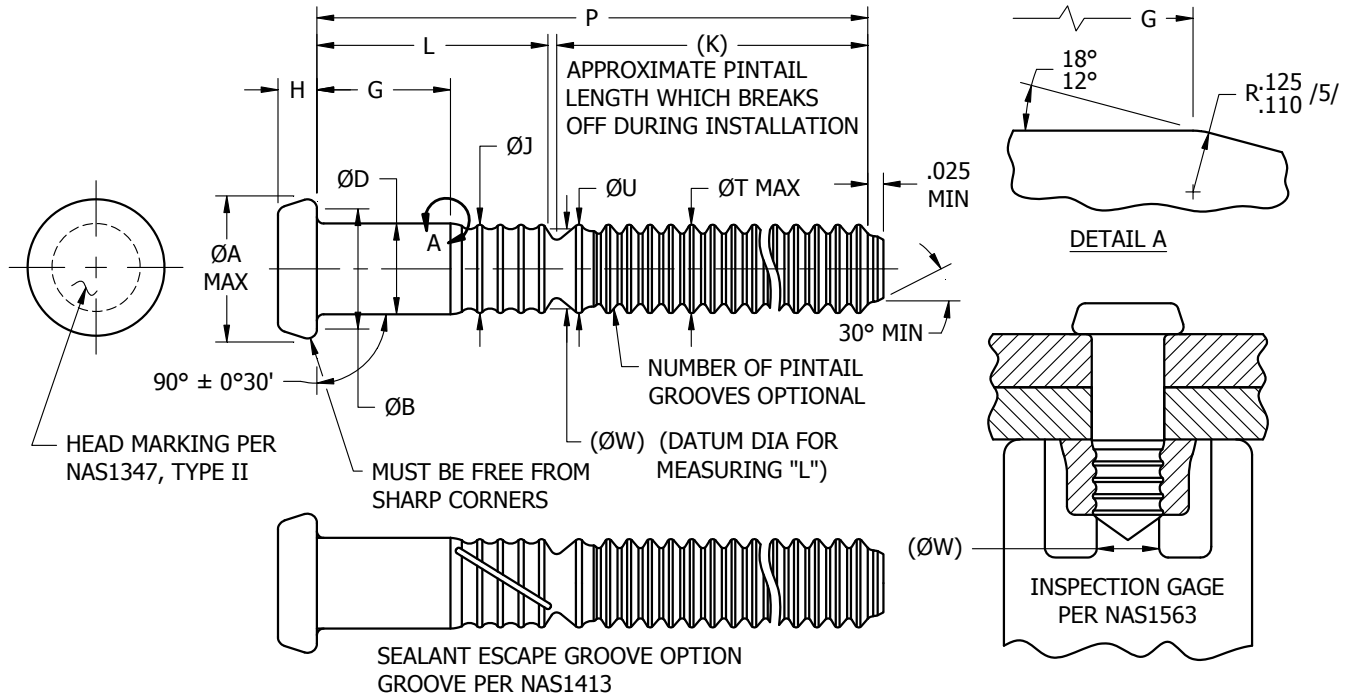


TABLE I – DIMENSIONS

APPROVED CALLOUT	NOM DIA	ØA	ØB MIN	ØD	ØJ	H	(K) SEE TABLE II	R RAD	ØT MAX	U	(ØW)	Z /8/
NAS6914-06-()	.1900	.302 .288	.260	.1895 .1890	.185 .177	.065 .056	P – L	.025 .015	.183	.185 .169	.164	4
NAS6914-08-()	.2500	.377 .363	.309	.2495 .2490	.242 .235	.081 .074		.025 .015	.243	.242 .221	.224	4
NAS6914-10-()	.3125	.471 .455	.374	.3120 .3115	.305 .294	.100 .094		.030 .020	.299	.305 .276	.268	5
NAS6914-12-()	.3750	.565 .549	.436	.3745 .3740	.368 .361	.120 .113		.030 .020	.359	.368 .336	.339	5

MATERIAL:

PH13-8Mo (UNS S13800) PER AMS5629.

HEAT TREATMENT:

SOLUTION AND PRECIPITATION HEAT TREATED TO CONDITION H1000.
MINIMUM SHEAR STRENGTH 125 KSI.

② COMPLETELY REVISED

THIRD ANGLE PROJECTION	CUSTODIAN NATIONAL AEROSPACE STANDARDS COMMITTEE	REVISION 2
PROCUREMENT SPECIFICATION NAS1413	TITLE PIN, SWAGE LOCKING, PH13-8Mo CRES, PROTRUDING HEAD, SHEAR, PULL-TYPE	CLASSIFICATION PART STANDARD
		NAS6914 SHEET 1 OF 3

FINISH:

PASSIVATE IN ACCORDANCE WITH AMS2700, METHOD 1, CLASS 4.

LUBRICATION:

DRY FILM LUBRICANT PER MIL-PRF-46010 AS5272, TYPE I AND CETYL ALCOHOL PER MIL-L-87132 AS87132.

CODE:

FIRST DASH NUMBER DESIGNATES NOMINAL DIAMETER IN .03125 INCREMENTS.
SECOND DASH NUMBER DESIGNATES NOMINAL GRIP LENGTH IN .062 INCREMENTS.
ADD "H" AFTER BASIC NUMBER WHEN SEALANT ESCAPE GROOVE IS REQUIRED.

EXAMPLES OF PART NUMBER:

NAS6914-06-08 = Ø.1900, PH13-8Mo CRES, PROTRUDING HEAD, PULL-TYPE, .500 GRIP.
NAS6914H06-08 = Ø.1900, PH13-8Mo CRES, PROTRUDING HEAD, SEALANT ESCAPE GROOVE, PULL-TYPE, .500 GRIP.

NOTES:

- (1) DIMENSIONS IN INCHES AND APPLY AFTER FINISH AND PRIOR TO THE APPLICATION OF LUBRICATION UNLESS OTHERWISE SPECIFIED.
- (2) FOR RECOMMENDED HOLE SIZE, SEE NAS618.
- (3) FOR COLLAR SELECTION, MINIMUM TENSILE STRENGTH, AND INSPECTION GAGE, SEE NAS1080.
- (4) UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.
- /5/ RADIUS TO BE TANGENT TO SHANK AND 18°/12° ANGLE.
- (6) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
- (7) UNLESS OTHERWISE SPECIFIED HEREIN, REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF MANUFACTURE. HOWEVER, EXISTING MATERIAL INVENTORY CERTIFIED TO A PREVIOUS REVISION OF THE APPLICABLE MATERIAL SPECIFICATION(S) IS ACCEPTABLE FOR USE UNTIL DEPLETION.
- /8/ NUMBER OF LOCKING GROOVES.
- (9) DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.

② COMPLETELY REVISED

REVISION

2

NAS6914
SHEET 2



Document Sharing Hub

USE OF OR RELIANCE UPON THIS DOCUMENT OR ANY NATIONAL AEROSPACE STANDARD IS ENTIRELY VOLUNTARY. AIA DOES NOT QUALIFY SUPPLIERS OR CERTIFY

Copyright Aerospace Industries Association of America Inc. MS PRODUCED UNDER NATIONAL AEROSPACE STANDARD: AIA MAKES NO REPRESENTATION OR CLAIM RESPECTING (1) THE SUITABILITY OF
Provided by IHS under license with AIA/NAS. ANY PARTIAL OR APPLICATION OR (2) THE EXISTENCE OF OR APPLIC Licensee= www.sepana.ir/5991803002, User=sam, albert
No reproduction or networking permitted without license from IHS Not for Resale, 01/04/2016 08:19:28 MST TRADEMARKS RIGHTS.

Full document details: AIA NAS6914 2013