

NEDERLANDS ELEKTROTECHNISCH
COMITE
POSTBOX 5059
2600 GB DELFT

This specification is also available from
Nederlandse Philips Bedrijven B.V.

CECC 90 104-095



ISSUE 2

Page 1

Total number of pages: 14

ELECTRONIC COMPONENTS OF ASSESSED QUALITY IN ACCORDANCE WITH:

GS: CECC 90 000 Issue 3.
SS: CECC 90 100 Issue 3.
FS: CECC 90 104 Issue 2.

Detail Spec: NL-CECC 90 104-095

Issue: 2

Issued: December 1989

OUTLINE AND DIMENSIONS:

IEC 191-2 | 050 G09/A76 G1

TERMINAL CONNECTIONS:

See item 1.3 of this specification

DETAIL SPECIFICATION FOR DIGITAL INTEGRATED CIRCUITS IN ACCORDANCE WITH FS 90 104

HEC/HEF40162B

4-bit synchronous decade counter
with synchronous reset

TYPICAL CONSTRUCTION:

Silicon monolithic local oxidation
CMOS integrated circuit, cavity/non-
cavity packages.

CAUTION: STATIC SENSITIVE DEVICE

ASSESSMENT LEVELS: P, Y, L

REMARKS

Information about manufacturers who have components qualified to this detail specification is
available in the current CECC 00 200: Qualified Products List.



Documents

Document Sharing Hub

Nederlands Elektrotechnisch Comité Postbox 5059 2600 GB Delft	Page 2	CECC 90 104-095
This specification is also available from Nederlandse Philips Bedrijven B.V.	of 14	ISSUE 2

1 TYPE DESCRIPTION

1.1 Function

The HEC/HEF40162B are fully synchronous edge-triggered 4-bit decade counters with a clock input (CP), four synchronous parallel data inputs (P_0 to P_3), four synchronous mode control inputs (parallel enable ($\overline{PE}$), count enable parallel (CEP), count enable trickle (CET) and synchronous reset ($\overline{SR}$)), buffered outputs from all four bit positions (O_0 to O_3) and a terminal count output (TC).

Operation is synchronous and occurs on the LOW to HIGH transition of CP. When $\overline{PE}$ is LOW, the next LOW to HIGH transition of CP loads data into the counter from P_0 to P_3 . When $\overline{PE}$ is HIGH, the next LOW to HIGH transition of CP advances the counter to its next state only if both CEP and CET are HIGH; otherwise no change occurs in the state of the counter. TC is HIGH when the state of the counter is 9 ($O_0 = O_3 = \text{HIGH}$, $O_1 = O_2 = \text{LOW}$) and when CET is HIGH. A LOW on $\overline{SR}$ sets all outputs (O_0 to O_3 and TC) LOW on the next LOW to HIGH transition of CP, independent of the state of all other synchronous mode control inputs (CEP, CET and $\overline{PE}$). Multistage synchronous counting is possible without additional components by using a carry look-ahead counting technique; in this case, TC is used to enable successive cascaded stages. CEP, CET, $\overline{PE}$ and $\overline{SR}$ must be stable only during the set-up time before the LOW to HIGH transition of CP.

1.1.1 Synchronous mode selection table

$\overline{SR}$	$\overline{PE}$	CEP	CET	mode
H	L	X	X	preset
H	H	L	X	no change
H	H	X	L	no change
H	H	H	H	count
L	X	X	X	reset

H = HIGH state (the more positive voltage)

L = LOW state (the less positive voltage)

X = state is immaterial

1.1.2 Terminal count generation table

CET	$(O_0 \cdot \overline{O}_1 \cdot \overline{O}_2 \cdot O_3)$	TC
L	L	L
L	H	L
H	L	L
H	H	H

$$TC = CET \cdot O_0 \cdot \overline{O}_1 \cdot \overline{O}_2 \cdot O_3$$

Nederlands Elektrotechnisch Comité Postbox 5059 2600 GB Delft This specification is also available from Nederlandse Philips Bedrijven B.V.	Page 3 of 14	CECC 90 104-095 ISSUE 2
--	---------------------	--------------------------------

1.1.3 State diagram

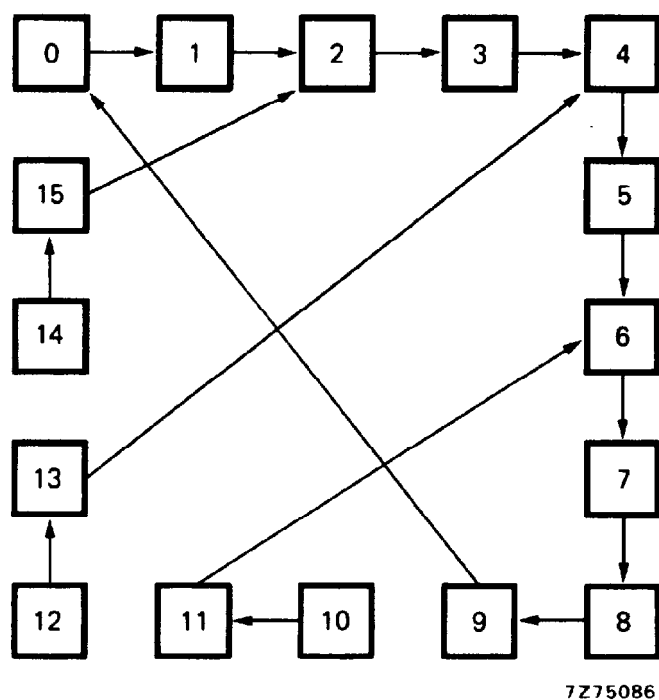


Fig. 1 State diagram.

Nederlands Elektrotechnisch Comité Postbox 5059 2600 GB Delft This specification is also available from Nederlandse Philips Bedrijven B.V.	Page 4 of 14	CECC 90 104-095 ISSUE 2
--	-------------------------	------------------------------------

1.1.4 Functional diagram

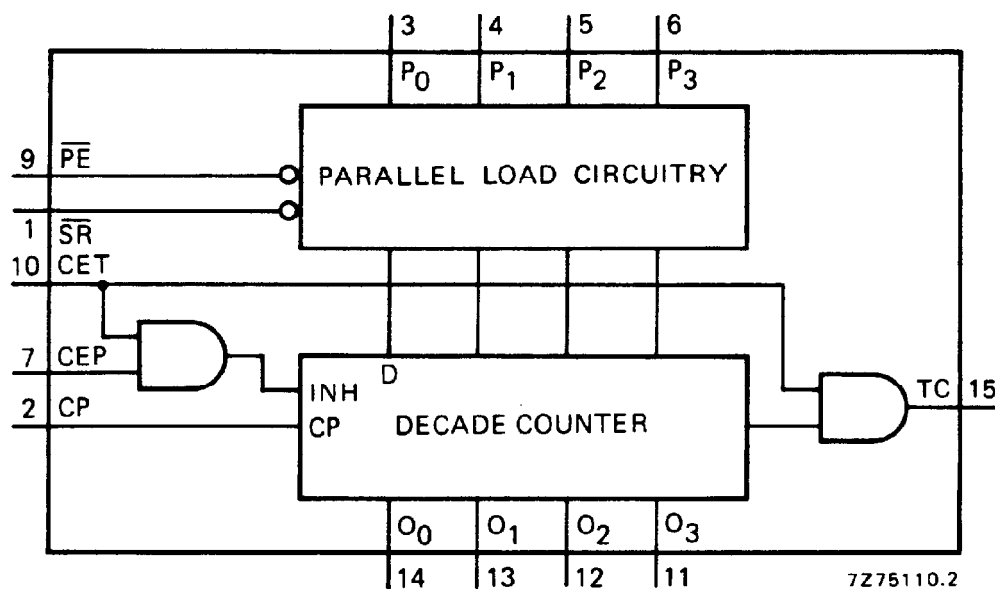


Fig. 2 Functional diagram.

1.1.5 Pinning information

$\overline{PE}$	parallel enable input
P_0 to P_3	parallel data inputs
CEP	count enable parallel input
CET	count enable trickle input
CP	clock input (LOW to HIGH, edge-triggered)
$\overline{SR}$	synchronous reset input (active LOW)
O_0 to O_3	parallel outputs
TC	terminal count output

Nederlands Elektrotechnisch Comité
Postbox 5059
2600 GB Delft

This specification is also available from
Nederlandse Philips Bedrijven B.V.

Page 5

CECC 90 104-095

of 14

ISSUE 2

1.2 Logic diagram

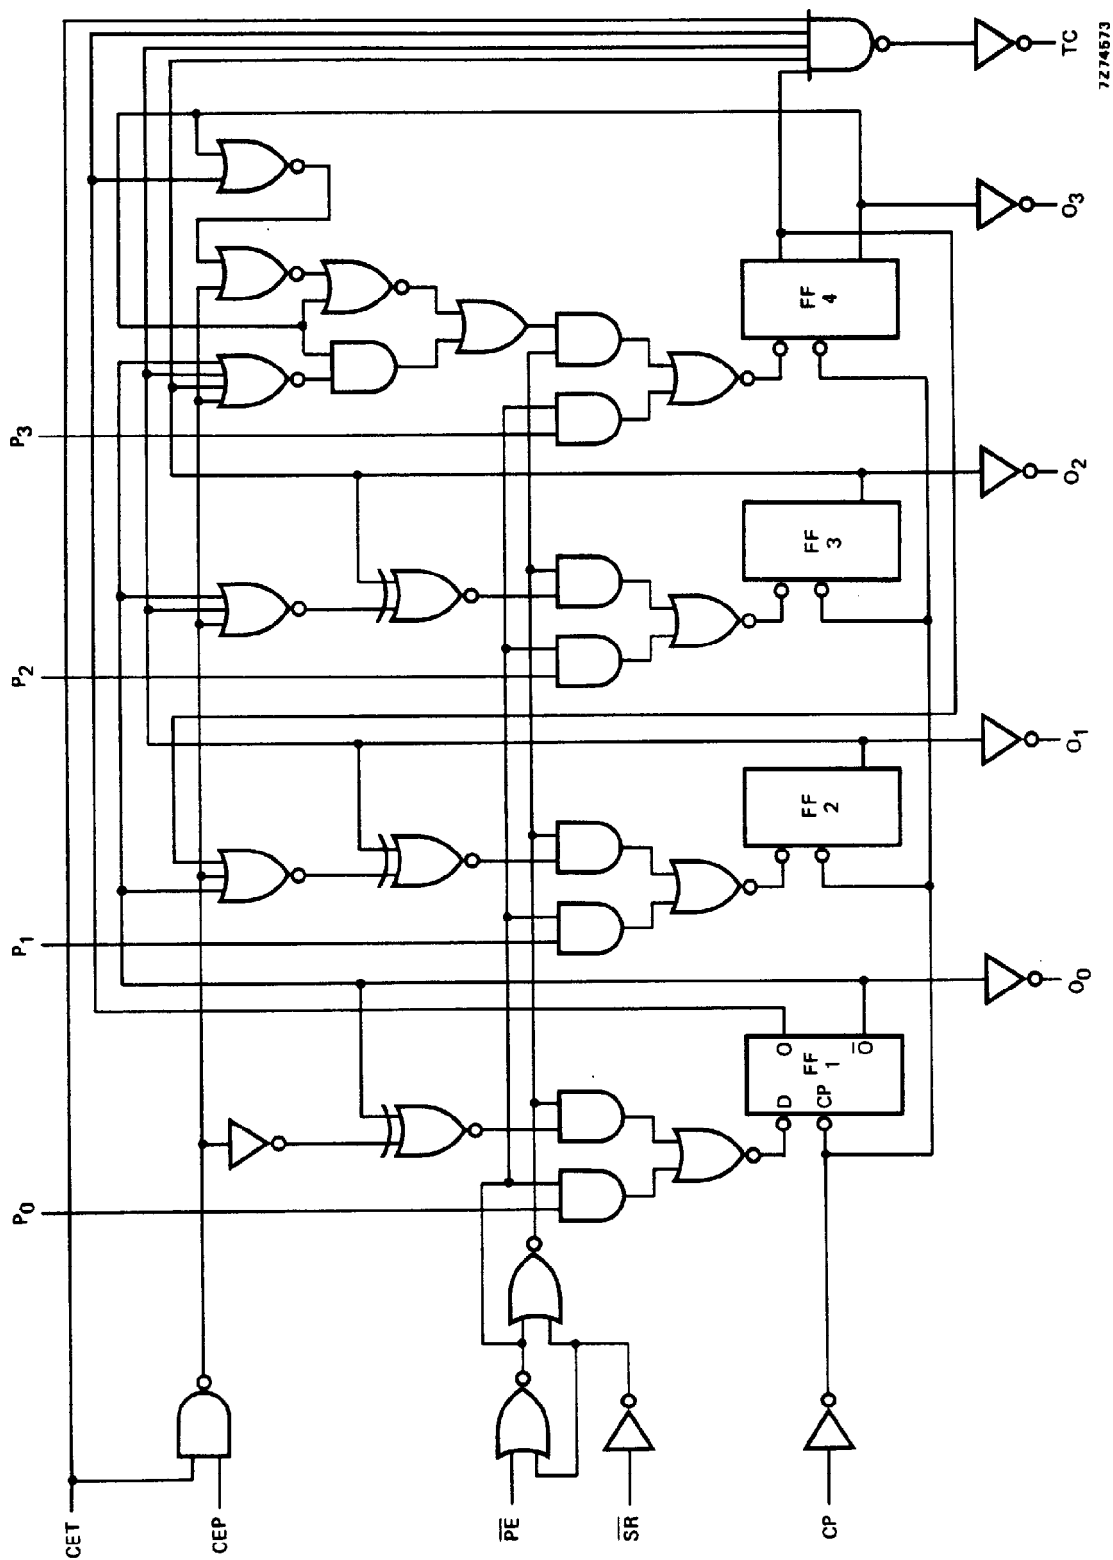


Fig. 3 Logic diagram.