


FED. SUPPLY CLASS

5110

NAS897



AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC.
1000 WILSON BLVD.
ARLINGTON, VA 22209

THIS DRAWING SUPERSEDES ALL ANTECEDENT STANDARD DRAWINGS FOR THE SAME
PRODUCT AND SHALL BECOME EFFECTIVE NO LATER THAN SIX MONTHS FROM THE LAST
REVISION DATE.

ISSUE DATE: AUGUST 1985 REVISION DATE: JUNE 29, 2012


THIRD ANGLE PROJECTION 	CUSTODIAN ENGINEERING MANAGEMENT COMMITTEE	REVISION 2
PROCUREMENT SPECIFICATION NONE	TITLE REAMERS, CHUCKING, RIGHT-HAND CUT, 0.0938 THROUGH 1.5000 INCH	CLASSIFICATION PART STANDARD NAS897 SHEET 1 OF 23

TABLE OF CONTENTS

PURPOSE.....	3
SCOPE.....	3
ORDERING EXAMPLE.....	3
REAMER NOMENCLATURE	4
TYPE "A" HSS CHUCKING REAMER.....	5
TYPE "B" COBALT HSS CHUCKING REAMER	6
TYPE "C" CARBIDE TIPPED CHUCKING REAMER	7
OPTIONAL SHANK CONFIGURATIONS	8
Option 2: Tri-Flat	8
Option 3: Quick-Change	8
Option 4: Reduced Shank	8
Option 5: Reduced Shank with Tri-Flats	8
Option 6: Tang Shank	9
GLOSSARY OF TERMS	20

List of Tables

TABLE I – NAS897 Reamer Types.....	3
TABLE II – Type "A" Reamer.....	5
TABLE III – Type "B" Reamer	6
TABLE IV – Type "C" Reamer.....	7
TABLE V – Carbide tip lengths for type "C" reamers.....	7
TABLE VI – Tri-flat dimensions	8
TABLE VII – Tang dimensions	9
TABLE VIII – Quick change adapter torque requirements.....	10
TABLE IX – Basic Reamer Dimensions.....	12
TABLE X – Element Dimensions and Tolerances for Reamers	16
TABLE XI – Material Groups	18
TABLE XII – Application Summary for all Reamer Types.....	19

PURPOSE

This document provides the aerospace industry with a uniform standard for the procurement of chucking reamers. Utilization of the specified reamers in accordance with recommended applications will ensure the performance of a wide variety of reaming tasks with optimum quality, reliability, and economy.

SCOPE

Included in the standard are reamer design parameters, nomenclature, reamer geometry, suggested areas of application, acceptable materials, hardness requirements, and a Glossary of Terms defining reamer terminology.

TABLE I – NAS897 Reamer Types

Standard Types
Type "A" HSS Chucking Reamer
Type "B" Cobalt HSS Chucking Reamer
Type "CS" Carbide Tipped Chucking Reamer (Short Tip)
Type "CL" Carbide Tipped Chucking Reamer (Long Tip)

See individual types (sheets 5 through 7) for specific applications.

ORDERING EXAMPLE

Standard:	NAS 897 - B - 0.3750 - S
Standard with Options:	NAS 897 - B - 0.3750 - S - 0.315 - 2 - 4.00 - 1.50 - 0.300
Specification:	
Reamer Type:	
Diameter:	
Helix Type:	
Pilot Diameter:	
Shank Type:	
Overall Length:	
Flute Length:	
Pilot Length:	

Note: The Standard with Options example (using the options list below) is an NAS897 Type B, 3/8 inch reamer with pilot. If an option is not chosen, add a zero in that place within the part number.

Reamer Type

- A - HSS (Type "A")
- B - Cobalt HSS (Type "B")
- CL - Long Carbide Tipped (Type "C")
- CS - Short Carbide Tipped (Type "C")

Helix Type

- R - Right-Hand
- L - Left-Hand
- S - Straight Flute

Shank Options

- 1 – Standard Straight
- 2 – Straight with Tri-Flats
- 3 – Quick-Change
- 4 – Reduced-Shank
- 5 – Reduced-Shank with Tri-Flats
- 6 – Tang Shank

REVISION

2

NAS897
SHEET 3









Document Sharing Hub

USE OF OR RELIANCE UPON THIS DOCUMENT OR ANY NATIONAL AEROSPACE STANDARD IS ENTIRELY VOLUNTARY. AIA DOES NOT QUALIFY SUPPLIERS OR CERTIFY

Copyright Aerospace Industries Association of America, Inc. MS PRODUCED UNDER NATIONAL AEROSPACE STANDARD: AIA MAKES NO REPRESENTATION OR CLAIM RESPECTING (1) THE SUITABILITY OF
Provided by IHS under license with AIA/NAS Licensee= www.sepana.ir/5991803002, User=sam, albert
No reproduction or networking permitted without license from IHS Not for Resale, 01/04/2016 11:26:04 MST TRADEMARKS RIGHTS.

Full document details: AIA NAS897 2012

REAMER NOMENCLATURE

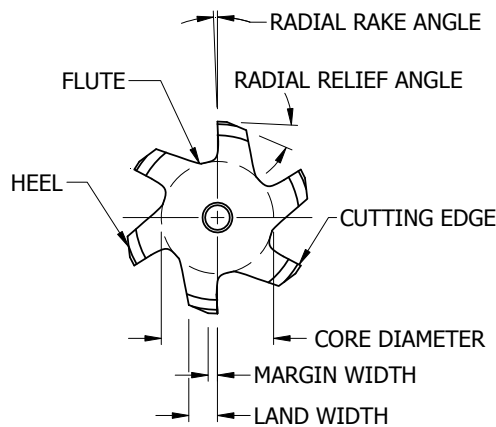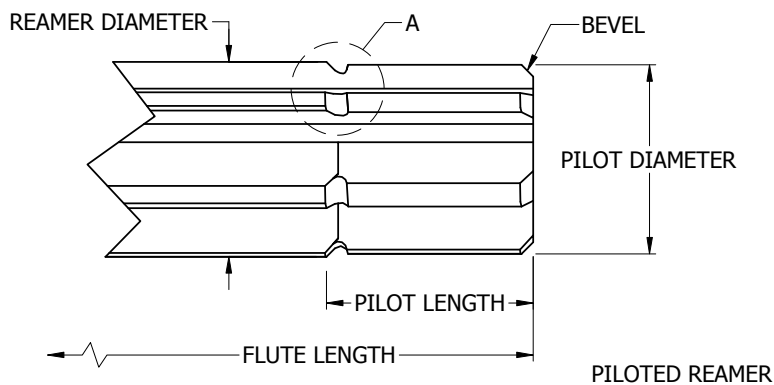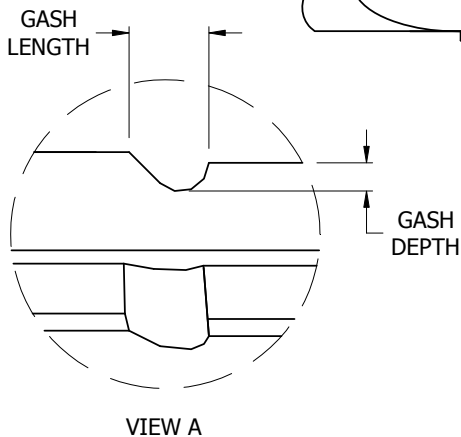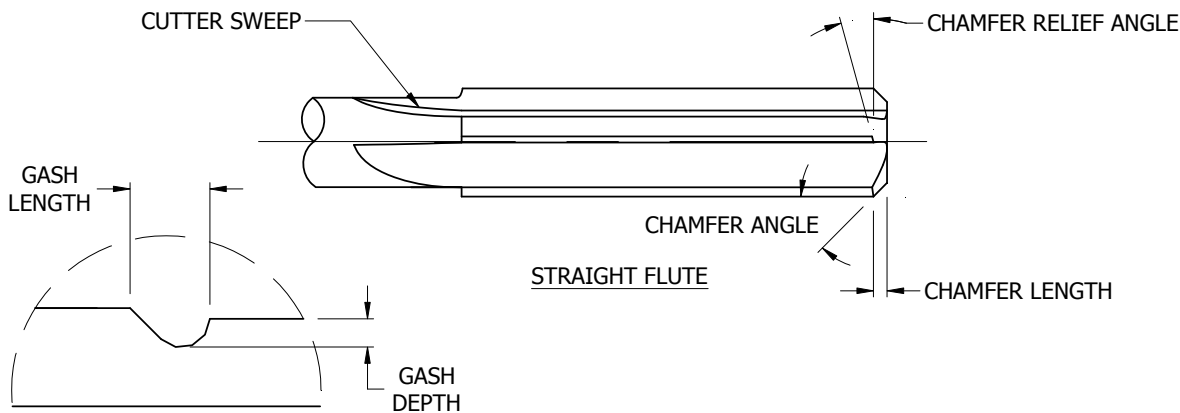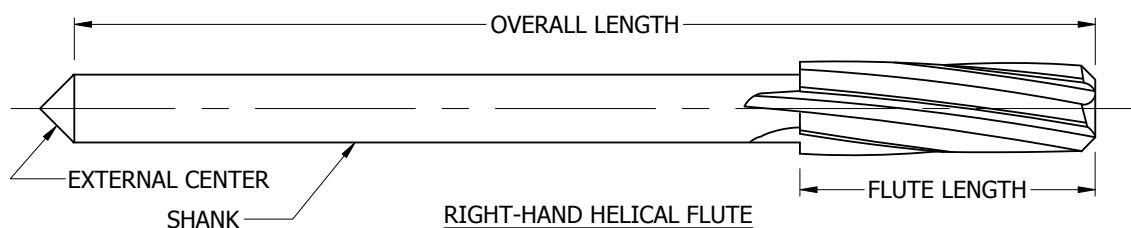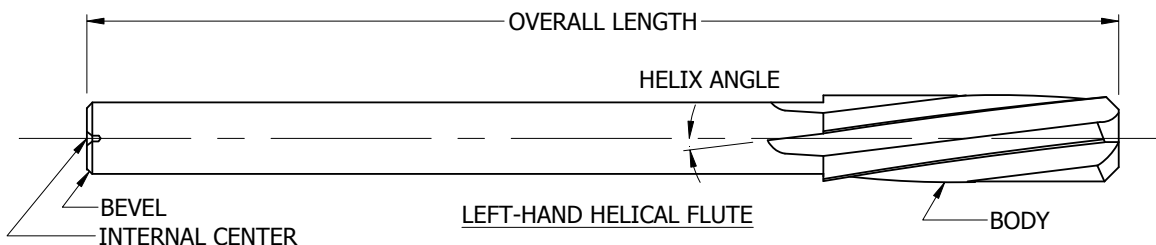

PILOTED REAMER

REVISION

2

NAS897
SHEET 4



Document Sharing Hub

USE OF OR RELIANCE UPON THIS DOCUMENT OR ANY NATIONAL AEROSPACE STANDARD IS ENTIRELY VOLUNTARY. AIA DOES NOT QUALIFY SUPPLIERS OR CERTIFY

Copyright Aerospace Industries Association of America Inc. MS PRODUCED UNDER NATIONAL AEROSPACE STANDARD: AIA MAKES NO REPRESENTATION OR WARRANTY AS TO THE SUITABILITY OF
Provided by IHS under license with AIA/NAS Licensee: www.sepana.ir/5991803002, User: sam, albert
No reproduction or networking permitted without license from IHS Not for Resale, 01/04/2016 11:26:04 MST TRADEMARK RIGHTS.


AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC.
1000 WILSON BLVD.
ARLINGTON, VA 22209

THIS DRAWING SUPERSEDES ALL ANTECEDENT STANDARD DRAWINGS FOR THE SAME
PRODUCT AND SHALL BECOME EFFECTIVE NO LATER THAN SIX MONTHS FROM THE LAST
REVISION DATE.

FORM 09-01

Full document details: AIA NAS897 2012

TYPE "A"
HSS CHUCKING REAMER
STRAIGHT OR HELICAL FLUTES
DIAMETERS 0.0938 – 1.5000 INCHES




Type "A" available with pilot see sheet 3 "Standard with Options" for ordering. Piloted type "A" replaced type "E".

TABLE II – Type "A" Reamer

Application	Material groups: 11, 21, 31.
Reamer Material	M-2 or M-7 HSS
Hardness	Flute length: 63 – 66 HRC From cutter sweep to within 1-1/2 inch from end of shank: 45 – 66 HRC 1 inch from end of shank: 30 HRC minimum
Surface Treatment	Bright finish standard. Other customer specified finish optional. Tools to have adequate protection from corrosion.
Identification	Manufacturer's symbol, reamer type, manufacturing lot number, and size to be marked with laser marking or steel stamping. Identification shall be permanent and legible (without magnification) on the tool shank for sizes 1/8 inch and larger. Sizes less than 1/8 inch to be marked on shank or packaging.

See sheets 12-15 for reamer sizes, overall and flute lengths, shank diameter, and number of flutes. See sheets 16-17 for element dimensions and tolerances.

TYPE "B"
COBALT HSS CHUCKING REAMER
STRAIGHT OR HELICAL FLUTES
DIAMETERS 0.0938 – 1.5000 INCHES



Type "B" available with pilot see sheet 3 "Standard with options" for ordering. Piloted type "B" replaced type "F".

TABLE III – Type "B" Reamer

Application	Material groups: 11, 21 (any condition), 31 (any condition), 43 < HRC 30, 61 (any condition), 62.
Reamer Material	M33 or M42 cobalt HSS
Hardness	Flute length: 65 - 68 HRC From cutter sweep to within 1-1/2 inch from end of shank: 45 – 68 HRC 1 inch from end of shank: 30 HRC minimum
Surface Treatment	Bright finish standard. Other customer specified finish optional. Tools to have adequate protection from corrosion.
Identification	Manufacturer's symbol, reamer type, manufacturing lot number, and size to be marked with laser marking or steel stamping. Identification shall be permanent and legible (without magnification) on the tool shank for sizes 1/8 inch and larger. Sizes less than 1/8 inch to be marked on shank or packaging.

See sheets 12-15 for reamer sizes, overall and flute lengths, shank diameter, and number of flutes. See sheets 16-17 for element dimensions and tolerances.

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC.
1000 WILSON BLVD.
ARLINGTON, VA 22209

THIS DRAWING SUPERSEDES ALL ANTECEDENT STANDARD DRAWINGS FOR THE SAME
PRODUCT AND SHALL BECOME EFFECTIVE NO LATER THAN SIX MONTHS FROM THE LAST
REVISION DATE.

FORM 09-01

REVISION

2

NAS897
SHEET 6




Document Sharing Hub

USE OF OR RELIANCE UPON THIS DOCUMENT OR ANY NATIONAL AEROSPACE STANDARD IS ENTIRELY VOLUNTARY. AIA DOES NOT QUALIFY SUPPLIERS OR CERTIFY

Copyright Aerospace Industries Association of America Inc. MS PRODUCED UNDER NATIONAL AEROSPACE STANDARD: AIA MAKES NO REPRESENTATION OR CLAIM RESPECTING (1) THE SUITABILITY OF
Provided by IHS under license with AIA/NAS Licensee= www.sepana.ir/5991803002, User=sam, albert
No reproduction or networking permitted without license from IHS
Not for Resale, 01/04/2016 11:26:04 MST

Full document details: AIA NAS897 2012

TYPE "C"
CARBIDE TIPPED CHUCKING REAMER
STRAIGHT OR HELICAL FLUTES
DIAMETERS 0.2500 – 1.5000 INCHES

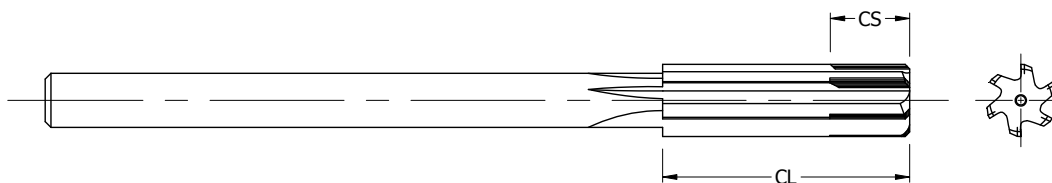

Type "C" available with pilot for long tipped only. See sheet 3 "Standard with Options" for ordering.

TABLE IV – Type "C" Reamer

Application	Material groups: 11, 21 (any condition), 31 (any condition), 41, 43 < HRC 30, 61 (any condition), 62, 91.
Reamer Material	Reamer body: AISI 4000 or 8000 series or any HSS Carbide tip material: Tungsten carbide: 90 – 94% Cobalt = 6 - 10% Hardness = 91 – 93 HRA Porosity = A02 B00 C00 (per ASTM B276) No eta phase Less than 1% other carbides
Hardness	Body: 38 – 66 HRC Shank: For reamers up to 1/2 inch, 38 - 66 HRC to within 1-1/2 inch of end, last 1/2 inch 30 – 45 HRC
Surface Treatment	Bright finish standard. Other customers specified finish optional. Tools to have adequate protection from corrosion.
Identification	Manufacturer's symbol, reamer type, manufacturing lot number, and size to be marked with laser marking or steel stamping. Identification shall be permanent and legible (without magnification) on the tool shank.

TABLE V – Carbide tip lengths for type "C" reamers

REAMER DIAMETER	CARBIDE SHORT TIPPED "CS"	CARBIDE LONG TIPPED "CL"
0.2500 - 0.3150	0.500	FULL FLUTE LENGTH
0.3151 - 0.7220	0.625	FULL FLUTE LENGTH
0.7221 - 1.0660	0.750	FULL FLUTE LENGTH
1.0661 - 1.5000	0.875	FULL FLUTE LENGTH

REVISION

2

NAS897
SHEET 7



Document Sharing Hub

USE OF OR RELIANCE UPON THIS DOCUMENT OR ANY NATIONAL AEROSPACE STANDARD IS ENTIRELY VOLUNTARY. AIA DOES NOT QUALIFY SUPPLIERS OR CERTIFY

Copyright Aerospace Industries Association of America Inc. MS PRODUCED UNDER NATIONAL AEROSPACE STANDARD: AIA MAKES NO REPRESENTATION OR CLAIM RESPECTING (1) THE SUITABILITY OF
Provided by IHS under license with AIA/NAS Licensee= www.sepana.ir/5991803002, User=sam, albert
No reproduction or networking permitted without license from IHS
Not for Resale, 01/04/2016 11:26:04 MST TRADEMARKS RIGHTS.

Full document details: AIA NAS897 2012