

DIN EN 61158-3-3

ICS 35.100.20; 35.160; 35.240.50

Ersatzvermerk
siehe unten**Industrielle Kommunikationsnetze –
Feldbusse –****Teil 3-3: Dienstfestlegungen des Data Link Layer (Sicherheitsschicht) –
Typ 3-Elemente (IEC 61158-3-3:2007);
Englische Fassung EN 61158-3-3:2008, nur auf CD-ROM**Industrial communication networks –
Fieldbus specifications –Part 3-3: Data-link layer service definition – Type 3 elements (IEC 61158-3-3:2007);
English version EN 61158-3-3:2008, only on CD-ROMRéseaux de communication industriels –
Spécifications des bus de terrain –Partie 3-3: Définition des services des couches de liaison de données – Eléments de
type 3 (CEI 61158-3-3:2007); Version anglais EN 61158-3-3:2008, seulement en
CD-ROM**Ersatzvermerk**

Mit DIN EN 61158-3-1:2008-09, DIN EN 61158-3-2:2008-09, DIN EN 61158-3-4:2008-09,
DIN EN 61158-3-7:2008-09, DIN EN 61158-3-8:2008-09, DIN EN 61158-3-11:2008-09,
DIN EN 61158-3-12:2008-09, DIN EN 61158-3-13:2008-09, DIN EN 61158-3-14:2008-09,
DIN EN 61158-3-16:2008-09, DIN EN 61158-3-17:2008-09, DIN EN 61158-3-18:2008-09 und
DIN EN 61158-3-19:2008-09 Ersatz für DIN EN 61158-3:2005-05
Siehe jedoch Beginn der Gültigkeit

Gesamtumfang 71 Seiten

DKE Deutsche Kommission Elektrotechnik Elektronik Informationstechnik im DIN und VDE

Beginn der Gültigkeit

Die von CENELEC am 2008-02-01 angenommene EN 61158-3-3 gilt als DIN-Norm ab 2008-09-01.

Daneben darf DIN EN 61158-3:2005-05 noch bis 2011-02-01 angewendet werden.

Nationales Vorwort

Mit DIN EN 61158-3-1:2008-09, DIN EN 61158-3-2:2008-09, DIN EN 61158-3-4:2008-09, DIN EN 61158-3-7:2008-09, DIN EN 61158-3-8:2008-09, DIN EN 61158-3-11:2008-09, DIN EN 61158-3-12:2008-09, DIN EN 61158-3-13:2008-09, DIN EN 61158-3-14:2008-09, DIN EN 61158-3-16:2008-09, DIN EN 61158-3-17:2008-09, DIN EN 61158-3-18:2008-09 und DIN EN 61158-3-19:2008-09 Ersatz für DIN EN 61158-3:2005-05.

Vorausgegangener Norm-Entwurf: E DIN EN 61158-300:2006-11.

Für diese Norm ist das nationale Arbeitsgremium K 956 „Feldbus“ der DKE Deutsche Kommission Elektrotechnik Elektronik Informationstechnik im DIN und VDE (www.dke.de) zuständig.

Die enthaltene IEC-Publikation wurde vom SC 65C „Industrial networks“ erarbeitet.

Das IEC-Komitee hat entschieden, dass der Inhalt dieser Publikation bis zu dem Datum (maintenance result date) unverändert bleiben soll, das auf der IEC-Website unter „<http://webstore.iec.ch>“ zu dieser Publikation angegeben ist. Zu diesem Zeitpunkt wird entsprechend der Entscheidung des Komitees die Publikation

- bestätigt,
- zurückgezogen,
- durch eine Folgeausgabe ersetzt oder
- geändert.

Für den Fall einer undatierten Verweisung im normativen Text (Verweisung auf eine Norm ohne Angabe des Ausgabedatums und ohne Hinweis auf eine Abschnittsnummer, eine Tabelle, ein Bild usw.) bezieht sich die Verweisung auf die jeweils neueste gültige Ausgabe der in Bezug genommenen Norm.

Für den Fall einer datierten Verweisung im normativen Text bezieht sich die Verweisung immer auf die in Bezug genommene Ausgabe der Norm.

Der Zusammenhang der zitierten Normen mit den entsprechenden Deutschen Normen ergibt sich, soweit ein Zusammenhang besteht, grundsätzlich über die Nummer der entsprechenden IEC-Publikation. Beispiel: IEC 60068 ist als Europäische Norm EN 60068 durch CENELEC übernommen und als DIN EN 60068 ins Deutsche Normenwerk aufgenommen.

Einführung

Ein Feldbus ist ein digitaler serieller Datenbus für die Kommunikation zwischen Geräten der industriellen Automatisierungstechnik wie beispielsweise Messeinrichtungen, Stellgliedern, Reglern und speicherprogrammierbaren Steuerungen. Die Normen der Reihe DIN EN 61158 legen eine Anzahl von Feldbus-Protokolltypen fest.

Die vorliegende Norm legt die nach außen sichtbaren Dienste fest, die durch den Data Link Layer des Typs 3 (PROFIBUS) zur Verfügung gestellt werden.

Änderungen

Gegenüber DIN EN 61158-3:2005-05 wurden folgende Änderungen vorgenommen:

- a) Streichung des Typ 6-Feldbusses und des Platzhalters für einen Data Link Layer des Typ 5-Feldbusses wegen zu geringer Marktbedeutung;
- b) Hinzufügung von weiteren Feldbustypen;
- c) Aufteilung in mehrere Teile, jeweils als 3-1, 3-2, ..., 3-19 benummert.

Frühere Ausgaben

DIN V 19245-1: 1988-01
DIN 19245-1: 1991-04
DIN 19245-2: 1991-04
DIN EN 50170-1: 1997-07
DIN EN 50170-2: 1997-07
DIN EN 50170-3: 1997-07
DIN EN 50254: 1999-07
DIN EN 50170/A1: 2002-11
DIN EN 50170/A2: 2000-08
DIN EN 50170/A3: 2002-11
DIN EN 61158-3: 2005-05

– Leerseite –

Deutsche Fassung

Industrielle Kommunikationsnetze –
Feldbusse –
Teil 3-3: Dienstfestlegungen des Data Link Layer (Sicherheitsschicht) –
Typ 3-Elemente
(IEC 61158-3-3:2007)

Industrial communication networks –
Fieldbus specifications –
Part 3-3: Data-link layer service definition –
Type 3 elements
(IEC 61158-3-3:2007)

Réseaux de communication industriels –
Spécifications des bus de terrain –
Partie 3-3: Définition des services des couches
de liaison de données – Éléments de type 3
(CEI 61158-3-3:2007)

Diese Europäische Norm wurde von CENELEC am 2008-02-01 angenommen. Die CENELEC-Mitglieder sind gehalten, die CEN/CENELEC-Geschäftsordnung zu erfüllen, in der die Bedingungen festgelegt sind, unter denen dieser Europäischen Norm ohne jede Änderung der Status einer nationalen Norm zu geben ist.

Auf dem letzten Stand befindliche Listen dieser nationalen Normen mit ihren bibliographischen Angaben sind beim Zentralsekretariat oder bei jedem CENELEC-Mitglied auf Anfrage erhältlich.

Diese Europäische Norm besteht in drei offiziellen Fassungen (Deutsch, Englisch, Französisch). Eine Fassung in einer anderen Sprache, die von einem CENELEC-Mitglied in eigener Verantwortung durch Übersetzung in seine Landessprache gemacht und dem Zentralsekretariat mitgeteilt worden ist, hat den gleichen Status wie die offiziellen Fassungen.

CENELEC-Mitglieder sind die nationalen elektrotechnischen Komitees von Belgien, Bulgarien, Dänemark, Deutschland, Estland, Finnland, Frankreich, Griechenland, Irland, Island, Italien, Lettland, Litauen, Luxemburg, Malta, den Niederlanden, Norwegen, Österreich, Polen, Portugal, Rumänien, Schweden, der Schweiz, der Slowakei, Slowenien, Spanien, der Tschechischen Republik, Ungarn, dem Vereinigten Königreich und Zypern.

CENELEC

Europäisches Komitee für Elektrotechnische Normung
European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique

Zentralsekretariat: rue de Stassart 35, B-1050 Brüssel

© 2008 CENELEC – Alle Rechte der Verwertung, gleich in welcher Form und in welchem Verfahren, sind weltweit den Mitgliedern von CENELEC vorbehalten.

Ref. Nr. EN 61158-3-3:2008 D

Vorwort

Der Text des Schriftstücks 65C/473/FDIS, zukünftige 1. Ausgabe von IEC 61158-3-3, ausgearbeitet von dem SC 65C „Industrial networks“ des IEC/TC 65 „Industrial-process measurement, control and automation“, wurde der IEC-CENELEC Parallelen Abstimmung unterworfen und von CENELEC am 2008-02-01 als EN 61158-3-3 angenommen.

Dieser und die weiteren Teile der Normenreihe EN 61158-3 ersetzen EN 61158-3:2004.

Gegenüber EN 61158-3:2004 wurden die folgenden Änderungen durchgeführt:

- Streichung des Typ 6-Feldbusses und des Platzhalters für einen Data Link Layer des Typ 5-Feldbusses wegen zu geringer Marktbedeutung;
- Hinzufügung von weiteren Feldbustypen;
- Aufteilung in mehrere Teile, jeweils als 3-1, 3-2, ..., 3-19 benummert.

Nachstehende Daten wurden festgelegt:

- spätestes Datum, zu dem die EN auf nationaler Ebene durch Veröffentlichung einer identischen nationalen Norm oder durch Anerkennung übernommen werden muss (dop): 2008-11-01
- spätestes Datum, zu dem nationale Normen, die der EN entgegenstehen, zurückgezogen werden müssen (dow): 2011-02-01

ANMERKUNG Die Anwendung einiger der aufgeführten Protokolltypen wird durch die Inhaber der Rechte an geistigem Eigentum hieran eingeschränkt. Die Zusage zur begrenzten Freigabe ihrer Rechte an geistigem Eigentum durch die Inhaber erlaubt in jedem Fall die Anwendung eines bestimmten Data Link Layer-Protokolls zusammen mit einem Physical Layer- und einem Application Layer-Protokoll in Typzusammenstellungen, die in der Normenreihe EN 61784 angegeben sind. Die Anwendung der verschiedenen Protokolltypen in anderen Zusammenstellungen erfordert möglicherweise die Erlaubnis des jeweiligen Inhabers der Rechte an dem entsprechenden geistigen Eigentum.

Der Anhang ZA wurde von CENELEC hinzugefügt.

Anerkennungsnotiz

Der Text der Internationalen Norm IEC 61158-3-3:2007 wurde von CENELEC ohne irgendeine Abänderung als Europäische Norm angenommen.

In der offiziellen Fassung sind unter „Literaturhinweise“ zu den aufgelisteten Normen die nachstehenden Anmerkungen einzutragen:

- | | | |
|---------------|-----------|---|
| IEC 61158-2 | ANMERKUNG | Harmonisiert als EN 61158-2:2008 (nicht modifiziert). |
| IEC 61158-4-3 | ANMERKUNG | Harmonisiert als EN 61158-4-3:2008 (nicht modifiziert). |
| IEC 61158-5-3 | ANMERKUNG | Harmonisiert als EN 61158-5-3:2008 (nicht modifiziert). |
| IEC 61158-6-3 | ANMERKUNG | Harmonisiert als EN 61158-6-3:2008 (nicht modifiziert). |
| IEC 61784-1 | ANMERKUNG | Harmonisiert als EN 61784-1:2008 (nicht modifiziert). |
| IEC 61784-2 | ANMERKUNG | Harmonisiert als EN 61784-2:2008 (nicht modifiziert). |

CONTENTS

INTRODUCTION	6
1 Scope	7
1.1 Overview	7
1.2 Specifications	7
1.3 Conformance	7
2 Normative references	8
3 Terms, definitions, symbols, abbreviations and conventions	8
3.1 Reference model terms and definitions	8
3.2 Service convention terms and definitions	9
3.3 Common data-link service terms and definitions	10
3.4 Additional Type 3 data-link specific definitions	12
3.5 Common symbols and abbreviations	14
3.6 Additional Type 3 symbols and abbreviations	15
3.7 Common conventions	17
3.8 Additional Type 3 conventions	18
4 Connectionless-mode data-link service	18
4.1 General	18
4.2 Model of the connectionless-mode data-link service	18
4.3 Sequence of primitives	20
4.4 Detailed description of DL services	24
5 DL-management Service	43
5.1 General	43
5.2 Facilities of the DLMS	43
5.3 Services of the DL-management	43
5.4 Overview of interactions	45
5.5 Detailed specification of services and interactions	46
Bibliography	66
Annex ZA (normative) Normative references to international publications with their corresponding European publications	68
Figure 1 – Relationships of DLSAPs, DLSAP-addresses and group DL-addresses	11
Figure 2 – SDA service	21
Figure 3 – SDN service	22
Figure 4 – SRD service	22
Figure 5 – MSRD service	23
Figure 6 – CS service	23
Figure 7 – Reset, Set value, Get value, Ident (local), DLSAP status, DLSAP activate, DLSAP activate responder, DLSAP activate subscriber and DLSAP deactivate services	46
Figure 8 – Event service	46
Figure 9 – Ident (remote) service	46
Table 1 – Summary of DL services and primitives	21
Table 2 – SDA data ack primitives and parameters	25

Table 3 – Values of DL_status for the SDA data ack service	27
Table 4 – SDN data primitives and parameters	28
Table 5 – Values of DL_status for the SDN data service	29
Table 6 – SRD data reply primitives and parameters	30
Table 7 – Values of Update_status for the SRD data reply service	32
Table 8 – Additional values of DL_status for the SRD data reply service	33
Table 9 – SRD reply-update primitives and parameters	33
Table 10 – Values of DL_status for the SRD reply-update service	34
Table 11 – MSRD MCT data reply primitives and parameters	36
Table 12 – MSRD DXM data reply primitive and parameters	38
Table 13 – CS time event primitives and parameters	39
Table 14 – Values of DL_status for the CS time event service	41
Table 15 – CS clock value primitives and parameters	41
Table 16 – Values of CS_status for the CS clock value service	42
Table 17 – Values of DL_status for the CS clock value service	43
Table 18 – Summary of DL-management services and primitives	45
Table 19 – Reset primitives and parameters	46
Table 20 – Values of DLM_status for the reset service	47
Table 21 – Set value primitives and parameters	47
Table 22 – Mandatory DLE-variables	48
Table 23 – Optional DLE-variables	48
Table 24 – Permissible values of mandatory DLE-variables	49
Table 25 – Permissible values of optional DLE-variables	49
Table 26 – Meaning of the values for the parameter isochronous_mode	50
Table 27 – Default reaction times and operating parameters for a master station for asynchronous transmission	50
Table 28 – Default reaction times and operating parameters for a slave station with asynchronous transmission	50
Table 29 – Default reaction times and operating parameters for master stations for coupling of synchronous and asynchronous transmission segments	51
Table 30 – Default reaction times and operating parameter for slave stations for coupling of synchronous and asynchronous transmission segments	51
Table 31 – Values of DLM_status for the set value service	52
Table 32 – Get value primitives and parameters	52
Table 33 – Additional mandatory DLE-variables in master stations	52
Table 34 – Permissible values of the additional DLE-variables in master stations	53
Table 35 – Values of DLM_status for the get value service	53
Table 36 – Event primitive and parameters	54
Table 37 – Mandatory DLL events and fault types	54
Table 38 – Permissible values of T _{SH}	54
Table 39 – Ident primitives and parameters	55
Table 40 – Ident_list for the ident service	56
Table 41 – Values of DLM_status for the ident service (local)	56
Table 42 – Values of DLM_status for the ident service (remote)	56

Table 43 – DLSAP status primitives and parameters	57
Table 44 – Values of DLM_status for the DLSAP status service.....	58
Table 45 – DLSAP activate primitives and parameters.....	58
Table 46 – DLSAP activate service_list	59
Table 47 – DLSAP activate DLSDU_length_list (SDA, SDN, SRD, MSRD and CS).....	59
Table 48 – DLSDU lengths of SDA and SDN as used in the DLSAP activate service.....	60
Table 49 – DLSDU lengths of SRD and MSRD as used in the (master station) DLSAP activate service	60
Table 50 – DLSDU lengths of CS as used in the DLSAP activate service.....	60
Table 51 – Values of DLM_status for the DLSAP activate service	61
Table 52 – DLSAP activate responder primitives and parameters	61
Table 53 – DLSDU_length_list for the DLSAP activate responder service	62
Table 54 – DLSDU length of SRD and MSRD as used in the DLSAP activate responder service	62
Table 55 – Values of DLM_status for the DLSAP activate responder service	63
Table 56 – DLSAP activate subscriber primitives and parameters.....	63
Table 57 – DLSDU_length_list for the DLSAP activate subscriber service.....	64
Table 58 – DLSDU lengths of MSRD as used in the DLSAP activate subscriber service (master and slave stations).....	64
Table 59 – Values of DLM_status for the DLSAP activate subscriber service	64
Table 60 – DLSAP deactivate primitives and parameters.....	65
Table 61 – Values of DLM_status for the DLSAP deactivate service	65

INTRODUCTION

This part of IEC 61158 is one of a series produced to facilitate the interconnection of automation system components. It is related to other standards in the set as defined by the “three-layer” fieldbus reference model described in IEC/TR 61158-1.

Throughout the set of fieldbus standards, the term “service” refers to the abstract capability provided by one layer of the OSI Basic Reference Model to the layer immediately above. Thus, the data-link layer service defined in this standard is a conceptual architectural service, independent of administrative and implementation divisions.

INDUSTRIAL COMMUNICATION NETWORKS – FIELD BUS SPECIFICATIONS –

Part 3-3: Data-link layer service definition – Type 3 elements

1 Scope

1.1 Overview

This part of IEC 61158 provides common elements for basic time-critical messaging communications between devices in an automation environment. The term “time-critical” is used to represent the presence of a time-window, within which one or more specified actions are required to be completed with some defined level of certainty. Failure to complete specified actions within the time window risks failure of the applications requesting the actions, with attendant risk to equipment, plant and possibly human life.

This standard defines in an abstract way the externally visible service provided by the Type 3 fieldbus data-link layer in terms of

- a) the primitive actions and events of the service;
- b) the parameters associated with each primitive action and event, and the form which they take; and
- c) the interrelationship between these actions and events, and their valid sequences.

The purpose of this standard is to define the services provided to

- the Type 3 fieldbus application layer at the boundary between the application and data-link layers of the fieldbus reference model, and
- systems management at the boundary between the data-link layer and systems management of the fieldbus reference model.

1.2 Specifications

The principal objective of this standard is to specify the characteristics of conceptual data-link layer services suitable for time-critical communications, and thus supplement the OSI Basic Reference Model in guiding the development of data-link protocols for time-critical communications. A secondary objective is to provide migration paths from previously existing industrial communications protocols.

This specification may be used as the basis for formal DL-Programming-Interfaces. Nevertheless, it is not a formal programming interface, and any such interface will need to address implementation issues not covered by this specification, including

- a) the sizes and octet ordering of various multi-octet service parameters, and
- b) the correlation of paired request and confirm, or indication and response, primitives.

1.3 Conformance

This standard does not specify individual implementations or products, nor do they constrain the implementations of data-link entities within industrial automation systems.

There is no conformance of equipment to this data-link layer service definition standard. Instead, conformance is achieved through implementation of the corresponding data-link protocol that fulfills the Type 1 data-link layer services defined in this standard.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 7498-1, *Information technology – Open Systems Interconnection – Basic Reference Model – Basic Reference Model: The Basic Model*

ISO/IEC 7498-3, *Information technology – Open Systems Interconnection – Basic Reference Model: Naming and addressing*

ISO/IEC 10731, *Information technology – Open Systems Interconnection – Basic Reference Model – Conventions for the definition of OSI services*

3 Terms, definitions, symbols, abbreviations and conventions

For the purposes of this document, the following terms, definitions, symbols, abbreviations and conventions apply.

3.1 Reference model terms and definitions

This standard is based in part on the concepts developed in ISO/IEC 7498-1 and ISO/IEC 7498-3, and makes use of the following terms defined therein.

3.1.1 DL-address	[7498-3]
3.1.2 DL-address-mapping	[7498-1]
3.1.3 called-DL-address	[7498-3]
3.1.4 calling-DL-address	[7498-3]
3.1.5 centralized multi-end-point-connection	[7498-1]
3.1.6 DL-connection	[7498-1]
3.1.7 DL-connection-end-point	[7498-1]
3.1.8 DL-connection-end-point-identifier	[7498-1]
3.1.9 DL-connection-mode transmission	[7498-1]
3.1.10 DL-connectionless-mode transmission	[7498-1]
3.1.11 correspondent (N)-entities	[7498-1]
correspondent DL-entities (N=2)	
correspondent Ph-entities (N=1)	
3.1.12 DL-duplex-transmission	[7498-1]
3.1.13 (N)-entity	[7498-1]
DL-entity (N=2)	
Ph-entity (N=1)	
3.1.14 DL-facility	[7498-1]
3.1.15 flow control	[7498-1]

3.1.16 (N)-layer	[7498-1]
DL-layer (N=2)	
Ph-layer (N=1)	
3.1.17 layer-management	[7498-1]
3.1.18 DL-local-view	[7498-3]
3.1.19 DL-name	[7498-3]
3.1.20 naming-(addressing)-domain	[7498-3]
3.1.21 peer-entities	[7498-1]
3.1.22 primitive name	[7498-3]
3.1.23 DL-protocol	[7498-1]
3.1.24 DL-protocol-connection-identifier	[7498-1]
3.1.25 DL-protocol-data-unit	[7498-1]
3.1.26 DL-relay	[7498-1]
3.1.27 reset	[7498-1]
3.1.28 responding-DL-address	[7498-3]
3.1.29 routing	[7498-1]
3.1.30 segmenting	[7498-1]
3.1.31 (N)-service	[7498-1]
DL-service (N=2)	
Ph-service (N=1)	
3.1.32 (N)-service-access-point	[7498-1]
DL-service-access-point (N=2)	
Ph-service-access-point (N=1)	
3.1.33 DL-service-access-point-address	[7498-3]
3.1.34 DL-service-connection-identifier	[7498-1]
3.1.35 DL-service-data-unit	[7498-1]
3.1.36 DL-simplex-transmission	[7498-1]
3.1.37 DL-subsystem	[7498-1]
3.1.38 systems-management	[7498-1]
3.1.39 DLS-user-data	[7498-1]

3.2 Service convention terms and definitions

This standard also makes use of the following terms defined in ISO/IEC 10731 as they apply to the data-link layer:

3.2.1 acceptor

3.2.2 asymmetrical service

3.2.3 confirm (primitive);
 requestor.deliver (primitive)

3.2.4 deliver (primitive)

3.2.5 DL-confirmed-facility

3.2.6 DL-facility

3.2.7 DL-local-view

3.2.8 DL-mandatory-facility

3.2.9 DL-non-confirmed-facility

3.2.10 DL-provider-initiated-facility

3.2.11 DL-provider-optional-facility

3.2.12 DL-service-primitive;
 primitive

3.2.13 DL-service-provider

3.2.14 DL-service-user

3.2.15 DLS-user-optional-facility

3.2.16 indication (primitive);
 acceptor.deliver (primitive)

3.2.17 multi-peer

3.2.18 request (primitive);
 requestor.submit (primitive)

3.2.19 requestor

3.2.20 response (primitive);
 acceptor.submit (primitive)

3.2.21 submit (primitive)

3.2.22 symmetrical service

3.3 Common data-link service terms and definitions

NOTE Many definitions are common to more than one protocol Type; they are not necessarily used by all protocol Types.

3.3.1

DL-segment, link, local link


single DL-subnetwork in which any of the connected DLEs may communicate directly, without any intervening DL-relaying, whenever all of those DLEs that are participating in an instance of communication are simultaneously attentive to the DL-subnetwork during the period(s) of attempted communication

3.3.2

DLSAP

distinctive point at which DL-services are provided by a single DL-entity to a single higher-layer entity

NOTE This definition, derived from ISO/IEC 7498-1, is repeated here to facilitate understanding of the critical distinction between DLSAPs and their DL-addresses.

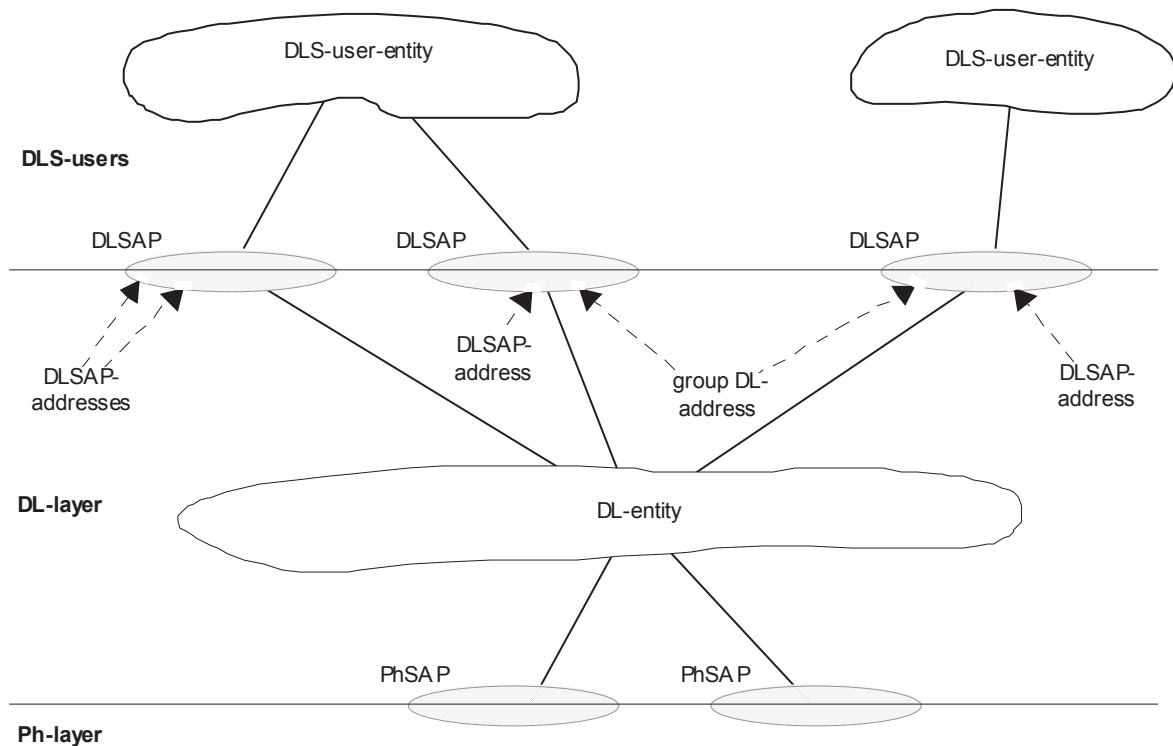

NOTE 1 DLSAPs and PhSAPs are depicted as ovals spanning the boundary between two adjacent layers.

NOTE 2 DL-addresses are depicted as designating small gaps (points of access) in the DLL portion of a DLSAP.

NOTE 3 A single DL-entity may have multiple DLSAP-addresses and group DL-addresses associated with a single DLSAP.

Figure 1 – Relationships of DLSAPs, DLSAP-addresses and group DL-addresses

3.3.3

DL(SAP)-address

either an individual DLSAP-address, designating a single DLSAP of a single DLS-user, or a group DL-address potentially designating multiple DLSAPs, each of a single DLS-user

NOTE This terminology is chosen because ISO/IEC 7498-3 does not permit the use of the term DLSAP-address to designate more than a single DLSAP at a single DLS-user.

3.3.4

(individual) DLSAP-address

DL-address that designates only one DLSAP within the extended link

NOTE A single DL-entity may have multiple DLSAP-addresses associated with a single DLSAP.

3.3.5

extended link

DL-subnetwork, consisting of the maximal set of links interconnected by DL-relays, sharing a single DL-name (DL-address) space, in which any of the connected DL-entities may communicate, one with another, either directly or with the assistance of one or more of those intervening DL-relay entities

NOTE An extended link may be composed of just a single link.

3.3.6

frame

denigrated synonym for DLPDU

3.3.7

group DL-address

DL-address that potentially designates more than one DLSAP within the extended link. A single DL-entity can have multiple group DL-addresses associated with a single DLSAP. A single DL-entity also can have a single group DL-address associated with more than one DLSAP

3.3.8

node

single DL-entity as it appears on one local link

3.3.9

receiving DLS-user

DL-service user that acts as a recipient of DLS-user-data

NOTE A DL-service user can be concurrently both a sending and receiving DLS-user.

3.3.10

sending DLS-user

DL-service user that acts as a source of DLS-user-data

3.4 Additional Type 3 data-link specific definitions

3.4.1

acknowledgement DLPDU

reply DLPDU that contains no DLSDU

3.4.2

bit time

time to transmit one bit

3.4.3

clock synchronization

represents a sequence of interactions to synchronize the clocks of all time receivers by a time master

3.4.4

controller_type

hardware class of the communications entity

3.4.5

data DLPDU

DLPDU that carries a DLSDU from a local DLS-user to a remote DLS-user

3.4.6

DL_status, DLM_status

status that specifies the result of the execution of the associated request

3.4.7

GAP

range of station (DLE) DL-addresses from this station (TS) to its successor (NS) in the logical token ring, excluding stations above HSA

3.4.8

isochronous mode

special operational mode that implies both a constant (isochronous) cycle with a fixed schedule of high and low priority messages, and the synchronization of the DLS-users with this constant (isochronous) cycle

3.4.9

local DLE

DLE in a current master station that initiates the current transaction

3.4.10

local DLS-user

DLS-user that initiates the current service

3.4.11

publisher

transmitter of messages for consumption by subscribers

3.4.12

region/segment address

address extension that identifies a particular fieldbus subnetwork

NOTE This supports DL-routing between fieldbuses.

3.4.13

remote DLE

addressed DLE of a service request (that is, the intended receiving DLE of any resulting request DLPDU)

3.4.14

remote DLS-user

addressed DLS-user of a service request (that is, the intended receiver of any resulting indication primitive)

3.4.15

reply DLPDU

DLPDU transmitted from a remote DLE to the initiating (local) DLE, and possibly other DLEs

NOTE When the remote DLE is a Publisher, the reply DLPDU also can be sent to several remote DLEs.

3.4.16

request DLPDU

DLPDU that carries either a request for data or a DLSDU or both from a local DLS-user to a remote DLS-user

3.4.17

response DLPDU

reply DLPDU that carries a DLSDU from a remote DLS-user to local DLS-user

3.4.18

station

master or slave device containing a DLE

3.4.19

subscriber

receiver of messages produced by a publisher

3.4.20

time event

message that represents a trigger for a moment of time

3.4.21

time master

device which is able to send clock synchronization messages

NOTE Link devices have time master functionality.

3.4.22

time receiver

fieldbus device able to be time synchronized by a time master

3.4.23

token passing

medium access method, in which the right to transmit is passed from master station to master station in a logical ring

3.5 Common symbols and abbreviations

NOTE Many symbols and abbreviations are common to more than one protocol Type; they are not necessarily used by all protocol Types.

3.5.1 DL-	data-link layer (as a prefix)
3.5.2 DLC	DL-connection
3.5.3 DLCEP	DL-connection-end-point
3.5.4 DLE	DL-entity (the local active instance of the data-link layer)
3.5.5 DLL	DL-layer
3.5.6 DLPCI	DL-protocol-control-information
3.5.7 DLPDU	DL-protocol-data-unit
3.5.8 DLM	DL-management
3.5.9 DLME	DL-management Entity (the local active instance of DL-management)
3.5.10 DLMS	DL-management Service
3.5.11 DLS	DL-service
3.5.12 DLSAP	DL-service-access-point
3.5.13 DLSDU	DL-service-data-unit
3.5.14 FIFO	first-in first-out (queuing method)
3.5.15 OSI	open systems interconnection
3.5.16 Ph-	physical layer (as a prefix)
3.5.17 PhE	Ph-entity (the local active instance of the physical layer)
3.5.18 PhL	Ph-layer
3.5.19 QoS	quality of service

3.6 Additional Type 3 symbols and abbreviations

3.6.1 ACK	acknowledge(ment) DLPDU
3.6.2 cnf	confirm primitive
3.6.3 CS	clock synchronization
3.6.4 DA	destination address of a DLPDU
3.6.5 DAE	destination address extension(s) of a DLPDU which conveys D_SAP_index or destination region/segment address or both
3.6.6 DS	DL/DLM_status: Disconnected station, local DL-entity not in logical token ring or disconnected from line
3.6.7 D_SAP	destination service access point, the DLSAP which identifies the remote DLS-user.
3.6.8 D_SAP_index	destination service access point index, that component of a DLSAP-address which designates a DLSAP and remote DLS-user within the remote DLE
3.6.9 DXM	data exchange multicast
3.6.10 EXT	address extension bit of a DLPDU
3.6.11 FC	frame control (DLPDU type) field of a DLPDU
3.6.12 G	GAP update factor, the number of token cycles between GAP maintenance (update) cycles
3.6.13 HSA	highest station address installed (configured) on this fieldbus
3.6.14 ind	indication primitive
3.6.15 IsoM	isochronous mode
3.6.16 LMS	list of master stations
3.6.17 LR	DL/DLM_status: Local resource not available or not sufficient
3.6.18 LS	DL/DLM_status: Local service not activated at DLSAP or local DLSAP not activated
3.6.19 MSRD	send and request data with multicast reply (DL-service)
3.6.20 NA	DL/DLM_status: No acknowledgement/response
3.6.21 NIL	locally existing value, but not fixed
3.6.22 NO	DL/DLM_status: Not ok
3.6.23 NR	DL/DLM_status: No response, DL/DLM-data acknowledgement negative and send data ok
3.6.24 NS	Next station, the station to which this Master will pass the token
3.6.25 OK	DL/DLM_status: Service finished according to the rules
3.6.26 RDH	DL/DLM_status: Response DL-data high and no resource for send data

3.6.27 RDL	DL/DLM_status: Response DL/DLM-data low and no resource for send data
3.6.28 req	request primitive
3.6.29 RR	DL/DLM_status: No resource for send data and no response DL-data available (acknowledgement negative)
3.6.30 RS	DL/DLM_status: No service or no remote address activated at remote-service-access-point (acknowledgement negative)
3.6.31 SA	source address of a DLPDU
3.6.32 SAE	source address extension(s) of a DLPDU, which conveys S_SAP_index or source region/segment address or both
3.6.33 SC	single character acknowledge DLPDU
3.6.34 SDA	send data with acknowledge (DL-service)
3.6.35 SDN	send data with no acknowledge (DL-service)
3.6.36 SRD	send and request data with reply (DL-service)
3.6.37 S_SAP	source service access point, the DLSAP associated with the initiates local DLS-user
3.6.38 S_SAP_index	source service access point index, a component of a DLSAP-address which designates that DLSAP within the DLE at which the transaction is being initiated
3.6.39 SYN	synchronizing bits of a DLPDU (period of IDLE), which guarantees the specified DLPDU integrity and facilitates receiver synchronization
3.6.40 SYNCHT	synchronization telegram, indicates the start of a new cycle in IsoM
3.6.41 tBIT	bit time, DL-symbol period, the time to transmit one bit on the fieldbus: $1/(\text{data signaling rate in bit/s})$
3.6.42 TCSI	clock synchronization interval time
3.6.43 TCT	Isochronous cycle time, the requested duration for one cycle in IsoM
3.6.44 TQUI	quiet time, transmitter fall time (line state uncertain time) or repeater switch time or both. The time a transmitting station needs to wait after the end of a DLPDU before enabling its receiver.
3.6.45 TRDY	ready time, the time after which the transmitting master will expect a reply DLPDU
3.6.46 TRR	real rotation time, the time between the last successive receptions of the token by the observing master station
3.6.47 TS	This Station
3.6.48 TSDI	station delay of initiator, the time a master station will wait before sending successive DLPDUs
3.6.49 TSDR	station delay of responder, the actual time a responder needs to generate a reply DLPDU

3.6.50 TSET	setup time, the time between an event (e.g. interrupt SYN timer expired) and the necessary reaction (e.g. enabling a receiver)
3.6.51 TSH	time shift, the time a real isochronous cycle deviates from the requested duration for one cycle in IsoM
3.6.52 TSL	slot time, the maximum time a master station waits for a reply DLPDU
3.6.53 TSYN	synchronization time, the period of IDLE before the beginning of a DLPDU after which a station enables its receiver; the required minimum inter-DLPDU idle period to guarantee DLPDU integrity and a valid DLPDU
3.6.54 TSYNI	synchronization interval time, the maximum time that a receiving station waits for the required inter-DLPDU idle period, of duration TSYN, to occur before it detects a bus fault
3.6.55 TTR	Target rotation time, the anticipated time for one token cycle, including allowances for high and low priority transactions, errors and GAP maintenance
3.6.56 UE	DL/DLM_status: Negative acknowledgement, remote user interface error

3.7 Common conventions

This standard uses the descriptive conventions given in ISO/IEC 10731.

The service model, service primitives, and time-sequence diagrams used are entirely abstract descriptions; they do not represent a specification for implementation.

Service primitives, used to represent service user/service provider interactions (see ISO/IEC 10731), convey parameters that indicate information available in the user/provider interaction.

This standard uses a tabular format to describe the component parameters of the DLS primitives. The parameters that apply to each group of DLS primitives are set out in tables throughout the remainder of this standard. Each table consists of up to six columns, containing the name of the service parameter, and a column each for those primitives and parameter-transfer directions used by the DLS:

- the request primitive's input parameters;
- the request primitive's output parameters;
- the indication primitive's output parameters;
- the response primitive's input parameters; and
- the confirm primitive's output parameters.

NOTE The request, indication, response and confirm primitives are also known as requestor.submit, acceptor.deliver, acceptor.submit, and requestor.deliver primitives, respectively (see ISO/IEC 10731).

One parameter (or part of it) is listed in each row of each table. Under the appropriate service primitive columns, a code is used to specify the type of usage of the parameter on the primitive and parameter direction specified in the column:

- M** — parameter is mandatory for the primitive.
- U** — parameter is a User option, and may or may not be provided depending on the dynamic usage of the DLS-user. When not provided, a default value for the parameter is assumed.
- C** — parameter is conditional upon other parameters or upon the environment of the DLS-user.
- (blank)** — parameter is never present.

Some entries are further qualified by items in brackets. These may be

a) a parameter-specific constraint

(=) indicates that the parameter is semantically equivalent to the parameter in the service primitive to its immediate left in the table.

b) an indication that some note applies to the entry

(n) indicates that the following note n contains additional information pertaining to the parameter and its use.

In any particular interface, not all parameters need be explicitly stated. Some may be implicitly associated with the DLSAP at which the primitive is issued.

In the diagrams which illustrate these interfaces, dashed lines indicate cause-and-effect or time-sequence relationships, and wavy lines indicate that events are roughly contemporaneous.

3.8 Additional Type 3 conventions

In the diagrams which illustrate the DLS and DLM interfaces, dashed lines indicate cause-and-effect or time-sequence relationships between actions at different stations, while solid lines with arrows indicate cause-and-effect time-sequence relationships which occur within the DLE-provider at a single station.

The following notation, a shortened form of the primitive classes defined in 3.7, is used in the figures.

req	request primitive
ind	indication primitive
cnf	confirm primitive (confirmation)

4 Connectionless-mode data-link service

4.1 General

This clause describes the interface between a DLE and a data-link service user (DLS-user). The services of this interface are typical of those needed in application fields such as process control, factory automation, power distribution, building automation and other primary process industries:

- general purpose data transfer service;
- time transfer service.

4.2 Model of the connectionless-mode data-link service

4.2.1 Overview

This subclause describes the abstract model for data and time transfer services. The model defines interactions between the DLS-user and the DLL that take place at the DLSAPs. Information is passed between the DLS-user and the local DLE by DLS primitives and their associated parameters.