

DIN EN IEC 62604-2



ICS 31.140; 31.160

Einsprüche bis 2021-07-28
Vorgesehen als Ersatz für
DIN EN IEC 62604-2:2018-08

Entwurf

**Oberflächenwellen-(OFW-) und Volumenwellen-(BAW-)Duplexer mit
bewerteter Qualität –
Teil 2: Leitfaden für die Anwendung
(IEC 49/1353/CD:2020);
Text English**

Surface acoustic wave (SAW) and bulk acoustic wave (BAW) duplexers of assessed quality –

Part 2: Guidelines for the use
(IEC 49/1353/CD:2020);
Text in English

Duplexeurs à ondes acoustiques de surface (OAS) et à ondes acoustiques de volume (OAV) sous assurance de la qualité –

Partie 2: Lignes directrices d'utilisation
(IEC 49/1353/CD:2020);
Texte en anglais

Anwendungswarnvermerk

Dieser Norm-Entwurf mit Erscheinungsdatum 2021-05-28 wird der Öffentlichkeit zur Prüfung und Stellungnahme vorgelegt.

Weil die beabsichtigte Norm von der vorliegenden Fassung abweichen kann, ist die Anwendung dieses Entwurfs besonders zu vereinbaren.

Stellungnahmen werden erbeten

- vorzugsweise online im Norm-Entwurfs-Portal von DIN unter www.din.de/go/entwuerfe bzw. für Norm-Entwürfe der DKE auch im Norm-Entwurfs-Portal der DKE unter www.entwuerfe.normenbibliothek.de, sofern dort wiedergegeben;
- oder als Datei per E-Mail an dke@vde.com möglichst in Form einer Tabelle. Die Vorlage dieser Tabelle kann im Internet unter www.din.de/go/stellungnahmen-norm-entwuerfe oder für Stellungnahmen zu Norm-Entwürfen der DKE unter www.dke.de/stellungnahme abgerufen werden;
- oder in Papierform an die DKE Deutsche Kommission Elektrotechnik Elektronik Informationstechnik in DIN und VDE oder Stresemannallee 15, 60596 Frankfurt am Main.

Die Empfänger dieses Norm-Entwurfs werden gebeten, mit ihren Kommentaren jegliche relevanten Patentrechte, die sie kennen, mitzuteilen und unterstützende Dokumentationen zur Verfügung zu stellen.

Gesamtumfang 27 Seiten

DKE Deutsche Kommission Elektrotechnik Elektronik Informationstechnik in DIN und VDE

Nationales Vorwort

Das internationale Dokument IEC 49/1353/CD:2020-09 „Surface acoustic wave (SAW) and bulk acoustic wave (BAW) duplexers of assessed quality – Part 2: Guidelines for the use“ (CD, en: Committee Draft) ist unverändert in diesen Norm-Entwurf übernommen worden.

Das internationale Dokument wurde vom IEC/TC 49 „Piezoelectric, dielectric and electrostatic devices and associated materials for frequency control, selection and detection“ der Internationalen Elektrotechnischen Kommission (IEC) erarbeitet und unterliegt dem Copyright der IEC . Das Dokument wurde den nationalen Komitees zur Stellungnahme vorgelegt.

Die Internationale Elektrotechnische Kommission (IEC) und das Europäische Komitee für Elektrotechnische Normung (CENELEC) haben vereinbart, dass ein auf IEC-Ebene erarbeiteter Entwurf für eine Internationale Norm zeitgleich (parallel) bei IEC und CENELEC zur Umfrage (CDV-Stadium) und Abstimmung als FDIS (en: Final Draft International Standard) bzw. Schluss-Entwurf für eine Europäische Norm gestellt wird, um eine Beschleunigung und Straffung der Normungsarbeit zu erreichen. Dokumente, die bei CENELEC als Europäische Norm angenommen und ratifiziert werden, sind unverändert als Deutsche Normen zu übernehmen.

Da der Abstimmungszeitraum für einen FDIS bzw. Schluss-Entwurf FprEN nur 6 Wochen beträgt, und dann keine sachlichen Stellungnahmen mehr abgegeben werden können, sondern nur noch eine „JA/NEIN“-Entscheidung möglich ist, wobei eine „NEIN“-Entscheidung fundiert begründet werden muss, wird bereits der CD als DIN-Norm-Entwurf veröffentlicht, um die Stellungnahmen aus der Öffentlichkeit frühzeitig berücksichtigen zu können.

Dieses Dokument enthält unter Berücksichtigung des Beschlusses des Technischen Beirats Internationale und Nationale Koordinierung (TBINK) der DKE vom 17.09.2020 nur die englische Fassung von IEC 49/1353/CD:2020.

Für dieses Dokument ist das nationale Arbeitsgremium DKE/K 642 „Piezoelektrische Bauteile zur Frequenzstabilisierung und -selektion“ der DKE Deutsche Kommission Elektrotechnik Elektronik Informationstechnik in DIN und VDE (www.dke.de) zuständig.

Aktuelle Informationen zu diesem Dokument können über die Internetseiten von DKE (www.dke.de) und DIN (www.din.de) durch eine Suche nach der Dokumentennummer aufgerufen werden.

Für den Fall einer undatierten Verweisung im normativen Text (Verweisung auf ein Dokument ohne Angabe des Ausgabedatums und ohne Hinweis auf eine Abschnittsnummer, eine Tabelle, ein Bild usw.) bezieht sich die Verweisung auf die jeweils aktuellste Ausgabe des in Bezug genommenen Dokuments.

Für den Fall einer datierten Verweisung im normativen Text bezieht sich die Verweisung immer auf die in Bezug genommene Ausgabe des Dokuments.

Der Zusammenhang der zitierten Dokumente mit den entsprechenden deutschen Dokumenten ergibt sich, soweit ein Zusammenhang besteht, grundsätzlich über die Nummer der entsprechenden IEC-Publikation. Beispiel: IEC 60068 ist als EN 60068 als Europäische Norm durch CENELEC übernommen und als DIN EN 60068 ins Deutsche Normenwerk aufgenommen.

Es wird auf die Möglichkeit hingewiesen, dass einige Elemente dieses Dokuments Patentrechte berühren können. IEC ist nicht dafür verantwortlich, einige oder alle diesbezüglichen Patentrechte zu identifizieren.

Das Original-Dokument enthält Bilder in Farbe, die in der Papierversion in einer Graustufen-Darstellung wiedergegeben werden. Elektronische Versionen dieses Dokuments enthalten die Bilder in der originalen Farbdarstellung.

Änderungen

Gegenüber DIN EN IEC 62604-2:2018-08 wurden folgende Änderungen vorgenommen:

- a) Alle Abschnitte wurden unter Berücksichtigung des gesamten Inhalts der vorherigen Ausgabe entsprechend den aktuellen Anforderungen an Form und Gestaltung überarbeitet;
- b) die Duplexer werden beschrieben;
- c) Duplexer mit symmetrischem RX-Anschluss werden in 7.3, Messverfahren für Duplexer, behandelt.

Content

1	Scope.....	6
2	Normative references	6
3	Terms and definitions	6
4	Technical considerations	7
5	Fundamentals of SAW and BAW duplexers.....	7
5.1	Basic function	7
5.1.1	General.....	7
5.1.2	TX filter response (filter response from TX port to antenna port).....	8
5.1.3	RX filter response (filter response from antenna port to RX port).....	8
5.1.4	Isolation (isolation from TX port to RX port)	8
5.2	Basic structure	10
5.3	Principle of operation.....	10
5.4	Diplexer.....	14
5.5	Multiplexer	14
6	SAW and BAW duplexer characteristics	15
6.1	General conditions for SAW and BAW duplexers	15
6.2	Typical characteristics of SAW and BAW duplexers.....	18
6.2.1	UMTS duplexer.....	18
6.2.2	US CDMA duplexer	18
6.2.3	PCS CDMA duplexer.....	18
6.2.4	LTE Band 1 + Band 3 multiplexer.....	19
7	Application guidelines.....	24
7.1	Power durability	24
7.2	Harmonics and inter-modulation distortion.....	24
7.3	Measurement method for the duplexer	24
7.4	Electrostatic voltage protection	26
	Bibliography	27

Figures

Figure 1 – Basic duplexer configuration	7
Figure 2 – Basic TX filter response example of SAW and BAW duplexers.....	9
Figure 3 – Basic RX filter response example of SAW and BAW duplexers	9
Figure 4 – Basic isolation characteristics example of SAW and BAW duplexers	9
Figure 5 – The block diagram of a duplexer	11
Figure 6 – Demanded condition of TX part for duplexers.....	12
Figure 7 – Phase rotation in TX part.....	13
Figure 8 – Demanded condition of RX part for duplexers	13
Figure 9 – Basic duplexer configuration	14
Figure 10 – Basic multiplexer configuration.....	15

Figure 11 – Typical wide range frequency response of TX filter	16
Figure 12 – Typical wide range frequency response of RX filter for upper local system	17
Figure 13 – Phase shifter by microstrip line on the surface of a ceramic package	17
Figure 14 – Lumped element phase shifter	17
Figure 15 – Duplexer configuration	18
Figure 16 – Frequency characteristics of SAW duplexer for UMTS Band 1 system	20
Figure 17 – Frequency characteristics of a SAW duplexer for US CDMA system	22
Figure 18 – Frequency characteristics of BAW duplexer for PCS CDMA system)	23
Figure 19 – Frequency characteristics of SAW Band 1 + Band 3 multiplexer for LTE	24
Figure 20 – Four-port-type network analyzer for duplexer measurement	25
Figure 21 – Four-port-type network analyzer for measurement of a balanced RX port duplexer	26

Tables

Table 1 – Frequency allocation for typical LTE frequency division duplex (FDD) bands	8
--	---

SURFACE ACOUSTIC WAVE (SAW) AND BULK ACOUSTIC WAVE (BAW) DUPLEXERS OF ASSESSED QUALITY –

Part 2: Guidelines for the use

1 Scope

This part of IEC 62604 concerns duplexers which can separate receiving signals from transmitting signals and are key components for two-way radio communications, and which are generally used in mobile phone systems compliant with CDMA systems such as N-CDMA in second generation mobile telecommunication systems (2G), W-CDMA / UMTS (3G) or LTE (4G). While in 2G systems mainly dielectric duplexers have been used, the ongoing miniaturization in 3G and 4G mobile communication systems promoted the development and application of acoustic wave duplexers due to their small size, light weight and good electrical performance. While standard surface acoustic wave (SAW) duplexers have been employed for applications with moderate requirements regarding the steepness of individual filters, applications with narrow duplex gap (e.g. Bands 2, 3, 8, 25), i.e. the frequency gap between receiving and transmitting bands, require the application of temperature-compensated (TC) SAW or bulk acoustic wave (BAW) technology, because of their better temperature characteristics and resonator Q-factors.

It is neither the aim of these guidelines to explain theory, nor to attempt to cover all the eventualities which may arise in practical circumstances. These guidelines draw attention to some of the more fundamental questions, which should be considered by the user before he places an order for SAW and BAW duplexers for a new application. Such a procedure will be the user's insurance against unsatisfactory performance. Because SAW and BAW duplexers have very similar performance for the usage, it is useful and convenient for users that both duplexers are described in one standard.

Standard specifications, such as those of IEC, of which these guidelines form a part, and national specifications or detail specifications issued by manufacturers will define the available combinations of centre frequency, pass bandwidth and insertion attenuation for each sort of transmitting and receiving filters and the isolation level between transmitter and receiver ports, etc. These specifications are compiled to include a wide range of SAW and BAW duplexers with standardized performances. It cannot be over-emphasized that the user should, wherever possible, select his duplexers from these specifications, when available, even if it may lead to making small modifications to his circuit to enable the use of standard duplexers. This applies particularly to the selection of the nominal frequency band.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60862-1:2015, *Surface acoustic wave (SAW) filters of assessed quality – Part 1: Generic specification*

IEC 62575-1:2015, *Radio frequency (RF) bulk acoustic wave (BAW) filters of assessed quality – Part 1: Generic specification*

3 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

4 Technical considerations

It is of prime interest to a user that the duplexer characteristics should satisfy particular specifications. The selection of the front-end circuits in user equipments and SAW and BAW duplexers to meet such specifications should be a matter of agreement between the user and the manufacturer.

Duplexer characteristics are usually expressed in terms of centre frequency, pass bandwidth and insertion attenuation for each of transmitting and receiving filter parts in the duplexer and isolation level between the transmitter and receiver ports. Since the SAW and BAW duplexer is used in RF front-end of the user equipments, lower insertion attenuation, higher isolation/rejection level, stronger power durability and smaller/thinner package dimensions are strictly required.

5 Fundamentals of SAW and BAW duplexers

5.1 Basic function

5.1.1 General

Duplexers are necessary for frequency division duplex (FDD) equipments to receive and transmit signals simultaneously. Duplexers are 3-port devices which consist of an antenna port, a transmitter port (TX port) and a receiver port (RX port), as shown in Figure 1. The duplexer has three basic functions;

- to transfer the transmitting signal from the TX port to the antenna port;
- to transfer the receiving signal from the antenna port to the RX port;
- to prevent transfer of the transmitting signal and noise from the TX port to the RX port.

The transmitting and the receiving frequencies are determined corresponding to each mobile communication system. For example, Table 1 shows typical allocated frequency bands for UMTS.

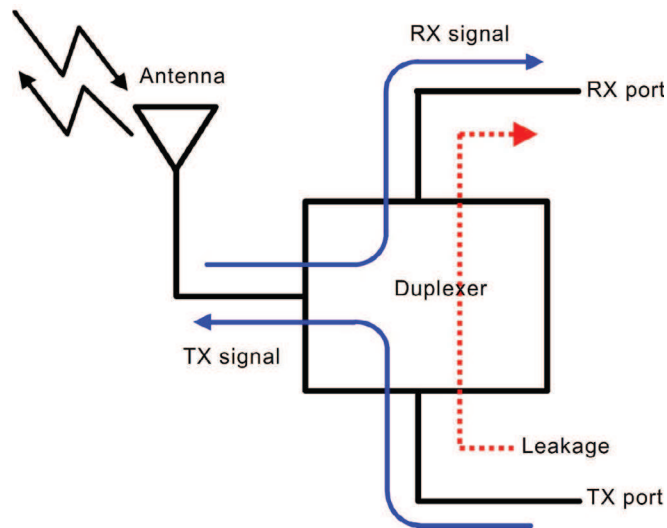


Figure 1 – Basic duplexer configuration

Table 1 – Frequency allocation for typical LTE frequency division duplex (FDD) bands

Band	Uplink frequency (MHz)	Downlink frequency (MHz)	Band	Uplink frequency (MHz)	Downlink frequency (MHz)
1	1 920 – 1 980	2 110 – 2 170	16	2 010 – 2 025	2 585 – 2 600
2	1 850 – 1 910	1 930 – 1 990	17	704 – 716	734 – 746
3	1 710 – 1 785	1 805 – 1 880	18	815 – 830	860 – 875
4	1 710 – 1 755	2 110 – 2 155	19	830 – 845	875 – 890
5	824 – 849	869 – 894	20	832 – 862	791 – 821
6	830 – 840	875 – 885	21	1 447,9 – 1 462,9	1 495,5 – 1 510,9
7	2 500 – 2 570	2 620 – 2 690	22	3 410 – 3 490	3 510 – 3 590
8	880 – 915	925 – 960	23	2 000 – 2 020	2 180 – 2 200
9	1 749,9 – 1 784,9	1 844,9 – 1 879,9	24	1 626,5 – 1 660,5	1 525 – 1 559
10	1 710 – 1 770	2 110 – 2 170	25	1 850 – 1 915	1 930 – 1 995
11	1 427,9 – 1 447,9	1 475,9 – 1 495,9	26	814 – 849	859 – 894
12	699 – 716	729 – 746	27	807 – 824	852 – 869
13	777 – 787	746 – 756	28	703 – 748	758 – 803
14	788 – 798	758 – 768	30	2 305 – 2 315	2 350 – 2 360
15	1 900 – 1 920	2 600 – 2 620	31	452,5 – 457,5	462,5 – 467,5

NOTE For a user equipment, uplink frequency means transmitting frequency and downlink frequency means receiving frequency respectively.

5.1.2 TX filter response (filter response from TX port to antenna port)

Figure 2 shows an example of frequency characteristics of the TX filter. The required frequency characteristics are low insertion attenuation in the transmitting frequency band (f_T), high insertion attenuation in the receiving frequency band (f_R) and good impedance matching.

5.1.3 RX filter response (filter response from antenna port to RX port)

Figure 3 shows an example of frequency characteristics of the RX filter. The required frequency characteristics are low insertion attenuation in the receiving band (f_R) and high insertion attenuation in the transmitting frequency band (f_T).

5.1.4 Isolation (isolation from TX port to RX port)

Figure 4 shows an example of isolation characteristics. One of the important functions for the duplexers is isolation characteristics, which show the frequency dependence of the leakage power from the TX port to the RX port.

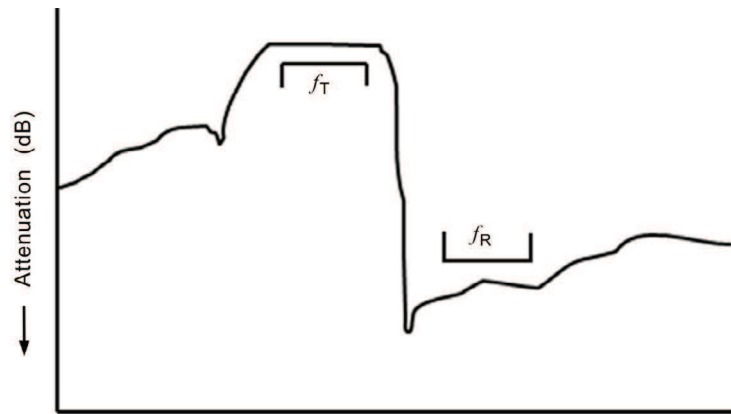


Figure 2 – Basic TX filter response example of SAW and BAW duplexers

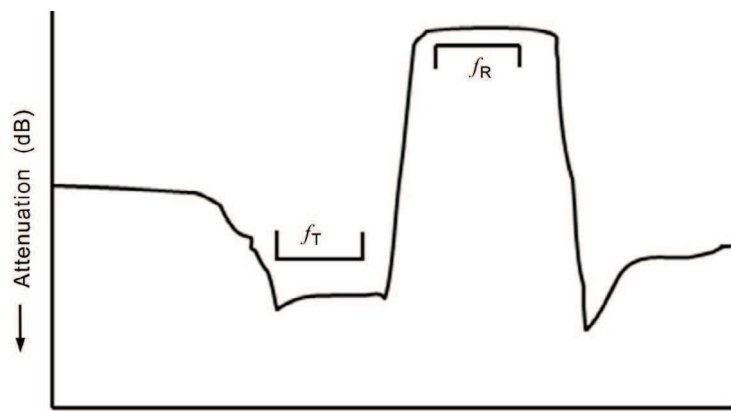


Figure 3 – Basic RX filter response example of SAW and BAW duplexers

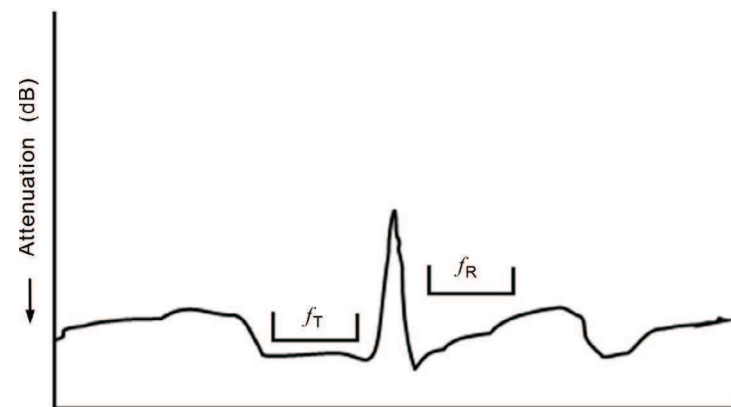


Figure 4 – Basic isolation characteristics example of SAW and BAW duplexers