

FED. SUPPLY CLASS

5340

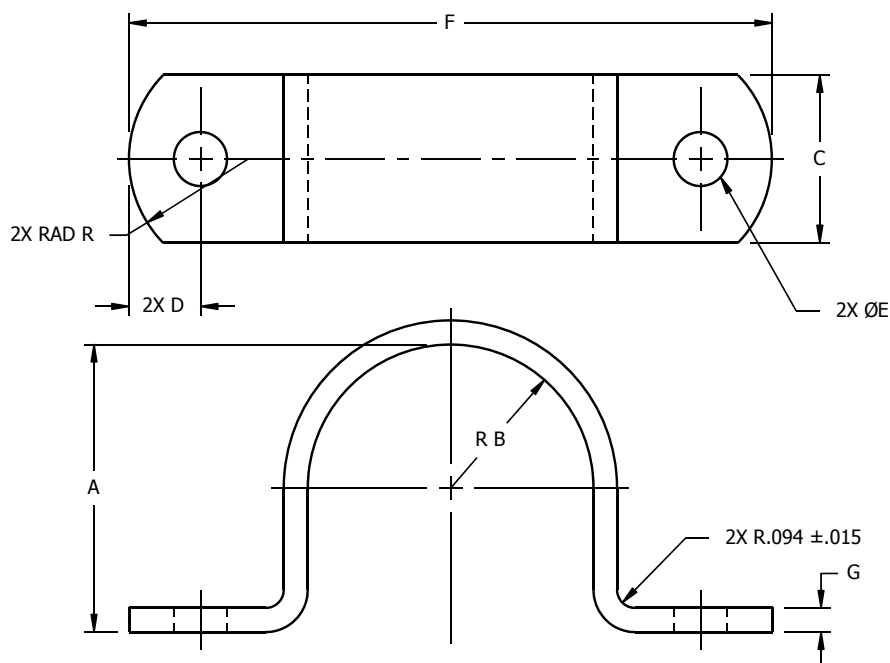



TABLE I – DASH NUMBERS AND DIMENSIONS

DASH NUMBER	PIPE OR CONDUIT SIZE	CABLE OD	A	B	C +.125 −.000	D ±.062	ØE +.031 −.016	F ±.125	G ±.015	R RADIUS ±.125
1	.125	.406	.406	.203	.500	.219	.203	1.750	.048	.375
2	.250	.531	.540	.270			.219	2.000		
3		.563	.562	.281						
4		.625	.625	.312						
5	.375	.688	.688	.344	.625	.375	.281	2.375	.063	.500
6		.750	.750	.375	.688			2.500		
7	.500	.844	.844	.422				2.625		
8		1.000	1.000	.500				.750	2.750	.080
9	.750	1.063	1.062	.531	2.875					
10		1.125	1.125	.562	3.000					
11	1.000	1.313	1.315	.657	.875			3.125	.125	.625
12		1.500	1.500	.750				3.375		
13	1.250	1.656	1.660	.830				3.625		
14		1.750	1.750	.875				3.750		
15	1.500	1.906	1.906	.953				4.000		
16	2.000	2.375	2.375	1.187	1.000			.500	.344	5.500
17	2.500	2.875	2.875	1.437		6.000				
18	3.000	3.500	3.500	1.750		6.500				
19	3.500	4.000	4.000	2.000		.375	7.000			
20	4.000	4.500	4.500	2.250	1.125	.600	.437	7.250	.187	.813

② COMPLETELY REVISED

THE INITIAL RELEASE OF THIS DOCUMENT SUPERSEDES MS21314, REVISION B. PART NUMBERS REMAIN MS21314

THIRD
ANGLE
PROJECTION



CUSTODIAN

NATIONAL AEROSPACE STANDARDS COMMITTEE

REVISION

2

PROCUREMENT
SPECIFICATION

NASM760

TITLE

**STRAP, RETAINING, TWO HOLE, FOR
PIPE, CONDUIT, AND CABLE**

CLASSIFICATION
PART STANDARD

NASM21314

SHEET 1 OF 2

MATERIAL:

CARBON STEEL, SHEET OR STRIP, IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.

FINISH:

CADMIUM PLATE IN ACCORDANCE WITH AMS-QQ-P-416, CLASS 1, TYPE II.
ZINC COAT IN ACCORDANCE WITH ASTM B 633, TYPE II, Fe/Zn 13.

EXAMPLE OF PART NUMBER:

MS21314 - 8 = STRAP, RETAINING, TWO HOLE, A DIMENSION 1.000, B DIMENSION .500, CADMIUM
PLATED OR ZINC COATED.
DASH NUMBER FROM TABLE I
BASIC MS NUMBER

NOTES:

- (1) DIMENSIONS IN INCHES.
- (2) STRAP CORRESPONDS TO TYPE II, STYLE A, PIPE, CONDUIT OR CABLE IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
- (3) MS21314 SUPERSEDES BLAX.1.
- (4) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
- (5) UNLESS OTHERWISE SPECIFIED HEREIN, REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF MANUFACTURE. HOWEVER, EXISTING MATERIAL INVENTORY CERTIFIED TO A PREVIOUS REVISION OF THE APPLICABLE MATERIAL SPECIFICATION(S) IS ACCEPTABLE FOR USE UNTIL DEPLETION.
- (6) REMOVE ALL BURRS AND SHARP EDGES, .010 RADIUS MAXIMUM.
- (7) TOLERANCES UNLESS OTHERWISE SPECIFIED: DECIMALS $\pm .010$.
- (8) DIMENSIONS APPLY AFTER FINISH UNLESS OTHERWISE SPECIFIED.
- (9) DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.
- (10) UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.

② COMPLETELY REVISED

REVISION
2
NASM21314
SHEET 2

