

FED. SUPPLY CLASS

5325

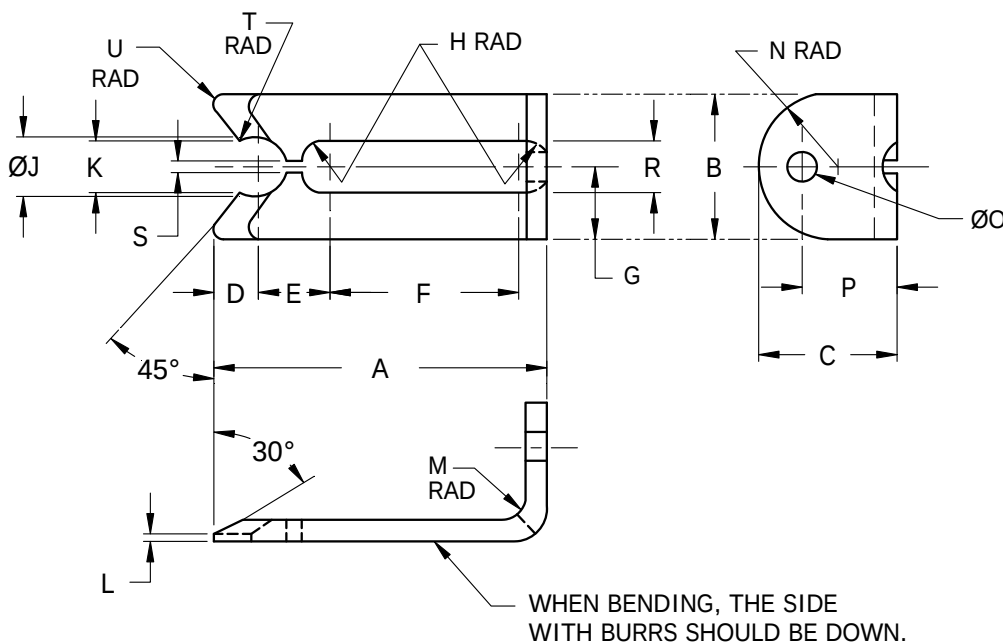


FIGURE 1 – LATCH

TABLE I – LATCH DIMENSIONS

DASH NO.	A	B	C	D	E	F	G	H RAD	ØJ	K ±.005	L	M RAD	N RAD	P	ØO	R +1/64 -0	S	T RAD	U RAD
11	1-1/8	7/16	13/32	3/16	7/32	5/8	7/32	3/32	.187	.156	.020	1/32	7/32	1/4	.125	3/16	1/16	1/64	1/32
12	1-15/32	9/16	1/2	1/4	5/16	25/32	9/32	1/8	.250	.219	.030	3/32	9/32	5/16	.160	1/4	1/16	1/64	1/32
13	39/64	7/32	3/16	7/64	5/32	5/16	7/64	1/16	.125	.080	.015	1/32	7/64	1/8	.047	1/8	1/32	1/64	1/64

① COMPLETELY REVISED

THE INITIAL RELEASE OF THIS DOCUMENT SUPERSEDES MS21332, REVISION B. PART NUMBERS REMAIN MS21332.

THIRD ANGLE PROJECTION

CUSTODIAN
NATIONAL AEROSPACE STANDARDS COMMITTEE

REVISION
1

PROCUREMENT SPECIFICATION

TITLE

FASTENER, SNAPSLIDE

①

CLASSIFICATION
PART STANDARD

NONE

MS21332
SHEET 1 OF 4



Document Sharing Hub

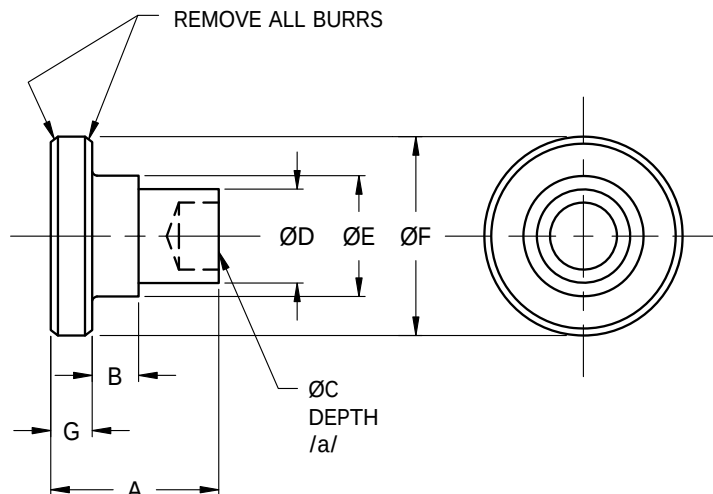


FIGURE 2 – RIVET

TABLE II – RIVET DIMENSIONS

DASH NO.	A ±.003	B	ØC /a/	ØD +.000 -.002	ØE	ØF	G
31	.250	.075	.086	.125	.184	3/8	1/16
32	.300	.100	.147	.187	.220	3/8	1/16
33	.300	.100	.147	.187	.227	7/16	1/16
34	.300	.075	.086	.125	.184	3/8	1/16
35	.154	.045	.055	.078	.125	.219	1/32

/a/ "ØC" DEPTH: DASH 31 THRU 34 = .125
DASH 35 = .078

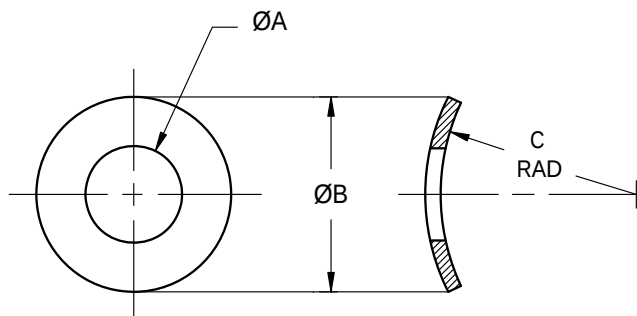


FIGURE 3 – WASHER

TABLE III – WASHER DIMENSIONS

DASH NO.	ØA	ØB /b/	C RAD APPROX
41	.199	3/8	7/16
42	.228	3/8	7/16
43	.234	7/16	3/8
44	.130	.225	7/32

/b/ "ØB" IS SIZE BEFORE FORMING