


FED. SUPPLY CLASS

5310

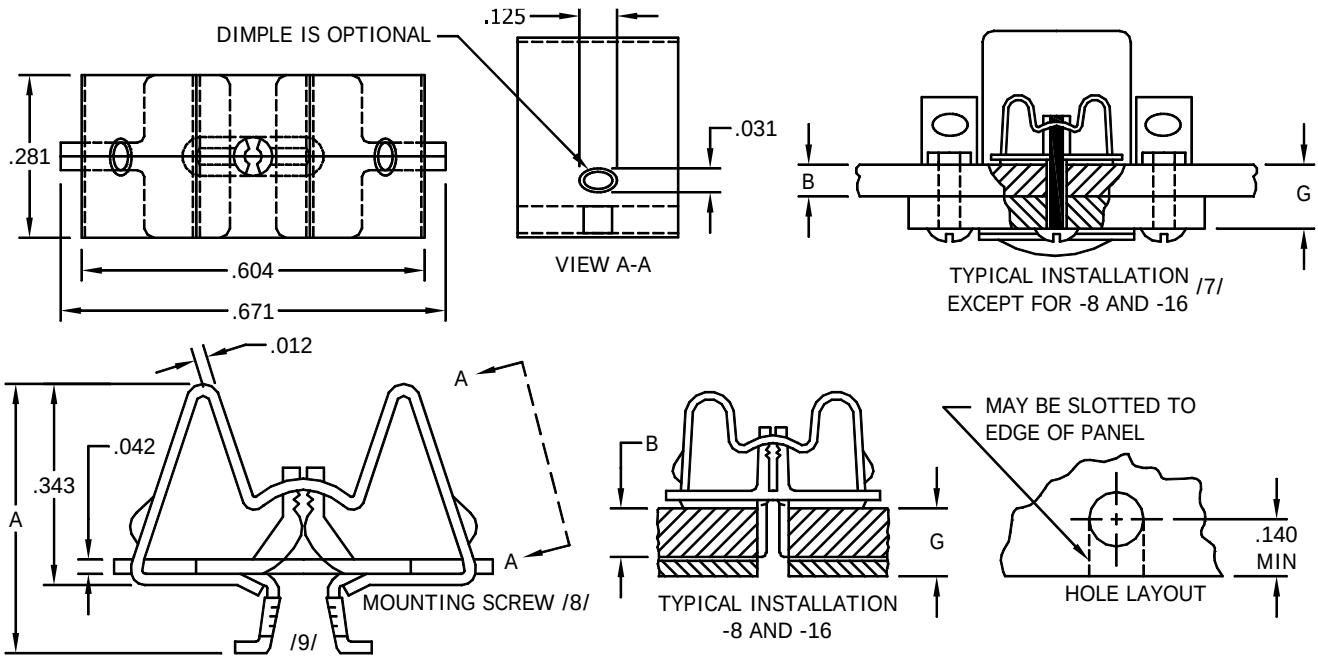

② TABLE I – DASH NUMBERS AND DIMENSIONS

DASH NUMBER	DIMENSIONS		SCREW THREAD SIZE /8/	WEIGHT LBS/1000
	A	B		
1	.438	.062	4-40	4.0
2	.469	.093		
3	.500	.125		4.1
4	.562	.187		
5	.625	.250		4.2
6	.688	.312		
7	.750	.375		4.3
8 /7/		OVER .375		
9	.438	.062	6-32	5.0
10	.469	.093		
11	.500	.125		5.1
12	.562	.187		
13	.625	.250		5.2
14	.688	.312		
15	.750	.375		5.3
16 /7/		OVER .375		

THE INITIAL RELEASE OF THIS DOCUMENT SUPERSEDES MS33737, REVISION B, AMENDMENT 1. PART NUMBERS REMAIN MS33737.

THIRD ANGLE PROJECTION	CUSTODIAN NATIONAL AEROSPACE STANDARDS COMMITTEE	REVISION 2
PROCUREMENT SPECIFICATION MIL-N-3336	TITLE NUT, SHEET SPRING, INSTRUMENT MOUNTING	CLASSIFICATION PART STANDARD



Documents
SHEET 1 OF 2
Document Sharing Hub

MATERIAL:

(2)

CAGE, PHOSPHOR BRONZE, COMPOSITION A OR D SPRING TEMPER (UNS C51000), (UNS C52400) AND (UNS C54400), IN ACCORDANCE WITH ASTM B139/B139M.

NUT, HALF-HARD BRASS (UNS C26000) AND (UNS C34000) IN ACCORDANCE WITH ASTM B36/B36M.

FINISH:

CADMIUM PLATE IN ACCORDANCE WITH AMS-QQ-P-416, TYPE II, CLASS 2 WHEN SPECIFIED.

EXAMPLE OF PART NUMBER:

MS33737 - 1 C
 C = CADMIUM PLATE
 NO CODE = NO FINISH
 DASH NUMBER FROM TABLE I
 BASIC NUMBER

NOTES:

- (1) DIMENSIONS ARE IN INCHES AND SHALL APPLY AFTER FINISH UNLESS OTHERWISE SPECIFIED.
- (2) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
- (3) UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.
- (2) (4) UNLESS OTHERWISE SPECIFIED HEREIN, REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF MANUFACTURE. HOWEVER, EXISTING MATERIAL INVENTORY CERTIFIED TO A PREVIOUS REVISION OF THE APPLICABLE MATERIAL SPECIFICATION(S) IS ACCEPTABLE FOR USE UNTIL DEPLETION.
- (5) DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.
- (6) TOLERANCES UNLESS OTHERWISE SPECIFIED: DECIMALS ± 0.010 .
- /7/ SEE TYPICAL INSTALLATION ILLUSTRATION FOR CONFIGURATION OF -8 AND -16.
- /8/ USE MS35214 SCREW OR SIMILAR FOR MOUNTING. THE LENGTH SHALL BE DIMENSION G PLUS .250 INCH.
- /9/ THE NUT NEED NOT HAVE THE SHAPE SHOWN, BUT MUST BE CONTAINED WITHIN THE OUTLINE SHOWN.

REVISION
2
MS33737
SHEET 2



Documents

Document Sharing Hub