IEC 60268-4

Edition 6.0 2018-09
REDLINE VERSION

INTERNATIONAL STANDARD

colour inside

Sound system equipment – Part 4: Microphones

IEC 60268-4:2018-09 RLV(en)

Documents
Document Sharing Hub

Full document details: IEC 60268-4 2018 RLV

THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2018 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembé
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC
The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications
The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue
The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - webstore.iec.ch/advsearchform
The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,…). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished
Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org
The world's leading online dictionary of electronic and electrical terms containing 21 000 terms and definitions in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary
67 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc
If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

Documents
Document Sharing Hub

Full document details: IEC 60268-4 2018 RLV

IEC 60268-4

Edition 6.0 2018-09
REDLINE VERSION

INTERNATIONAL STANDARD

colour inside

Sound system equipment – Part 4: Microphones

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 33.160.50

ISBN 978-2-8322-6047-0

Warning! Make sure that you obtained this publication from an authorized distributor.

® Registered trademark of the International Electrotechnical Commission

Documents
Document Sharing Hub

Full document details: IEC 60268-4 2018 RLV

CONTENTS

FOREWORD....6
1 Scope....8
2 Normative references....8
3 Terms and definitions....9
4 General conditions....10
4.1 General....10
4.2 Measurement conditions....10
4.2.1 General....10
4.2.2 Rated conditions....11
5 Particular conditions....12
5.1 Pre-conditioning....12
5.2 Sound source....12
5.3 Measurement of sound pressure....12
5.4 Voltage measuring system....12
5.5 Acoustical environment....12
5.5.1 General....12
5.5.2 Free-field conditions....13
5.5.3 Diffuse field conditions....15
5.5.4 Microphone coupled to a sound source by means of a small cavity coupler....15
5.6 Methods of measuring frequency response....16
5.6.1 Point-by-point and continuous sweep frequency methods....16
5.6.2 Calibration methods....16
5.7 Overall accuracy....17
5.8 Graphical presentation of results....17
6 Type description (acoustical behaviour)....17
6.1 Principle of the transducer....17
6.2 Type of microphone....17
6.3 Type of directional response characteristics....17
6.4 Application....17
7 Terminals and controls....17
7.1 Marking....17
7.2 Connectors and electrical interface values....18
8 Reference point and axis....18
8.1 Reference point....18
8.2 Reference axis....18
9 Rated power supply....18
9.1 Characteristics to be specified....18
9.2 Method of measurement....18
10 Electrical impedance....19
10.1 Internal impedance....19
10.1.1 Characteristic to be specified....19
10.1.2 Methods of measurement....19
10.2 Rated impedance....19
10.3 Rated minimum permitted load impedance....20

AVA Documents
Document Sharing Hub
Full document details: IEC 60268-4 2018 RLV

11 Sensitivity 20
11.1 General 20
11.2 Sensitivities with respect to acoustical environment 20
11.2.1 Free-field sensitivity 20
11.2.2 Diffuse-field sensitivity 21
11.2.3 Close-talking ~~or~~ and near-field sensitivity 22
11.2.4 Pressure sensitivity 22
11.3 Rated sensitivity 22
12 Response 23
12.1 Frequency response 23
12.1.1 Characteristic to be specified 23
12.1.2 Method of measurement 23
12.1.3 Graphical presentation of results 23
12.2 Effective frequency range 23
12.2.1 Characteristic to be specified 23
12.2.2 Method of measurement 23
13 Directional characteristics 24
13.1 Directional pattern 24
13.1.1 Characteristic to be specified 24
13.1.2 Methods of measurement 24
13.1.3 Graphical presentation of results 25
13.2 Directivity index 25
13.2.1 Characteristic to be specified 25
13.2.2 Method of measurement 25
14 Amplitude non-linearity 26
14.1 General 26
14.2 Total harmonic distortion 26
14.2.1 Characteristic to be specified 26
14.2.2 Method of measurement 26
14.3 Harmonic distortion of the nth order (n = 2, 3,...) 27
14.3.1 Characteristic to be specified 27
14.3.2 Method of measurement 27
14.4 Difference frequency distortion of second order 27
14.4.1 Characteristic to be specified 27
14.4.2 Method of measurement 27
15 Limiting characteristics 28
15.1 Rated maximum permissible peak sound pressure 28
15.2 Overload sound pressure 28
15.2.1 Characteristic to be specified 28
15.2.2 Method of measurement 28
16 Balance 29
16.1 Balance of the microphone output 29
16.2 Balance under working conditions 29
17 Equivalent sound pressure level due to inherent noise 30
17.1 Characteristic to be specified 30
17.2 Method of measurement 30
18 Ambient conditions 30
18.1 General 30

AVA Documents
Document Sharing Hub
Full document details: IEC 60268-4 2018 RLV

18.2 Pressure range 31
18.3 Temperature range....31
18.4 Relative humidity range....31
19 External influences 31
19.1 General....31
19.1.1 Specification and methods of measurement....31
19.1.2 Other external interferences....31
19.2 Equivalent sound pressure due to mechanical vibration....31
19.2.1 Characteristic to be specified 31
19.2.2 Method of measurement....32
19.3 Equivalent sound pressure due to wind....32
19.3.1 Characteristic to be specified 32
19.3.2 Method of measurement....32
19.4 Transient equivalent sound pressure due to "pop" effect 36
19.4.1 General 36
19.4.2 Characteristic to be specified 36
19.4.3 Method of measurement....38
20 Electromagnetic compatibility (EMC)....39
20.1 Regulatory requirements 39
20.2 Requirements for preserving programme quality 39
20.3 Performance criteria....40
20.3.1 Criterion A 40
20.3.2 Criterion B 40
20.4 Testing for immunity to disturbances in the presence of acoustical noise....41
20.5 Immunity to frequency-modulated radiated disturbances 41
20.6 Immunity to magnetic fields 41
20.7 Immunity to ripple on DC power supply....41
20.8 Permanent magnetic field....42
20.9 Evaluation and reporting of the test results 42
21 Physical characteristics 42
21.1 Dimensions....42
21.2 Weight....42
21.3 Cables and connectors....42
22 Classification of the characteristics to be specified 42
Annex A (normative) Additional characteristics 45
A.1 Characteristic sensitivity for speech....45
A.1.1 Characteristic to be specified 45
A.1.2 Method of measurement....45
A.2 Front-to-rear sensitivity index (0° to 180°)....46
A.2.1 Characteristic to be specified 46
A.2.2 Method of measurement....46
A.3 Noise-cancelling index 46
A.3.1 Characteristic to be specified 46
A.3.2 Method of measurement....46
A.4 Special characteristics for stereo microphones....47
A.4.1 General 47
A.4.2 Included angle of an XY (left-right) microphone....47
A.4.3 Acceptance angle 47

AVA Documents
Document Sharing Hub
Full document details: IEC 60268-4 2018 RLV

Annex B (informative) Sound insulation device 48
~~Annex (informative) Simplified procedure for "pop" measurements .....~~
~~General.....~~
~~Measurement set-up.....~~
~~Measurement procedure.....~~
~~Approximate inclusion of different frequency responses .....~~
Annex C (informative) Recommendations for professional digital microphones 52
C.1 General.....52
C.2 Data sheets for digital microphones 52
Annex D (informative) Recommended method for measuring noise levels according to ITU-R BS.468-4 in the digital domain 55
D.1 General.....55
D.2 Recommended method.....55
D.3 Matlab code 56
Bibliography 59

~~Figure – Measurement set-up.....~~
~~Figure – Test fixture for the sound field sensitivity .....~~
Figure 1 – Balance of the output 29
Figure 2 – Balance under working conditions.....29
Figure 3 – Measurement set-up for wind influence 33
Figure 4 – Wind generators, type 1 (Figure 4a) and type 2 (Figure 4b) 35
Figure 5 – Electrical and mechanical setup for the measuring of the "pop" effect.....37
Figure B.1 – Sound insulation device 48
Figure D.1 – ITU weighting filter for weighted and unweighted measurements 55
Figure D.2 – Peak value rectifier scheme 56

~~Table – Reference signal and characteristics.....~~
Table 1 – Reverberation time of the empty room.....15
Table 2 – Examples of EMC regulations and standards.....39
Table 3 – Basic EMC standards and their application to microphones 40
Table 4 – Classification of characteristics.....43
Table A.1 – Speech power weighting factor at octave-band centre frequencies 45
Table C.1 – Classification of the characteristics recommended to be specified 52
Table C.2 – Additional digital characteristics to be specified 54
Table D.1 – Time constants for the two PVRs.....56

Documents
Document Sharing Hub
Full document details: IEC 60268-4 2018 RLV

INTERNATIONAL ELECTROTECHNICAL COMMISSION

_____

SOUND SYSTEM EQUIPMENT –

Part 4: Microphones

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This redline version of the official IEC Standard allows the user to identify the changes made to the previous edition. A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text.

Documents
Document Sharing Hub

Full document details: IEC 60268-4 2018 RLV

International Standard IEC 60268-4 has been prepared by IEC technical committee 100: Audio, video and multimedia systems and equipment.

This sixth edition cancels and replaces the fifth edition published in 2014. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

a) Subclause 19.4 on "pop" measurement replaces Annex C;

b) new Annex D for noise measurements in the digital domain.

The text of this International Standard is based on the following documents:

CDV	Report on voting
100/2992/CDV	100/3109/RVC

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 60268 series, under the general title *Sound system equipment*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "http://webstore.iec.ch" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The “colour inside” logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this publication using a colour printer.

Documents
Document Sharing Hub

Full document details: IEC 60268-4 2018 RLV

A bilingual version of this publication may be issued at a later date.SOUND SYSTEM EQUIPMENT –

Part 4: Microphones

1 Scope

This part of IEC 60268 specifies methods of measurement for the electrical impedance, sensitivity, directional response pattern, dynamic range and external influences of sound system microphones, and also details the characteristics to be specified by the manufacturer.

It applies to sound system microphones for all applications for speech and music. It does not apply to measurement microphones, but it does apply to each audio channel of microphones having more than one channel, for example for stereo or similar use. It is also applicable to flush-mounted microphones and to the analogue characteristics of microphones with digital audio output.

For the purposes of this International Standard, a microphone includes all such devices as transformers, pre-amplifiers, or other elements that form an integral part of the microphone, up to the output terminals specified by the manufacturer.

The major characteristics of a microphone are considered in Clauses 6 to 21. Additional characteristics are considered in Annex A~~, Annex C~~ and Annex ~~D~~C.

NOTE The characteristics specified in this document do not ~~completely~~ describe the subjective response of the microphone. Further work is necessary to find new definitions and measurement procedures for a later ~~replacement by~~ introduction of objective characteristics ~~of~~ for at least some of the subjective descriptions used to describe microphone performance.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

CISPR 35:2016, *Electromagnetic compatibility of multimedia equipment – Immunity requirements*

IEC 60268-1:1985, *Sound system equipment – Part 1: General*
IEC 60268-1:1985/AMD1:1988
IEC 60268-1:1985/AMD2:1988

IEC 60268-2:1987, *Sound system equipment – Part 2: Explanation of general terms and calculation methods*
IEC 60268-2:1987/AMD1:1991

IEC 60268-3:2013, *Sound system equipment – Part 3: Amplifiers*

IEC 60268-5:2003, *Sound system equipment – Part 5: Loudspeakers*
IEC 60268-5:2003/AMD1:2007

IEC 60268-11:1987, *Sound system equipment – Part 11: Application of connectors for the interconnection of sound system components*

AVA Documents
Document Sharing Hub

Full document details: IEC 60268-4 2018 RLV

IEC 60268-11:1987/AMD1:1989
IEC 60268-11:1987/AMD2:1991

IEC 60268-12:1987, *Sound system equipment – Part 12: Application of connectors for broadcast and similar use*
IEC 60268-12:1987/AMD1:1991
IEC 60268-12:1987/AMD2:1994

IEC 61000-4-2:2008, *Electromagnetic compatibility (EMC) – Part 4-2: Testing and measurement techniques – Electrostatic discharge immunity test*

IEC 61000-4-3:2006, *Electromagnetic compatibility (EMC) – Part 4-3: Testing and measurement techniques – Radiated, radio-frequency, electromagnetic field immunity test*
IEC 61000-4-3:2006/AMD1:2007
IEC 61000-4-3:2006/AMD2:2010

IEC 61000-4-4:2012, *Electromagnetic compatibility (EMC) – Part 4-4: Testing and measurement techniques – Electrical fast transient/burst immunity test*

IEC 61000-4-6:~~2008~~ 2013, *Electromagnetic compatibility (EMC) – Part 4-6: Testing and measurement techniques – Immunity to conducted disturbances, induced by radio-frequency fields*

IEC 61000-4-8:2009, *Electromagnetic compatibility (EMC) – Part 4-8: Testing and measurement techniques – Power frequency magnetic field immunity test*

IEC 61000-4-16:2015, *Electromagnetic compatibility (EMC) – Part 4-16: Testing and measurement techniques – Test for immunity to conducted, common mode disturbances in the frequency range 0 Hz to 150 kHz*

IEC 61000-4-17:1999, *Electromagnetic compatibility (EMC) – Part 4-17: Testing and measurement techniques – Ripple on d.c. input power port immunity test*
61000-4-17:1999/AMD1:2001
61000-4-17:1999/AMD2:2008

IEC 61260-1:2014, *Electroacoustics – Octave-band and fractional-octave-band filters – Part 1: Specifications*

IEC 61938:2013, *Multimedia systems – Guide to the recommended characteristics of analogue interfaces to achieve interoperability*

ITU-T Recommendation P.51:1996, *Artificial mouth*

EN 55103-2:2009, *Electromagnetic compatibility – Product family standard for audio, video, audio-visual and entertainment lighting control apparatus for professional use – Part 2: Immunity*

EN 300 422-2 V1.3.1:2011, *Electromagnetic compatibility and radio spectrum matters (ERM) – Wireless microphones in the 25 MHz to 3 GHz frequency range – Part 2: Harmonized EN covering the essential requirements of article 3.2 of the R&TTE Directive*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60268-1 and the following apply.

Documents
Document Sharing Hub
Full document details: IEC 60268-4 2018 RLV

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at http://www.electropedia.org/
- ISO Online browsing platform: available at http://www.iso.org/obp

3.1
far-field microphone
microphone for use mainly at a distance of 1 m or more ~~than 1 m~~ from the source of sound

Note 1 to entry: The term "far-field microphone" describes a microphone application (see 6.4) and not a type of microphone. A specific microphone may have one or more applications, but the term is helpful in specifying the method of measurement.

3.2
near-field microphone
microphone for use by an individual performer at a distance of approximately 30 cm

Note 1 to entry: The term "near-field microphone" describes a microphone application (see 6.4) and not a type of microphone. A specific microphone may have one or more applications, but the term is helpful in specifying the method of measurement.

3.3
close-talking microphone
microphone for use at a distance of approximately 25 mm from the source of sound

Note 1 to entry: The term "close-talking microphone" describes a microphone application (see 6.4) and not a type of microphone. A specific microphone may have one or more applications, but the term is helpful in specifying the method of measurement.

4 General conditions

4.1 General

Special reference is made to IEC 60268-1, concerning:

- units and system of measurement;
- frequencies of measurement;
- quantities to be specified and their accuracy (see also 5.7);
- marking (see also 7.1);
- ambient conditions;
- filters, networks and measuring instruments for noise specification and measurement;
- individual specifications and type specifications;
- graphical presentation of characteristics;
- scales for graphical presentation;
- personal safety and prevention of spread of fire;
- method of producing a uniform alternating magnetic field;
- search coils for measuring the magnetic field strength,

and to IEC 61938 concerning powering of microphones.

4.2 Measurement conditions

4.2.1 General

For convenience in specifying how microphones shall be set up for measurement, three sets of conditions have been defined in this document, under the title of "rated conditions".

Documents
Document Sharing Hub
Full document details: IEC 60268-4 2018 RLV

Microphones should be measured in conditions approximating those in which they are intended to be used. Three sets of measurement conditions are specified in this document: free-field, near-field and close-talking. The differences between these sets of conditions are in the distance to the sound source and the sound pressure level of the measurement. Measurements shall be reported using at least one of these sets of conditions. Additional data may be included, provided that the measurement conditions are specified.

Three ratings are basic to the formulation of these concepts:

- rated power supply (see 9.1);
- rated impedance (see 10.2);
- rated sensitivity (see 11.3).

To obtain the correct conditions for measurement, the above-mentioned ratings shall be taken from the specifications supplied by the manufacturer of the equipment.

The term "rated" applied to other characteristics relates to the specification or measurement of the particular characteristic under rated conditions or under conditions unambiguously connected to them. This applies, for example, to the following two characteristics:

- rated output voltage;
- rated equivalent sound pressure level due to inherent noise.

Methods of measurement are given in this document for electrical impedance, sensitivity, directional pattern, dynamic range and external influences. Where alternative methods are given, the chosen method shall be specified.

4.2.2 Rated conditions

The microphone is understood to be working under rated conditions when the following conditions are fulfilled:

- the microphone is connected to the resistive load specified in 5.4, or as specified by the manufacturer;
- if the microphone needs a power supply, this is the rated power supply;
- the microphone (except a close-talking or near-field microphone) is placed in a sound field meeting the free-field conditions in 5.5.2, the waves having zero-degree incidence with respect to the reference direction;
- far-field microphones shall be measured in free-field conditions;
- the undisturbed sound pressure (in the absence of the microphone) in the sound field at the reference point of the microphone is sinusoidal and set at a level of 1 Pa (94 dB SPL);
- for close-talking microphones, the microphone is placed at a stated distance, no more than 25 mm from the artificial mouth complying with ITU-T Recommendation P.51, and the undisturbed sound pressure in the sound field at the reference point of microphone is sinusoidal and set at a level of 3 Pa (104 dB SPL);
- for near-field microphones, the microphone is placed at 30 cm from the artificial mouth complying with ITU-T Recommendation P.51, and the undisturbed sound pressure in the sound field at the reference point of microphone is sinusoidal and set at a level of 1 Pa (94 dB SPL);
- if a special microphone needs a different measurement level or procedure (e.g. Lavalier or boundary layer microphones), it shall be stated in the technical data together with the reason for this. Levels related to the normal reference level of 94 dB by multiples of 10 dB are preferred;
- controls, if any, are set to the position recommended by the manufacturer;

Documents
Document Sharing Hub
Full document details: IEC 60268-4 2018 RLV

- in the absence of a clear reason to the contrary, the measurement frequency is 1 000 Hz (see IEC 60268-1);
- the ambient pressure, relative humidity and ambient temperature are within the limits given in IEC 60268-1, and shall be stated.

Measurements may be made at a sound pressure of 0,3 Pa if this is necessary due to limitations of the performance of the loudspeaker or other measurement equipment, and only if any change in performance between the level used and the reference level is known with the necessary accuracy for the relevant characteristics.

5 Particular conditions

5.1 Pre-conditioning

A microphone with preamplifier shall be switched on for the period of time specified by the manufacturer, before measurements are made, to allow the components to reach the stationary temperature for rated conditions. If the manufacturer specifies no period, a period of 10 s shall be allowed for stabilization. If the microphone contains a vacuum tube or other heating device the time shall be 10 min.

5.2 Sound source

The sound source shall be capable of producing at the microphone position the sound pressure level as defined for rated conditions. The amplitude non-linearity of the sound source shall be held to such a value that the effect on the measured response does not exceed 0,5 dB. If the conditions of measurement preclude the possibility of securing sufficiently low distortion, a narrow-band filter may be used at the microphone output terminals, which allows the response at the fundamental frequency to be measured.

For free-field calibration and calibration of near-field microphones, the sound source shall be contained in an enclosure which radiates sound from one well-defined opening ~~only, and such an opening shall be~~ fulfilling the sound field requirements, preferably by only one being radially symmetrical with respect to the axis of the reference direction of the microphone.

5.3 Measurement of sound pressure

A calibrated reference pressure microphone shall be used to measure the sound pressure. The reference microphone shall be calibrated with an accuracy of ±1 dB at 1 kHz or better.

5.4 Voltage measuring system

The voltage generated by the microphone, when in a sound field, shall be determined by using a voltmeter with an input resistance ~~of~~ negligible to the specified microphone load. This load is five times the rated impedance of the microphone, unless otherwise stated by the manufacturer. If external equipment, such as a power supply, applies an impedance in parallel with the microphone, its impedance shall be taken into account.

NOTE Microphones having a rated impedance of 200 Ω often have an actual internal impedance in the order of 50 Ω, and many of them perform best with a minimum load impedance around 1 000 Ω.

5.5 Acoustical environment

5.5.1 General

The microphone can be measured in different acoustical environments:

a) in a free field or similar with negligible boundary effects, e.g. by using special computer-generated sound source signals:
   – spherical waves, or

Documents
Document Sharing Hub
Full document details: IEC 60268-4 2018 RLV

– plane waves, or

– waves produced by a specific sound source (artificial mouth or artificial head);

b) in a diffuse field;

c) coupled to a sound source by means of a small cavity (coupler).

5.5.2 Free-field conditions

5.5.2.1 General

A free-field sound wave is normally divergent in character. In certain circumstances it can approximate an ideal plane wave. Free-field conditions can be obtained:

- in open air, ambient noise and wind permitting, or
- in an anechoic room, or
- in a duct.

A sound source of small dimensions with respect to the wavelength produces a spherical wave in these environments. The spherical wave can be approximated to a plane wave in a region of measurement located at a sufficient distance from the source. Spherical waves can be used to measure pressure microphones but it is necessary to use almost perfect plane waves in the low-frequency range for the measurement of pressure gradient microphones.

For microphones responding both to pressure and to pressure gradient, having a sufficiently flat frequency response in a plane-wave free sound field (i.e. at a sufficient distance from the source), the response as a function of frequency f of distance r from a centre of spherical diverging waves and of angle of incidence θ of the waves at the microphone, can be given in a complex form:

$$(1-B)+B\left(1+\frac{1}{\mathrm{j}kr}\right)\cos\theta$$

where

$1-B$ is the contribution of the pressure component;

B is the contribution of the pressure gradient component;

k = $2\pi/\lambda$ or $2\pi f/\cancel{v}c$ (λ – wavelength, c – speed of sound);

B = 0 for the omnidirectional pressure type;

B = 0,5 for the cardioid type;

B = 1 for the bidirectional pressure gradient type.

At low frequencies, it becomes difficult to realize plane wave conditions in an anechoic room. A plane wave at low frequencies, below the cut-off frequency of the anechoic room, can therefore be better produced under other conditions.

Free-field conditions are considered to be sufficiently realized in the region around the microphone if the following conditions are met:

- within a distance of 200 mm in front, behind, right, left, above and below the position of the microphone the sound pressure level is measured at every measuring frequency by means of a pressure transducer;
- the axis of the transducer shall point towards the reference point of the loudspeaker (see IEC 60268-5);
- the corresponding sound pressure levels on axis positioned at different distances from the loudspeaker shall not differ by more than 0,5 dB from the calculated levels in the ideal sound field;

AVA Documents
Document Sharing Hub
Full document details: IEC 60268-4 2018 RLV

- the values at a nearly constant distance to the sound source, right, left, above and below the microphone shall not differ by more than 1 dB from the level at the reference point of the microphone.

5.5.2.2 Spherical waves

The sound pressure generated in a free field by an omnidirectional sound source varies inversely with the distance from the acoustic centre of the source~~s~~.

The output voltage of the microphone varies inversely with the distance between the source and the microphone when the relevant dimensions of both are small compared with the wavelength, allowing the results from the measurements made at a certain distance r to be converted by calculation to results which would be obtained at the reference distance.

When either the circumference of the radiating surface of the source or the circumference of the principal acoustic entry of the microphone exceeds the wavelength, this computation applies only when the measuring distance conforms to:

$$r \geq d$$

$$r \geq d^2/\lambda$$

where

r is the distance from the source to the measuring point;

d is the effective diameter of the sound source;

λ is the sound wavelength.

It is advisable for the distance from the source to the measuring point to exceed three times the largest dimension of the radiating surface of the source.

5.5.2.3 Plane progressive waves

A plane progressive wave can be obtained either in a duct or in a free field.

a) In a duct

In designing a duct capable of producing useful results, there are many problems to be solved such as the design of the terminating impedance, the avoidance of cross-modes, the shape of the original wavefront and the relative dimensions of the duct and the microphone.

b) In a free field

A spherical wave at a distance of at least half the wavelength from the centre of curvature at the lowest frequency of measurement is a practical approximation to a plane progressive wave.

For measurement of "shotgun" types and pressure zone microphones, determining the smallest permitted distance is complicated and no exact rules can be given. Therefore, in these cases the measuring distance used shall be stated.

5.5.2.4 Use of an artificial mouth

In order that the conditions of test are similar to those of actual use, it ~~may~~ can be necessary to introduce ~~an obstacle in the shape of a human head~~ extensions of the measurement setup, such as a head and torso simulator when measuring close-talking and near-field microphones by means of an artificial mouth (see 4.2.2). If measurements are made in such conditions, i.e. in other than with the artificial mouth in approximately anechoic conditions, details of the measurement shall be provided.

Documents
Document Sharing Hub
Full document details: IEC 60268-4 2018 RLV

5.5.3 Diffuse field conditions

Some measurements can be made in a diffuse field in which sound waves are propagated with random incidence. In this case, bands of noise of third-octave width or broadband signals together with suitable filtering shall be used.

A diffuse sound field can be approximately realized in a reverberant room characterized by a sufficiently long duration of reverberation at a sufficiently large distance from the source and the walls, and above a limiting frequency (see also ISO 354).

The reverberation time T of the empty room is specified in Table 1.

Table 1 – Reverberation time of the empty room

T >	5 s	5 s	5 s	4,5 s	3,5 s	2 s
At	125 Hz	250 Hz	500 Hz	1 000 Hz	2 000 Hz	4 000 Hz

For the determination of the lower frequency limit, the following equation can be used:

$$f \geq \frac{500}{V^{1/3}}$$

where

V is the volume of the room, in cubic metres;

f is the frequency, in hertz.

The region of measurement shall be chosen at such a distance from the source that the direct sound of the source is negligible.

When an omnidirectional source is used, the minimum distance r (in metres) from the source to the measuring points is given by:

$$r \geq 0{,}06(V/T)^{1/2}$$

where

V is the volume of the room, in cubic metres;

T is the Sabine reverberation time at the frequency f.

NOTE Multiple uncorrelated noise sources are used successfully to generate stationary diffuse sound fields under non-reverberant conditions.

5.5.4 Microphone coupled to a sound source by means of a small cavity coupler

To determine the pressure sensitivity of a microphone, a rigid cavity is used to couple the sound source to the microphone. This method is useful for obtaining the pressure sensitivity of a microphone by comparison with the sensitivity of a calibrated reference microphone. In order to obtain a sufficiently uniform sound pressure inside the cavity, this method shall only be used within the limits of the frequency range where the linear dimensions of the cavity are less than one-tenth of the wavelength. At low frequencies care shall be taken to eliminate air leakage.

Documents
Document Sharing Hub
Full document details: IEC 60268-4 2018 RLV

5.6 Methods of measuring frequency response

5.6.1 Point-by-point and continuous sweep frequency methods

Response curves may be prepared point-by-point, or through the use of a slow continuous sweep frequency method, or automatically.

a) Point-by-point method

Great care shall be taken to ensure that all significant peaks and troughs of the frequency response curve are explored. The graph should clearly indicate the measurement points.

b) Continuous sweep frequency method

The rate of traversing the frequency range shall be slow enough to ensure that the resulting curve does not deviate from that which would be obtained under steady state conditions. Stopping the trace at any instant shall not change the indicated response by more than ±1 dB.

The following additional apparatus may be used:

– equipment capable of automatically maintaining the requisite sound pressure level over the frequency range concerned;

– an automatic level recorder as output indicator.

c) Special computer-based signals and procedures

Computer algorithms are available to generate signals and to evaluate responses in the time domain, as well as in the frequency domain. Some of them are just digital procedures that replace their analogue ancestors, such as the Fast Fourier Transform for spectral analysis. Other algorithms provide new types of test signals and responses. Most of them are applicable if the user takes into account their inherent limitations and requirements. In cases where existing specified procedures are replaced by new ones for the evaluation of the same characteristic, the user shall ensure that the result is at least as accurate as with the old procedure. While new techniques are considered for standardization when basic matters of background and their relationship to known properties have been determined, any technique may be used for frequency response measurement if it produces the same result as the point-by-point or continuous sweep frequency methods.

5.6.2 Calibration methods

Irrespective of the choice of the point-by-point or automatic method, there are two methods of conducting the calibration.

a) Substitution method

A method of measurement of the response of a microphone in which the microphone to be calibrated and the standard microphone employed to measure the requisite sound pressure are placed alternately at the same test points in the sound field. This method leads to the highest accuracy.

b) Simultaneous comparison method

For reasons of convenience an alternative method for measuring the response of a microphone is sometimes employed in which the microphone to be calibrated and the standard microphone employed to measure the requisite sound pressure are placed simultaneously at two different points normally not widely separated. Care shall be taken that one microphone is not placed at a more favourable point in the sound field than the other. The points chosen shall be such that the results of a response test carried out by the comparison method agree within ±1 dB with the corresponding results obtained by the substitution method. The simultaneous method may be used only after checking that this requirement is met. Compliance with this requirement can be assumed when

– the sound pressures, measured at the two different points in the free sound field by means of a calibrated microphone, corresponds within ±1 dB, and

Documents
Document Sharing Hub
Full document details: IEC 60268-4 2018 RLV

– the distance between the microphones is such that the sound pressure at each of the two microphone points is independent within ±1 dB of the presence of the second microphone at the other point.

5.7 Overall accuracy

An overall accuracy of ±2 dB or better shall be obtained for the measurement of all types of microphones.

5.8 Graphical presentation of results

The graphical presentation of measurement results ~~should~~ shall conform to the provisions of IEC 60268-1.

6 Type description (acoustical behaviour)

6.1 Principle of the transducer

The manufacturer shall specify the principle of the transducer, for example electrostatic (condenser), electrodynamic, electromagnetic or piezoelectric.

6.2 Type of microphone

The manufacturer shall specify the type of microphone, for example pressure, pressure-gradient (with acoustical phase shift network, if any), or combination of a pressure and pressure-gradient microphone, or velocity microphone.

6.3 Type of directional response characteristics

The manufacturer shall specify the type of directional response characteristics of the microphone, for example omnidirectional, unidirectional, bidirectional (e.g. sphere, cardioid, supercardioid, hypercardioid, hemisphere or half-cardioid of revolution~~, etc.~~).

6.4 Application ~~profile~~

The manufacturer shall specify the intended application ~~profile~~ or applications of the microphone to indicate the primary use for which it is intended, such as ~~free field~~ far-field, near-field or close-talking.

- ~~Free field~~ Far-field microphones are intended to be used and are measured in approximately plane progressive wave conditions.
- Near-field microphones are typically hand-held by the user and are measured using an artificial mouth as the sound source, at a distance of 30 cm.
- Close-talking microphones are used at very short distances and are measured using an artificial mouth as the sound source, at a distance of 25 mm.

Other applications ~~profiles~~ (e.g. for boundary layer or body-contact/Lavalier microphones) may be used if details are provided for measurement and ~~as a basis for~~ specifications ~~if details are provided~~.

7 Terminals and controls

7.1 Marking

Recommendations for marking the terminals and controls are given in IEC 60268-1:1985, Clause 5, and IEC 61938:2013, 9.4.6 and 9.5.5, with the addition of the following requirement, if the microphone conforms to the requirements of IEC 61938, Clause 9.

Documents
Document Sharing Hub
Full document details: IEC 60268-4 2018 RLV

The polarity shall be indicated by a mark, preferably a coloured dot or a connector pin number designated in the instruction manual, at that output terminal at which a positive instantaneous voltage is produced by an inward movement of the diaphragm or equivalent, that is an increase in sound pressure at the principal entry. Marking for safety shall be in accordance with IEC 60065 or other appropriate safety standard.

Marking of the polarity is recommended if the microphone conforms to the requirements of IEC 61938. If the polarity is not in accordance with IEC 61938, the polarity shall be marked on the microphone.

7.2 Connectors and electrical interface values

Connectors and their wiring shall be in accordance with IEC 60268-11 or IEC 60268-12. Interface values (voltages and impedances) shall be in accordance with IEC 61938.

8 Reference point and axis

8.1 Reference point

In the absence of clear reason to the contrary, the reference point shall be the centre of the principal sound entry. Otherwise it shall be stated.

In order to allow unambiguous specification of the reference point, reference axis and polarity, the manufacturer ~~should~~ shall designate a principal sound entry even for a bidirectional microphone.

8.2 Reference axis

The reference axis is a line passing through the reference point indicating a recommended direction of sound incidence specified by the manufacturer. The microphone shall be so designed that the recommended direction of sound incidence is obvious to the user.

The reference axis should preferably be perpendicular to the plane of the principal acoustic entry of the microphone and should pass through the centre of the entry.

9 Rated power supply

9.1 Characteristics to be specified

The following information shall be specified by the manufacturer for each microphone interface port to be connected to the power supply and for each position of the power supply adaptor, if any:

- the type of power supply (phantom, A-B, etc.; see IEC 61938);
- power supply voltage and its upper and lower limits;
- current drawn from the power supply, expressed in amperes;
- for multi-voltage microphones, the voltage-current characteristic.

9.2 Method of measurement

For measurements, proceed as follows.

a) The microphone is operated under rated conditions.

b) The current drawn from the power supply is measured in amperes.

Documents
Document Sharing Hub

Full document details: IEC 60268-4 2018 RLV

10 Electrical impedance

10.1 Internal impedance

10.1.1 Characteristic to be specified

The modulus of the internal impedance of the microphone measured between the output terminals.

If the impedance can be satisfactorily represented by that of a simple network, the values of the network components may be given. If this is not applicable, the impedance should be specified as a function of frequency.

10.1.2 Methods of measurement

The internal impedance may be measured by the comparison method or by applying a sound pressure and measuring the output voltage under different load conditions. Both methods are indicated below.

a) Method 1

The impedance can be measured by means of a measuring bridge. An alternative method is that of comparison with a known impedance. In the latter case, a constant current from a high-impedance source is passed through the microphone and the voltage across its terminals is measured.

The microphone is then replaced by a known resistance, and the procedure repeated. Comparison of the two values gives the modulus of the impedance directly.

The voltage applied at the microphone terminals shall not exceed the output voltage generated by the microphone at the overload sound pressure level.

NOTE While the internal impedance of microphones is often assumed to be resistive, and the load impedance to be resistive, in many cases the internal impedance is complex, such as when there is an output coupling capacitor, and the input impedance is also complex, such as when there is a transformer. The combination of these impedances can result in resonance within the audio band and exacerbation of negative effects such as wind noise.

b) Method 2

The internal impedance can also be computed from the output voltages occurring under three different conditions of load. Generally speaking, this procedure requires very accurate measuring apparatus.

If the internal impedance is approximately a pure resistance, the following simple procedure may be used to obtain approximate results, which are sufficiently accurate for normal practice:

- the microphone is operated under rated conditions;
- sound pressure is applied to the microphone and the impedance is deduced from the output voltage obtained for different loads. For example, the impedance Z may be calculated from the no-load output voltage U'_2 and the output U_2 obtained when a load impedance R_2 is applied by using the formula:

$$Z = \frac{U'_2 - U_2}{U_2} R_2$$

10.2 Rated impedance

The rated impedance shall be specified by the manufacturer. Microphones are generally designed to be connected to a load impedance much higher than the rated impedance (see 5.4 of this document and 9.1 of IEC 61938:2013), and should not be used with loads below the minimum permitted load impedance.

Documents
Document Sharing Hub
Full document details: IEC 60268-4 2018 RLV

NOTE The recommendations of IEC 61938 are based on the assumption that a value of 5 times the rated impedance is suitable in most cases. This load causes the output voltage level to be 1,6 dB below the no-load voltage.

10.3 Rated minimum permitted load impedance

The rated minimum permitted load impedance is the minimum impedance, specified by the manufacturer, by which the microphone may be terminated.

NOTE The minimum permitted load impedance is a compromise leading to negligible effect on performance.

11 Sensitivity

11.1 General

The sensitivity is the ratio of the output voltage of the microphone to the sound pressure to which it is exposed.

The sensitivity M is expressed in volts per pascal. If the microphone is not loaded with a resistance equal to five times the rated impedance, this shall be stated with the results.

NOTE 1 Normally the ratio gives a complex value, but usually only the amplitudes (with sinusoidal signal) are considered.

NOTE 2 For practical reasons, values for sensitivity are typically expressed in mV/Pa.

The sensitivity level L_M, is the ratio, expressed in decibels, of the sensitivity M to the reference sensitivity M_r.

$$L_M = 20 \lg \frac{M}{M_r}$$

The reference sensitivity is M_r = 1 V/Pa. The following types of sensitivity may be specified:

– free-field sensitivity (see 11.2.1) referring to the sound pressure of the undisturbed free field (in the absence of the microphone);
– diffuse-field sensitivity (see 11.2.2) referring to the sound pressure of the undisturbed diffuse field;
– close-talking sensitivity and near-field sensitivity (see 11.2.3) referring to the sound pressure of the undisturbed field at a specified short distance from the human or artificial mouth;
– pressure sensitivity (see 11.2.4) referring to the actual sound pressure at the principal acoustic entrance of the microphone.

These types of sensitivity may be given, if appropriate, either at specified frequencies, within a specified frequency band, for octave/third-octave bands, or for complex signal inputs. In the latter case, the characteristics of the signal and the measuring system shall be specified. Definition and figures for the sensitivity of microphones should be related to the purpose for which the microphones are used.

11.2 Sensitivities with respect to acoustical environment

11.2.1 Free-field sensitivity

11.2.1.1 Characteristic to be specified

At a specific frequency or within a specified frequency band and for a specified direction of sound incidence with respect to the reference axis, the ratio of the output voltage to the sound pressure in the undisturbed free field.

AVA Documents Document Sharing Hub

Full document details: IEC 60268-4 2018 RLV

Unless otherwise specified, the undisturbed free field ~~should~~ shall be a plane progressive wave with the wavefront perpendicular to the reference axis of the microphone.

11.2.1.2 Method of measurement

The conditions for measurement are specified in Clauses 4 and 5. A free-field calibration of the standard microphone employed to measure the sound pressure is required. It is important to ensure that the orientation of the standard microphone agrees with the orientation used during its calibration.

For omnidirectional microphones (pressure type only), the free-field sensitivity in a plane-wave and that in a spherical wave do not differ from each other, and are equal to the pressure sensitivity, provided that diffraction effects in the field can be neglected. This is the case when the lateral dimensions of the microphone are small compared to the wavelength. At low frequencies, therefore, a spherical wave is sufficient to measure the plane-wave sensitivity of an omnidirectional microphone (pressure type only). At very low frequencies, free-field sensitivity and pressure sensitivity can be different owing to the effect of a pressure equalization vent. For the higher frequency range, the microphone should be measured in the relevant sound field. If a cone loudspeaker with a diameter not larger than 0,3 m is used as a sound source, a suitable minimum distance for the free-field calibration of omnidirectional microphones (pressure type only) in the audio frequency range is 1 m.

11.2.2 Diffuse-field sensitivity

11.2.2.1 Characteristic to be specified

At a specified frequency or within a specified frequency band, the ratio of the output voltage to the sound pressure in the undisturbed diffuse field. The diffuse-field sensitivity is equal to the RMS value of the free-field sensitivities for all directions of sound incidence. The diffuse-field sensitivity level equals the free-field plane-wave sensitivity level (see 11.2.1) minus the directivity index (see 13.2).

NOTE The diffuse field is characterized by the fact that sound waves with random phase are randomly distributed over all directions (random incidence).

Instead of the diffuse-field sensitivity, the manufacturer may state the free-field plane-wave sensitivity and the front-to-random sensitivity index at the same frequency or within the same frequency band.

11.2.2.2 Methods of measurement

The diffuse-field sensitivity can be obtained in two different ways:

a) The diffuse-field sensitivity for a given frequency can be calculated from the free-field sensitivity (see 11.2.1) and the directional pattern (see 13.1) of the microphone in a plane progressive wave.

   If the directional pattern has rotational symmetry the relationship between the diffuse-field sensitivity and the sensitivities at other angles of incidence θ is:

$$M_{\text{diff}}^2 = \frac{1}{2}\int_0^{\pi} M^2(\theta)\sin\theta \,\mathrm{d}\theta$$

   NOTE Modern computation algorithms allow easy calculation of the integral to any desired accuracy, thus allowing the replacement of earlier proposals for calculation with fixed steps every 30°.

b) The diffuse-field sensitivity for a band of frequencies can be measured in a reverberant room if the conditions laid down in Clauses 4 and 5 are fulfilled. An omnidirectional sound source should preferably be used. A diffuse-field calibration of the standard microphone employed to measure the sound pressure is required.

AVA Documents Document Sharing Hub

Full document details: IEC 60268-4 2018 RLV

11.2.3 Close-talking ~~or~~ and near-field sensitivity

11.2.3.1 Characteristic to be specified

At a specified frequency or within a specified frequency band, the ratio of the output voltage to the sound pressure in the undisturbed sound field produced by a special source. This source shall simulate the human head and mouth (artificial mouth) and the reference point of the microphone shall be placed at a stated distance from the reference point of the source, the reference axis of the microphone being in a stated orientation with respect to the reference axis of the source.

11.2.3.2 Method of measurement

An artificial mouth is used as sound source (see 4.2.2). The distance between the reference point of the source and the reference point of the microphone, unless otherwise stated, shall be 25 mm for close-talking microphones and 30 cm for near-field microphones. The reference axis of the microphone shall be coincident with the reference axis of the sound source. If a different distance and/or orientation is used, it shall be stated with the measurement.

The standard microphone employed to measure the sound pressure shall be calibrated at the same distance used in the measurement. It is important that the orientation of the standard microphone shall be in accordance with the orientation used at the calibration laboratory. Unless otherwise specified, the diameter of the mouth opening shall be 20 mm.

11.2.4 Pressure sensitivity

11.2.4.1 Characteristic to be specified

At a specified frequency or within a specified frequency band, the ratio of the output voltage to the actual sound pressure at the acoustic entry of the microphone. This definition is relevant only to microphones with one sound entry.

The amplitude and phase of the sound pressure ~~should~~ shall be kept constant over the sound entry.

11.2.4.2 Method of measurement

The pressure sensitivity can be measured in a small chamber (coupler, sound calibrator). The calibrator produces the sound pressure, for example, by means of an oscillating piston. For the exact calculation of the sound pressure the equivalent volume of the microphone shall be added to the coupler volume. The upper frequency limit with this calibration is determined by the dimensions of the pressure chamber. The pressure sensitivity can be derived from the microphone output voltage with known sound pressure in the chamber.

Omnidirectional condenser microphones can be measured by exciting the diaphragm with an electrostatic actuator designed for use with the microphone being measured. The grid of the actuator carries a DC voltage on which is superimposed the audio-frequency test voltage. Without the DC voltage, the microphone output signal is at twice the frequency of the test voltage. The electrostatic actuator method may be used only when the results differ from coupler or free-field conditions by less than ±1 dB. This typically requires the use of a correction curve.

11.3 Rated sensitivity

Rated sensitivity is the free-field, diffuse-field, close-talking, or pressure sensitivity assigned by the manufacturer. The rated sensitivity corresponds to the response at the standard reference frequency of 1 000 Hz. If the frequency response is not flat, it is recommended that the rated sensitivity corresponds to the arithmetic average over a one-octave band of the logarithmically plotted response, centred on the standard reference frequency of 1 000 Hz.

AVA Documents
Document Sharing Hub
Full document details: IEC 60268-4 2018 RLV

Unless otherwise specified, the rated sensitivity is understood to refer to the microphone under rated conditions. The manufacturer may specify the rated sensitivity for a specified load impedance (see 5.4 and 11.1).

12 Response

12.1 Frequency response

12.1.1 Characteristic to be specified

For stated conditions, the ratio, expressed in decibels, of the output voltage as a function of frequency of a sinusoidal signal to the output voltage at a stated frequency (or to the mean output voltage over a narrow band of frequencies) at a constant sound pressure and stated angle of incidence.

Unless otherwise stated, measurements shall be made in free-field conditions, and the frequency response refers to a plane progressive wave with the wavefront perpendicular to the reference axis of the microphone. It is strongly recommended that free-field response be given to allow evaluation of response to distant sound sources, even if the intended use is closer than this would imply. If free-field conditions apply but the sound field is not a plane progressive wave, sufficient further details shall be specified.

If the microphone is intended for near-field or close-talking applications ~~profiles~~ (see 6.4) the close-talking or near-field frequency response shall be specified. It shall refer to the same source and to the same geometrical configuration of source and microphone as those for the specification of close-talking or near-field sensitivity (see 11.2.3).

Any other frequency response characteristic specified in this document may also be given, such as sound pressure response or diffuse-field response. Frequency responses not specified in this document may also be given, for an acoustical environment specified in 5.5, provided that no confusion is caused.

Technical specifications supplied by the manufacturer shall include frequency response over the effective frequency range (12.2) with the manufacturer's guaranteed tolerance either as a numerical value or as graphics superimposed on the response curve.

12.1.2 Method of measurement

The conditions for obtaining frequency response curves are specified in Clauses 4 and 5.

12.1.3 Graphical presentation of results

The graphical presentation of measurement results ~~should~~ shall be in accordance with IEC 60268-1:1985, Clause 10.

12.2 Effective frequency range

12.2.1 Characteristic to be specified

The frequency range over which the response of the microphone does not deviate by more than a specified amount from an 'ideal' response for the given purpose.

NOTE The response regarded as 'ideal' by the manufacturer might not be constant with respect to frequency. From artistic considerations, this might even apply to microphones of the highest quality. For speech-only microphones, the 'ideal' response can be chosen to achieve maximum intelligibility.

12.2.2 Method of measurement

For specified deviations relative to the specified required frequency response curve, the effective frequency range is obtained from the curve referred to in 12.1.1.

AVA Documents
Document Sharing Hub

Full document details: IEC 60268-4 2018 RLV

13 Directional characteristics

13.1 Directional pattern

13.1.1 Characteristic to be specified

Curve representing the free-field sensitivity level of the microphone as a function of the angle of incidence of the sound wave, for a stated frequency or narrow band of frequencies.

The characteristic directional pattern for plane progressive waves shall be stated. Other measurement conditions such as spherical sound waves may also be used in addition, when sufficient details are specified. Directional curves shall be provided at a sufficient number of frequencies or bands of frequencies in order to present adequately the frequency dependence of the directional pattern. The bands of frequencies shall be the preferred octave or third-octave bands of frequencies specified in IEC 61260-1.

NOTE It is often useful to specify in addition the ratio, in decibels, of the response at certain specified angles to the response on axis.

13.1.2 Methods of measurement

The conditions for measurement are specified in Clauses 4 and 5. The microphone shall be placed in an essentially plane progressive wave (see 5.5.2). Care shall be taken when measuring the directional characteristic of a highly directional microphone in an anechoic room. The inevitable reflections from the boundaries of the room can influence the results, particularly when the output voltage of the microphone is measured for an angle of sound incidence for which the sensitivity is low.

NOTE In order to obtain correct results for microphones of large dimensions it might be necessary to measure these in the open air (see 5.5.2).

The measurement can be carried out in two different ways.

a) Directional response pattern:
   1) the microphone is operated under rated conditions;
   2) the distance between the reference point of the sound source and the reference point of the microphone is kept constant during the measurement;
   3) the sound pressure is kept constant during the measurement;
   4) the frequency is kept constant during the measurement;
   5) the angle θ of sound incidence, measured with respect to the microphone reference axis, is varied continuously or step by step, including the angle zero; for the step-by-step method the angle of sound incidence is varied in steps ~~depending on the guaranteed accuracy, preferably 10° or 15°~~, with each step small enough that the measured level difference between any two steps is less than 3 dB;
   6) for each angle θ the corresponding output voltage $U(\theta)$ is measured or recorded;
   7) the ratio $\Gamma(\theta)$ of the sensitivity of the microphone at the angle θ to the sensitivity at the angle zero is expressed as direct:

$$\Gamma(\theta) = \frac{U(\theta)}{U(0)}$$

or $G(\theta)$ in decibels:

$$G(\theta) = 20 \lg \frac{U(\theta)}{U(0)}$$

Documents
Document Sharing Hub
Full document details: IEC 60268-4 2018 RLV

8) the measurement is repeated for a number of frequencies, preferred frequencies being the octave centre-frequencies 125 Hz, 250 Hz, 500 Hz, 1 000 Hz, 2 000 Hz, 4 000 Hz, 8 000 Hz and 16 000 Hz;

9) if the microphone has no rotational symmetry, measurements of the directional characteristic in different planes through the reference axis of the microphone can be necessary;

10) the results shall be presented as a family of polar response curves for the frequencies given under item 8). The polar response curves shall be drawn in accordance with IEC 60268-1. The origin of the polar characteristic of the directional pattern shall be the reference point of the microphone. Unless otherwise specified, the reference axis of the microphone shall be in the direction zero degree of the polar diagrams.

b) directional frequency characteristic:

1) the microphone is operated under rated conditions;

2) the angle of sound incidence θ, measured with respect to the microphone reference axis, is kept constant during the measurement;

3) the distance between the reference point of the sound source and the reference point of the microphone is kept constant during the measurement;

4) the sound pressure is kept constant during the measurement;

5) the output voltage $U(\theta)$ of the microphone is measured as a function of the frequency for a number of discrete angles of sound incidence θ, including the angle zero;

6) the results shall be presented as a family of frequency response curves for the various angles of incidence θ with respect to the reference axis;

7) from these curves, it is possible to derive the ratio of the sensitivity of the microphone at the angle θ to the sensitivity at the angle zero for a specific frequency (polar curve (see 13.1.2 a)).

13.1.3 Graphical presentation of results

The graphical presentation of measurement results ~~should~~ shall conform to IEC 60268-1:1985, Clause 10.

13.2 Directivity index

13.2.1 Characteristic to be specified

The ratio, expressed in decibels, of the output voltage produced by plane sound waves arriving in the direction of the reference axis, to the output voltage produced by diffuse sound field having the same frequency or frequency band and RMS sound pressure. The frequency or frequency band shall be stated.

13.2.2 Method of measurement

The directivity index D is given by

$$D = 20\lg\frac{M_0}{M_{\text{diff}}}$$

where

M_0 is the free-field sensitivity specified in 11.2.1;

M_{diff} is the diffuse-field sensitivity specified in 11.2.2.

Documents
Document Sharing Hub
Full document details: IEC 60268-4 2018 RLV

14 Amplitude non-linearity

14.1 General

A general explanation of amplitude non-linearity can be found in IEC 60268-2. The characteristics to be specified and the methods of measurement of various types of amplitude non-linearity which can be of importance for microphones can be found in 14.2 to 14.4. ~~In simple cases, it is possible to generate sound fields with lower distortion than that of the microphone at moderate sound pressure levels.~~ Nonlinearity of the sound field should be negligible. Measurement of highly linear microphones might require special provisions to achieve low distortion at the necessary high sound pressure level. The distortion shall be measured under fixed conditions of bandwidth and level specified for different applications.

14.2 Total harmonic distortion

14.2.1 Characteristic to be specified

The ratio, expressed as a percentage or in decibels, of the RMS sum of the harmonic voltage components in the output voltage to the total RMS output voltage.

Harmonic distortion is one manifestation of amplitude non-linearity. If the sound field distortion cannot be kept small enough compared to the microphone non-linearity, other ~~methods~~ characteristics, for example difference frequency distortion, (see 14.4) shall be used.

14.2.2 Method of measurement

The relevant conditions specified in Clauses 4 and 5 shall be established.

A selective voltmeter, such as a wave analyzer, preceded if necessary by a high-pass filter which suppresses the fundamental frequency, is connected to the output of the microphone under test. The measuring device shall indicate the true RMS value of the harmonic remainder.

The voltage of each of the separate harmonics U_{nf} is measured.

The total voltage U_t, including the fundamental frequency, is measured by a wide band RMS meter connected to the microphone under test.

The total harmonic distortion can be determined by the equations

in percentage:

$$d_t = \frac{\sqrt{U_{2f}^2 + U_{3f}^2 + \ldots + U_{nf}^2}}{U_t} \times 100\ \%$$

in decibels:

$$L_{dt} = 20 \lg\left(\frac{d_t}{100}\right)$$

where

d_t is the total harmonic distortion;

U_{nf} is the voltage of the nth harmonics;

U_t is the total voltage;

Documents
Document Sharing Hub
Full document details: IEC 60268-4 2018 RLV

L_{dt} is the total harmonic distortion in decibels.

The non-linearity distortion of the sound field in which the microphone under test is placed shall be much less than the distortion of the microphone itself (see 14.2.1).

14.3 Harmonic distortion of the nth order (n = 2, 3,...)

14.3.1 Characteristic to be specified

The harmonic distortion of the nth order, expressed in terms of the total voltage.

14.3.2 Method of measurement

The relevant conditions specified in Clauses 4 and 5 shall be established. A selective voltmeter, such as a wave analyzer, preceded, if necessary, by a high-pass filter which suppresses the fundamental frequency, is connected to the output of the microphone under test. The measuring device shall indicate the true RMS value of the harmonic remainder.

The voltage of the separate harmonics U_{nf} is measured.

The total voltage, including the fundamental frequency, U_t is measured by a wide band RMS meter connected to the microphone under test.

The harmonic distortion of the nth order can be determined by the equations

in percentage:

$$d_n = \frac{U_{nf}}{U_t} \times 100\ \%$$

in decibels:

$$L_{dn} = 20 \lg \left(\frac{d_n}{100} \right)$$

The non-linearity distortion of the sound field in which the microphone under test is placed shall be much less than the distortion of the microphone itself (see 14.2.1).

14.4 Difference frequency distortion of second order

14.4.1 Characteristic to be specified

The ratio of the signal of frequency f_d = 80 Hz at the output of the microphone when placed in a sound field consisting of two sinusoidal signals of frequencies f_1 and f_2, such that $f_2 - f_1$ = 80 Hz, selected with an appropriate selective filter, to the signal voltage at the input of the selective filter (see IEC 60268-2:1987, 7.2).

14.4.2 Method of measurement

The measurements are made with two sound sources, one of which radiates the signal of frequency f_1, and the other of frequency $f_1 = f_2 - 80$ Hz. The sound pressure levels produced by each of the sound sources at the reference point of the microphone shall be the same.

The method of measurement shall follow the procedure described in IEC 60268-3:2013, 14.12.8. The result is given by

Documents
Document Sharing Hub
Full document details: IEC 60268-4 2018 RLV

in percentage

$$d_{fd} = \frac{U_{fd}}{2U_{\text{ref}}} \times 100\ \%$$

in decibels

$$L_{fd} = 20 \lg \frac{d_{fd}}{100}$$

with U_{ref} as the geometric mean of U_{f1} and U_{f2}

where

U_{f1} is the voltage of frequency f_1 at the output of the microphone produced by the sound pressure from the first sound source;

U_{f2} as for U_{f1}, but for the voltage of frequency f_2;

U_{fd} is the voltage at the output of the microphone of frequency $f_d = f_2 - f_1 = 80$ Hz.

The distance between the reference points of the sound sources and the microphone under test is chosen so as to produce the required sound pressure levels at the microphone.

15 Limiting characteristics

15.1 Rated maximum permissible peak sound pressure

The maximum instantaneous sound pressure of a plane sound wave, specified by the manufacturer, that the microphone can tolerate without a permanent change of its performance characteristics, for any direction of sound incidence.

NOTE This characteristic includes the word "rated" because it is specified by the manufacturer as a result of a series of tests and cannot be reliably measured in one sample (see IEC 60268-2).

15.2 Overload sound pressure

15.2.1 Characteristic to be specified

The maximum sound pressure of a plane sound wave at which the amplitude non-linearity of the microphone does not exceed a specified limit, for any frequency within the effective frequency range and for any direction of sound incidence. Overload sound pressure shall be measured under rated conditions (see 4.2.2), and also for operation at the minimum permitted load impedance.

NOTE No common limits have yet been defined, however many data sheets refer to values of 0,5 % or 1 % for difference frequency distortion (14.2.2).

15.2.2 Method of measurement

The microphone is brought under rated conditions and the overload sound pressure is then measured for different angles of sound incidence by increasing the sound pressure of a pure sinusoidal sound until the distortion at the output of the microphone reaches a specified value. The sound pressure shall be stated for the angle of incidence for which maximum distortion occurs.

NOTE Non-linearities of the sound sources and of the air can limit the procedure. Difference frequency measurements as specified in 14.4.2 at least minimize the influence of loudspeaker non-linearities.

Documents
Document Sharing Hub

Full document details: IEC 60268-4 2018 RLV

16 Balance

16.1 Balance of the microphone output

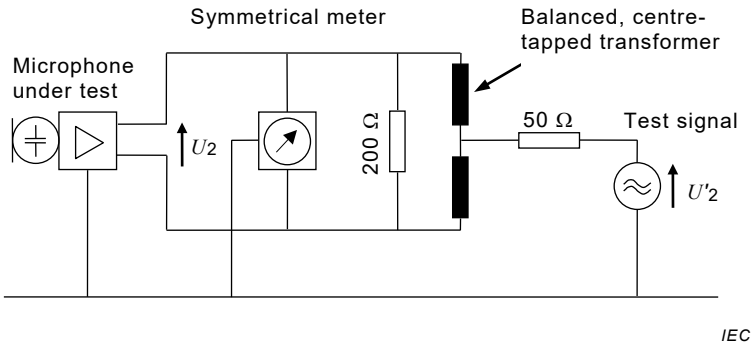

Figure 1 – Balance of the output

Figure 1 shows the measurement set-up shown in ~~accordance with~~ IEC 60268-2. Further reference is made to IEC 60268-3:2013, 14.15. All requirements for balance of source and meter are also valid for microphone measurements. The load resistor shall have a value of 200 Ω. The source impedance of the test signal U'_2 shall be 50 Ω. The balance of the measurement device itself shall be tested without the microphone by replacing it by a 200 Ω resistor. The "balance" b in decibels is calculated by

$$b = 20 \lg \frac{U_2}{U'_2} \quad \text{(see Figure 1)}$$

The external sound level should be kept as low as possible in order not to influence the results.

16.2 Balance under working conditions

The procedure specified in ~~15.1~~ 16.1 does not cover interference picked up via the output cable. With a modification of the setup in accordance with Figure 1, the corresponding voltage U_2 can be measured (see Figure 2).

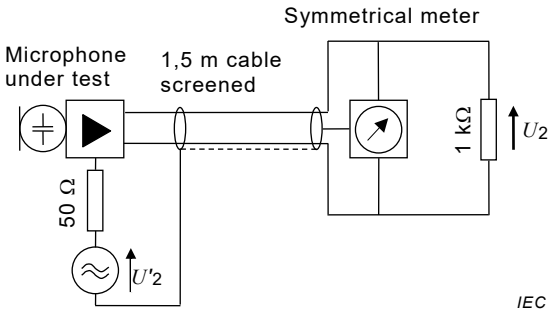

Figure 2 – Balance under working conditions

To get comparable conditions for different mechanical designs of microphones, the test shall be made including 1,5 m of high-quality cable and with an output load of 1 kΩ.

NOTE A separate measurement of the cable verifies that its contribution to the result is negligible.

Documents
Document Sharing Hub
Full document details: IEC 60268-4 2018 RLV

For the measurement, the cable screen is disconnected at the microphone output and the test voltage inserted. The ratio of the resulting voltage at the balanced meter to the interfering source is calculated in accordance with 16.1.

17 Equivalent sound pressure level due to inherent noise

17.1 Characteristic to be specified

The external sound pressure level that would give the same weighted output voltage as is observed when there is no external field, and the output voltage is only due to the inherent noise of the microphone. The reference frequency of the external sound pressure level shall be the same as for the rated free-field sensitivity.

It shall be specified which value (maximum, average, typical) is given in the specification. The maximum value is preferred.

NOTE Unless otherwise stated, it is understood that reference is made to free-field conditions and zero angle of incidence of sound.

17.2 Method of measurement

For measurements, proceed as follows.

a) When measuring the inherent electric noise, the microphone shall be isolated against sound, wind, shock, vibration and electric or magnetic external fields. However, the microphone shall be in acoustical operating mode (see Note 2).

NOTE 1 An example for an efficient sound insulation device is given in Annex B.

NOTE 2 It has often been the practice to measure the noise level only of the electronics, using an “equivalent” circuit to replace the transducer element. This does not accurately measure the noise level of the complete microphone, due to noise contributed by the transducer element itself.

NOTE 3 Using a modern 40 dB to 60 dB amplifier for this measurement gives enough headroom that the microphone noise is dominant and there is no need to correct the measurement for amplifier noise.

b) The weighted output voltage of the microphone due to inherent noise is measured, using the weighted measurements specified in IEC 60268-1:1985. Psophometric, quasi-peak measurements in accordance with IEC 60268-1:1985, 6.2.2, shall be included. It is strongly recommended that A-weighted RMS noise measurements in accordance with IEC 60268-1:1985, 6.2.1, and one-third octave unweighted RMS noise measurements in accordance with IEC 60268-1:1985, 6.2.3, are also included.

c) With the microphone replaced by a resistor at room temperature, equal in value to the rated impedance of the microphone, the measured output voltage shall be less than one third of the value measured in step b), so that the wanted result is increased by less than 10 % by the internal noise of the measuring equipment and any residual external sound.

d) The equivalent sound pressure due to inherent noise is the ratio of the output voltage to the rated free-field sensitivity.

e) The equivalent sound pressure level is the ratio, expressed in decibels, of the equivalent sound pressure to the reference sound pressure (20 μPa).

18 Ambient conditions

18.1 General

The following characteristics shall be specified independently of each other. In cases where interdependencies exist, conditions and effects shall be specified by the manufacturer.

Documents
Document Sharing Hub
Full document details: IEC 60268-4 2018 RLV

18.2 Pressure range

The ambient pressure range over which the characteristics of the microphone do not vary by more than ±2 dB. If the manufacturer claims that the microphone is suitable for applications in which a high rate of change of ambient pressure occurs (such as an air-borne sound system) then the maximum tolerable rate of change of the ambient pressure shall also be stated.

18.3 Temperature range

The temperature range over which the characteristics of the microphone do not vary by more than ±2 dB.

18.4 Relative humidity range

The relative humidity range over which the characteristics of the microphone do not vary by more than ±2 dB.

19 External influences

19.1 General

19.1.1 Specification and methods of measurement

Microphones are subject to many forms of external interference, which it can be of vital importance to exclude or limit in particular cases. As, however, external influences by reason of non-linear effects can give rise to very complicated interference, no generally valid method of measurement can be given to evaluate all of them. The special case of external influences known as electromagnetic compatibility is covered in Clause 20. Specifications are subject to discussion between supplier and user and can lead to possibly elaborate laboratory and/or field tests.

The methods of measurement given below (see 19.2 to 19.4) deal only with external influences from:

– mechanical vibrations;
– wind;
– the "pop" effect.

The methods given are neither exhaustive nor final, but are intended to provide useful guidance.

19.1.2 Other external interferences

For all external interferences other than those given in this document, specifications shall be determined by agreement between the supplier and the user.

19.2 Equivalent sound pressure due to mechanical vibration

19.2.1 Characteristic to be specified

For a mechanical vibration, specified by the RMS value of the acceleration, frequency and direction, the equivalent sound pressure due to the vibration, in the absence of a sound field. The equivalent sound pressure shall be stated for the direction of the vibration for which maximum influence occurs. The directions for both maximum and minimum influence shall be stated.

The equivalent sound pressure may be stated for vibrations at specified frequencies, or within a specified frequency band having the reference frequency as the geometric mean frequency.

AVA Documents
Document Sharing Hub
Full document details: IEC 60268-4 2018 RLV

If linear relations exist, the equivalent sound pressure may be specified as a transmission factor, relating the equivalent sound pressure and the acceleration.

19.2.2 Method of measurement

For measurements, proceed as follows.

a) The microphone is connected under rated conditions~~, without the application of a sound field~~ and in a surrounding with sufficiently low acoustic background signal.

b) A mechanical vibration of a specified RMS acceleration and of a specified frequency or a specified frequency band is applied. The direction of the vibration shall be such that maximum output voltage is obtained.

c) The RMS output voltage U'_2 and the RMS acceleration are measured.

d) The equivalent sound pressure is computed from U'_2 and from the rated sensitivity. The acceleration and the direction of the vibration shall be specified.

e) A test is made to obtain the direction of vibration for minimum influence. This direction is also specified.

f) The measurement is preferably made with a gliding frequency up to 250 Hz.

g) If a linear relation exists between the equivalent sound pressure and the acceleration, the transmission factor may be specified. In cases of strong dependency on frequency, more values or the complete characteristic may be given.

19.3 Equivalent sound pressure due to wind

19.3.1 Characteristic to be specified

For a wind, specified by velocity and direction, the equivalent sound pressure due to the wind in the absence of a sound field. The equivalent sound pressure shall be stated for the direction of the wind for which maximum influence occurs. The directions for both maximum and minimum influence shall be stated. Besides the weighted wide-band level, the equivalent sound pressure level may also be stated for octave or third-octave bands in the effective frequency range of the microphone and for additional wind velocities besides the reference value of 10 m/s.

19.3.2 Method of measurement

All measurements of wind noise are subject to large variations if the stream of air is turbulent at the source or develops turbulence between source and microphone. After evaluating several methods, the wind tunnel method has proven to give the best matching to natural wind conditions. It is, however, still difficult to measure the nature of the generated wind and to describe it with enough accuracy. Therefore, at present it is better to specify the generator by mechanical characteristics.

Documents
Document Sharing Hub
Full document details: IEC 60268-4 2018 RLV

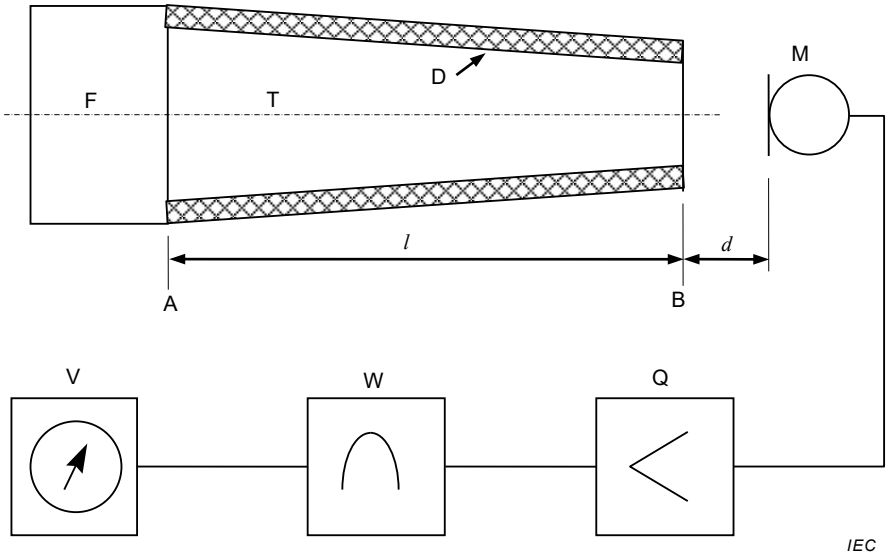

Key

F fan with low acoustic noise

A inlet cross-section of wind tunnel

T wind tunnel

D damping material

B outlet cross-section of wind tunnel

l length of tunnel

d measuring distance between microphone and tunnel outlet

M microphone under test

Q amplifier

W weighting filter / band filter (optional)

V voltmeter

Figure 3 – Measurement set-up for wind influence

Two different solutions have been investigated, a short device with radial fan and a long device with axial fan (see Figure 4). The first has been installed by several institutions and has proven to give reproducible results everywhere. Similar experience with the second is not yet known. Comparative measurements between the first installation and other generators showed that major differences have to be expected. Therefore, the published wind sensitivity values shall also state whether machine 1 or machine 2 has been used.

A block diagram of the measurement setup is shown in Figure 3. The microphone under test is placed at a distance of 25 cm from the outlet of the tunnel. The tunnel is operated in a room not influencing the measurement results, for example an anechoic chamber. The output voltage of the microphone under wind conditions is measured by the A-weighting filter in accordance with IEC 60268-1 and optionally as octave or third-octave band value. Microphones with detachable windscreens shall be measured with and without the windscreen.

The two different machines to generate the air flow are shown in Figure 4. The tunnel inner surface is constructed to provide a homogeneous air flow. The dimensions chosen are large enough compared with those of the microphones to be tested. The higher velocity at the outlet of machine 1 is achieved by the conical construction reducing the cross-section. To achieve a laminar flow, the inside of machine 2 is covered with glass wool of 55 kg/m^3 density and 2,5 cm thickness, or similar material. At the necessary speed, the fans produce negligible acoustic noise. The measuring distance of 25 cm has been chosen to get an amount of turbulence similar to the natural wind conditions.

Documents
Document Sharing Hub
Full document details: IEC 60268-4 2018 RLV

The nature of wind noise is such that pressure fluctuations, whose frequencies lie below the effective frequency range (so that they are not directly indicated), can give rise to microphone output signals large enough to overload the first stage of the amplifier. Care shall be taken to avoid such overloading effects.

Documents
Document Sharing Hub

Full document details: IEC 60268-4 2018 RLV