

FED. SUPPLY CLASS

5355

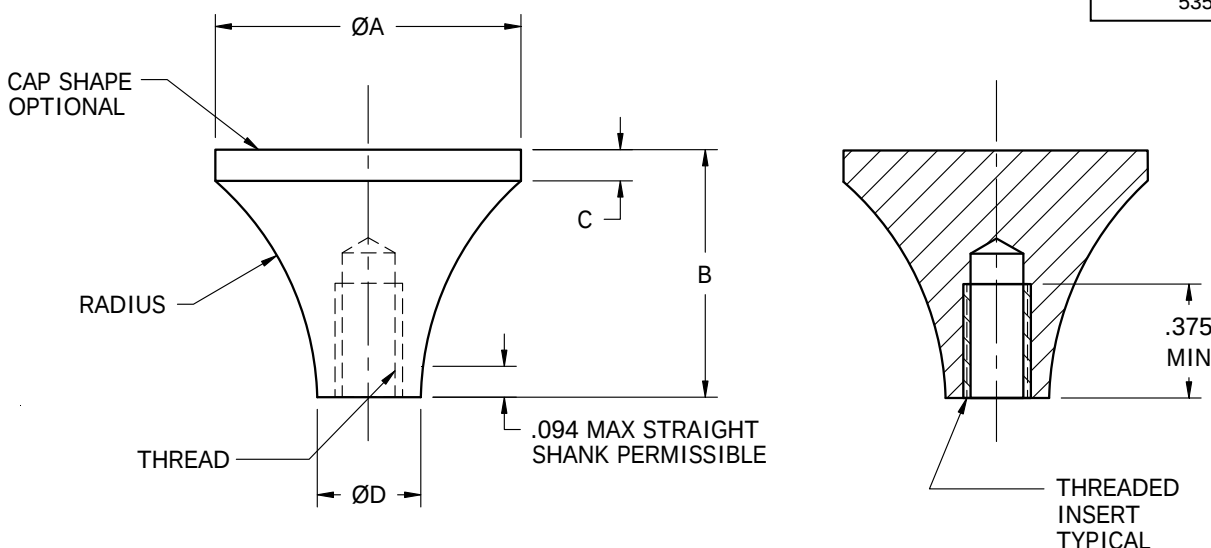


FIGURE 1 – KNOB, CONTROL, TAPERED

TABLE I – CONFIGURATION SERIES NUMBERS

SERIES	ØA ±.016	B ±.031	C ±.016	ØD ±.016	THREAD CODE (SEE EXAMPLE OF PART NUMBER)	
					MATERIAL 1 & 3	MATERIAL 2
0	.750	.750	.094	.500	A,B	—
1	.875	.875	.094	.562	A,B,C,E	A,B
2	1.000	1.000	.125	.562	A,B,C,D,E	A,B,C,E
3	1.250	1.250	.156	.625	A,B,C,D,E,F,G	C,D,E,F,G
4	1.500	1.500	.250	.688	C,D,E,F,G	C,D,E,F,G

MATERIAL:

KNOB – ALUMINUM ALLOY OR PLASTIC.
INSERT – METAL.

FINISH:

IN ACCORDANCE WITH MIL-STD-7179, TYPE I.

COLOR:


BLACK LUSTERLESS NUMBER 37038, GRAY LUSTERLESS NUMBER 36237, RED LUSTERLESS NUMBER 31136, OLIVE DRAB LUSTERLESS NUMBER 34087 IN ACCORDANCE WITH FED-STD-595, METALLIC (AS ANODIZED).

① COMPLETELY REVISED

THE INITIAL RELEASE OF THIS DOCUMENT SUPERSEDES MIL-K-3926/3, REVISION A. PART NUMBERS REMAIN M3926/3.

THIRD ANGLE PROJECTION	CUSTODIAN NATIONAL AEROSPACE STANDARDS COMMITTEE	REVISION 1
		CLASSIFICATION PART STANDARD NAS3926/3
PROCUREMENT SPECIFICATION NAS3926	TITLE KNOB, CONTROL, TAPERED	SHEET 1 OF 2

EXAMPLE OF PART NUMBER:

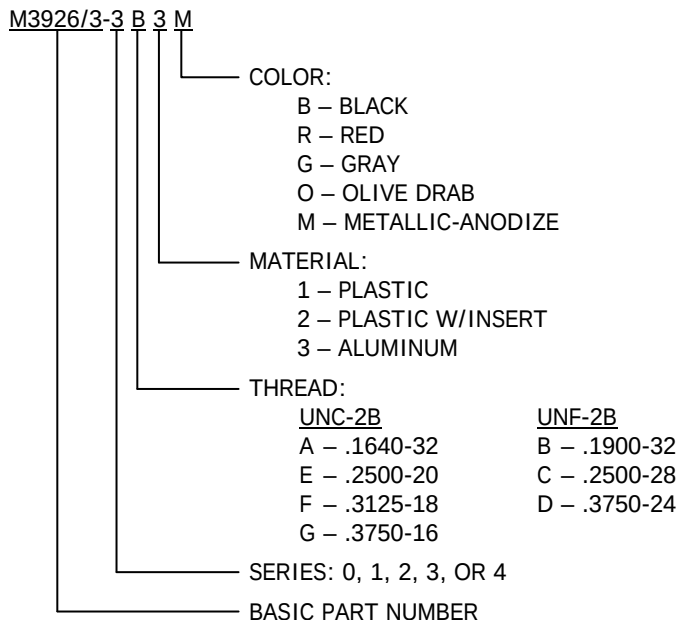

NOTES:

- (1) DIMENSIONS IN INCHES AND APPLY AFTER FINISH UNLESS OTHERWISE SPECIFIED.
- (2) QUALIFICATION REQUIREMENTS PER NASM3926 ARE EXCLUDED FOR THESE KNOBS.
- (3) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
- (4) UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.
- (5) UNLESS OTHERWISE SPECIFIED HEREIN, REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF MANUFACTURE. HOWEVER, EXISTING MATERIAL INVENTORY CERTIFIED TO A PREVIOUS REVISION OF THE APPLICABLE MATERIAL SPECIFICATION(S) IS ACCEPTABLE FOR USE UNTIL DEPLETION.
- (6) DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.

① COMPLETELY REVISED

REVISION
1
NASM3926/3
SHEET 2

