

FED. SUPPLY CLASS

5310

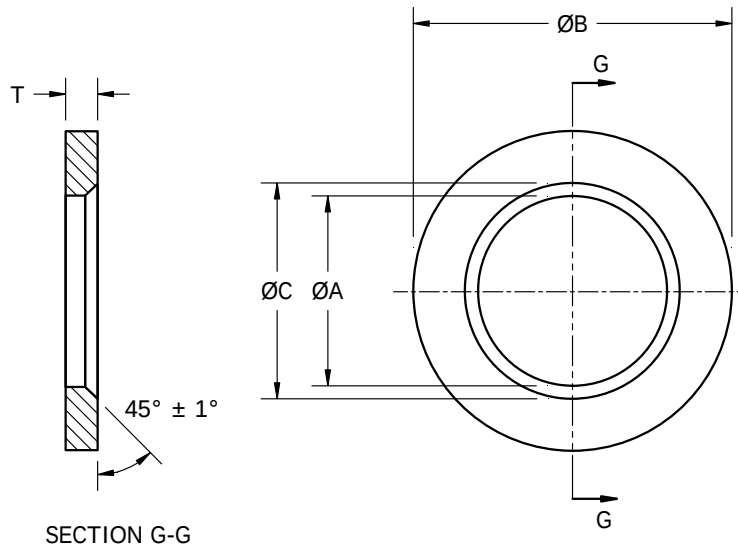


TABLE I – DASH NUMBERS AND DIMENSIONS

DASH NUMBER	ØA ID		ØB OD		ØC		T THICKNESS	
	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN
01	.260	.252	.542	.522	.344	.334	.088	.078
02	.324	.315	.603	.583	.406	.396	.088	.078
03	.388	.378	.697	.677	.495	.485	.088	.078
04	.451	.441	.791	.771	.557	.543	.088	.078
05	.515	.504	.895	.875	.620	.604	.088	.078
06	.579	.569	.978	.958	.687	.667	.088	.078
07	.643	.631	1.072	1.052	.785	.765	.088	.078
08	.770	.757	1.260	1.250	.910	.890	.088	.078
09	.897	.884	1.447	1.427	1.035	1.015	.088	.078
10	1.025	1.010	1.635	1.615	1.160	1.140	.088	.078
11	1.150	1.135	1.885	1.865	1.285	1.265	.088	.078
12	1.275	1.260	2.135	2.115	1.447	1.427	.106	.096
13	1.400	1.385	2.323	2.303	1.572	1.552	.106	.096
14	1.525	1.510	2.510	2.490	1.687	1.667	.106	.096

① COMPLETELY REVISED

THE INITIAL RELEASE OF THIS DOCUMENT SUPERSEDES MIL-W-45595/3. PART NUMBERS REMAIN M45595/3.

THIRD ANGLE PROJECTION	CUSTODIAN NATIONAL AEROSPACE STANDARDS COMMITTEE	REVISION 1
PROCUREMENT SPECIFICATION NASM45595	TITLE WASHER, RECESSED, ALUMINUM ALLOY	CLASSIFICATION PART STANDARD
		NASM45595/3

SHEET 1 OF 2



Document Sharing Hub

MATERIAL:

ALUMINUM ALLOY.

FINISH:

ANODIC COATING OR CHEMICAL SURFACE TREATMENT.

CODE:

THE PART NUMBER CONSISTS OF THE LETTER "M" AND THE BASIC PART NUMBER, FOLLOWED BY A DASH NUMBER TAKEN FROM TABLE I PLUS A FINISH CODE LETTER "C" FOR CHEMICAL SURFACE TREATMENT OR "D" FOR ANODIZE.

EXAMPLE OF PART NUMBER:

EXAMPLE: M45595/3 - 01 D = WASHER, RECESSED, ALUMINUM ALLOY; INSIDE DIAMETER .260 MAX; OUTSIDE DIAMETER .542 MAX; ANODIZED.

FINISH CODE
"C" CHEMICAL SURFACE TREATMENT
"D" ANODIZE

DASH NUMBER

BASIC PART NUMBER

NOTES:

- (1) DIMENSIONS IN INCHES AND APPLY AFTER FINISH UNLESS OTHERWISE SPECIFIED.
- (2) SURFACE ROUGHNESS SHALL BE 125 MICROINCHES Ra PER ASME B46.1.
- (3) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
- (4) UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.
- (5) UNLESS OTHERWISE SPECIFIED HEREIN, REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF MANUFACTURE. HOWEVER, EXISTING MATERIAL INVENTORY CERTIFIED TO A PREVIOUS REVISION OF THE APPLICABLE MATERIAL SPECIFICATION(S) IS ACCEPTABLE FOR USE UNTIL DEPLETION.
- (6) DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.

① COMPLETELY REVISED

REVISION
1
NASM45595/3s
SHEET 2

