

INTERNATIONAL STANDARD

IEC
61131-2

Second edition
2003-02

Programmable controllers –

Part 2: Equipment requirements and tests

Automates programmables –

*Partie 2:
Spécifications et essais des équipements*



Reference number
IEC 61131-2:2003(E)

Publication numbering

As from 1 January 1997 all IEC publications are issued with a designation in the 60000 series. For example, IEC 34-1 is now referred to as IEC 60034-1.

Consolidated editions

The IEC is now publishing consolidated versions of its publications. For example, edition numbers 1.0, 1.1 and 1.2 refer, respectively, to the base publication, the base publication incorporating amendment 1 and the base publication incorporating amendments 1 and 2.

Further information on IEC publications

The technical content of IEC publications is kept under constant review by the IEC, thus ensuring that the content reflects current technology. Information relating to this publication, including its validity, is available in the IEC Catalogue of publications (see below) in addition to new editions, amendments and corrigenda. Information on the subjects under consideration and work in progress undertaken by the technical committee which has prepared this publication, as well as the list of publications issued, is also available from the following:

- **IEC Web Site** (www.iec.ch)

- **Catalogue of IEC publications**

The on-line catalogue on the IEC web site (http://www.iec.ch/searchpub/cur_fut.htm) enables you to search by a variety of criteria including text searches, technical committees and date of publication. On-line information is also available on recently issued publications, withdrawn and replaced publications, as well as corrigenda.

- **IEC Just Published**

This summary of recently issued publications (http://www.iec.ch/online_news/justpub/jp_entry.htm) is also available by email. Please contact the Customer Service Centre (see below) for further information.

- **Customer Service Centre**

If you have any questions regarding this publication or need further assistance, please contact the Customer Service Centre:

Email: custserv@iec.ch
Tel: +41 22 919 02 11
Fax: +41 22 919 03 00

INTERNATIONAL STANDARD

IEC
61131-2

Second edition
2003-02

Programmable controllers –

Part 2: Equipment requirements and tests

Automates programmables –

*Partie 2:
Spécifications et essais des équipements*

© IEC 2003 — Copyright - all rights reserved

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Electrotechnical Commission, 3, rue de Varembé, PO Box 131, CH-1211 Geneva 20, Switzerland
Telephone: +41 22 919 02 11 Telefax: +41 22 919 03 00 E-mail: inmail@iec.ch Web: www.iec.ch



Commission Electrotechnique Internationale
International Electrotechnical Commission
Международная Электротехническая Комиссия

PRICE CODE

XE

For price, see current catalogue

CONTENTS

FOREWORD.....	7
INTRODUCTION.....	9
1 General	10
1.1 Scope and object.....	10
1.2 Compliance with this standard	11
1.3 Normative references	11
2 Type tests	13
2.1 Equipment to be tested (equipment under test/EUT).....	13
2.2 Special features for immunity and EMC tests.....	15
2.3 Withstand test conditions	16
2.4 Verification procedure	16
2.5 Requirements for test programmes and proper functioning verification procedures (PFVPs) to be provided by the manufacturer	16
2.6 General conditions for tests.....	17
3 Terms and definitions	17
4 Normal service conditions and requirements.....	24
4.1 Climatic conditions and requirements	24
4.2 Mechanical service conditions and requirements	25
4.3 Transport and storage conditions and requirements	26
4.4 Electrical service conditions and requirements	27
4.5 Special conditions and requirements	28
5 Functional requirements	28
5.1 Functional power supply and memory back-up requirements	30
5.2 Digital I/Os	31
5.3 Analogue I/Os	38
5.4 Communication interface requirements.....	39
5.5 Main processing unit(s) and memory(ies) of the PLC-system requirements	39
5.6 Remote input/output stations (RIOSs) requirements	39
5.7 Peripherals (PADTs, TEs, HMIs) requirements	39
5.8 PLC-system self-tests and diagnostics requirements	40
5.9 Functional earthing.....	40
5.10 Mounting requirements.....	40
5.11 General marking requirements	41
5.12 Requirements for normal service and functional type tests and verifications	41
5.13 Requirements for information on normal service and function	41
6 Normal service and functional type tests and verifications	41
6.1 Climatic tests	41
6.2 Mechanical tests	43
6.3 Verification of special functional requirements for power ports and memory back-up – Special immunity limits for power ports	45
6.4 Verification of input/output requirements	50
6.5 Verification of communication interface requirements	53
6.6 Verification of MPU requirements	53
6.7 Verification of remote I/O stations	53
6.8 Verification of peripheral (PADTs, TEs, HMIs) requirements.....	54
6.9 Verification of PLC-system self-tests and diagnostics	54

6.10	Verification of markings and manufacturer's documentation.....	54
7	General information to be provided by the manufacturer.....	54
7.1	Information on type and content of documentation.....	54
7.2	Information on compliance with this standard	55
7.3	Information on reliability	55
7.4	Information on other conditions	55
7.5	Information on shipping and storage.....	55
7.6	Information on a.c. and d.c. power supply	55
7.7	Information on digital inputs (current sinking)	56
7.8	Information on digital outputs for alternating currents (current sourcing).....	56
7.9	Information on digital outputs for direct current (current sourcing)	57
7.10	Information on analogue inputs	57
7.11	Information on analogue outputs	59
7.12	Information on communication interfaces.....	60
7.13	Information on main processing unit(s) and memory(ies) of the PLC-system	60
7.14	Information on remote input/output stations (RIOs).....	61
7.15	Information on peripherals (PADTs, TEs, HMIs).....	62
7.16	Information on self-tests and diagnostics.....	62
8	Electromagnetic compatibility (EMC) requirements.....	62
8.1	General.....	62
8.2	Emission requirements	63
8.3	EMC immunity requirements.....	63
8.4	Requirements for EMC tests and verifications	69
8.5	Requirements for information on EMC	69
9	Electromagnetic compatibility (EMC) type tests and verifications	69
9.1	Electromagnetic compatibility-related tests.....	69
9.2	Test environment.....	70
9.3	Measurement of radiated interference	70
9.4	Measurement of conducted interference	70
9.5	Electrostatic discharge	71
9.6	Radiofrequency electromagnetic field – Amplitude modulated	72
9.7	Power-frequency magnetic fields.....	72
9.8	Fast transient bursts.....	73
9.9	High-energy surges	74
9.10	Conducted radiofrequency interference	75
9.11	Damped oscillatory wave (for zone C only).....	76
9.12	Voltage drops and interruptions - Power port type tests and verifications	76
10	Electromagnetic compatibility (EMC) information to be provided by the manufacturer	77
11	Safety requirements	78
11.1	Protection against electrical shock	78
11.2	Protection against the spread of fire	83
11.3	Limited power circuits.....	83
11.4	Clearance and creepage distances requirements	84
11.5	Flame-retardant requirements for non-metallic materials	90
11.6	Temperature limits	91
11.7	Enclosures	91
11.8	Field-wiring terminals constructional requirements	92

11.9 Provisions for protective earthing	92
11.10 Wiring	93
11.11 Switching devices	94
11.12 Components	94
11.13 Battery requirements	95
11.14 Maximum voltage and minimum voltage	95
11.15 Markings and identification	95
11.16 Requirements for safety type tests and verifications	97
11.17 Requirements for safety routine tests and verifications	97
11.18 Requirements for information on safety	97
12 Safety type tests and verifications	97
12.1 Safety-related mechanical tests and verifications	97
12.2 Safety-related electrical tests	100
12.3 Single-fault condition test – General	104
13 Safety routine tests	105
13.1 Dielectric withstand test	105
13.2 Dielectric withstand verification test	106
13.3 Protective earthing test	106
14 Safety information to be provided by the manufacturer	107
14.1 Information on evaluation of enclosures for open equipment (power dissipation)	107
14.2 Information on mechanical terminal connection	107
Annex A (informative) Illustration of PLC-system hardware definitions	108
Annex B (informative) Digital input standard operating range equations	109
Annex C (normative) Test tools	110
Annex D (informative) Zone C – EMC immunity levels	113
Annex E (informative) Overvoltage example	115
Bibliography	116
Figure 1 – EUT configurations	15
Figure 2 – Typical interface/port diagram of a PLC-system	29
Figure 3 – I/O Parameters	31
Figure 4 – U-I operation regions of current-sinking inputs	33
Figure 5 – Temporary overload waveform for digital a.c. outputs	35
Figure 6 – Temporary overload waveform for digital d.c. outputs	37
Figure 7 – Gradual shut-down/start-up test	46
Figure 8 – Fast supply voltage variation test	46
Figure 9 – Third harmonic immunity test	47
Figure 10 – Slow supply voltage variation test	49
Figure 11 – EMC immunity zones	64
Figure 12 – Impact withstand test procedure	98
Figure 13 – Dielectric withstand test procedures	103
Figure A.1 – Programmable controller system (PLC-system)	108
Figure C.1 – Jointed test finger	110

Figure C.2 – 15 mm × 3 mm test pin	111
Figure C.3 – 100 mm × 4 mm test pin	111
Figure C.4 – 100 mm × 3 mm test pin	112
Figure E.1 – Creepage distances of circuits where recurring peak voltages are generated	115
Table 1 – General conditions for tests.....	17
Table 2 – Operating ambient air temperature of PLC-systems.....	24
Table 3 – Sinusoidal vibrations service conditions for PLC-systems.....	26
Table 4 – Free fall on concrete floor for portable and hand-held equipment.....	26
Table 5 – Free fall on concrete floor in manufacturer's original packaging	27
Table 6 – Rated values and operating ranges of incoming power supply.....	30
Table 7 – Standard operating ranges for digital inputs (current sinking).....	34
Table 8 – Rated values and operating ranges for current sourcing digital a.c. outputs	35
Table 9 – Rated values and operating ranges (d.c.) for current sourcing digital d.c. outputs	37
Table 10 – Rated values and impedance limits for analogue inputs.....	38
Table 11 – Rated values and impedance limits for analogue outputs.....	38
Table 12 – Dry-heat and cold withstand tests.....	42
Table 13 – Change of temperature, withstand and immunity tests.....	42
Table 14 – Cyclic (12 + 12) damp-heat test.....	43
Table 15 – Immunity vibration test.....	43
Table 16 – Immunity shock test.....	44
Table 17 – Free-fall immunity/withstand tests (portable and hand-held equipment)	44
Table 18 – Free-fall withstand test (units within manufacturer's original packaging)	44
Table 19 – Insertions/withdrawals of removable units	45
Table 20 – Voltage-ripple and frequency-range immunity test (1).....	45
Table 21 – Third harmonic immunity test.....	46
Table 22 – Gradual shut-down/start-up test	48
Table 23 – Supply voltage variation tests.....	48
Table 24 – Back-up duration withstand test.....	49
Table 25 – Change of energy source test.....	50
Table 26 – Overload and short-circuit tests for digital outputs	51
Table 27 – Emission limits	63
Table 28 – EMC immunity zones.....	65
Table 29 – Criteria to prove the performance of a PLC-system against EMC disturbances	65
Table 30 – Radiated immunity and enclosure ports (1) Conducted immunity, Zones A-B.....	66
Table 31 – Conducted immunity, Zone B.....	67
Table 32 – Conducted immunity, Zone A.....	68
Table 33 – Voltage drops and interruptions.....	69
Table 34 – Radiated emission measurement.....	70
Table 35 – Conducted emission measurement.....	70
Table 36 – Electrostatic discharge immunity test.....	71

Table 37 – Radiated electromagnetic field immunity test.....	72
Table 38 – Power frequency magnetic field immunity test	72
Table 39 – Fast transient burst immunity test.....	73
Table 40 – High-energy surge immunity test	74
Table 41 – Conducted RF immunity test.....	75
Table 42 – Damped oscillatory wave immunity test	76
Table 43 – Voltage drop and interruption immunity test.....	77
Table 44 – Operator accessibility for open and enclosed equipment	81
Table 45 – Limits of output current and output power for inherently limited power sources	84
Table 46 – Limits of output current, output power and ratings for over-current protective devices for non-inherently limited power sources	84
Table 47 – Minimum clearances in air corresponding to overvoltage category II conditions (except for field-wiring terminals) for basic/supplementary insulation	85
Table 48 – Minimum clearances in air corresponding to overvoltage category II conditions (except for field-wiring terminals) for double /reinforced insulation	86
Table 49 – Minimum clearances in air at field-wiring terminals.....	86
Table 50 – Minimum clearances in air for micro-environment where the voltages are known and controlled	87
Table 51 – Classification of material group according to comparative tracking index (CTI)	88
Table 52 – Minimum creepage distances for other than printed circuit boards (1).....	88
Table 53 – Minimum creepage distances for printed circuit boards (1), (6), (9) (basic and supplementary insulation)	89
Table 54 – Minimum creepage distances related to recurring peak voltages on printed wiring boards without protective coating (1) (pollution degrees 1 and 2).....	90
Table 55 – Temperature limits	91
Table 56 – Impact withstand test (1)	97
Table 57 – Operator accessibility tests (1)	98
Table 58 – Dielectric withstand voltages for impulse a.c. power frequency and d.c. tests for basic/supplementary insulation (5)	102
Table 59 – Dielectric withstand voltages for impulse a.c. power frequency and d.c. tests for double/reinforced insulation (5)	102
Table 60 – Overload test circuit values	104
Table 61 – Endurance test circuit values.....	104
Table 62 – Routine dielectric withstand test (5).....	106
Table D.1 – Radiated immunity and enclosure ports (1) conducted immunity, Zone C	113
Table D.2 – Conducted immunity, Zone C	114

INTERNATIONAL ELECTROTECHNICAL COMMISSION

PROGRAMMABLE CONTROLLERS –**Part 2: Equipment requirements and tests**

FOREWORD

1. The IEC (International Electrotechnical Commission) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of the IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, the IEC publishes International Standards. Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations having liaisons with the IEC also participate in this preparation. The IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2. The formal decisions or agreements of the IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested National Committees.
3. The documents produced have the form of recommendations for international use and are published in the form of standards, technical specifications, technical reports or guides and they are accepted by the National Committees in that sense.
4. In order to promote international unification, IEC National Committees undertake to apply IEC International Standards transparently to the maximum extent possible in their national and regional standards. Any divergence between the IEC Standard and the corresponding national or regional standard shall be clearly indicated in the latter.
5. The IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with one of its standards.
6. Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. The IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61131-2 has been prepared by subcommittee 65B: Devices, of IEC technical committee 65: Industrial-process measurement and control.

This second edition of IEC 61131-2 cancels and replaces the first edition published in 1992 and constitutes a technical revision.

The text of this standard is based on the following documents:

FDIS	Report on voting
65B/470A/FDIS	65B/481/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

IEC 61131 consists of the following parts under the general title *Programmable controllers*:

- Part 1: General information
- Part 2: Equipment requirements and tests
- Part 3: Programming languages
- Part 4: User guidelines
- Part 5: Communications
- Part 6: Reserved
- Part 7: Fuzzy control programming
- Part 8: Guidelines for the application and implementation of programming languages

The committee has decided that the contents of this publication will remain unchanged until 2007. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

A bilingual version of this standard may be issued at a later date.

The contents of the corrigendum of March 2004 have been included in this copy.

Withdrawn

INTRODUCTION

This part of IEC 61131 constitutes Part 2 of a series of standards on programmable controllers and the associated peripherals and should be read in conjunction with the other parts of the series.

Where a conflict exists between this and other IEC standards (except basic safety standards), the provisions of this standard should be considered to govern in the area of programmable controllers and their associated peripherals.

Compliance with Parts 1 and 2 of this standard cannot be claimed unless the requirements of 7.2 of this part are met.

Service and physical environment requirements are specified in Clause 4. Functional requirements are specified in Clause 5. Electromagnetic compatibility requirements are specified in Clause 8. Safety requirements are specified in Clause 11.

Terms of general use are defined in Part 1 of this standard. More specific terms are defined in each part.

Withdrawn

PROGRAMMABLE CONTROLLERS –

Part 2: Equipment requirements and tests

1 General

1.1 Scope and object

This Part of IEC 61131 specifies requirements and related tests for programmable controllers (PLC) and their associated peripherals (for example, programming and debugging tools (PADTs), human-machine interfaces (HMIs), etc.) which have as their intended use the control and command of machines and industrial processes.

PLCs and their associated peripherals are intended to be used in an industrial environment and may be provided as open or enclosed equipment. If a PLC or its associated peripherals are intended for use in other environments, then the specific requirements, standards and installation practices for those other environments must be additionally applied to the PLC and its associated peripherals.

This standard also applies to any products performing the function of PLCs and/or their associated peripherals.

Equipment covered in this standard is intended for use in overvoltage category II (IEC 60664-1) in low-voltage installations, where the rated mains supply voltage does not exceed a.c. 1 000 V r.m.s. (50/60 Hz), or d.c. 1 500 V. (If PLCs or their associated peripherals are applied in overvoltage category III installations, then additional analysis will be required to determine the suitability of the equipment for those applications.)

This standard does not deal with the functional safety or other aspects of the overall automated system. PLCs, their application programme and their associated peripherals are considered as components of a control system.

Since PLCs are component devices, safety considerations for the overall automated system including installation and application are beyond the scope of this standard. However, PLC safety as related to electric shock and fire hazards, electrical interference immunity and error detecting of the PLC-system operation (such as the use of parity checking, self-testing diagnostics, etc.), are addressed. Refer to IEC 60364 or applicable national/local regulations for electrical installation and guidelines.

The object of this standard is

- to establish the definitions and identify the principal characteristics relevant to the selection and application of PLCs and their associated peripherals;
- to specify the minimum requirements for functional, electrical, mechanical, environmental and construction characteristics, service conditions, safety, EMC, user programming and tests applicable to PLCs and the associated peripherals.

This Part also specifies

- a) service, storage and transportation requirements for PLCs and their associated peripherals (Clause 4);
- b) functional requirements for PLCs and their associated peripherals (Clause 5);
- c) EMC requirements for PLCs and their associated peripherals (Clause 8);
- d) safety requirements for PLCs and their associated peripherals (Clause 11);

- e) information that the manufacturer is required to supply (Clauses 7, 10 and 14);
- f) test methods and procedures that are to be used for the verification of compliance of PLCs and their associated peripherals with the requirements (Clauses 6, 9 and 12).

The tests are type tests or production routine tests, and not tests related to the ways PLC systems are applied.

1.2 Compliance with this standard

When compliance with this Part of IEC 61131 is indicated without qualification, compliance with all clauses, including all tests and verifications required in this part, must be verified. Moreover, the manufacturer's obligations expressed in this part are not waived if no type test is required, or if the test conditions are restricted for practical reasons.

When compliance with some portion of this Part of IEC 61131 is indicated, it is only necessary to verify compliance with those clauses against which the compliance claim is made. The manufacturer's obligations as indicated above are still applicable. The smallest unit of this part for compliance purposes shall be a clause, such as Clauses 5, 8 or 11.

Compliance with a portion of this Part of IEC 61131 is provided to facilitate efforts with respect to particular conformity assessment requirements (for example, Clause 8 as the compliance requirement for the EU electromagnetic compatibility directive or Clause 11 as the compliance requirement for the EU low-voltage directive).

Compliance with constructional requirements and with requirements for information to be provided by the manufacturer shall be verified by suitable examination, visual inspection and/or measurement.

All requirements not tested according to the clauses on tests and verifications shall be verifiable under a procedure to be agreed to by the manufacturer and the user.

The manufacturer shall provide, on request, compliance verification information for all requirements referenced in the claims of compliance with all or a portion of this Part of IEC 61131.

It is the manufacturer's responsibility to ensure that delivered PLC equipment and associated peripherals are equivalent to the sample(s) which have been type-tested according to this Part of IEC 61131 and therefore that they comply with all requirements of this part.

Significant modifications shall be indicated through the use of suitable revision level indexes and markings (see 5.11 and 11.15) and shall comply with this Part of IEC 61131.

NOTE A new type test may be required to confirm compliance.

Where the manufacturer is allowed to select among several options, he shall clearly specify in his catalogues and/or datasheets those to which any portion of the PLC-system equipment complies. This applies to severity classes of voltage drops (i.e. PS1 or PS2) and types of digital inputs (i.e. Type 1 or Type 3).

1.3 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60068-2-1:1990, *Environmental testing – Part 2: Tests – Tests A: Cold*

IEC 60068-2-2:1974, *Environmental testing – Part 2: Tests – Tests B: Dry heat*

IEC 60068-2-6:1995, *Environmental testing – Part 2: Tests – Test Fc: Vibration (sinusoidal)*

IEC 60068-2-14:1984, *Environmental testing – Part 2: Tests – Test N: Change of temperature*

IEC 60068-2-27:1987, *Environmental testing – Part 2: Tests – Test Ea and guidance: Shock*

IEC 60068-2-30:1980, *Environmental testing – Part 2: Tests – Test Db and guidance: Damp heat, cyclic (12 + 12-hour cycle)*

IEC 60068-2-31:1969, *Environmental testing – Part 2: Tests – Test Ec: Drop and topple, primarily for equipment-type specimens*

IEC 60068-2-32:1975, *Environmental testing – Part 2: Tests – Test Ed: Free fall (Procedure 1)*

IEC 60364 (all parts), *Electrical installations of buildings*

IEC 60417 (all parts), *Graphical symbols for use on equipment*

IEC 60529:1989, *Degrees of protection provided by enclosures (IP Code)*

IEC 60664-1:1992, *Insulation coordination for equipment within low-voltage systems – Part 1: Principles, requirements and tests*

IEC 60664-3:1992, *Insulation coordination for equipment within low-voltage systems – Part 3: Use of coatings to achieve insulation coordination of printed board assemblies*

IEC 60695-2-1 (all sheets), *Fire hazard testing – Part 2: Test methods – Section 1: Glow-wire test and methods*

IEC 60707:1999, *Flammability of solid non-metallic materials when exposed to flame sources – List of test methods*

IEC 60947-5-1:1997, *Low-voltage switchgear and controlgear – Part 5-1: Control circuit devices and switching elements – Electromechanical control circuit devices*

IEC 60947-7-1:2002, *Low-voltage switchgear and controlgear – Part 7-1: Ancillary equipment – Terminal blocks for copper conductors*

IEC 60950-1:2001, *Information technology equipment—Safety – Part 1: General requirements*

IEC 61000-4-2:1995, *Electromagnetic compatibility (EMC) – Part 4-2: Testing and measurement techniques – Electrostatic discharge immunity test*

IEC 61000-4-3:2002, *Electromagnetic compatibility (EMC) – Part 4-3: Testing and measurement techniques – Radiated radio-frequency electromagnetic field immunity test*

IEC 61000-4-4:1995, *Electromagnetic compatibility (EMC) – Part 4: Testing and measurement techniques – Section 4: Electrical fast transient/burst immunity test*

IEC 61000-4-5:1995, *Electromagnetic compatibility (EMC) – Part 4-5: Testing and measurement techniques – Surge immunity test*

IEC 61000-4-6:1996, *Electromagnetic compatibility (EMC) – Part 4-6: Testing and measurement techniques – Immunity to conducted disturbances induced by radio-frequency fields*

IEC 61000-4-8:1993, *Electromagnetic compatibility (EMC) – Part 4-8: Testing and measurement techniques – Power frequency magnetic field immunity test*

IEC 61000-4-12:1995, *Electromagnetic compatibility (EMC) – Part 4-12: Testing and measurement techniques – Oscillatory waves immunity test*

IEC 61010-1:2001, *Safety requirements for electrical equipment for measurement, control, and laboratory use – Part 1: General requirements*

CISPR 11:1999, *Industrial, scientific and medical (ISM) radio-frequency equipment – Electromagnetic disturbance characteristics – Limits and methods of measurement*

CISPR 16-1:1999, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 1: Radio disturbance and immunity measuring apparatus*

CISPR 16-2:1999, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 2: Methods of measurement of disturbances and immunity*

2 Type tests

The object of this clause is to define how to verify compliance of the PLC and the associated peripherals with the requirements set forth in this part of IEC 61131. This compliance verification includes

- verification by type tests given in Clauses 6, 9 and 12,
- verification by suitable examination, visual inspection or/and measurement.

These tests are qualification tests, and not tests related to the ways PLCs are employed. According to the scope of this standard, the above compliance verification may not cover the verification of the ability of the PLC-system to satisfy the intended automated system requirements. Where needed, special tests, not covered by this standard, shall be agreed to by the manufacturer and the user.

In addition, routine tests are specified in Clause 13.

NOTE Peripherals, used in the same environment as the PLC-system, must meet the same requirements as the PLC-system.

2.1 Equipment to be tested (equipment under test/EUT)

PLC-systems span the range from stand-alone products to modular designs; this leads to an infinite variety of user-built actual PLC-system configurations. For obvious practical reasons, in most cases type tests cannot be conducted on EUT identical to user-built PLC-systems, and engineering judgement is necessary. Therefore, the manufacturer is required to define the EUTs and document the corresponding test plan and test programmes to meet the following principles.

Combination of tests/EUTs/test programmes shall be such that one may reasonably think that any configuration built by the user according to the manufacturer's specifications and installation instructions would pass satisfactorily the same tests, and will properly function in normal operation, which these tests are intended to reflect.

Unless otherwise specified in this standard, the manufacturer may elect to use various EUTs to achieve the objectives of a given type test.

If an EUT representing a basic PLC or a remote I/Os (RIOS) is of modular structure, it shall fulfil the following minimum requirement.

All types of modules shall be represented in 1 or several EUT configurations in which any mix of modules is permissible.

All types of modules shall be configured in the EUTs and tested at least once.

NOTE It may be appropriate to consider statistical criteria based on samples, for a large number of I/Os (for example, >100).

If there are too many families to be included into a single EUT, the manufacturer will define several EUTs.

- For the type test of a family with very similar modules (i.e. modules using the same schematic and basic manufacturing and differing mainly by, for example, the number of inputs and outputs), the manufacturer may elect to include in the basic PLC-system only 1 arbitrarily chosen member of the family. If the type test is dependent on the differences between the modules, then a single family member may not be used.
- Appropriate catalogued options, such as power supply units, application memory(ies), processing unit(s) etc. shall be used to build the relevant EUT(s).
- If a local bus extension is part of the PLC-system and if its maximum cable length cable is less than, or equal to, 3 m, it is considered to be an internal PLC bus. As such, it should not be considered a port for test.
- If a local bus extension is part of the PLC-system and is capable of driving cables with a length of >3 m, then only 1 end of the link is part of the EUT and it is considered as a communication port.


When new units/modules are introduced after initial release of a PLC-system catalogue, which has already been satisfactorily tested according to this standard, EUT(s) simpler than those originally used can be defined. This is only permissible if such EUTs and the associated test programmes provided by the manufacturer allow proper verification as if these new units/modules had been tested within the originally tested EUTs.

Unless otherwise specified in this standard, the manufacturer may elect either that each type test be conducted on a new EUT or that several type tests be performed successively on the same EUT.

Certain tests can be easily targeted at a single item, others are more appropriate to a set of items configured together. Equipment to be tested must reflect this need. See specific test clauses for recommendations for EUTs.

2.2 Special features for immunity and EMC tests

Interfaces/ports shown are meant to represent major/example links, not all links. Most EUTs will have multiple interface/ports active during testing.

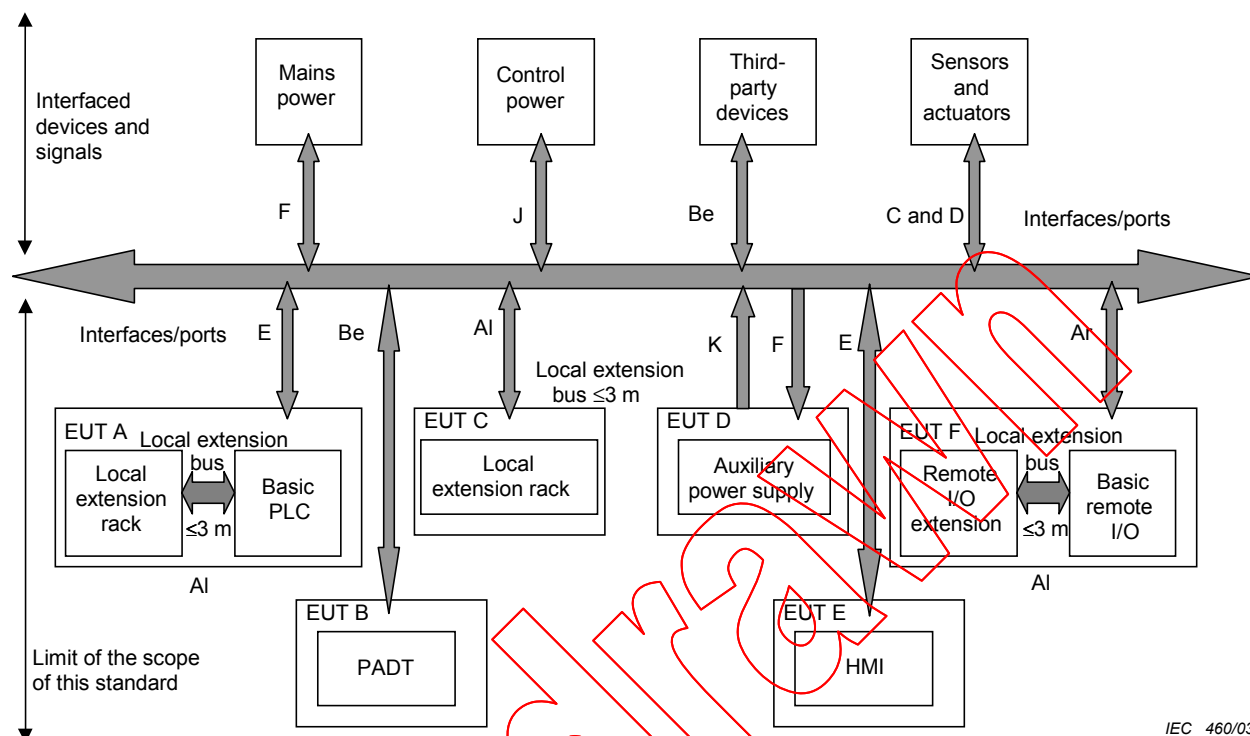

IEC 460/03

Figure 1 – EUT configurations

Each subpart of the PLC-system as shown in Figure 2 may constitute an EUT represented in Figure 1 as EUT A, B, C, D, E and/or F. To exercise the different ports of each EUT, the manufacturer may define subsystems and the different EUTs are tested in turn.

Only 1 subsystem is under test at any time, the others being considered as auxiliary equipment.

For instance, to achieve a given test on the EUT A, equipment of the other EUTs may be connected but are not in the test bed.

For example, to check the electrical interference immunity of the PLC-system, the manufacturer may choose between the following, as applicable:

- to build a single global EUT including the PADT/TE/RIOSs, and check the whole configuration; or
- to define a suite of simpler EUTs (for example, a PLC-system without any PADT/TE/RIOS, and a single PADT and a single RIOS and a single PADT and a single TE, or any other suite of partial combinations of them which make sense) but correspondingly exercise the appropriate ports of each EUT with an equipment part of the test bed (the laboratory equipment necessary to test the EUT) as would do the missing PADT/TE/RIOSs. For practical reasons, the manufacturer may elect to use actual PADTs/TEs/RIOSs to exercise the EUT ports.

At least 1 of each type or a representative number of I/O ports of the EUT must be connected and be functional.

A selection of the representative functional modes shall be made considering that only the most typical functions of the PLC can be tested.

2.3 Withstand test conditions

In general, the module which is in the manufacturer's catalogue should be tested alone, providing that mixing several modules does not affect the result of the test. Refer to those clauses dealing with withstand tests for specifics.

2.4 Verification procedure

Type tests shall be conducted on the EUT(s) defined in 2.1, unless otherwise specified.

For each test, the manufacturer shall

- specify how this configuration shall be installed and externally connected;
- provide the suitable test programmes which shall be run during the test;
- provide the proper operation verification procedure including the way to measure accuracy and temporary deviations of analogue I/Os.

The appropriate test programmes and proper functioning verification procedures provided by the manufacturer shall satisfy the requirements given in 2.5.

2.5 Requirements for test programmes and proper functioning verification procedures (PFVPs) to be provided by the manufacturer

During the type tests, there shall be no

- destruction of hardware, unless required by the test;
- modification of the operating system and test programmes and/or alteration of their execution;
- unintended modification of system and application data stored or exchanged;
- erratic or unintended behaviour of the EUT;
- deviation of the analogue I/Os out of the limits specified in item 4 of 710.2 and item 3 of 7.11.2.

All relevant functions and parts of the EUT (i.e. units and modules) shall be functioning in such a way that the information paths to/from these functions and parts are exercised.

All the I/O and communication channels of the EUT shall be exercised.

NOTE It is acceptable to apply statistical criteria based on samples, for large number of I/Os, etc. (for example, >100).

All external and internal product status information reporting means, such as displays, lamps, alarm signals, self-test result registers, shall be exercised. The test procedures shall include conditions to verify the related activities.

All various PLC-system operation modes significant for the user's implementation such as start-up and shut-down, cold/warm/hot restart, "normal run", "normal stop", "programme/monitor with PADTs", etc., as applicable, shall be verified for performance and behaviour.

Initialization and reset conditions of all system components shall be checked for controlled start-up and shut-down. The various modes, such as "run", "programme", "monitor", shall be verified for performance and behaviour.

Any special feature/performance not covered in this standard but necessary for the proper operation of the basic PLC-system shall be exercised and tested.

2.6 General conditions for tests

The tests shall be carried out in accordance with the appropriate test procedure.

The tests shall be carried out under the general test conditions given in Table 1, unless otherwise specified.

Unless otherwise specified, no sequence is imposed for type tests.

Table 1 – General conditions for tests

	Test conditions
Mains power supply	Rated voltage and frequency
Temperature	15 °C to 35 °C
Relative humidity	≤75 %
Barometric pressure	86 kPa to 106 kPa (650 mm Hg to 800 mm Hg)
Output loads	Outputs loaded to rated load
Pollution	Pollution degree 2

3 Terms and definitions

For the purposes of this Part of IEC 61131, the following terms and definitions, in addition to those given in IEC 61131-1, apply.

3.1

analogue input

device which converts a continuous signal to a discretely valued multi-bit binary number, for use by the PLC-system

3.2

analogue output

device which converts a multi-bit binary number from the PLC-system to a continuous signal

3.3

accessible

able to be touched by the jointed test finger or test pin, when installed as intended. See 12.1.2, 12.1.3 and Annex C

3.4

basic PLC (-system)

configuration which consists, at a minimum, of a processing unit, power supply and I/O. See Figure 2

3.5

battery

electrochemical energy source which may be rechargeable or non-rechargeable

3.6

clearance

shortest distance in air between two conductive parts

[IEC 60664-1]

3.7

coating, protective

covering of suitable insulating material that encloses the clearance and/or creepage distance of the printed wiring board and conforms to the surface of the board in such a manner that the environment is excluded and the clearance and/or creepage distance can withstand the required impulse and continuous potential

NOTE Coating is normally applied to exclude the effects of atmosphere and to increase the dielectric properties of the clearance and/or creepage distances that would not normally be adequate without coating. A less effective coating may exclude the atmosphere, but cannot be relied on to enhance the dielectric properties.

3.8

comparative tracking index (CTI)

numerical value of the maximum voltage at which a material withstands 50 drops of NH_4Cl solution (ammonia chloride) without tracking.

[IEC 60112]

3.9

creepage distance

shortest distance along the surface of the insulating material between two conductive parts

[IEV 60151-15-50]

3.10

current sinking

property of receiving current

3.11

current sourcing

property of supplying current.

3.12

digital input, type 1

device for sensing signals from mechanical contact switching devices, such as relay contacts, push-buttons, switches, etc. Converts an essentially two-state signal to a single-bit binary number

NOTE Type 1 digital inputs may not be suitable for use with solid-state devices such as sensors, proximity switches, etc.

3.13

digital input, type 2

device for sensing signals from solid-state switching devices such as 2-wire proximity switches. Converts an essentially 2-state signal to a single-bit binary number

NOTE 1 Two-wire proximity switches described here are designed to IEC 60947-5-2.

NOTE 2 This class could also be used for Type 1 or Type 3 applications.

3.14

digital input, type 3

device for sensing signals from solid-state switching devices such as 2-wire proximity switches. Converts an essentially 2-state signal to a single-bit binary number

NOTE 1 This class could also be used for Type 1 applications.

NOTE 2 Type 3 digital inputs offer lower power characteristics than Type 2 digital inputs. Generally, this allows much higher input channel densities per module or product. Type 3 differs from Type 2 in that it is compatible with those IEC 60947-5-2 devices that offer low current in the off state. See Table 7 for details of operating ranges. Proximity switch compatibility is such that a high percentage of proximity switches having Type 2 compatibility will also have Type 3 compatibility.

3.15**digital output**

device which converts a single-bit binary number to a 2-state signal

3.16**earth**

conducting mass of the Earth, whose electric potential at any point is conventionally taken as zero

3.17**EMC (electromagnetic compatibility)**

ability of an equipment or system to function satisfactorily in its electromagnetic environment without introducing intolerable electromagnetic disturbances to anything in that environment

[IEV 60161-01-07]

3.18**enclosed equipment**

equipment which is enclosed on all sides with the possible exception of its mounting surface to prevent personnel from accidentally touching live or moving parts contained therein and to protect the equipment against ingress of medium-size solid foreign bodies, and meeting requirements of mechanical strength, flammability, and stability (where applicable). Protection degree must be $\geq$ IP20

3.19**enclosure**

housing affording the type and degree of protection suitable for the intended application

[IEV 60195-02-35]

3.20**equipment class**

class numbers designate the means by which electric shock protection is maintained in normal condition and single-fault conditions of the installed equipment

[IEC 61140]

3.21**equipment under test (EUT)**

representative configuration(s), as defined by the manufacturer, used for type tests (see Clause 2)

3.22**external wiring**

wiring of the PLC-system equipment, which is installed by the user

3.23**field wiring**

external wiring

3.24**functional earthing conductor**

conductor that is in electrical contact with, for example, Earth, for purposes of interference immunity improvement

3.25**hand-held equipment**

equipment which is intended to be held in one hand while being operated with the other hand

3.26

hazardous live

capable of rendering an electric shock or electric burn in normal condition or single-fault condition.

NOTE See 11.1.1.1 for values applicable to normal condition and 11.1.1.2 for the values applicable to single-fault condition.

3.27

immunity (to a disturbance)

ability of a device, equipment or system to perform without degradation in the presence of an electromagnetic disturbance

[IEV 60161-01-20]

NOTE Not used exclusively to refer to EMC in this standard. It may also refer, for example, to vibration, humidity, etc.

3.28

immunity type test (immunity test)

type test verifying that the basic PLC-system operation is not altered by the application of specified influencing quantities that are intended to approximate normal operation

3.29

insulation

NOTE 1 Insulation can be a solid, a liquid, a gas (for example, air), or any combination. [IEV 60151-03-30]

NOTE 2 (To) insulate – To prevent conduction between separate conductive bodies. [IEV 60151-03-28]

NOTE 3 (To) isolate – To disconnect completely a device or circuit from other devices or circuits.

To provide (by separation) a specified degree of protection from any live circuit.

[IEV 60151-03-29]

3.29.1

basic insulation

insulation of hazardous live parts, which provides basic protection against electric shock under fault-free conditions

[IEV 60195-06-06 and IEC 60195-06-01]

NOTE This concept does not apply to insulation used exclusively for functional purposes. Such insulation is referred to as functional insulation.

3.29.2

double insulation

insulation comprising both basic insulation and supplementary insulation

[IEV 60195-06-08]

3.29.3

reinforced insulation

insulation of hazardous live parts which provides a degree of protection against electric shock equivalent to double insulation

NOTE Reinforced insulation may comprise several layers which cannot be tested singly as basic or supplementary insulation.

[IEV 60195-06-09]

3.29.4

supplementary insulation

independent insulation applied in addition to basic insulation, for fault protection

[IEV 60195-06-07]

3.30**interface**

shared boundary between a considered system and another system, or between parts of a system, through which information or electrical energy is conveyed

3.31**internal wiring**

wiring which is inside the PLC-system equipment, which is installed by the manufacturer

3.32**isolated (devices, circuits)**

devices or circuits without galvanic connection between them

3.33**live part**

conductor or conductive part intended to be energized in normal operation, including a neutral conductor, but by convention not a PEN conductor or PEM conductor or PEL conductor

NOTE 1 This concept does not necessarily imply a risk of electric shock. [IEV 60195-02-19]

NOTE 2 PEN conductor – conductor combining the functions of both a protective earthing conductor and a neutral conductor. [IEV 60195-02-12]

NOTE 3 PEM conductor – conductor combining the functions of a protective earthing conductor and a mid-point conductor. [IEV 60195-02-13]

NOTE 4 PEL conductor – conductor combining the functions of both a protective earthing conductor and a line conductor. [IEV 60195-02-14]

[IEV 60195-02-19]

3.34**mains power supply**

power from the conductors/mains of the permanent installation of the building at the supply voltage to the PLC-system

3.35**material group**

classification of insulating materials in terms of comparative tracking index (CTI) range (see 11.4.3)

3.36**micro-environment**

ambient conditions which surround the clearance or creepage distance being reviewed

NOTE The micro-environment of the clearance or creepage distance and not the environment of the equipment determines the effect of the insulation. The micro-environment may be better or worse than the environment of the equipment. It includes all factors influencing the insulation, such as climatic, electromagnetic, pollution, etc. (IEC 60664).

3.37**module**

part of the PLC-system containing an identified function(s) (MPU, analogue input, etc.), which may plug into a backplane or base

3.38**multi-channel module**

module containing multiple input and/or output signal interfaces. These signal interfaces could be isolated or not isolated from each other

3.39**normal use**

operation, including stand-by, according to the instructions for use or for the obvious intended purpose

NOTE Normal service conditions are stated in Clause 4.

3.40

normal condition

condition in which all means for protection against hazards are intact that is, a fault-free condition

3.41

open equipment

equipment that may have live electrical parts accessible, for example, a main processing unit. Open equipment is to be incorporated into other assemblies manufactured to provide safety

3.42

operator

person commanding and monitoring a machine or process through an HMI connected to the PLC. The operator does not change the PLC hardware configuration, software or the application programme. A PLC is not intended for use by untrained personnel. The operator is assumed to be aware of the general hazards in an industrial environment

3.43

overvoltage category (of a circuit or within an electrical system)

classification based on limiting (or controlling) the values of prospective transient overvoltages occurring in a circuit (or within an electrical system having different nominal voltages) and depending upon the means employed to influence the overvoltages.

[IEC 60664-1]

NOTE 1 In an electrical system, the transition from 1 overvoltage category to another of lower category is obtained through appropriate means complying with interface requirements. These interface requirements may be an overvoltage protective device or a series-shunt impedance arrangement capable of dissipating, absorbing, or diverting the energy in the associated surge current, to lower the transient overvoltage value to that of the desired lower overvoltage category.

NOTE 2 Equipment covered in this standard is intended for use in overvoltage category II.

3.44

permanent installation

portion of the PLC-system which is required to perform the intended application function

NOTE See Annex A.

3.45

pollution degree (in the micro-environment)

for the purpose of evaluating clearances and creepage distances, 3 degrees of pollution in the micro-environment are established

NOTE 1 The conductivity of a polluted insulation is due to the deposition of foreign matter and moisture.

NOTE 2 The minimum clearances given for pollution degrees 2 and 3 are based on experience rather than on fundamental data.

3.45.1

pollution degree 1

no pollution or only dry, non-conductive pollution occurs. The pollution has no influence

3.45.2

pollution degree 2

normally, only non-conductive pollution occurs. Occasionally, however, a temporary conductivity caused by condensation must be expected

3.45.3

pollution degree 3

conductive pollution occurs, or dry, non-conductive pollution occurs which becomes conductive due to condensation, which is expected

3.46**port
interface**

NOTE Most commonly used with respect to EMC.

3.47**portable equipment**

enclosed equipment that is moved while in operation or which can easily be moved from one place to another while connected to the supply

NOTE Examples are programming and debugging tools (PADTs) and test equipment (TE).

3.48**protective conductor**

conductor provided for purposes of safety, for example, protection against electric shock

[IEV 60195-02-09]

3.49**protective extra-low voltage (PELV) circuit**

electrical circuit in which the voltage cannot exceed a.c. 30 V r.m.s., 42,4 V peak or d.c. 60 V in normal and single-fault condition, except earth faults in other circuits.

A PELV circuit is similar to an SELV circuit that is connected to protective earth

3.50**protective impedance**

single component regarded as fault-free, a combination of components, or a combination of basic insulation and a current- or voltage-limiting device, the impedance, construction and reliability of which are such that when connected between parts which are hazardous live and accessible conductive parts, it provides protection to the extent required by this standard in normal and single-fault condition

3.51**recurring peak voltage**

peak value of a generated voltage whose characteristic is recurring at some specified period

3.52**routine test**

conformity test made on each individual item during or after manufacture

[IEV 60151-16-17]

3.53**safety extra-low voltage circuit (SELV circuit)**

electrical circuit in which the voltage cannot exceed a.c. 30 V r.m.s., 42,4 V peak or d.c. 60 V in normal and single-fault condition, including earth faults in other circuits.

An SELV circuit is not connected to protective earth

3.54**service personnel**

person changing or repairing the PLC hardware configuration or the application programme

The service person may also install software updates provided by the manufacturer. They are assumed to be trained in the programming and operation of the PLC equipment and its use.

They are persons having the appropriate technical training and experiences necessary to be aware of hazards – in particular, electrical hazards – to which they are exposed in performing a task and of measures to minimize danger to themselves or to other persons or to the equipment.

3.55

total output current (of an output module)

current that a multi-channel module operating at the most adverse combination of normal operation can supply without any part of it (insulation, terminals, exposed conductive parts, etc.) exceeding the specified temperature limits

NOTE For a multi-channel module, the total output current is generally less than the sum of the output currents of the channels.

3.56

type test

conformity test made on one or more items representative of the production

[IEV 60151-16-16]

3.57

unit

integral assembly (which may consist of modules plugged in or otherwise connected within the assembly) connected to other units within the system by means of cables for permanently installed units and cables or other means for portable units

3.58

withstand type test (withstand test)

type test verifying that the application of more severe influencing quantities to the basic PLC-system does not impair its ability to assume its intended mission

3.59

working voltage

highest value of the a.c. (r.m.s) or d.c. voltage across any particular insulation which can occur when the equipment is supplied at rated voltage (U_e)

Transients are disregarded.

Both open-circuit conditions and normal use are taken into account.

4 Normal service conditions and requirements

It is the user's responsibility to ensure that the equipment service conditions are not exceeded. The PLC and PLC-system is intended to be used in an industrial environment.

The user must ensure the installation conditions match the environmental conditions given in this standard.

4.1 Climatic conditions and requirements

4.1.1 Operating ambient air temperature

The equipment shall be suitable for the operating temperature ranges given by the following Table 2.

Table 2 – Operating ambient air temperature of PLC-systems

Temperature range	Type of limit	Enclosed equipment (ventilated/non-ventilated)		Open equipment
		Permanent installation	Non-permanent installation	Permanent installation
	Max.	40 °C	40 °C	55 °C
	Min.	5 °C	5 °C	5 °C
Average temperature over 24 h	Max.	35 °C	35 °C	50 °C

For enclosed non-ventilated equipment that is cooled by natural air convection, the equipment ambient air temperature is the room temperature 1 m away from the surface of the enclosure on a horizontal plane located at the vertical mid-point of the enclosure.

For enclosed ventilated equipment, the equipment ambient temperature is the temperature of the incoming air.

For open equipment, the ambient air temperature is the temperature of the incoming air immediately below the equipment.

No forced external cooling is assumed. Open peripherals, which are intended to be permanently installed as part of the PLC-system, shall meet the operating temperature range of the PLC.

Some types of equipment (for example, panel-mounted HMI, etc.) can use a combination of open and enclosed characteristics.

Requirements of this subclause are verified in accordance with 6.1.1 and 6.1.2.

4.1.2 Relative humidity

The equipment shall be suitable for a relative humidity level from 10 % to 95 %, non-condensing.

Requirements of this subclause are verified in accordance with 6.1.3.

4.1.3 Altitude

The equipment shall be suitable for operation up to 2 000 m.

No test required.

4.1.4 Pollution degree

Where not otherwise specified by the manufacturer the equipment is designed for use in pollution degree 2.

4.2 Mechanical service conditions and requirements

Vibration, shock and free-fall conditions vary widely depending on the installation and environment and are very difficult to specify.

For the purpose of this standard, the service conditions are indirectly defined by the following requirements which apply to fixed equipment as well as to unpackaged portable and hand-held equipment (see exceptions in 4.2.2). They do not apply to equipment containing assemblies other than PLC-systems and/or associated peripherals.

Experience shows that equipment meeting these requirements is suitable for industrial use on stationary installations.

Fixed equipment is that which is part of the permanent installation.

4.2.1 Vibrations

Immunity requirements are:

Table 3 – Sinusoidal vibrations service conditions for PLC-systems

Frequency range Hz	Continuous	Occasional
$5 \leq f < 9$	1,75 mm amplitude	3,5 mm amplitude
$9 \leq f \leq 150$	0,5 g constant acceleration	1,0 g constant acceleration

Vibration is applicable to each 3 mutually perpendicular axes.

The manufacturer shall specify the method of mounting portable and hand-held peripherals on the test equipment.

Requirements of this subclause are verified in accordance with 6.2.1.

4.2.2 Shock

Immunity requirements are occasional excursions to 15 g, 11 ms, half-sine, in each of 3 mutually perpendicular axes.

Devices containing CRTs are excluded from this requirement.

Electromechanical relays may temporarily respond to 15 g shocks. Temporary malfunctioning is allowed during the test, but equipment should be fully functional after the test.

Requirements of this subclause are verified in accordance with 6.2.2.

4.2.3 Free falls (portable and hand-held equipment)

Immunity requirements for free falls are:

Table 4 – Free fall on concrete floor for portable and hand-held equipment

	Portable and hand-held (any weight) (withstand)	Hand-held (any weight) (immunity)	Normative items
Random drops	–	1 000 mm; 2 trials	(1), (2), (4)
Flat drops	100 mm; 2 trials	–	(1), (4)
Supported drops	30° or 100 mm; 2 trials	–	(1), (3), (4)

(1) Caution: temporary malfunctioning is allowed at the impact, but equipment shall be fully functional after the test. Therefore, if equipment is operating during the fall, erroneous operation could be introduced upon impact which may require operator correction.

(2) From prescribed altitude (normal position of use) Table 17.

(3) See Table 17.

(4) Random drops are drops on any edge, surface or corner. Flat drops are only on surfaces. Supported drops are only on edges.

Requirements of this subclause are verified in accordance with 6.2.3.

4.3 Transport and storage conditions and requirements

The following requirements apply to PLC units placed within manufacturer's original packaging.

Transport and storage of unpackaged portable equipment should not exceed the requirements of 4.2.

When components are included in the equipment that have particular limitations (for example, CMOS components, batteries, etc.), the manufacturer shall specify the arrangements to be made for transport and storage.

4.3.1 Temperature

The allowable temperature range is $-40\text{ }^{\circ}\text{C}$ to $+70\text{ }^{\circ}\text{C}$.

The temperature range $-25\text{ }^{\circ}\text{C}$ to $+70\text{ }^{\circ}\text{C}$ is acceptable, but is not recommended for future designs.

Requirements of this subclause are verified in accordance with 6.1.1.

The relative humidity range is 10 % to 95 %, non-condensing.

Requirements of this subclause are verified in accordance with 6.2.3.

4.3.2 Relative humidity

The relative humidity range is 10 % to 95 %, non-condensing.

Requirements of this subclause are verified in accordance with 6.1.3.

4.3.3 Altitude

The design atmospheric pressure for transportation shall be equivalent to 0-3 000 m altitude (minimum 70 kPa).

No test required.

4.3.4 Free falls (PLC units in manufacturer's original packaging)

Withstand requirements for PLC units within manufacturer's original packaging are given in Table 5 below. After the test, they shall be fully functional and shall show no evidence of physical damage.

Table 5 – Free fall on concrete floor in manufacturer's original packaging

Shipping weight with packaging kg	Random free-fall drop height mm		Number of falls
	With shipping package	With product package	
<10	1000	300	5
10 to 40	500	300	5
>40	250	250	5

Requirements of this subclause are verified in accordance with 6.2.4.

4.3.5 Other conditions

The user should reach agreement with the manufacturer for any mechanical conditions that are not specified in this standard. This may include items such as extra-low temperature storage, higher altitude transportation, etc.

4.4 Electrical service conditions and requirements

4.4.1 AC and d.c. mains power supply

Refer to 5.1.1.

4.4.2 Overvoltage category, control of transient overvoltages

The nature of the installation shall be such that overvoltage category II conditions shall not be exceeded.

Transient overvoltages at the point of connection to the mains power supply shall be controlled not to exceed overvoltage category II, i.e. not higher than the impulse voltage corresponding to the rated voltage for basic insulation. The equipment or the transient suppression means shall be capable of absorbing the energy in the transient.

4.4.3 Non-periodic overvoltages


In the industrial environment, non-periodic overvoltage peaks may appear on mains power supply lines as a result of power interruptions to high-energy equipment (for example, blown fuse on 1 branch in a 3-phase system). This will cause high current pulses at relatively low voltage levels (approximately $2 \times U_{\text{peak}}$). The user shall take the necessary steps to prevent damage to the PLC-system (for example, by interposing a transformer).

4.5 Special conditions and requirements

When the service conditions are more severe than those given in 4.1, 4.2, 4.3 and 4.4 or other adverse environmental conditions exist (for example, air pollution by dust, smoke, corrosive or radioactive particles, vapours or salts, attack by fungi, insects or small animals), the manufacturer should be consulted to determine suitability of the equipment or the steps to be taken.

5 Functional requirements

A typical PLC-system and its interfaces/ports are shown in Figure 2.

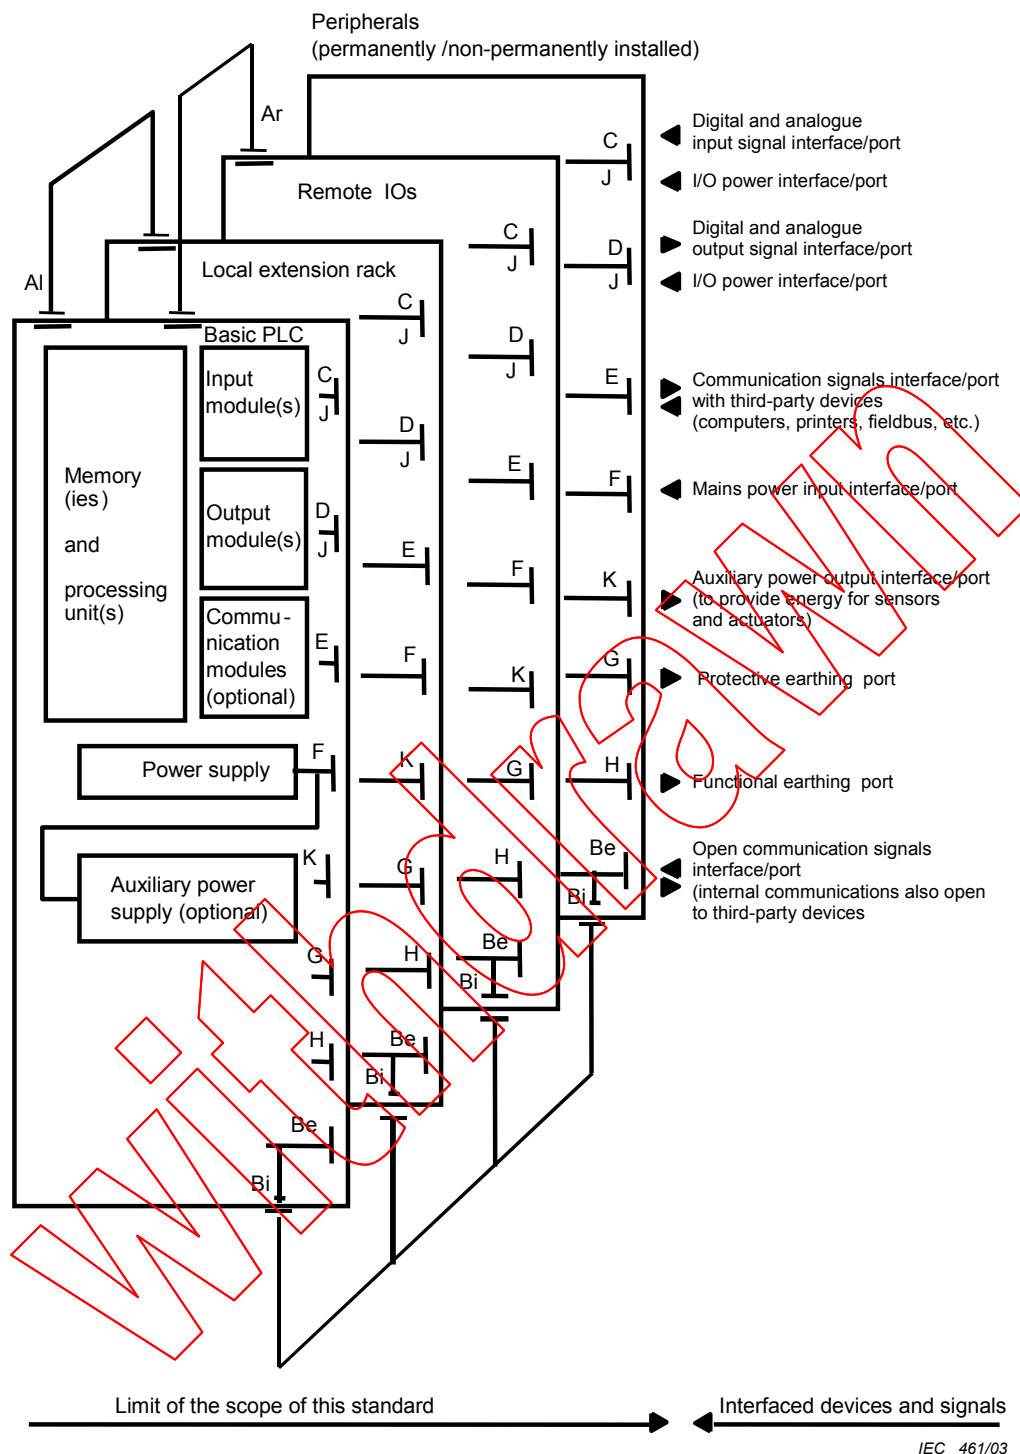

Key

- Al Communication interface/port for local I/O
- Ar Communication interface/port for remote I/O station
- Be Open communication interface/port also open to third-party devices (for example, personal computer used for programming instead of a PADT)
- Bi Internal communication interface/port for peripherals
- C Interface/port for digital and analogue input signals
- D Interface/port for digital and analogue output signals
- E Serial or parallel communication interfaces/ports for data communication with third-party devices
- F Mains-power interface/port. Devices with F ports have requirements on keeping downstream devices intelligent during power up, power down and power interruptions.
- G Port for protective earthing
- H Port for functional earthing
- J I/O power interface/port used to power sensors and actuators.
- K Auxiliary power output interface/port

Figure 2 – Typical interface/port diagram of a PLC-system



5.1 Functional power supply and memory back-up requirements

5.1.1 AC and d.c. power supply

Requirements of this subclause are verified in accordance with 6.3.1, 6.3.2 and 6.3.3.

5.1.1.1 Rated values and operating ranges

Incoming power supplies to the PLC-system and to the externally powered I/O modules shall be as shown in Table 6.

Table 6 – Rated values and operating ranges of incoming power supply

Voltage		Frequency		Recommended use (R)		Normative items and note (3)
Rated (U_e)	Tolerance (min./max.)	Rated (F_n)	Tolerance (min./max.)	Power supply	I/O signals (5)	
DC 24 V	-15 %/+20 %			R	R	(1)
DC 48 V				R	R	(1), (2)
DC 125 V				-	-	-
AC 24 V r.m.s.	-15 %/+10 %	50 Hz or 60 Hz	-6 %/+4 %	-	-	(Note)
AC 48 V r.m.s.				-	-	(Note)
AC 100 V r.m.s.				R	R	-
AC 110 V r.m.s.				R	R	(Note)
AC 120 V r.m.s.				R	R	-
AC 200 V r.m.s.				R	R	(Note)
AC 230 V r.m.s.				R	R	-
AC 240 V r.m.s.				R	R	(Note), (4)
AC 400 V r.m.s.				R	-	
(1) In addition to the voltage tolerances, a total a.c. component having a peak value of 5 % of the rated voltage is allowed. The absolute limits are d.c. 30/19,2 V for d.c. 24 V and d.c. 60/38,4 V for d.c. 48 V. (2) See Note 5 of Table 7 if Type 2 digital inputs are likely to be used. (3) For incoming voltages other than those given in the table such as d.c. 110 V etc., the tolerances given in the table and Note 1 apply. These voltage tolerances shall be used to calculate the input limits of Table 7, using the equations in Annex B. (4) Three-phase supply. (5) For power supplies for analogue I/Os, see item 5 of 7.10.3 and item 3 of 7.11.3.						
NOTE The rated voltages are derived from IEC 60038.						

Requirements of this subclause are verified in accordance with 6.3.1.

5.1.1.2 Voltage harmonics

AC voltage is in terms of the total r.m.s. voltage values measured at the point of entry to the equipment.

Total r.m.s. content of true harmonics (integral multiple of nominal frequency) less than 10 times nominal frequency may reach 10 % of the total voltage. Harmonic and other frequency content for higher frequencies may reach 2 % of the total voltage. However, to provide constant comparative results, the equipment shall be tested at the third harmonic only (10 % at 0° and at 180° phase angle).

The total content of harmonics of the power supply to the PLC-system may be affected when the energy source output impedance is relatively high with regard to the input impedance of the PLC-system power supply; sizing a dedicated power source such as an inverter for a PLC-system may require an agreement between the user and the manufacturer. The use of line conditioner should be considered. See IEC 61131-4.

Requirements of this subclause are verified in accordance with 6.3.1.2.

5.1.2 Memory back-up

Power back-up for volatile memories shall be capable of maintaining stored information for at least 300 h under normal use, and 1 000 h at a temperature not greater than 25 °C when the energy source is at rated capacity. (For power back-up needing replacement, the rated capacity is the value used to designate the procedure and time interval for replacement.)

The manufacturer should specify storage time information relative to volatile memory if different from stated durations.


It shall be possible to change or refresh power back-up without loss of data in the backed-up portions of memory. (See also 4.3, 7.6 item 8 and 7.13 item 4.)

If a memory back-up battery is provided, a warning of "low battery voltage" shall be provided.

Requirements of this subclause are verified in accordance with 6.3.4.

5.2 Digital I/Os

Figure 3 gives an illustration of definitions of some I/O parameters.

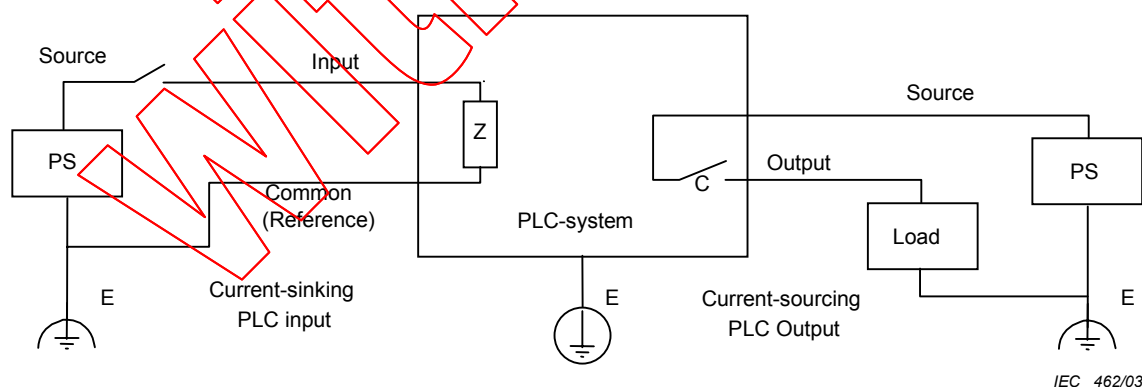

Key

- C Output
Mechanical or static contact (for example dry relay contact, triac, transistor or equivalent).
- E Earthings
The earths shown are original.
Earthing is dependent on national regulations and/or application needs.
- Z Input
Input impedance
- PS External power supplies

NOTE Some applications may use only 1 PS common to inputs, outputs and PLC-system.

Figure 3 – I/O Parameters

Digital I/Os shall comply with the following requirements.

The PLC-system shall be provided with at least 1 type of input interface and 1 type of output interface among those defined respectively in 5.2.1, 5.2.2 and 5.2.3.

Digital inputs shall comply with the requirements of the standard voltage ratings given in 5.2.1. Non-standard voltage digital inputs should be in accordance with the design equation given in Annex B.

Digital outputs shall comply with the requirements of the standard ratings given in 5.2.2.1 for a.c. or 5.2.3.1 for d.c..

It shall be possible to interconnect inputs and outputs by means of a correct selection of the above digital I/Os, resulting in proper PLC-system operation. (Additional external load shall be specified by the manufacturer if necessary.)

It shall be possible to feed isolated multi-channel a.c. input modules from different phases and the modules shall then comply with the maximum voltage difference likely to occur between phases, or the user manual shall include a note indicating that all channels must be fed from the same phase.

If a multi-channel a.c. circuit is intended for multi-phase use, the circuit shall comply with the clearance and creepage distance requirements and the dielectric test corresponding to the voltage between phases.

NOTE 1 Current-sourcing inputs and current-sinking outputs which may be required for certain applications are not covered in this Part of IEC 61131. Special care should be exercised in their use. (Where positive logic, current-sinking inputs and current-sourcing outputs are used, any short-circuit to the reference potential and wire-breakage are interpreted by the inputs and loads as the "off state"; on the other hand, for current-sourcing inputs and current-sinking outputs, earth faults are interpreted as the "on state") (See Figure 3.)

NOTE 2 A PLC-system may be offered with interfaces that are not covered in this standard, i.e., interfaces for TTL and CMOS circuits, etc. In such a case, the manufacturer's data shall give all relevant information to the user.


5.2.1 Digital inputs (current sinking)

Requirements of this subclause are verified in accordance with 6.4.2.

5.2.1.1 Terminology (U/I operation regions)

Figure 4 represents graphically the limits and operating ranges which are used herein to characterize current sinking digital input circuits.

The operating region consists of "on region", "transition region" and "off region". It is necessary to exceed both U_T min. and I_T min. to leave the "off region", and to exceed I_H min. before U_H min. to enter the "on region": all input U-I curves shall remain within these boundary conditions. The region below zero volts is a valid part of the "off region" for d.c. inputs only.

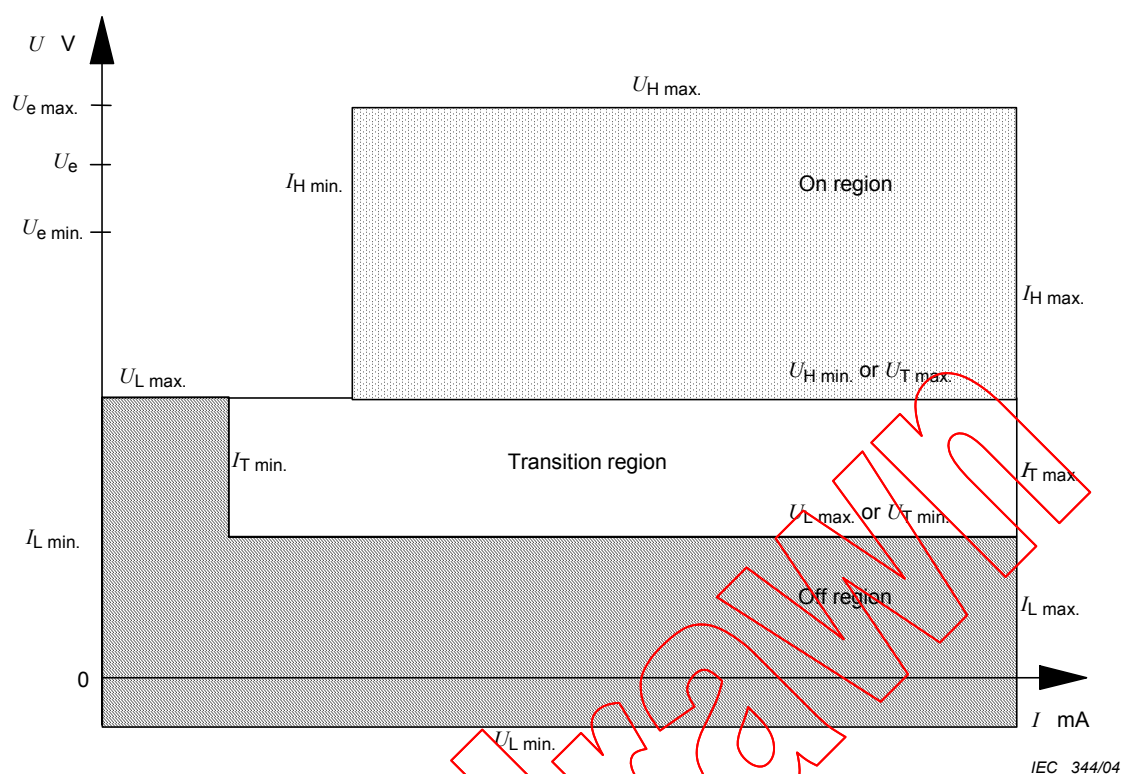

NOTE

U_{Hmax} and U_{Hmin} are the voltage limits for the on conditions (state 1)

I_{Hmax} and I_{Hmin} are the current limits for the on conditions (state 1)

U_{Tmax} and U_{Tmin} are the voltage limits for the transition state (on or off)

I_{Tmax} and I_{Tmin} are the current limits for the transition state (on or off)

U_{Lmax} and U_{Lmin} are the voltage limits for the off conditions (state 0)

I_{Lmax} and I_{Lmin} are the current limits for the off conditions (state 0)

U_{Lmax} equals U_{Hmin} to I_{Tmin} and equals U_{Tmin} above I_{Tmin}

U_e , $U_{e max}$ and $U_{e min}$ are the rated voltage and its limits for the external power supply voltage

Figure 4 – U-I operation regions of current-sinking inputs

5.2.1.2 Standard operating ranges for digital inputs (current sinking)

Current-sinking digital inputs shall operate within the limits presented in Table 7.

Table 7 – Standard operating ranges for digital inputs (current sinking)

Rated voltage U_e	Rated frequency F_n Hz	Type of limit	Type 1 limits (7)						Type 2 limits (7), (Note)						Type 3 limits (7)						Normative items
			State 0		Transition		State 1		State 0		Transition		State 1		State 0		Transition		State 1		
			UL V	IL mA	UT V	IT mA	UH V	IH mA	UL V	IL mA	UT V	IT mA	UH V	IH mA	UL V	IL mA	UT V	IT mA	UH V	IH mA	
DC 24V	—	Max. Min.	15/5 –3	15 ND	15 5	15 0,5	30 15	15 2	11/5 –3	30 ND	11 5	30 2	30 11	30 6	11/5 –3	15 ND	11 5	15 1,5	30 11	15 2	(1), (2),(4), (5)
DC 48V	—	Max. Min.	34/10 –6	15 ND	34 10	15 0,5	60 34	15 2	30/10 –6	30 ND	30 10	30 2	60 30	30 6	30/10 –6	15 ND	30 10	15 1,5	60 30	15 2	(1), (2), (4)
AC 24V V r.m.s.	50/60	Max. Min.	14/5 0	15 0	14 5	15 1	27 14	15 2	10/5 0	30 0	10 5	30 4	27 10	30 6	10/5 0	15 0	10 5	15 2	27 10	15 5	(1), (3)
AC 48 V r.m.s.	50/60	Max. Min.	34/10 0	15 0	34 10	15 1	53 34	15 2	29/10 0	30 0	29 10	30 4	53 29	30 6	30/10 0	15 0	30 10	15 2	53 30	15 5	(1), (3)
AC 100 AC 110 AC 120 V r.m.s.	50/60	Max. Min.	79/20 0	15 0	79 20	15 1	1,1 U_e 79	15 2	74/20 0	30 0	74 20	30 4	1,1 U_e 74	30 6	74/20 0	15 0	74 20	15 2,5	1,1 U_e 74	15 5	(1), (3), (4), (6)
AC 200 AC 230 AC 240 V r.m.s.	50/60	Max. Min.	164/40 0	15 0	164 40	15 2	1,1 U_e 164	15 3	159/40 0	30 0	159 40	30 5	1,1 U_e 159	30 7	159/40 0	15 0	159 40	15 2,5	1,1 U_e 159	15 5	(1), (3), (4), (6)

(1) All logic signals are in positive logic. Open inputs shall be interpreted as state 0 signal. See Annex B for equations and assumptions used in developing values in this table and for additional comments.

(2) The given voltage limits include all alternating voltages components.

(3) Static switches may affect the total r.m.s. content of true harmonics of the input signals and therefore affect the compatibility of the input interface with proximity switches, especially for Type 2, a.c. 24 V r.m.s. See 5.1.1.1 for requirements.

(4) Recommended for common usage and future designs.

(5) The minimum external power supply voltage for Type 2, d.c. 24 V inputs connected to 2-wire proximity switches should be higher than d.c. 20 V or $U_{H \min}$ lower than d.c. 11 V to allow sufficient safety margin.

(6) As allowed by current technology, and to encourage the design of single input modules compatible with all commonly used rated voltages, limits are absolute and independent of rated voltage (except $U_{H \max}$) and based on equations given in Annex B and respectively a.c. 100 V r.m.s. and a.c. 200 V r.m.s.

(7) See definitions 3.12, 3.13 and 3.14.

NOTE Compatibility with 2-wire proximity switches according to IEC 60947-5-2 is possible with Type 2. See also (3).

ND = Not defined.

5.2.1.3 Additional requirements

Each input channel shall be provided with a lamp or equivalent means to indicate the state 1 condition when the indicator is energized.

5.2.2 Digital outputs for alternating currents (current sourcing)

Requirements of this subclause are verified in accordance with 6.4.3.

5.2.2.1 Rated values and operating ranges (a.c.)

Digital a.c. outputs shall comply with the ratings given in Table 8, at the output voltage(s) stated by the manufacturer according to 5.1.1.1.


Table 8 – Rated values and operating ranges for current sourcing digital a.c. outputs

Rated current (state 1)	I_e A	0,25	0,5	1	2	Normative items
Current range for state 1	Min. (mA)	10 [5]	20	100	100	(1), (2)
(continuous at max. voltage)	Max. (A)	0,28	0,55	1,1	2,2	(1)
Voltage drop, U_d for state 1	U_d	–	–	–	–	–
– Non protected output	Max. (V)	3	3	3	3	(1)
– Protected and short-circuit proof	Max. (V)	5	5	5	5	(1)
Leakage current for state 0		–	–	–	–	–
– Solid-state outputs	Max. (mA)	5 [3]	10	10	10	(1), (2), (3)
– Electromechanical outputs	Max. (mA)	2,5	2,5	2,5	2,5	(1), (3)
Repetition rate for temporary overload (see Figure 5)	Operating cycle time	–	–	–	–	
	(s)	–	–	–	–	
– Solid-state outputs	Max.	1	2	2	2	
– Relay-based outputs	Max.	10	10	10	10	

(1) RMS currents and voltages.

(2) Figures in square brackets apply to a module not equipped with RC network or equivalent surge suppressers. All other values apply to modules with suppression.

(3) Leakage current for solid-state outputs greater than 3 mA imply the use of additional external loads to drive Type 2 digital inputs.

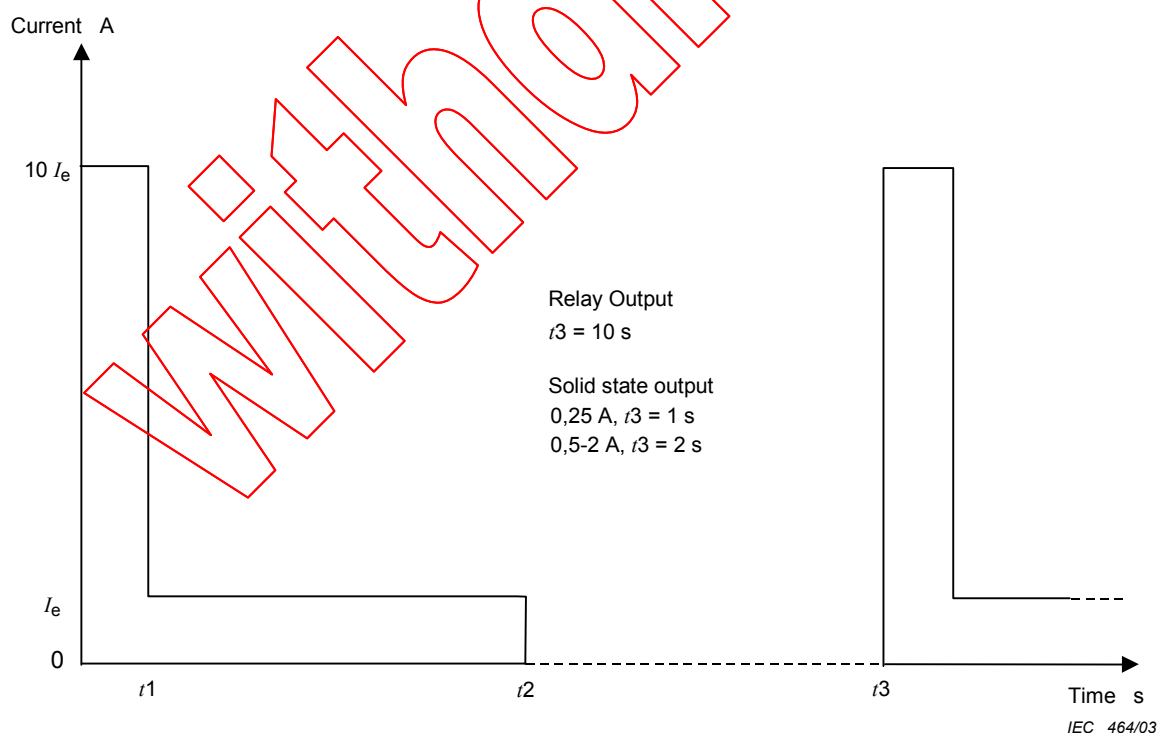

- t1: 2 cycles at F_n (F_n = rated line frequency)
t2: ON time
t3 - t2: OFF time (OFF time = ON time)
t3: Operation time

Figure 5 – Temporary overload waveform for digital a.c. outputs