

FED. SUPPLY CLASS

5340

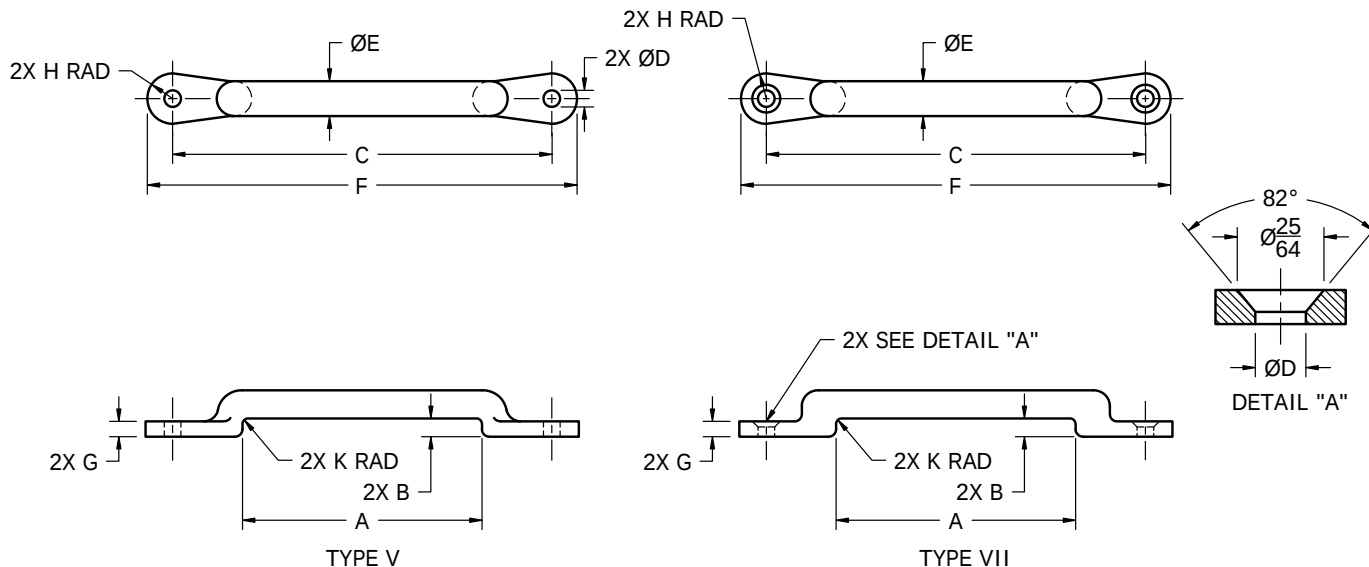


TABLE I – DIMENSIONS

DASH NUMBER	STRAP SIZE	TYPE /2/ /3/	OPENINGS		HOLES		ØE BAR	F OVERALL LENGTH MAX	G THICKNESS	RADIUS	
			A	B	C	ØD				H	K
1	1-1/4	V	1-3/8	1/4	2.875	13/64	1/4	3-1/2	1/8	5/16	1/16
2	1-1/2	V	1-5/8	1/4	3.125	13/64	1/4	3-3/4	1/8	5/16	1/16
3	1-1/2	VII	1-5/8	5/16	2.625	7/32	1/4	3-3/16	1/8	5/16	1/16

MATERIAL:

FORGED STEEL OR MALLEABLE IRON, SUITABLE FOR WELDING, IN ACCORDANCE WITH MIL-L-2045.

FINISH:

OLIVE DRAB IN ACCORDANCE WITH MIL-L-2045.

CODE:

THE MS PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER.

① COMPLETELY REVISED

THE INITIAL RELEASE OF THIS DOCUMENT SUPERSEDES MS51939, REVISION A. PART NUMBERS REMAIN MS51939.

THIRD ANGLE PROJECTION	CUSTODIAN NATIONAL AEROSPACE STANDARDS COMMITTEE	REVISION 1
PROCUREMENT SPECIFICATION MIL-L-2045	TITLE LOOP, STRAP FASTENER (FOOTMAN'S LOOP)	CLASSIFICATION PART STANDARD
		MS51939 SHEET 1 OF 2

EXAMPLE OF PART NUMBER:

MS51939-1 = LOOP, STRAP FASTENER, STRAP SIZE 1-1/4 INCHES, TYPE V.

NOTES:

- (1) DIMENSIONS IN INCHES AND APPLY AFTER FINISH UNLESS OTHERWISE SPECIFIED.
- /2/ TYPE V – DRILLED ONLY.
- /3/ TYPE VII – DRILLED AND COUNTERSUNK.
- (4) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
- (5) UNLESS OTHERWISE SPECIFIED HEREIN, REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF MANUFACTURE. HOWEVER, EXISTING MATERIAL INVENTORY CERTIFIED TO A PREVIOUS REVISION OF THE APPLICABLE MATERIAL SPECIFICATION(S) IS ACCEPTABLE FOR USE UNTIL DEPLETION.
- (6) TOLERANCES UNLESS OTHERWISE SPECIFIED: DECIMALS $\pm .005$, FRACTIONS $\pm 1/64$.
- (7) UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.
- (8) DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.

① COMPLETELY REVISED

REVISION
1