



IEEE Standard for Ethernet

Amendment 8: Physical Layer Specifications and Management Parameters for 2.5 Gb/s, 5 Gb/s, and 10 Gb/s Automotive Electrical Ethernet

IEEE Computer Society

Developed by the
LAN/MAN Standards Committee

IEEE Std 802.3ch™-2020

(Amendment to IEEE Std 802.3™-2018
as amended by IEEE Std 802.3cb™-2018,
IEEE Std 802.3bt™-2018,
IEEE Std 802.3cd™-2018,
IEEE Std 802.3cn™-2019,
IEEE Std 802.3cg™-2019,
IEEE Std 802.3cq™-2020,
and IEEE Std 802cm-2020)

IEEE Std 802.3ch™-2020
(Amendment to IEEE Std 802.3™-2018
as amended by IEEE Std 802.3cb™-2018,
IEEE Std 802.3bt™-2018,
IEEE Std 802.3cd™-2018,
IEEE Std 802.3cn™-2019,
IEEE Std 802.3cg™-2019,
IEEE Std 802.3cq™-2020,
and IEEE Std 802.3cm™-2020)

IEEE Standard for Ethernet

Amendment 8: Physical Layer Specifications and Management Parameters for 2.5 Gb/s, 5 Gb/s, and 10 Gb/s Automotive Electrical Ethernet

Developed by the
LAN/MAN Standards Committee
of the
IEEE Computer Society

Approved 4 June 2020
IEEE SA Standards Board

Abstract: This amendment to IEEE Std 802.3-2018 adds physical layer specifications and management parameters for 2.5 Gb/s, 5 Gb/s, and 10 Gb/s operation on a single balanced pair of conductors suitable for automotive applications.

Keywords: 2.5GBASE-T1, 5GBASE-T1, 10GBASE-T1, Ethernet, IEEE 802.3ch™, MASTER-SLAVE, Medium Dependent Interface, Physical Coding Sublayer, Physical Layer, Physical Medium Attachment

The Institute of Electrical and Electronics Engineers, Inc.
3 Park Avenue, New York, NY 10016-5997, USA

Copyright © 2020 by The Institute of Electrical and Electronics Engineers, Inc.
All rights reserved. Published 3 July 2020. Printed in the United States of America.

IEEE and 802 are registered trademarks in the U.S. Patent & Trademark Office, owned by The Institute of Electrical and Electronics Engineers, Incorporated.

PDF: ISBN 978-1-5044-6770-4 STD24222
Print: ISBN 978-1-5044-6771-1 STDPD24222

IEEE prohibits discrimination, harassment and bullying.

For more information, visit <http://www.ieee.org/web/aboutus/whatis/policies/p9-26.html>.

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

Important Notices and Disclaimers Concerning IEEE Standards Documents

IEEE documents are made available for use subject to important notices and legal disclaimers. These notices and disclaimers, or a reference to this page, appear in all standards and may be found under the heading “Important Notices and Disclaimers Concerning IEEE Standards Documents.” They can also be obtained on request from IEEE or viewed at <https://standards.ieee.org/ipr/disclaimers.html>.

Notice and Disclaimer of Liability Concerning the Use of IEEE Standards Documents

IEEE Standards documents (standards, recommended practices, and guides), both full-use and trial-use, are developed within IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (“IEEE SA”) Standards Board. IEEE (“the Institute”) develops its standards through a consensus development process, approved by the American National Standards Institute (“ANSI”), which brings together volunteers representing varied viewpoints and interests to achieve the final product. IEEE Standards are documents developed through scientific, academic, and industry-based technical working groups. Volunteers in IEEE working groups are not necessarily members of the Institute and participate without compensation from IEEE. While IEEE administers the process and establishes rules to promote fairness in the consensus development process, IEEE does not independently evaluate, test, or verify the accuracy of any of the information or the soundness of any judgments contained in its standards.

IEEE Standards do not guarantee or ensure safety, security, health, or environmental protection, or ensure against interference with or from other devices or networks. Implementers and users of IEEE Standards documents are responsible for determining and complying with all appropriate safety, security, environmental, health, and interference protection practices and all applicable laws and regulations.

IEEE does not warrant or represent the accuracy or content of the material contained in its standards, and expressly disclaims all warranties (express, implied and statutory) not included in this or any other document relating to the standard, including, but not limited to, the warranties of: merchantability; fitness for a particular purpose; non-infringement; and quality, accuracy, effectiveness, currency, or completeness of material. In addition, IEEE disclaims any and all conditions relating to: results; and workmanlike effort. IEEE standards documents are supplied “AS IS” and “WITH ALL FAULTS.”

Use of an IEEE standard is wholly voluntary. The existence of an IEEE standard does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the IEEE standard. Furthermore, the viewpoint expressed at the time a standard is approved and issued is subject to change brought about through developments in the state of the art and comments received from users of the standard.

In publishing and making its standards available, IEEE is not suggesting or rendering professional or other services for, or on behalf of, any person or entity nor is IEEE undertaking to perform any duty owed by any other person or entity to another. Any person utilizing any IEEE Standards document, should rely upon his or her own independent judgment in the exercise of reasonable care in any given circumstances or, as appropriate, seek the advice of a competent professional in determining the appropriateness of a given IEEE standard.

IN NO EVENT SHALL IEEE BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO: PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE PUBLICATION, USE OF, OR RELIANCE UPON ANY STANDARD, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE AND REGARDLESS OF WHETHER SUCH DAMAGE WAS FORESEEABLE.

Translations

The IEEE consensus development process involves the review of documents in English only. In the event that an IEEE standard is translated, only the English version published by IEEE should be considered the approved IEEE standard.

Official statements

A statement, written or oral, that is not processed in accordance with the IEEE SA Standards Board Operations Manual shall not be considered or inferred to be the official position of IEEE or any of its committees and shall not be considered to be, or be relied upon as, a formal position of IEEE. At lectures, symposia, seminars, or educational courses, an individual presenting information on IEEE standards shall make it clear that his or her views should be considered the personal views of that individual rather than the formal position of IEEE.

Comments on standards

Comments for revision of IEEE Standards documents are welcome from any interested party, regardless of membership affiliation with IEEE. However, IEEE does not provide consulting information or advice pertaining to IEEE Standards documents. Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments. Since IEEE standards represent a consensus of concerned interests, it is important that any responses to comments and questions also receive the concurrence of a balance of interests. For this reason, IEEE and the members of its societies and Standards Coordinating Committees are not able to provide an instant response to comments or questions except in those cases where the matter has previously been addressed. For the same reason, IEEE does not respond to interpretation requests. Any person who would like to participate in revisions to an IEEE standard is welcome to join the relevant IEEE working group.

Comments on standards should be submitted to the following address:

Secretary, IEEE SA Standards Board
445 Hoes Lane
Piscataway, NJ 08854 USA

Laws and regulations

Users of IEEE Standards documents should consult all applicable laws and regulations. Compliance with the provisions of any IEEE Standards document does not imply compliance to any applicable regulatory requirements. Implementers of the standard are responsible for observing or referring to the applicable regulatory requirements. IEEE does not, by the publication of its standards, intend to urge action that is not in compliance with applicable laws, and these documents may not be construed as doing so.

Copyrights

IEEE draft and approved standards are copyrighted by IEEE under U.S. and international copyright laws. They are made available by IEEE and are adopted for a wide variety of both public and private uses. These include both use, by reference, in laws and regulations, and use in private self-regulation, standardization, and the promotion of engineering practices and methods. By making these documents available for use and adoption by public authorities and private users, IEEE does not waive any rights in copyright to the documents.

Photocopies

Subject to payment of the appropriate fee, IEEE will grant users a limited, non-exclusive license to photocopy portions of any individual standard for company or organizational internal use or individual, non-commercial use only. To arrange for payment of licensing fees, please contact Copyright Clearance Center, Customer Service, 222 Rosewood Drive, Danvers, MA 01923 USA; +1 978 750 8400. Permission to photocopy portions of any individual standard for educational classroom use can also be obtained through the Copyright Clearance Center.

Updating of IEEE Standards documents

Users of IEEE Standards documents should be aware that these documents may be superseded at any time by the issuance of new editions or may be amended from time to time through the issuance of amendments, corrigenda, or errata. A current IEEE document at any point in time consists of the current edition of the document together with any amendments, corrigenda, or errata then in effect.

Every IEEE standard is subjected to review at least every ten years. When a document is more than ten years old and has not undergone a revision process, it is reasonable to conclude that its contents, although still of some value, do not wholly reflect the present state of the art. Users are cautioned to check to determine that they have the latest edition of any IEEE standard.

In order to determine whether a given document is the current edition and whether it has been amended through the issuance of amendments, corrigenda, or errata, visit the IEEE SA Website at <https://ieeexplore.ieee.org> or contact IEEE at the address listed previously. For more information about the IEEE SA or IEEE's standards development process, visit the IEEE SA Website at <https://standards.ieee.org>.

Errata

Errata, if any, for all IEEE standards can be accessed on the IEEE SA Website at the following URL: <https://standards.ieee.org/findstds/errata/index.html>. Users are encouraged to check this URL for errata periodically.

Patents

Attention is called to the possibility that implementation of this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken by the IEEE with respect to the existence or validity of any patent rights in connection therewith. If a patent holder or patent applicant has filed a statement of assurance via an Accepted Letter of Assurance, then the statement is listed on the IEEE SA Website at <https://standards.ieee.org/about/sasb/patcom/patents.html>. Letters of Assurance may indicate whether the Submitter is willing or unwilling to grant licenses under patent rights without compensation or under reasonable rates, with reasonable terms and conditions that are demonstrably free of any unfair discrimination to applicants desiring to obtain such licenses.

Essential Patent Claims may exist for which a Letter of Assurance has not been received. The IEEE is not responsible for identifying Essential Patent Claims for which a license may be required, for conducting inquiries into the legal validity or scope of Patents Claims, or determining whether any licensing terms or conditions provided in connection with submission of a Letter of Assurance, if any, or in any licensing agreements are reasonable or non-discriminatory. Users of this standard are expressly advised that determination of the validity of any patent rights, and the risk of infringement of such rights, is entirely their own responsibility. Further information may be obtained from the IEEE Standards Association.

Participants

The following individuals were officers and members of the IEEE 802.3 Working Group at the beginning of the IEEE P802.3ch Working Group ballot.

David J. Law, *IEEE 802.3 Working Group Chair*
Adam Healey, *IEEE 802.3 Working Group Vice-Chair*
Pete Anslow, *IEEE 802.3 Working Group Secretary, Phase 1*
Jon Lewis, *IEEE 802.3 Working Group Secretary, Phase 2*
Steven B. Carlson, *IEEE 802.3 Working Group Executive Secretary*
Valerie Maguire, *IEEE 802.3 Working Group Treasurer*

Steven B. Carlson, *IEEE P802.3ch Multi-Gig Automotive Ethernet PHY Task Force Chair*
Natalie Wienckowski, *IEEE P802.3ch Multi-Gig Automotive Ethernet PHY Task Force Editor-in-Chief*

John Abbott	Kathryn Dube	Yong Kim
David Abramson	Mike Dudek	Mark Kimber
Andrea Agnes	Marc Dupuis	Jonathan King
Dale Amason	Frank Effenberger	Michael Klempa
Hongming An	David Estes	Curtis Knittle
Jes Asmussen	John Ewen	Elizabeth Kochuparambil
Richard Baca	Borhan Fathi Moghadam	Wojciech Koczwar
Tim Baggett	Vincent Ferretti	Paul Kolesar
Amrik Bains	Brian Franchuk	Taiji Kondo
Thananya Baldwin	Matthias Fritsche	Glen Kramer
Steven Baumgartner	Richard Frosch	Olaf Krieger
Denis Beaudoin	Shiyong Fu	Hans Lackner
Liav Ben-Artzi	Mike Gardner	Jeffrey Lapak
Piergiorgio Beruto	Claude Gauthier	Mark Laubach
Vipul Bhatt	Ali Ghiasi	Han Hyub Lee
Gao Bo	Joel Goergen	June Hee Lee
Martin Bouda	Zhigang Gong	Alex Levin
David Brandt	Steven Gorshe	David Li
Ralf-Peter Braun	Jens Gottron	Mike-Peng Li
Paul Brooks	Steffen Graber	Jane Lim
Alan Brown	Olaf Grau	Alex Lin
Matthew Brown	Robert Grow	Dekun Liu
Michal Brychta	Mark Gustlin	Hai-Feng Liu
Gary Burrell	Marek Hajduczenia	Karen Liu
Jairo Bustos Heredia	Hayden Haynes	Zhenyu Liu
Adrian Butter	Xiang He	William Lo
John Calvin	Howard Heck	Yuchun Lu
Clark Carty	Brian Holden	Miklos Lukacs
Craig Chabot	Rita Horner	Kent Lusted
David Chalupsky	Bernd Hormmeyer	Ilya Lyubomirsky
Frank Chang	Gergely Huszak	Jeffery Maki
Xin Chang	Yasuhiro Hyakutake	David Malicoat
Golam Choudhury	Jonathan Ingham	Flavio Marques
Keng Hua Chuang	Kazuhiko Ishibe	Arthur Marris
Kamal Dalmia	Hideki Isono	Chris Mash
John D'Ambrosia	Tom Issenhuth	Takeo Masuda
Piers Dawe	Kenneth Jackson	Kirsten Matheus
Fred Dawson	Andrew Jimenez	Erdem Matoglu
John Deandrea	John Johnson	Marco Mazzini
Gerrit den Besten	Chad Jones	Mick McCarthy
Claudio DeSanti	Peter Jones	
Chris Diminico	Lokesh Kabra	
Hormoz Djahanshahi	Manabu Kagami	
Curtis Donahue	Upen Kareti	
Liang Du	Yasuaki Kawatsu	

Brett McClellan
 Larry McMillan
 Greg McSorley
 Richard Mellitz
 Martin Miller
 Toshiyuki Moritake
 Thomas Mueller
 Edward Nakamoto
 Paul Neveux
 Gary Nicholl
 Shawn Nicholl
 John Nolan
 Kevin Noll
 Mark Nowell
 David Ofelt
 Josef Ohni
 Tom Palkert
 Sujan Pandey
 Carlos Pardo
 Earl Parsons
 Gerald Pepper
 Phong Pham
 David Piehler
 Rick Pimpinella
 Christopher Pohl
 William Powell
 Dino Pozzebon
 Rick Rabinovich
 Zvi Rechtman
 Alon Regev
 Duane Remein
 Victor Renteria
 Salvatore Rotolo

Alexander Rysin
 Toshiaki Sakai
 Hamid Salehi
 Sam Sambasivan
 Edward Sayre
 James Schuessler
 Steve Sekel
 Masood Shariff
 Mizuki Shirao
 Jialong Shuai
 Jeff Slavick
 Daniel Smith
 Scott Sommers
 Tom Souvignier
 Bryan Sparrowhawk
 Edward Sprague
 Peter Stassar
 Heath Stewart
 David Stover
 Junqing Sun
 Liyang Sun
 Steve Swanson
 Bharat Tailor
 Tomoo Takahara
 Kohichi Tamura
 Mehmet Tazebay
 Ronald Tellas
 Geoffrey Thompson
 Pirooz Tooyserkani
 Nathan Tracy
 David Tremblay
 Stephen Trowbridge
 Ta Chin Tseng

Ed Ulrichs
 Alexander Umnov
 Ricky Vernickel
 Marco Vitali
 Robert Voss
 Dylan Walker
 Haifei Wang
 Roy Wang
 Tongtong Wang
 Xinyuan Wang
 Xuehuan Wang
 Christoph Wechsler
 Brian Welch
 Matthias Wendt
 James Withey
 Mau-Lin Wu
 Peter Wu
 Markus Wucher
 Dayin Xu
 Yu Xu
 Shuto Yamamoto
 Adrian Young
 James Young
 Lennart Yseboodt
 Andrew Zambell
 Conrad Zerna
 Richard (Yujia) Zhou
 Yan Zhuang
 Martin Zielinski
 George Zimmerman
 Pavel Zivny
 Harald Zweck

The following members of the individual balloting committee voted on this standard. Balloters may have voted for approval, disapproval, or abstention.

Shadi Abughazaleh
 Thomas Alexander
 Dale Amason
 Butch Anton
 Stefan Aust
 Gitesh Bhagwat
 Rich Boyer
 Ralf-Peter Braun
 Theodore Brillhart
 Matthew Brown
 Demetrio Bucaneg, Jr.
 Jairo Bustos Heredia
 William Byrd
 John Calvin
 Radhakrishna Canchi
 Steven B. Carlson
 Juan Carreon
 Clark Carty
 Pin Chang
 Chan Chen
 Eunmin Choi
 James Cloos
 Charles Cook
 Rodney Cummings

John D'Ambrosia
 John Deandrea
 Christopher Diminico
 Marc Dupuis
 Avraham Freedman
 Matthias Fritsche
 Claude Gauthier
 Devon Gayle
 James Gilb
 Joel Goergen
 Zhigang Gong
 James Graba
 Randall Groves
 Robert Grow
 Martin Gubow
 Marek Hajduczenia
 Adam Healey
 Marco Hernandez
 Werner Hoelzl
 Oliver Holland
 Rita Horner
 Atsushi Ito
 Raj Jain
 SangKwon Jeong

Ragnar Jonsson
 Lokesh Kabra
 Manabu Kagami
 Piotr Karocki
 Stuart Kerry
 Yongbum Kim
 Taiji Kondo
 Peter Kroeplin
 Mark Laubach
 David J. Law
 Hyeong Ho Lee
 Yeou Song Lee
 Jon Lewis
 Robert Lingle
 Javier Luiso
 Michael Lynch
 Jeffery Maki
 David Malicoat
 Michael Maytum
 Stephen McCann
 Brett McClellan
 Larry McMillan
 Richard Mellitz
 Tremont Miao

Jose Morales
James Nadolny
Paul Neveux
Nick S. A. Nikjoo
Paul Nikolich
Satoshi Obara
Josef Ohni
Bansi Patel
Harsh Patel
Dev Paul
Arumugam Paventhan
Walter Pienciak
Rick Pimpinella
Adee Ran
R. K. Rannow

Alon Regev
Maximilian Riegel
Robert Robinson
Toshiaki Sakai
Olindo Savi
Dieter Schicketanz
James Schuessler
Hossein Sedarat
Thomas Starai
Heath Stewart
Walter Struppler
Mitsutoshi Sugawara
Geoffrey Thompson
Michael Thompson
Nathan Tracy

David Tremblay
Mark-Rene Uchida
Alexander Umnov
Paul Vanderlaan
Dmitri Varsanofiev
George Vlantis
Lisa Ward
Natalie Wienckowski
Scott Willy
Andreas Wolf
Peter Wu
Yu Yuan
Oren Yuen
Zhen Zhou
George Zimmerman

When the IEEE SA Standards Board approved this standard on 4 June 2020, it had the following membership:

Gary Hoffman, *Chair*
Jon Walter Rosdahl, *Vice Chair*
Jean-Philippe Faure, *Past Chair*
Konstantinos Karachalios, *Secretary*

Ted Burse
J. Travis Griffith
Grace Gu
Guido R. Hiertz
Joseph L. Koepfinger*
John D. Kulick

David J. Law
Howard Li
Dong Liu
Kevin Lu
Paul Nikolich
Damir Novosel
Dorothy Stanley

Mehmet Ulema
Lei Wang
Sha Wei
Philip B. Winston
Daidi Zhong
Jingyi Zhou

*Member Emeritus

Introduction

This introduction is not part of IEEE Std 802.3ch-2020, IEEE Standard for Ethernet. Amendment 8: Physical Layer Specifications and Management Parameters for 2.5 Gb/s, 5 Gb/s, and 10 Gb/s Automotive Electrical Ethernet.

IEEE Std 802.3™ was first published in 1985. Since the initial publication, many projects have added functionality or provided maintenance updates to the specifications and text included in the standard. Each IEEE 802.3 project/amendment is identified with a suffix (e.g., IEEE Std 802.3ba™-2010).

The half duplex Media Access Control (MAC) protocol specified in IEEE Std 802.3-1985 is Carrier Sense Multiple Access with Collision Detection (CSMA/CD). This MAC protocol was key to the experimental Ethernet developed at Xerox Palo Alto Research Center, which had a 2.94 Mb/s data rate. Ethernet at 10 Mb/s was jointly released as a public specification by Digital Equipment Corporation (DEC), Intel and Xerox in 1980. Ethernet at 10 Mb/s was approved as an IEEE standard by the IEEE Standards Board in 1983 and subsequently published in 1985 as IEEE Std 802.3-1985. Since 1985, new media options, new speeds of operation, and new capabilities have been added to IEEE Std 802.3. A full duplex MAC protocol was added in 1997.

Some of the major additions to IEEE Std 802.3 are identified in the marketplace with their project number. This is most common for projects adding higher speeds of operation or new protocols. For example, IEEE Std 802.3u™ added 100 Mb/s operation (also called Fast Ethernet), IEEE Std 802.3z added 1000 Mb/s operation (also called Gigabit Ethernet), IEEE Std 802.3ae added 10 Gb/s operation (also called 10 Gigabit Ethernet), IEEE Std 802.3ah™ specified access network Ethernet (also called Ethernet in the First Mile) and IEEE Std 802.3ba added 40 Gb/s operation (also called 40 Gigabit Ethernet) and 100 Gb/s operation (also called 100 Gigabit Ethernet). These major additions are all now included in and are superseded by IEEE Std 802.3-2018 and are not maintained as separate documents.

At the date of IEEE Std 802.3ch-2020 publication, IEEE Std 802.3 was composed of the following documents:

IEEE Std 802.3-2018

Section One—Includes Clause 1 through Clause 20 and Annex A through Annex H and Annex 4A. Section One includes the specifications for 10 Mb/s operation and the MAC, frame formats and service interfaces used for all speeds of operation.

Section Two—Includes Clause 21 through Clause 33 and Annex 22A through Annex 33E. Section Two includes management attributes for multiple protocols and speed of operation as well as specifications for providing power over twisted pair cabling for multiple operational speeds. It also includes general information on 100 Mb/s operation as well as most of the 100 Mb/s Physical Layer specifications.

Section Three—Includes Clause 34 through Clause 43 and Annex 36A through Annex 43C. Section Three includes general information on 1000 Mb/s operation as well as most of the 1000 Mb/s Physical Layer specifications.

Section Four—Includes Clause 44 through Clause 55 and Annex 44A through Annex 55B. Section Four includes general information on 10 Gb/s operation as well as most of the 10 Gb/s Physical Layer specifications.

Section Five—Includes Clause 56 through Clause 77 and Annex 57A through Annex 76A. Clause 56 through Clause 67 and Clause 75 through Clause 77, as well as associated annexes, specify subscriber access and other Physical Layers and sublayers for operation from 512 kb/s to 10 Gb/s, and defines

services and protocol elements that enable the exchange of IEEE Std 802.3 format frames between stations in a subscriber access network. Clause 68 specifies a 10 Gb/s Physical Layer specification. Clause 69 through Clause 74 and associated annexes specify Ethernet operation over electrical backplanes at speeds of 1000 Mb/s and 10 Gb/s.

Section Six—Includes Clause 78 through Clause 95 and Annex 83A through Annex 93C. Clause 78 specifies Energy-Efficient Ethernet. Clause 79 specifies IEEE 802.3 Organizationally Specific Link Layer Discovery Protocol (LLDP) type, length, and value (TLV) information elements. Clause 80 through Clause 95 and associated annexes include general information on 40 Gb/s and 100 Gb/s operation as well the 40 Gb/s and 100 Gb/s Physical Layer specifications. Clause 90 specifies Ethernet support for time synchronization protocols.

Section Seven—Includes Clause 96 through Clause 115 and Annex 97A through Annex 115A. Clause 96 through Clause 98, Clause 104, and associated annexes, specify Physical Layers and optional features for 100 Mb/s and 1000 Mb/s operation over a single twisted pair. Clause 100 through Clause 103, as well as associated annexes, specify Physical Layers for the operation of the EPON protocol over coaxial distribution networks. Clause 105 through Clause 114 and associated annexes include general information on 25 Gb/s operation as well as 25 Gb/s Physical Layer specifications. Clause 99 specifies a MAC merge sublayer for the interspersing of express traffic. Clause 115 and its associated annex specify a Physical Layer for 1000 Mb/s operation over plastic optical fiber.

Section Eight—Includes Clause 116 through Clause 126 and Annex 119A through Annex 120E. Clause 116 through Clause 124 and associated annexes include general information on 200 Gb/s and 400 Gb/s operation as well the 200 Gb/s and 400 Gb/s Physical Layer specifications. Clause 125 and Clause 126 include general information on 2.5 Gb/s and 5 Gb/s operation as well as 2.5 Gb/s and 5 Gb/s Physical Layer specifications.

IEEE Std 802.3cb™-2018

Amendment 1—This amendment includes changes to IEEE Std 802.3-2018 and its amendments, and adds Clause 127 through Clause 130, Annex 127A, Annex 128A, Annex 128B, and Annex 130A. This amendment adds new Physical Layers for operation at 2.5 Gb/s and 5 Gb/s over electrical backplanes.

IEEE Std 802.3bt™-2018

Amendment 2—This amendment includes changes to IEEE Std 802.3-2018 and adds Clause 145, Annex 145A, Annex 145B, and Annex 145C. This amendment adds power delivery using all four pairs in the structured wiring plant, resulting in greater power being available to end devices. This amendment also allows for lower standby power consumption in end devices and adds a mechanism to better manage the available power budget.

IEEE Std 802.3cd™-2018

Amendment 3—This amendment includes changes to IEEE Std 802.3-2018 and adds Clause 131 through Clause 140 and Annex 135A through Annex 136D. This amendment adds MAC parameters, Physical Layers, and management parameters for the transfer of IEEE 802.3 format frames at 50 Gb/s, 100 Gb/s, and 200 Gb/s.

IEEE Std 802.3cn™-2019

Amendment 4—This amendment includes changes to IEEE Std 802.3-2018 and adds 50 Gb/s, 200 Gb/s, and 400 Gb/s Physical Layer specifications and management parameters for operation over single-mode fiber with reaches of at least 40 km.

IEEE Std 802.3cg™-2019

Amendment 5—This amendment includes changes to IEEE Std 802.3-2018 and its amendments and adds Clause 146 through Clause 148 and Annex 146A and Annex 146B. This amendment adds 10 Mb/s Physical Layer specifications and management parameters for operation on a single balanced pair of conductors.

IEEE Std 802.3cq™-2020

Amendment 6—This amendment includes editorial and technical corrections, refinements, and clarifications to Clause 33 and related portions of the standard.

IEEE Std 802.3cm™-2020

Amendment 7—This amendment includes changes to IEEE Std 802.3-2018 and adds Clause 150. This amendment adds Physical Layer (PHY) specifications and management parameters for 400 Gb/s operation on four pairs (400GBASE-SR4.2) and eight pairs (400GBASE-SR8) of multimode fiber, over reaches of at least 100 m.

IEEE Std 802.3ch™-2020

Amendment 8—This amendment includes changes to IEEE Std 802.3-2018 and adds Clause 149, Annex 149A, Annex 149B, and Annex 149C. This amendment adds physical layer specifications and management parameters for operation at 2.5 Gb/s, 5 Gb/s, and 10 Gb/s over a single balanced pair of conductors.

Two companion documents exist, IEEE Std 802.3.1 and IEEE Std 802.3.2. IEEE Std 802.3.1 describes Ethernet management information base (MIB) modules for use with the Simple Network Management Protocol (SNMP). IEEE Std 802.3.2 describes YANG data models for Ethernet. IEEE Std 802.3.1 and IEEE Std 802.3.2 are updated to add management capability for enhancements to IEEE Std 802.3 after approval of those enhancements.

IEEE Std 802.3 will continue to evolve. New Ethernet capabilities are anticipated to be added within the next few years as amendments to this standard.

Contents

1. Introduction.....	23
1.3 Normative references	23
1.4 Definitions	23
1.5 Abbreviations	24
30. Management.....	25
30.3 Layer management for DTEs.....	25
30.3.2 PHY device managed object class	25
30.3.2.1 PHY device attributes	25
30.3.2.1.2 aPhyType	25
30.3.2.1.3 aPhyTypeList	25
30.5 Layer management for medium attachment units (MAUs)	26
30.5.1 MAU managed object class.....	26
30.5.1.1 MAU attributes	26
30.5.1.1.2 aMAUType	26
30.5.1.1.4 aMediaAvailable	26
30.6 Management for link Auto-Negotiation	26
30.6.1 Auto-Negotiation managed object class.....	26
30.6.1.1 Auto-Negotiation attributes	26
30.6.1.1.5 aAutoNegLocalTechnologyAbility.....	26
30.15 Layer management for Power over Data Lines (PoDL) of Single Balanced Twisted-Pair Ethernet.....	27
30.15.1 PoDL PSE managed object class	27
30.15.1.1 PoDL PSE attributes	27
30.15.1.1.4 aPoDLPSEType	27
30.15.1.1.5 aPoDLPSEDetectedPDType.....	27
44. Introduction to 10 Gb/s baseband network.....	28
44.1 Overview.....	28
44.1.1 Scope	28
44.1.2 Objectives.....	28
44.1.3 Relationship of 10 Gigabit Ethernet to the ISO OSI reference model	29
44.1.4 Summary of 10 Gigabit Ethernet sublayers	30
44.1.4.1 Reconciliation Sublayer (RS) and 10 Gigabit Media Independent Interface (XGMII).....	30
44.1.4.4 Physical Layer signaling systems	30
44.3 Delay constraints.....	31
44.4 Protocol implementation conformance statement (PICS) proforma.....	31
45. Management Data Input/Output (MDIO) Interface.....	32
45.2 MDIO Interface Registers.....	32
45.2.1 PMA/PMD registers.....	32
45.2.1.7 PMA/PMD status 2 register (Register 1.8).....	32
45.2.1.7.4 Transmit fault (1.8.11)	32
45.2.1.7.5 Receive fault (1.8.10).....	33
45.2.1.16 BASE-T1 PMA/PMD extended ability register (1.18)	33
45.2.1.16.1 10GBASE-T1 ability (1.18.6).....	33

45.2.1.16.2	5GBASE-T1 ability (1.18.5).....	33
45.2.1.16.3	2.5GBASE-T1 ability (1.18.4).....	34
45.2.1.18	2.5G/5G PMA/PMD extended ability register (Register 1.21)	34
45.2.1.185	BASE-T1 PMA/PMD control register (1.2100).....	34
45.2.1.185.2	Type selection (1.2100.3:0)	34
45.2.1.192	MultiGBASE-T1 PMA control register (Register 1.2309)	34
45.2.1.192.1	PMA/PMD reset (1.2309.15).....	35
45.2.1.192.2	Transmit disable (1.2309.14)	35
45.2.1.192.3	Low power (1.2309.11).....	35
45.2.1.193	MultiGBASE-T1 PMA status register (1.2310).....	36
45.2.1.193.1	MultiGBASE-T1 OAM ability (1.2310.11).....	37
45.2.1.193.2	EEE ability (1.2310.10)	37
45.2.1.193.3	Receive fault ability (1.2310.9).....	37
45.2.1.193.4	Low-power ability (1.2310.8)	37
45.2.1.193.5	PrecodeSel (1.2310.4:3).....	37
45.2.1.193.6	Receive polarity (1.2310.2).....	37
45.2.1.193.7	Receive fault (1.2310.1).....	37
45.2.1.193.8	Receive link status (1.2310.0).....	37
45.2.1.194	MultiGBASE-T1 training register (1.2311)	37
45.2.1.194.1	Interleave request (1.2311.12:11)	38
45.2.1.194.2	Precoder selection (1.2311.5).....	38
45.2.1.194.3	Slow Wake request (1.2311.4).....	39
45.2.1.194.4	User precoder selection (1.2311.3:2)	39
45.2.1.194.5	MultiGBASE-T1 OAM advertisement (1.2311.1)	39
45.2.1.194.6	EEE advertisement (1.2311.0)	39
45.2.1.195	MultiGBASE-T1 link partner training register (1.2312).....	39
45.2.1.195.1	Link partner interleave request (1.2312.12:11).....	40
45.2.1.195.2	Link partner Slow Wake requested (1.2312.4)	40
45.2.1.195.3	Link partner precoder requested (1.2312.3:2).....	40
45.2.1.195.4	Link partner MultiGBASE-T1 OAM advertisement (1.2312.1).....	40
45.2.1.195.5	Link partner EEE advertisement (1.2312.0)	40
45.2.1.196	MultiGBASE-T1 test mode control register (1.2313).....	40
45.2.1.196.1	Test mode control (1.2313.15:13).....	41
45.2.1.196.2	Local transmitter precoder override (1.2313.11)	41
45.2.1.196.3	Local transmit precoder setting (1.2313.10:9).....	41
45.2.1.196.4	Jitter test control (1.2313.1:0)	41
45.2.1.197	MultiGBASE-T1 SNR operating margin register (Register 1.2314)	42
45.2.1.198	MultiGBASE-T1 minimum SNR margin register (Register 1.2315).....	42
45.2.1.199	MultiGBASE-T1 user defined data (Register 1.2316)	42
45.2.1.199.1	MultiGBASE-T1 user defined data (1.2316.15:0).....	43
45.2.1.200	MultiGBASE-T1 link partner user defined data register (Register 1.2317).....	43
45.2.1.200.1	MultiGBASE-T1 link partner user defined data register (1.2317.15:0)	43
45.2.3	PCS registers	44
45.2.3.72	1000BASE-T1 OAM transmit register (Register 3.2308).....	44
45.2.3.72.1	1000BASE-T1 OAM message valid (3.2308.15)	45
45.2.3.72.2	Toggle value (3.2308.14)	45
45.2.3.72.3	1000BASE-T1 OAM message received (3.2308.13).....	45
45.2.3.72.4	Received message toggle value (3.2308.12).....	45
45.2.3.72.5	Message number (3.2308.11:8).....	45
45.2.3.72.6	Ping received (3.2308.3)	46
45.2.3.72.7	Ping transmit (3.2308.2).....	46
45.2.3.72.8	Local SNR (3.2308.1:0)	46
45.2.3.73	1000BASE-T1 OAM message register (Registers 3.2309 to 3.2312).....	46
45.2.3.74	1000BASE-T1 OAM receive register (Register 3.2313)	47

45.2.3.74.1	Link partner 1000BASE-T1 OAM message valid (3.2313.15)	47
45.2.3.74.2	Link partner toggle value (3.2313.14)	47
45.2.3.74.3	Link partner message number (3.2313.11:8)	47
45.2.3.74.4	Link partner SNR (3.2313.1:0)	47
45.2.3.75	Link partner 1000BASE-T1 OAM message register (Registers 3.2314 to 3.2317)	48
45.2.3.76	MultiGBASE-T1 OAM status message register (Register 3.2318 and 3.2319)....	48
45.2.3.77	Link partner MultiGBASE-T1 OAM status message register (Register 3.2320 and 3.2321)	49
45.2.3.78	MultiGBASE-T1 PCS control register (Register 3.2322)	49
45.2.3.78.1	PCS reset (3.2322.15)	49
45.2.3.78.2	Loopback (3.2322.14)	50
45.2.3.79	MultiGBASE-T1 PCS status 1 register (Register 3.2323)	50
45.2.3.79.1	Tx LPI received (3.2323.11)	51
45.2.3.79.2	Rx LPI received (3.2323.10)	51
45.2.3.79.3	Tx LPI indication (3.2323.9)	51
45.2.3.79.4	Rx LPI indication (3.2323.8)	51
45.2.3.79.5	Fault (3.2323.7)	51
45.2.3.79.6	PCS receive link status (3.2323.2)	51
45.2.3.80	MultiGBASE-T1 PCS status 2 register (Register 3.2324)	51
45.2.3.80.1	Receive link status (3.2324.10)	51
45.2.3.80.2	PCS high RFER (3.2324.9)	52
45.2.3.80.3	PCS block lock (3.2324.8)	52
45.2.3.80.4	Latched high BER (3.2324.7)	52
45.2.3.80.5	Latched block lock (3.2324.6)	52
45.2.3.80.6	BER count (3.2324.5:0)	53
45.2.9	Power Unit Registers.....	53
45.2.9.2	PoDL PSE Status 1 register (Register 13.1)	53
45.2.9.2.7	PSE Type (13.1.9:7)	53
45.2.9.3	PoDL PSE Status 2 register (Register 13.2)	54
45.2.9.3.2	PD Type (13.2.2:0)	54
45.5	Protocol implementation conformance statement (PICS) proforma for Clause 45, Management Data Input/Output (MDIO) interface	55
45.5.3	PICS proforma tables for the Management Data Input Output (MDIO) interface.	55
45.5.3.3	PMA/PMD management functions	55
45.5.3.7	PCS management functions	57
78.	Energy-Efficient Ethernet (EEE)	59
78.1	Overview	59
78.1.4	PHY types optionally supporting EEE	59
78.2	LPI mode timing parameters description	59
78.3	Capabilities Negotiation	60
78.5	Communication link access latency	60
97.	Physical Coding Sublayer (PCS), Physical Medium Attachment (PMA) sublayer, and baseband medium, type 1000BASE-T1	62
97.3	Physical Coding Sublayer (PCS)	62
97.3.8	1000BASE-T1 Operations, Administration, and Maintenance (OAM)	62
97.3.8.3	State diagram variable to 1000BASE-T1 OAM register mapping	62
98.	Auto-Negotiation for single differential-pair media	64

98.5	Detailed functions and state diagrams	64
98.5.1	State diagram variables	64
104.	Power over Data Lines (PoDL) of Single-Pair Ethernet.....	65
104.1	Overview.....	65
104.1.3	PoDL system types.....	65
104.4	Power Sourcing Equipment (PSE).....	65
104.4.1	PSE types.....	65
104.4.6	PSE output requirements.....	65
104.4.6.3	Power feeding ripple and transients.....	66
104.5	Powered Device (PD)	66
104.5.1	PD types	66
104.5.6	PD power.....	66
104.5.6.4	PD ripple and transients.....	66
104.6	Additional electrical specifications.....	67
104.6.2	Fault tolerance.....	67
104.7	Serial communication classification protocol (SCCP)	67
104.7.2	Serial communication classification protocols.....	67
104.7.2.4	Read_Scratchpad function command [0xAA].....	67
104.9	Protocol implementation conformance statement (PICS) proforma for Clause 104, Power over Data Lines (PoDL) of Single-Pair Ethernet.....	69
104.9.3	Major capabilities/options	69
104.9.4	PICS proforma tables for Clause 104, Power over Data Lines (PoDL) of Single- Pair Ethernet.....	69
104.9.4.3	Powered Device (PD)	69
104.9.4.4	Common Electrical.....	70
125.	Introduction to 2.5 Gb/s and 5 Gb/s networks.....	71
125.1	Overview.....	71
125.1.2	Relationship of 2.5 Gigabit and 5 Gigabit Ethernet to the ISO OSI reference model.....	71
125.1.3	Nomenclature	71
125.1.4	Physical Layer signaling systems.....	73
125.2	Summary of 2.5 Gigabit and 5 Gigabit Ethernet sublayers	74
125.2.2	Physical coding sublayer (PCS).....	74
125.2.3	Physical Medium Attachment sublayer (PMA)	74
125.2.4	Auto-Negotiation.....	74
125.2.4.3	Auto-Negotiation, type single differential-pair media	74
125.3	Delay Constraints.....	74
149.	Physical Coding Sublayer (PCS), Physical Medium Attachment (PMA) sublayer, and baseband medium, type 2.5GBASE-T1, 5GBASE-T1, and 10GBASE-T1	76
149.1	Overview.....	76
149.1.1	Nomenclature	76
149.1.2	Relationship of 2.5GBASE-T1, 5GBASE-T1, and 10GBASE-T1 to other standards ...	76
149.1.3	Operation of 2.5GBASE-T1, 5GBASE-T1, and 10GBASE-T1	77
149.1.3.1	Physical Coding Sublayer (PCS).....	78
149.1.3.2	Physical Medium Attachment (PMA) sublayer.....	80
149.1.3.3	EEE Capability	80
149.1.3.4	Link Synchronization	80
149.1.4	Signaling.....	80

149.1.5	Interfaces	81
149.1.6	Conventions in this clause	81
149.2	2.5GBASE-T1, 5GBASE-T1, and 10GBASE-T1 service primitives and interfaces	81
149.2.1	Technology Dependent Interface	82
149.2.1.1	PMA_LINK.request	82
149.2.1.1.1	Semantics of the primitive	82
149.2.1.1.2	When generated.....	82
149.2.1.1.3	Effect of receipt.....	82
149.2.1.2	PMA_LINK.indication	82
149.2.1.2.1	Semantics of the primitive	82
149.2.1.2.2	When generated.....	82
149.2.1.2.3	Effect of receipt.....	83
149.2.2	PMA service interface.....	83
149.2.2.1	PMA_TXMODE.indication	83
149.2.2.1.1	Semantics of the primitive	83
149.2.2.1.2	When generated.....	84
149.2.2.1.3	Effect of receipt.....	84
149.2.2.2	PMA_CONFIG.indication.....	85
149.2.2.2.1	Semantics of the primitive	85
149.2.2.2.2	When generated.....	85
149.2.2.2.3	Effect of receipt.....	85
149.2.2.3	PMA_UNITDATA.request	85
149.2.2.3.1	Semantics of the primitive	85
149.2.2.3.2	When generated.....	85
149.2.2.3.3	Effect of receipt.....	86
149.2.2.4	PMA_UNITDATA.indication.....	86
149.2.2.4.1	Semantics of the primitive	86
149.2.2.4.2	When generated.....	86
149.2.2.4.3	Effect of receipt.....	86
149.2.2.5	PMA_SCRSTATUS.request	86
149.2.2.5.1	Semantics of the primitive	86
149.2.2.5.2	When generated.....	86
149.2.2.5.3	Effect of receipt.....	86
149.2.2.6	PMA_PCSSTATUS.request.....	87
149.2.2.6.1	Semantics of the primitive	87
149.2.2.6.2	When generated.....	87
149.2.2.6.3	Effect of receipt.....	87
149.2.2.7	PMA_RXSTATUS.indication.....	87
149.2.2.7.1	Semantics of the primitive	87
149.2.2.7.2	When generated.....	87
149.2.2.7.3	Effect of receipt.....	87
149.2.2.8	PMA_REMRXSTATUS.request.....	88
149.2.2.8.1	Semantics of the primitive	88
149.2.2.8.2	When generated.....	88
149.2.2.8.3	Effect of receipt.....	88
149.2.2.9	PMA_PCSDATAMODE.indication.....	88
149.2.2.9.1	Semantics of the primitive	88
149.2.2.9.2	When generated.....	88
149.2.2.9.3	Effect of receipt.....	88
149.2.2.10	PMA_PCS_RX_LPI_STATUS.request	88
149.2.2.10.1	Semantics of the primitive	89
149.2.2.10.2	When generated.....	89
149.2.2.10.3	Effect of receipt.....	89
149.2.2.11	PMA_PCS_TX_LPI_STATUS.request	89

149.2.2.11.1	Semantics of the primitive	89
149.2.2.11.2	When generated.....	89
149.2.2.11.3	Effect of receipt.....	89
149.2.2.12	PMA_ALERTDETECT.indication	89
149.2.2.12.1	Semantics of the primitive	90
149.2.2.12.2	When generated.....	90
149.2.2.12.3	Effect of receipt.....	90
149.3	Physical Coding Sublayer (PCS) functions	90
149.3.1	PCS service interface (XGMII).....	90
149.3.2	PCS functions	90
149.3.2.1	PCS Reset function.....	91
149.3.2.2	PCS Transmit function	91
149.3.2.2.1	Use of blocks.....	93
149.3.2.2.2	65B RS-FEC transmission code.....	93
149.3.2.2.3	Notation conventions	94
149.3.2.2.4	Block structure	96
149.3.2.2.5	Control codes	97
149.3.2.2.6	Ordered sets.....	97
149.3.2.2.7	Idle (/I)	97
149.3.2.2.8	LPI (/LI)	97
149.3.2.2.9	Start (/S)	97
149.3.2.2.10	Terminate (/T).....	98
149.3.2.2.11	Ordered set (/O)	98
149.3.2.2.12	Error (/E).....	99
149.3.2.2.13	Transmit process	99
149.3.2.2.14	RS-FEC framing and RS-FEC encoder	99
149.3.2.2.15	RS-FEC superframe and round-robin interleaving	99
149.3.2.2.16	RS-FEC recombine	100
149.3.2.2.17	Reed-Solomon encoder.....	100
149.3.2.2.18	PCS scrambler.....	102
149.3.2.2.19	Gray mapping for PAM4 encoding.....	102
149.3.2.2.20	Selectable precoder	103
149.3.2.2.21	PAM4 encoding	103
149.3.2.2.22	EEE capability.....	104
149.3.2.3	PCS Receive function.....	105
149.3.2.3.1	Frame and block synchronization	106
149.3.2.3.2	PCS descrambler	106
149.3.2.3.3	Invalid blocks	106
149.3.3	Test-pattern generators	106
149.3.4	Side-stream scrambler polynomials	107
149.3.5	PMA training frame	108
149.3.5.1	Generation of symbol T _n	108
149.3.5.2	PMA training mode descrambler polynomials	108
149.3.6	LPI signaling	108
149.3.6.1	LPI synchronization.....	109
149.3.6.2	Quiet period signaling	110
149.3.6.3	Refresh period signaling.....	111
149.3.7	Detailed functions and state diagrams.....	111
149.3.7.1	State diagram conventions.....	111
149.3.7.2	State diagram parameters.....	111
149.3.7.2.1	Constants	111
149.3.7.2.2	Variables	112
149.3.7.2.3	Timers	114
149.3.7.2.4	Functions.....	114

149.3.7.2.5	Counters	116
149.3.7.2.6	Messages	116
149.3.7.3	State diagrams.....	117
149.3.8	PCS management	124
149.3.8.1	Status	124
149.3.8.2	Counter	124
149.3.8.3	Loopback	124
149.3.9	MultiGBASE-T1 operations, administration, and maintenance (OAM)	125
149.3.9.1	Definitions	125
149.3.9.2	Functional specifications	125
149.3.9.2.1	MultiGBASE-T1 OAM frame structure	125
149.3.9.2.2	OAM frame data	126
149.3.9.2.3	Ping RX.....	127
149.3.9.2.4	Ping TX.....	127
149.3.9.2.5	PHY health.....	127
149.3.9.2.6	OAM message valid.....	128
149.3.9.2.7	OAM message toggle.....	128
149.3.9.2.8	OAM message acknowledge.....	128
149.3.9.2.9	OAM message toggle acknowledge.....	128
149.3.9.2.10	OAM message number.....	128
149.3.9.2.11	OAM message data	128
149.3.9.2.12	OAM status	129
149.3.9.2.13	OAM Reed-Solomon	129
149.3.9.2.14	MultiGBASE-T1 OAM frame acceptance criteria	130
149.3.9.2.15	PHY health indicator.....	130
149.3.9.2.16	Ping	130
149.3.9.2.17	OAM message exchange.....	130
149.3.9.3	State diagram variable to OAM register mapping.....	132
149.3.9.4	Detailed functions and state diagrams	132
149.3.9.4.1	State diagram conventions	132
149.3.9.4.2	State diagram parameters	133
149.3.9.4.3	Variables	133
149.3.9.4.4	Counters	137
149.3.9.4.5	Functions	137
149.3.9.4.6	State diagrams	138
149.4	Physical Medium Attachment (PMA) sublayer.....	140
149.4.1	PMA functional specifications	140
149.4.2	PMA functions	140
149.4.2.1	PMA Reset function	141
149.4.2.2	PMA Transmit function.....	141
149.4.2.2.1	Global PMA transmit disable.....	141
149.4.2.3	PMA Receive function	141
149.4.2.4	PHY Control function.....	142
149.4.2.4.1	Infocfield notation.....	143
149.4.2.4.2	Start of Frame Delimiter	143
149.4.2.4.3	Partial PHY frame count (PFC24)	143
149.4.2.4.4	Message Field	143
149.4.2.4.5	PHY capability bits.....	144
149.4.2.4.6	Data switch partial PHY frame count	144
149.4.2.4.7	Reserved fields.....	145
149.4.2.4.8	CRC16.....	145
149.4.2.4.9	PMA MDIO function mapping	145
149.4.2.4.10	Startup sequence	146
149.4.2.5	Link Monitor function	146

149.4.2.6	PHY Link Synchronization	147
149.4.2.6.1	State diagram variables	148
149.4.2.6.2	State diagram timers.....	149
149.4.2.6.3	Messages	149
149.4.2.6.4	State diagrams	150
149.4.2.7	Refresh monitor function.....	151
149.4.2.8	Clock Recovery function.....	151
149.4.3	MDI	151
149.4.3.1	MDI signals transmitted by the PHY	151
149.4.3.2	Signals received at the MDI	151
149.4.4	State variables	151
149.4.4.1	State diagram variables.....	151
149.4.4.2	Timers	153
149.4.5	State diagrams	154
149.5	PMA electrical specifications	156
149.5.1	Test modes.....	156
149.5.1.1	Test fixtures	157
149.5.2	Transmitter electrical specifications.....	158
149.5.2.1	Maximum output droop	158
149.5.2.2	Transmitter linearity	158
149.5.2.3	Transmitter timing jitter.....	158
149.5.2.3.1	Transmit MDI random jitter in MASTER mode	159
149.5.2.3.2	Transmit MDI deterministic jitter in MASTER mode.....	159
149.5.2.4	Transmitter power spectral density (PSD) and power level	160
149.5.2.5	Transmitter peak differential output	161
149.5.2.6	Transmitter clock frequency	161
149.5.3	Receiver electrical specifications	161
149.5.3.1	Receiver differential input signals	161
149.5.3.2	Alien crosstalk noise rejection.....	161
149.6	Management interface.....	162
149.6.1	Optional Support for Auto-Negotiation	162
149.7	Link segment characteristics.....	162
149.7.1	Link transmission parameters.....	162
149.7.1.1	Insertion loss	163
149.7.1.2	Differential characteristic impedance	163
149.7.1.3	Return loss	163
149.7.1.3.1	2.5GBASE-T1 link segment return loss	163
149.7.1.3.2	5GBASE-T1 link segment return loss	164
149.7.1.3.3	10GBASE-T1 link segment return loss	165
149.7.1.4	Coupling attenuation.....	166
149.7.1.5	Screening attenuation	167
149.7.1.6	Maximum link delay.....	167
149.7.2	Coupling parameters between link segments	167
149.7.2.1	Power sum alien near-end crosstalk (PSANEXT).....	167
149.7.2.2	Power sum alien attenuation to crosstalk ratio far-end (PSAACRF)	168
149.8	MDI specification	169
149.8.1	MDI connectors.....	169
149.8.2	MDI electrical specification	169
149.8.2.1	MDI return loss.....	169
149.8.3	MDI fault tolerance	170
149.9	Environmental specifications	170
149.9.1	General safety.....	170
149.9.2	Network safety	171
149.9.2.1	Environmental safety	171

149.9.2.2	Electromagnetic compatibility.....	171
149.10	Delay constraints.....	171
149.11	Protocol implementation conformance statement (PICS) proforma for Clause 149, Physical Coding Sublayer (PCS), Physical Medium Attachment (PMA) sublayer, and baseband medium, type 2.5GBASE-T1, 5GBASE-T1, and 10GBASE-T1	173
149.11.1	Introduction	173
149.11.2	Identification	173
149.11.2.1	Implementation identification.....	173
149.11.2.2	Protocol summary	173
149.11.3	Major capabilities/options	174
149.11.4	PICS proforma tables for Physical Coding Sublayer (PCS), Physical Medium Attachment (PMA) sublayer, and baseband medium, type 2.5GBASE-T1, 5GBASE-T1, and 10GBASE-T1	174
149.11.4.1	General.....	174
149.11.4.2	Physical Coding Sublayer (PCS).....	175
149.11.4.2.1	PCS Transmit	175
149.11.4.2.2	PCS Receive.....	177
149.11.4.2.3	Test-pattern generators.....	177
149.11.4.2.4	Side-stream scrambler.....	178
149.11.4.2.5	LPI signaling.....	178
149.11.4.2.6	Functions and state diagrams	179
149.11.4.2.7	PCS loopback.....	179
149.11.4.2.8	OAM	180
149.11.4.3	Physical Medium Attachment (PMA)	180
149.11.4.3.1	PMA Reset function.....	180
149.11.4.3.2	PMA Transmit function	181
149.11.4.3.3	PMA Receive function.....	182
149.11.4.3.4	PHY Control function	182
149.11.4.3.5	Link Monitor function.....	183
149.11.4.3.6	PHY Link Synchronization.....	184
149.11.4.3.7	Refresh monitor function	185
149.11.4.3.8	Clock Recovery function	185
149.11.4.3.9	MDI.....	185
149.11.4.3.10	PMA State variables.....	185
149.11.4.4	PMA electrical specifications	186
149.11.4.4.1	Test modes	186
149.11.4.4.2	Transmitter electrical specifications	186
149.11.4.4.3	Receiver electrical specifications.....	187
149.11.4.5	Link segment characteristics	188
149.11.4.6	MDI specifications	188
149.11.4.7	Delay constraints	188
Annex 98B (normative)	IEEE 802.3 Selector Base Page definition	189
98B.3	Technology Ability Field bit assignments	189
98B.4	Priority Resolution.....	189
Annex 149A (normative)	Coupling and screening attenuation test methodology.....	190
149A.1	Introduction.....	190
149A.2	General test conditions.....	190
149A.3	Reference cable assembly	190
149A.4	Measurement setup	191

149A.5 Protocol implementation conformance statement (PICS) proforma for Annex 149A, Coupling and screening attenuation test methodology	193
149A.5.1 Introduction	193
149A.5.2 Identification	193
149A.5.2.1 Implementation identification	193
149A.5.2.2 Protocol summary	193
149A.5.3 Major capabilities/options	194
149A.5.4 PICS proforma tables for Coupling and screening attenuation test methodology	194
 Annex 149B (informative) OAM status	 196
149B.1 Purpose	196
149B.2 MultiGBASE-T1 OAM status structure	196
149B.3 MultiGBASE-T1 status message data	196
149B.3.1 MultiGBASE-T1 status valid	197
149B.3.2 Power supply warning	197
149B.3.3 Internal temperature warning	197
149B.3.4 No MAC messages warning	197
149B.3.5 Degraded link segment	197
149B.3.6 Polarity inversion	197
149B.3.7 Vendor-specific field	198
149B.3.8 Clear REC	198
149B.3.9 REC cleared	198
149B.3.10 Receive error counter (REC)	198
149B.4 Detailed functions and state diagrams	198
149B.4.1 State diagram conventions	198
149B.4.2 State diagram parameters	198
149B.4.2.1 Variables	198
149B.4.2.2 Counters	199
149B.4.2.3 Messages	199
149B.4.2.4 State diagrams	200
 Annex 149C (informative) Tx Function to Rx function channel characteristics	 201
149C.1 Overview	201
149C.2 Differential printed circuit board trace loss	201
149C.3 Channel insertion loss	202
149C.4 Channel return loss	202
149C.4.1 Tx/Rx function to MDI return loss	202
149C.4.2 Link segment return loss	204
149C.4.3 Channel return loss concatenation	205
149C.5 Coupling between ports on multiport designs	205

IEEE Standard for Ethernet

Amendment 8: Physical Layer Specifications and Management Parameters for 2.5 Gb/s, 5 Gb/s, and 10 Gb/s Automotive Electrical Ethernet

(This amendment is based on IEEE Std 802.3™-2018 as amended by IEEE Std 802.3cb™-2018, IEEE Std 802.3bt™-2018, IEEE Std 802.3cd™-2018, IEEE Std 802.3cn™-2019, IEEE Std 802.3cg™-2019, IEEE Std 802.3cq™-2020, and IEEE Std 802.3cm™-2020.)

NOTE—The editing instructions contained in this amendment define how to merge the material contained therein into the existing base standard and its amendments to form the comprehensive standard.

The editing instructions are shown in ***bold italic***. Four editing instructions are used: change, delete, insert, and replace. ***Change*** is used to make corrections in existing text or tables. The editing instruction specifies the location of the change and describes what is being changed by using ~~strike through~~ (to remove old material) and underscore (to add new material). ***Delete*** removes existing material. ***Insert*** adds new material without disturbing the existing material. Deletions and insertions may require renumbering. If so, renumbering instructions are given in the editing instruction. ***Replace*** is used to make changes in figures or equations by removing the existing figure or equation and replacing it with a new one. Editing instructions, change markings, and this NOTE will not be carried over into future editions because the changes will be incorporated into the base standard.

Cross references that refer to clauses, tables, equations, or figures not covered by this amendment are highlighted in green.¹

¹ Notes in text, tables, and figures are given for information only and do not contain requirements needed to implement the standard.

1. Introduction

1.3 Normative references

Insert the following references in 1.3 in alphanumeric order as follows:

IEC 62153-4-7, Metallic communication cable test methods—Part 4-7: Electromagnetic compatibility (EMC)—Test method for measuring of transfer impedance Z_T and screening attenuation a_S or coupling attenuation a_C of connectors and assemblies up to and above 3 GHz—Triaxial tube in tube method.²

1.4 Definitions

Insert a new definition for 10GBASE-T1 after 1.4.69 10GBASE-T as follows:

1.4.69a 10GBASE-T1: IEEE 802.3 Physical Layer specification for a 10 Gb/s Ethernet full duplex local area network over a single balanced pair of conductors. (See IEEE Std 802.3, Clause 149.)

Insert a new definition for 2.5GBASE-T1 after 1.4.82 2.5GBASE-T and before 1.4.82a 2.5GBASE-X (as inserted by IEEE Std 802.3cb-2018) as follows:

1.4.82aa 2.5GBASE-T1: IEEE 802.3 Physical Layer specification for a 2.5 Gb/s Ethernet full duplex local area network over a single balanced pair of conductors. (See IEEE Std 802.3, Clause 149.)

Insert a new definition for 5GBASE-T1 after 1.4.129 5GBASE-T and before 1.4.129a 5GSEI (as inserted by IEEE Std 802.3cb-2018) as follows:

1.4.129aa 5GBASE-T1: IEEE 802.3 Physical Layer specification for a 5 Gb/s Ethernet full duplex local area network over a single balanced pair of conductors. (See IEEE Std 802.3, Clause 149.)

Change the definition of Infocfield in 1.4.289 as follows:

1.4.289 Infocfield: A 16 octet frame transmitted at regular intervals containing messages for startup operation by certain PHYs. (See IEEE Std 802.3, [Clause 55](#), [Clause 113](#), and [Clause 126](#).) Also a 12-octet frame transmitted at regular intervals containing messages for startup operation by certain PHYs. (See IEEE Std 802.3, Clause 97 and Clause 149.)

Insert a new definition for MultiGBASE-T1 after 1.4.333 MultiGBASE-T (re-numbered from 1.4.334 due to the deletion of 1.4.294 by IEEE Std 802.3bt-2018) as follows:

1.4.333a MultiGBASE-T1: PHYs that belong to the set of specific BASE-T1 PHYs at speeds in excess of 1000 Mb/s, including 2.5GBASE-T1, 5GBASE-T1, and 10GBASE-T1. (See IEEE Std 802.3, Clause 149.)

Insert a new definition for Type F PoDL System after 1.4.494a Type E PoDL System (as inserted by IEEE Std 802.3cg-2019) as follows:

1.4.494b Type F PoDL System: A system comprising a PoDL PSE, link section, and PD that are compatible with 2.5GBASE-T1, 5GBASE-T1, and 10GBASE-T1.

²IEC publications are available from the International Electrotechnical Commission (<https://www.iec.ch/>) and the American National Standards Institute (<https://www.ansi.org>).

1.5 Abbreviations

Insert the following new abbreviation into the list, in alphanumeric order:

RFER RS-FEC frame error ratio

30. Management

30.3 Layer management for DTEs

30.3.2 PHY device managed object class

30.3.2.1 PHY device attributes

30.3.2.1.2 aPhyType

Insert the following new entry in the APPROPRIATE SYNTAX section of 30.3.2.1.2 after the entry for “2.5GBASE-T” (and before the entry for “2.5GBASE-X” inserted by IEEE Std 802.3cb-2018) as follows:

2.5GBASE-T1	Clause 149 2.5 Gb/s PAM4
-------------	--------------------------

Insert the following new entry in the APPROPRIATE SYNTAX section of 30.3.2.1.2 after the entry for “5GBASE-T” (and before the entry for “5GBASE-R” inserted by IEEE Std 802.3cb-2018) as follows:

5GBASE-T1	Clause 149 5 Gb/s PAM4
-----------	------------------------

Insert the following new entry in the APPROPRIATE SYNTAX section of 30.3.2.1.2 after the entry for “10GBASE-T” as follows:

10GBASE-T1	Clause 149 10 Gb/s PAM4
------------	-------------------------

30.3.2.1.3 aPhyTypeList

Insert the following new entry in the APPROPRIATE SYNTAX section of 30.3.2.1.3 after the entry for “2.5GBASE-T” (and before the entry for “2.5GBASE-X” inserted by IEEE Std 802.3cb-2018) as follows:

2.5GBASE-T1	Clause 149 2.5 Gb/s PAM4
-------------	--------------------------

Insert the following new entry in the APPROPRIATE SYNTAX section of 30.3.2.1.3 after the entry for “5GBASE-T” (and before the entry for “5GBASE-R” inserted by IEEE Std 802.3cb-2018) as follows:

5GBASE-T1	Clause 149 5 Gb/s PAM4
-----------	------------------------

Insert the following new entry in the APPROPRIATE SYNTAX section of 30.3.2.1.3 after the entry for “10GBASE-T” as follows:

10GBASE-T1	Clause 149 10 Gb/s PAM4
------------	-------------------------

30.5 Layer management for medium attachment units (MAUs)

30.5.1 MAU managed object class

30.5.1.1 MAU attributes

30.5.1.1.2 aMAUType

Insert the following new entry in the APPROPRIATE SYNTAX section of 30.5.1.1.2 after the entry for “2.5GBASE-T” (and before the entry for “2.5GBASE-X” inserted by IEEE Std 802.3cb-2018) as follows:

2.5GBASE-T1	Single balanced pair of conductors PHY as specified in Clause 149
-------------	---

Insert the following new entry in the APPROPRIATE SYNTAX section of 30.5.1.1.2 after the entry for “5GBASE-T” as follows:

5GBASE-T1	Single balanced pair of conductors PHY as specified in Clause 149
-----------	---

Insert the following new entry in the APPROPRIATE SYNTAX section of 30.5.1.1.2 after the entry for “10GBASE-T” as follows:

10GBASE-T1	Single balanced pair of conductors PHY as specified in Clause 149
------------	---

30.5.1.1.4 aMediaAvailable

Change the fifth sentence of the eighth paragraph of the BEHAVIOUR DEFINED AS section of 30.5.1.1.4 as follows:

Where a Clause 45 MDIO interface is present a zero in the PMA/PMD Receive link status bit (45.2.1.2.4) maps to the enumeration “PMD link fault”, a one in the LOF status bit (45.2.2.10.4) maps to the enumeration “WIS frame loss”, a one in the LOS status bit (45.2.2.10.5) maps to the enumeration “WIS signal loss”, a zero in the PCS Receive link status bit (45.2.3.2.7 or 45.2.3.80.1) maps to the enumeration “PCS link fault”, a one in the 10/40/100GBASE-R PCS Latched high BER status bit (45.2.3.16.2) or a one in the MultiGBASE-T1 PCS status 2 Latched high BER status bit (45.2.3.80.4) maps to the enumeration “excessive BER”, a zero in the DTE XS receive link status bit (45.2.5.2.7) maps to the enumeration “DXS link fault” and a zero in the PHY XS transmit link status bit (45.2.4.2.7) maps to the enumeration “PXS link fault”;

30.6 Management for link Auto-Negotiation

30.6.1 Auto-Negotiation managed object class

30.6.1.1 Auto-Negotiation attributes

30.6.1.1.5 aAutoNegLocalTechnologyAbility

Insert the following new entry in the APPROPRIATE SYNTAX section of 30.6.1.1.5 after the entry for “2.5GBASE-T” (and before the entry for “2.5GKX” inserted by IEEE Std 802.3cb-2018) as follows:

2.5GBASE-T1	2.5GBASE-T1 as specified in Clause 149
-------------	--

Insert the following new entry in the APPROPRIATE SYNTAX section of 30.6.1.1.5 after the entry for “5GBASE-T” (and before the entry for “5GKR” inserted by IEEE Std 802.3cb-2018) as follows:

5GBASE-T1	5GBASE-T1 as specified in Clause 149
-----------	--------------------------------------

Insert the following new entry in the APPROPRIATE SYNTAX section of 30.6.1.1.5 after the entry for “10GBASE-T” as follows:

10GBASE-T1 10GBASE-T1 as specified in Clause 149

30.15 Layer management for Power over Data Lines (PoDL) of Single Balanced Twisted-Pair Ethernet

30.15.1 PoDL PSE managed object class

30.15.1.1 PoDL PSE attributes

30.15.1.1.4 aPoDLPSEType

Insert the following new entry in the APPROPRIATE SYNTAX section of 30.15.1.1.4 after the entry for “typeE” (inserted by IEEE Std 802.3cg-2019) as follows:

typeF Type F PoDL PSE

30.15.1.1.5 aPoDLPSEDetectedPDType

Insert the following new entry in the APPROPRIATE SYNTAX section of 30.15.1.1.5 after the entry for “typeE” (inserted by IEEE Std 802.3cg-2019) as follows:

typeF Type F PoDL PD

44. Introduction to 10 Gb/s baseband network

44.1 Overview

44.1.1 Scope

Change the first paragraph of 44.1.1 as follows:

10 Gigabit Ethernet uses the IEEE 802.3 MAC sublayer, connected through a 10 Gigabit Media Independent Interface (XGMII) to Physical Layer entities such as 10GBASE-SR, 10GBASE-LX4, 10GBASE-CX4, 10GBASE-LRM, 10GBASE-LR, 10GBASE-ER, 10GBASE-SW, 10GBASE-LW, 10GBASE-EW, ~~and~~ 10GBASE-T, and 10GBASE-T1.

44.1.2 Objectives

Insert the following text as new item h) and renumber existing item h) to item i) of 44.1.2 as follows:

- h) Support operation over a single balanced pair of conductors.

44.1.3 Relationship of 10 Gigabit Ethernet to the ISO OSI reference model

Replace Figure 44-1 with the following figure, which adds 10GBASE-T1:

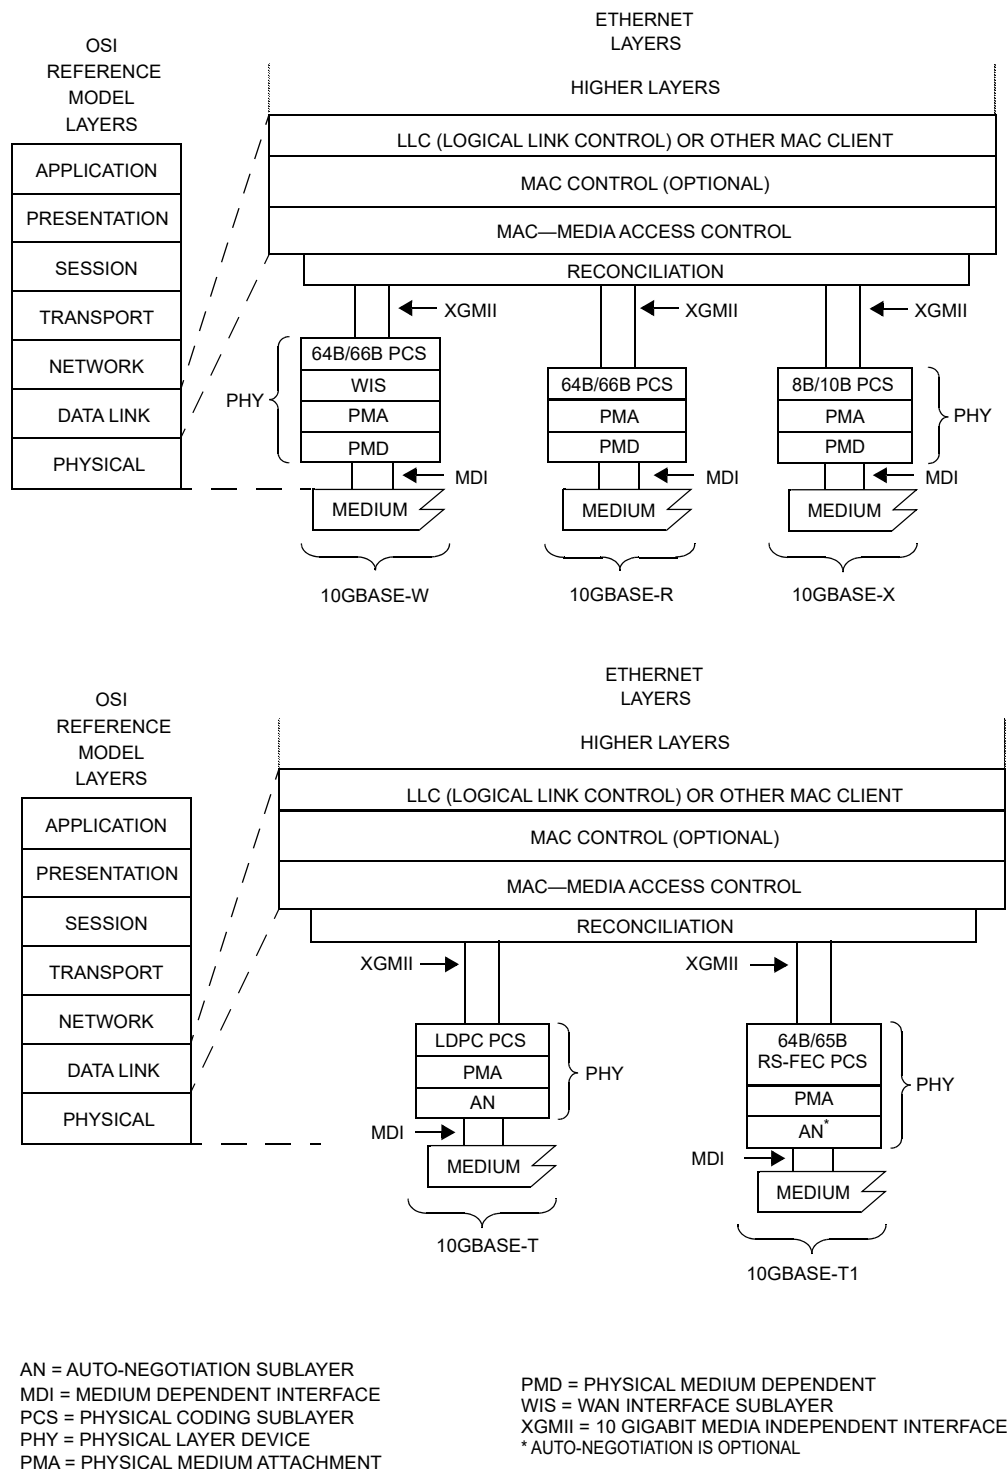


Figure 44-1—Architectural positioning of 10 Gigabit Ethernet

Change item d) of 44.1.3 as follows:

- d) The MDI as specified in [Clause 53](#) for 10GBASE-LX4, in [Clause 54](#) for 10GBASE-CX4, in [Clause 55](#) for 10GBASE-T, in [Clause 68](#) for 10GBASE-LRM, in Clause 149 for 10GBASE-T1, and in [Clause 52](#) for other PMD types.

44.1.4 Summary of 10 Gigabit Ethernet sublayers

44.1.4.1 Reconciliation Sublayer (RS) and 10 Gigabit Media Independent Interface (XGMII)

Change the second paragraph of 44.1.4.1 as follows:

While the XGMII is an optional interface, it is used extensively in this standard as a basis for functional specification and provides a common service interface for [Clause 47](#), [Clause 48](#), [Clause 49](#), ~~and [Clause 55](#)~~, and [Clause 149](#).

44.1.4.4 Physical Layer signaling systems

Change Table 44–1 as follows:

Table 44–1—Nomenclature and clause correlation

Nomenclature	Clause ^a											
	48	49	50	51	52			53	54	55	68	149
	8B/10B PCS & PMA	64B/66B PCS	WIS	Serial PMA	850 nm Serial PMD	1310 nm Serial PMD	1550 nm Serial PMD	1310 nm WDM PMD	4-Lane electrical PMD	~~Twisted-pair~~ LDPC PCS & 4-pair PMA	1310 nm Serial MMF PMD	~~RS-FEC PCS & 1-pair PMA~~
10GBASE-SR		M ^a		M	M							
10GBASE-SW		M	M	M	M							
10GBASE-LX4	M							M				
10GBASE-CX4	M								M			
10GBASE-LR		M		M		M						
10GBASE-LW		M	M	M		M						
10GBASE-ER		M		M			M					
10GBASE-EW		M	M	M			M					
10GBASE-T										M		
10GBASE-LRM		M		M							M	
10GBASE-T1												M

^a M = Mandatory

Insert the following paragraph between paragraphs 6 and 7 in 44.1.4.4 as follows:

The term 10GBASE-T1, specified in Clause 149, refers to a specific Physical Layer implementation based upon 64B/65B data coding method placed in an RS-FEC frame that is Gray-code mapped to PAM4 for transmission over a single balanced pair of conductors.

Change former paragraph 7 (now paragraph 8 due to the above insertion) in 44.1.4.4 as follows:

Physical Layer device specifications are contained in [Clause 52](#), [Clause 53](#), [Clause 54](#), [Clause 55](#), ~~and Clause 68~~, and [Clause 149](#).

44.3 Delay constraints

Insert new rows at the end of Table 44–2 as follows (unchanged rows not shown):

Table 44–2—Round-trip delay constraints (informative)

Sublayer	Maximum (bit time)	Maximum (pause_quanta)	Notes
...			
10GBASE-T1 no interleave	10 240	20	See 149.10.
10GBASE-T1 2x interleave	13 824	27	See 149.10.
10GBASE-T1 4x interleave	20 480	40	See 149.10.

44.4 Protocol implementation conformance statement (PICS) proforma

Change the first paragraph of 44.4 as follows:

The supplier of a protocol implementation that is claimed to conform to any part of IEEE Std 802.3, Clause 45 through [Clause 55](#), ~~and Clause 68~~, ~~and Clause 149~~, demonstrates compliance by completing a protocol implementation conformance statement (PICS) proforma.

45. Management Data Input/Output (MDIO) Interface

45.2 MDIO Interface Registers

45.2.1 PMA/PMD registers

Insert new rows in Table 45–3 for registers 1.2309 to 1.2315 after row for register 1.2308, and change the appropriate reserved row as follows (unchanged rows not shown):

Table 45–3—PMA/PMD registers

Register address	Register name	Subclause
...		
1.2309	MultiGBASE-T1 PMA control	45.2.1.192
1.2310	MultiGBASE-T1 PMA status	45.2.1.193
1.2311	MultiGBASE-T1 training	45.2.1.194
1.2312	MultiGBASE-T1 link partner training	45.2.1.195
1.2313	MultiGBASE-T1 test mode control	45.2.1.196
1.2314	MultiGBASE-T1 SNR operating margin	45.2.1.197
1.2315	MultiGBASE-T1 minimum SNR margin	45.2.1.198
1.2316	MultiGBASE-T1 user defined data	45.2.1.199
1.2317	MultiGBASE-T1 link partner user defined data	45.2.1.200
1.2309, 1.2318 through 1.32767	Reserved	
...		

45.2.1.7 PMA/PMD status 2 register (Register 1.8)

45.2.1.7.4 Transmit fault (1.8.11)

Insert a new row in Table 45–9 immediately after the row for “2.5GBASE-T, 5GBASE-T” as follows (unchanged rows not shown):

Table 45–9—Transmit fault description location

PMA/PMD	Description location
...	
2.5GBASE-T1, 5GBASE-T1, 10GBASE-T1	149.4.2.2
...	

45.2.1.7.5 Receive fault (1.8.10)

Insert a new row in Table 45–10 immediately after row for “2.5GBASE-T, 5GBASE-T” as follows (unchanged rows not shown):

Table 45–10—Receive fault description location

PMA/PMD	Description location
...	
2.5GBASE-T1, 5GBASE-T1, 10GBASE-T1	149.4.2.3
...	

45.2.1.16 BASE-T1 PMA/PMD extended ability register (1.18)

Change the identified reserved row in Table 45–19 (as modified by IEEE Std 802.3cg-2019) and insert new rows immediately below the changed row as follows (unchanged rows not shown):

Table 45–19—BASE-T1 PMA/PMD extended ability register bit definitions

Bit(s)	Name	Description	R/W ^a
1.18.15:47	Reserved	Value always 0	RO
1.18.6	10GBASE-T1 ability	1 = PMA/PMD is able to perform 10GBASE-T1 0 = PMA/PMD is not able to perform 10GBASE-T1	RO
1.18.5	5GBASE-T1 ability	1 = PMA/PMD is able to perform 5GBASE-T1 0 = PMA/PMD is not able to perform 5GBASE-T1	RO
1.18.4	2.5GBASE-T1 ability	1 = PMA/PMD is able to perform 2.5GBASE-T1 0 = PMA/PMD is not able to perform 2.5GBASE-T1	RO
...			

^aRO = Read only

Insert 45.2.1.16.1, 45.2.1.16.2, and 45.2.1.16.3 at the end of 45.2.1.16 as follows:

45.2.1.16.1 10GBASE-T1 ability (1.18.6)

When read as a one, bit 1.18.6 indicates that the PMA/PMD is able to operate as a 10GBASE-T1 PMA type. When read as a zero, bit 1.18.6 indicates that the PMA/PMD is not able to operate as a 10GBASE-T1 PMA type.

45.2.1.16.2 5GBASE-T1 ability (1.18.5)

When read as a one, bit 1.18.5 indicates that the PMA/PMD is able to operate as a 5GBASE-T1 PMA type. When read as a zero, bit 1.18.5 indicates that the PMA/PMD is not able to operate as a 5GBASE-T1 PMA type.

45.2.1.16.3 2.5GBASE-T1 ability (1.18.4)

When read as a one, bit 1.18.4 indicates that the PMA/PMD is able to operate as a 2.5GBASE-T1 PMA type. When read as a zero, bit 1.18.4 indicates that the PMA/PMD is not able to operate as a 2.5GBASE-T1 PMA type.

45.2.1.18 2.5G/5G PMA/PMD extended ability register (Register 1.21)

Insert the following note at the end of 45.2.1.18 (below Table 45–21):

NOTE—2.5GBASE-T1 and 5GBASE-T1 PMA/PMD extended abilities can be found in Register 1.18, see Table 45–19.

45.2.1.185 BASE-T1 PMA/PMD control register (1.2100)

Change the row for bits 1.2100.3:0 in Table 45–149 (as modified by IEEE Std 802.3cg-2019) (unchanged rows not shown) as follows:

Table 45–149—BASE-T1 PMA/PMD control register bit definitions

Bit(s)	Name	Description	R/W ^a
...			
1.2100.3:0	Type Selection	3 2 1 0 1 x x x = Reserved ~~0 1 x x = Reserved~~ ~~0 1 1 1 = Reserved~~ <u>0 1 1 0 = 10GBASE-T1</u> <u>0 1 0 1 = 5GBASE-T1</u> <u>0 1 0 0 = 2.5GBASE-T1</u> 0 0 1 1 = 10BASE-T1S 0 0 1 0 = 10BASE-T1L 0 0 0 1 = 1000BASE-T1 0 0 0 0 = 100BASE-T1	R/W

^aRO = Read only, R/W = Read/Write

45.2.1.185.2 Type selection (1.2100.3:0)

Insert the following text after the fifth sentence of 45.2.1.185.2 (as modified by IEEE Std 802.3cg-2019) as follows:

When these bits are set to 0100, the mode of operation is 2.5GBASE-T1. When these bits are set to 0101, the mode of operation is 5GBASE-T1. When these bits are set to 0110, the mode of operation is 10GBASE-T1.

Insert 45.2.1.192 through 45.2.1.196 after 45.2.1.191 as follows:

45.2.1.192 MultiGBASE-T1 PMA control register (Register 1.2309)

The assignment of bits in the MultiGBASE-T1 PMA control register is shown in Table 45–155a.

Table 45–155a—MultiGBASE-T1 PMA control register bit definitions

Bit(s)	Name	Description	R/W ^a
1.2309.15	PMA/PMD reset	1 = PMA/PMD reset 0 = Normal operation	R/W, SC
1.2309.14	Transmit disable	1 = Transmit disable 0 = Normal operation	R/W
1.2309.13:12	Reserved	Value always 0	RO
1.2309.11	Low-power	1 = Low-power mode 0 = Normal operation	R/W
1.2309.10:0	Reserved	Value always 0	RO

^aR/W = Read/Write, RO = Read only, SC = Self-clearing

45.2.1.192.1 PMA/PMD reset (1.2309.15)

Resetting the MultiGBASE-T1 PMA/PMD is accomplished by setting bit 1.2309.15 to a one. This action shall set all PMA/PMD registers to their default states. As a consequence, this action may change the internal state of a MultiGBASE-T1 PMA/PMD and the state of the physical link. This action may also initiate a reset in any other MMDs that are instantiated in the same package. Bit 1.2309.15 is self-clearing, and the MultiGBASE-T1 PMA/PMD shall return a value of one in bit 1.2309.15 when a reset is in progress; otherwise, it shall return a value of zero. The MultiGBASE-T1 PMA/PMD is not required to accept a write transaction to any of its registers until the reset process is completed. The control and management interface shall be restored to operation as defined in 149.4.2.1, starting when bit 1.2309.15 is set.

During a reset, the MultiGBASE-T1 PMA/PMD shall respond to reads from register bits 1.2309.15, 1.8.15:14, and 1.0.15. All other register bits shall be ignored.

NOTE—This operation may interrupt data communication.

Bit 1.2309.15 is a copy of bit 1.0.15 and setting or clearing either bit shall set or clear the other bit. Setting either bit shall reset the MultiGBASE-T1 PMA/PMD.

45.2.1.192.2 Transmit disable (1.2309.14)

When bit 1.2309.14 is set to a one, the PMA shall disable output on the transmit path. When bit 1.2309.14 is set to a zero, the PMA shall enable output on the transmit path.

Bit 1.2309.14 is a copy of bit 1.9.0 and setting or clearing either bit shall set or clear the other bit. Setting either bit shall disable the transmitter.

45.2.1.192.3 Low power (1.2309.11)

When the low-power ability is supported, the MultiGBASE-T1 PMA/PMD may be placed into a low-power mode by setting bit 1.2309.11 to one. This action may also initiate a low-power mode in any other MMDs that are instantiated in the same package. The low-power mode is exited by resetting the MultiGBASE-T1 PMA/PMD. The behavior of the MultiGBASE-T1 PMA/PMD in transition to and from the low-power mode is implementation specific and any interface signals should not be relied upon. While in the low-power

mode, the device shall, at a minimum, respond to management transactions necessary to exit the low-power mode.

The default value of bit 1.2309.11 is zero.

This operation interrupts data communication.

Bit 1.2309.11 is a copy of bit 1.0.11 and setting or clearing either bit shall set or clear the other bit. Setting either bit shall put the MultiGBASE-T1 PMA/PMD in low-power mode.

45.2.1.193 MultiGBASE-T1 PMA status register (1.2310)

The assignment of bits in the MultiGBASE-T1 PMA status register is shown in Table 45–155b.

Table 45–155b—MultiGBASE-T1 PMA status register bit definitions

Bit(s)	Name	Description	R/W ^a
1.2310.15:12	Reserved	Value always 0	RO
1.2310.11	MultiGBASE-T1 OAM ability	1 = PHY has MultiGBASE-T1 OAM ability 0 = PHY does not have MultiGBASE-T1 OAM ability	RO
1.2310.10	EEE ability	1 = PHY has EEE ability 0 = PHY does not have EEE ability	RO
1.2310.9	Receive fault ability	1 = PMA/PMD has the ability to detect a fault condition on the receive path 0 = PMA/PMD does not have the ability to detect a fault condition on the receive path	RO
1.2310.8	Low-power ability	1 = PMA/PMD has low-power ability 0 = PMA/PMD does not have low-power ability	RO
1.2310.7:5	Reserved	Value always 0	RO
1.2310.4:3	PrecodeSel	4 3 0 0 = no precoder requested 0 1 = 1–D precoder requested 1 0 = 1+D precoder requested 1 1 = 1–D ² precoder requested	RO
1.2310.2	Receive polarity	1 = Receive polarity is reversed 0 = Receive polarity is not reversed	RO
1.2310.1	Receive fault	1 = Fault condition detected 0 = Fault condition not detected	RO/LH
1.2310.0	Receive link status	1 = PMA/PMD receive link up 0 = PMA/PMD receive link down	RO/LL

^aRO = Read only, LH = Latching High, LL = Latching Low

45.2.1.193.1 MultiGBASE-T1 OAM ability (1.2310.11)

When read as a one, bit 1.2310.11 indicates that the MultiGBASE-T1 PHY supports MultiGBASE-T1 OAM (see 149.3.9). When read as a zero, bit 1.2310.11 indicates that the MultiGBASE-T1 PHY does not support MultiGBASE-T1 OAM.

45.2.1.193.2 EEE ability (1.2310.10)

When read as a one, bit 1.2310.10 indicates that the MultiGBASE-T1 PHY supports EEE. When read as a zero, bit 1.2310.10 indicates that the MultiGBASE-T1 PHY does not support EEE.

45.2.1.193.3 Receive fault ability (1.2310.9)

When read as a one, bit 1.2310.9 indicates that the MultiGBASE-T1 PMA/PMD has the ability to detect a fault condition on the receive path. When read as a zero, bit 1.2310.9 indicates that the MultiGBASE-T1 PMA/PMD does not have the ability to detect a fault condition on the receive path.

45.2.1.193.4 Low-power ability (1.2310.8)

When read as a one, bit 1.2310.8 indicates that the MultiGBASE-T1 PMA/PMD supports the low-power feature. When read as a zero, bit 1.2310.8 indicates that the MultiGBASE-T1 PMA/PMD does not support the low-power feature. If the MultiGBASE-T1 PMA/PMD supports the low-power feature, then it is controlled using either bit 1.2309.11 or bit 1.0.11.

45.2.1.193.5 PrecodeSel (1.2310.4:3)

Bits 1.2310.4:3 contain the requested precoder setting communicated by the PHY to the link partner via the PrecodeSel bits in the Infofield (see 149.4.2.4.5).

45.2.1.193.6 Receive polarity (1.2310.2)

When read as zero, bit 1.2310.2 indicates that the polarity of the receiver is not reversed. When read as one, bit 1.2310.2 indicates that the polarity of the receiver is reversed.

45.2.1.193.7 Receive fault (1.2310.1)

When read as a one, bit 1.2310.1 indicates that the MultiGBASE-T1 PMA/PMD has detected a fault condition on the receive path. When read as a zero, bit 1.2310.1 indicates that the MultiGBASE-T1 PMA/PMD has not detected a fault condition on the receive path. Detection of a fault condition on the receive path is optional and the ability to detect such a condition is advertised by bit 1.2310.9. A MultiGBASE-T1 PMA/PMD that is unable to detect a fault condition on the receive path shall return a value of zero for bit 1.2310.1. The receive fault bit shall be implemented with latching high behavior.

45.2.1.193.8 Receive link status (1.2310.0)

When read as a one, bit 1.2310.0 indicates that the MultiGBASE-T1 PMA/PMD receive link is up. When read as a zero, bit 1.2310.0 indicates that the MultiGBASE-T1 PMA/PMD receive link has been down one or more times since the register was last read. The receive link status bit shall be implemented with latching low behavior.

45.2.1.194 MultiGBASE-T1 training register (1.2311)

The assignment of bits in the MultiGBASE-T1 training register is shown in Table 45–155c.

Table 45–155c—MultiGBASE-T1 training register bit definitions

Bit(s)	Name	Description	R/W ^a
1.2311.15:13	Reserved	Value always 0	RO
1.2311.12:11	Interleave request	12 11 0 0: L=1, no interleaving, default for 2.5GBASE-T1 0 1: L=2, RS-FEC interleaving factor two, default for 5GBASE-T1, undefined for 2.5GBASE-T1 1 0: L=4, RS-FEC interleaving factor four, default for 10GBASE-T1, undefined for 2.5GBASE-T1 and 5GBASE-T1 1 1: Reserved	R/W
1.2311.10:6	Reserved	Value always 0	RO
1.2311.5	Precoder selection	Controls requested precoder setting 0 = PHY 1 = User	R/W
1.2311.4	Slow Wake request	1 = Alert window start is only immediate frame after refresh 0 = Alert window start is every 8th RS frame after refresh	R/W
1.2311.3:2	User precoder selection	3 2 0 0 = no precoder requested 0 1 = 1-D precoder requested 1 0 = 1+D precoder requested 1 1 = 1-D ² precoder requested	R/W
1.2311.1	MultiGBASE-T1 OAM advertisement	1 = MultiGBASE-T1 OAM ability advertised to link partner 0 = MultiGBASE-T1 OAM ability not advertised to link partner	R/W
1.2311.0	EEE advertisement	1 = EEE ability advertised to link partner 0 = EEE ability not advertised to link partner	R/W

^aRO = Read only, R/W = Read/Write

45.2.1.194.1 Interleave request (1.2311.12:11)

Bits 1.2311.12:11 control the Reed-Solomon interleave setting of this PHY. Reed-Solomon interleaving is described in 149.3.2.2.15. This is communicated to the link partner via Infofields as specified in 149.4.2.4.5.

The values of L = 2 and L = 4 are not defined for 2.5GBASE-T1 PHYs, and the value of L = 4 is not defined for 5GBASE-T1 PHYs. If bits 1.2311.12:11 are set to these undefined values, the PHY will communicate these values to the link partner, but the requested interleaver depth is out of scope of this standard and may not be supported by the link partner.

45.2.1.194.2 Precoder selection (1.2311.5)

When bit 1.2311.5 is set to a one, the PHY shall use bits 1.2311.3:2 for the value of PrecoderSel, and when set to a zero the PHY controls the value of PrecoderSel. PrecoderSel is the desired precoder setting communicated to the link partner via the Infofield specified in 149.4.2.4.5.

45.2.1.194.3 Slow Wake request (1.2311.4)

When set as a one, bit 1.2311.4 indicates to the link partner that the local MultiGBASE-T1 PHY may only transmit alert immediately following refresh. When set as a zero, bit 1.2311.4 indicates to the link partner that the local MultiGBASE-T1 PHY may transmit an alert at any eighth RS-FEC frame after a refresh.

45.2.1.194.4 User precoder selection (1.2311.3:2)

When bit 1.2311.5 is a one, bits 1.2311.3:2 are the requested precoder setting communicated by the PHY to the link partner via the PrecoderSel bits in the Infocfield (see 149.4.2.4.5).

45.2.1.194.5 MultiGBASE-T1 OAM advertisement (1.2311.1)

Support for MultiGBASE-T1 OAM capability shall be advertised if bit 1.2311.1 is set to one. Support for MultiGBASE-T1 OAM capability shall not be advertised if bit 1.2311.1 is set to zero. Support for MultiGBASE-T1 OAM capability should only be advertised if it is supported by the PHY.

45.2.1.194.6 EEE advertisement (1.2311.0)

Support for EEE capability shall be advertised if bit 1.2311.0 is set to one. Support for EEE capability shall not be advertised if bit 1.2311.0 is set to zero. Support for EEE operation should only be advertised if it is supported by the PHY.

45.2.1.195 MultiGBASE-T1 link partner training register (1.2312)

The assignment of bits in the MultiGBASE-T1 link partner training register is shown in Table 45–155d. The values in this register are not valid when the link is down.

Table 45–155d—MultiGBASE-T1 link partner training register bit definitions

Bit(s)	Name	Description	R/W ^a
1.2312.15:13	Reserved	Value always 0	RO
1.2312.12:11	Link partner interleave request	12 11 0 0: L=1, no interleaving, default for 2.5GBASE-T1 0 1: L=2, RS-FEC interleaving factor two, default for 5GBASE-T1, undefined for 2.5GBASE-T1 1 0: L=4, RS-FEC interleaving factor four, default for 10GBASE-T1, undefined for 2.5GBASE-T1 and 5GBASE-T1 1 1: Reserved	RO
1.2312.10:5	Reserved	Value always 0	RO
1.2312.4	Link partner Slow Wake requested	1 = Alert window start is only immediate frame after refresh 0 = Alert window start is every 8th RS frame after refresh	RO
1.2312.3:2	Link partner precoder requested	3 2 0 0 = no precoder requested 0 1 = 1–D precoder requested 1 0 = 1+D precoder requested 1 1 = 1–D ² precoder requested	RO

Table 45–155d—MultiGBASE-T1 link partner training register bit definitions (continued)

Bit(s)	Name	Description	R/W ^a
1.2312.1	Link partner MultiGBASE-T1 OAM advertisement	1 = Link partner has MultiGBASE-T1 OAM ability 0 = Link partner does not have MultiGBASE-T1 OAM ability	RO
1.2312.0	Link partner EEE advertisement	1 = Link partner has EEE ability 0 = Link partner does not have EEE ability	RO

^aRO = Read only

45.2.1.195.1 Link partner interleave request (1.2312.12:11)

Bits 1.2312.12:11 contain the Reed-Solomon interleave setting requested by the link partner. Reed-Solomon interleaving is described in 149.3.2.2.15. This is communicated by the link partner via Infofields as specified in 149.4.2.4.5.

The values of $L = 2$ and $L = 4$ are not defined for 2.5GBASE-T1 PHYs, and the value of $L = 4$ is not defined for 5GBASE-T1 PHYs. Bits 1.2312.12:11 will indicate whatever value is received from the link partner, but if the undefined values are received, the requested interleaver depth is out of scope of this standard and may not be supported by the local PHY.

45.2.1.195.2 Link partner Slow Wake requested (1.2312.4)

Bit 1.2312.4 contains the Slow Wake setting received from the link partner. When set as a one, the link partner may only transmit alert immediately following refresh. When set as a zero, the link partner may only transmit an alert at any eighth RS-FEC frame after a refresh.

45.2.1.195.3 Link partner precoder requested (1.2312.3:2)

Bits 1.2312.3:2 contain the precoder setting requested by the link partner. The precoder requested is encoded as the value of `precoder_type` defined in 149.3.2.2.20.

45.2.1.195.4 Link partner MultiGBASE-T1 OAM advertisement (1.2312.1)

When read as a one, bit 1.2312.1 indicates the link partner is advertising MultiGBASE-T1 OAM capability. When read as a zero, bit 1.2312.1 indicates the link partner is not advertising MultiGBASE-T1 OAM capability. MultiGBASE-T1 OAM capability shall be enabled only when both the local PHY and its link partner are advertising MultiGBASE-T1 OAM capability.

45.2.1.195.5 Link partner EEE advertisement (1.2312.0)

When read as a one, bit 1.2312.0 indicates the link partner is advertising EEE capability. When read as a zero, bit 1.2312.0 indicates the link partner is not advertising EEE capability. EEE capability shall be enabled only when both the local PHY and its link partner are advertising EEE capability.

45.2.1.196 MultiGBASE-T1 test mode control register (1.2313)

The assignment of bits in the MultiGBASE-T1 test mode control register is shown in Table 45–155e. The default values for each bit are chosen so that the initial state of the device upon power up or reset is a normal operational state without management intervention.

Table 45–155e—MultiGBASE-T1 test mode control register bit definitions

Bit(s)	Name	Description	R/W ^a
1.2313.15:13	Test mode control	15 14 13 1 1 1 = Test mode 7 1 1 0 = Test mode 6 1 0 1 = Test mode 5 1 0 0 = Test mode 4 0 1 1 = Test mode 3 0 1 0 = Test mode 2 0 0 1 = Test mode 1 0 0 0 = Normal (non-test) operation	R/W
1.2313.12	Reserved	Value always 0	RO
1.2313.11	Local transmitter precoder override	0 = Normal operation 1 = User override	R/W
1.2313.10:9	Local transmit precoder setting	10 9 0 0 = transmit with no precoder 0 1 = transmit with 1–D precoder 1 0 = transmit with 1+D precoder 1 1 = transmit with 1–D ² precoder	R/W
1.2313.8:2	Reserved	Value always 0	RO
1.2313.1:0	Jitter test control	1 0 0 0 = Square wave 0 1 = JP03A Pattern 1 0 = JP03B Pattern 1 1 = Reserved	R/W

^aRO = Read only, R/W = Read/Write

45.2.1.196.1 Test mode control (1.2313.15:13)

Transmitter test mode operations defined by bits 1.2313.15:13, are described in 149.5.1 and Table 149–17. The default value for bits 1.2313.15:13 is zero.

45.2.1.196.2 Local transmitter precoder override (1.2313.11)

When bit 1.2313.11 is set to one, the local transmitter's precoder shall be controlled by the value of bits 1.2313.10:9, and the precoder requested by the link partner in PrecoderSel shall be ignored. When bit 1.2313.11 is set to zero, the transmitter shall ignore bits 1.2313.10:9, and the precoder is set according to the value of PrecoderSel received from the link partner as specified in 149.3.2.2.20. The default value of 1.2313.11 is zero.

45.2.1.196.3 Local transmit precoder setting (1.2313.10:9)

When bit 1.2313.11 is set to one, bits 1.2313.10:9 control the precoder setting of the local transmitter, as defined in 149.3.2.2.20 in the variable precoder_type.

45.2.1.196.4 Jitter test control (1.2313.1:0)

When the transmitter is in test mode 2, bits 1.2313.1:0 control the pattern of the jitter test signal. When the transmitter is not in test mode 2, the setting of bits 1.2313.1:0 has no effect. A value of 00 transmits a square

wave from the transmitter, a value of 01 transmits the JP03A pattern, and a value of 10 transmits the JP03B pattern. See 149.5.2.3.1 and 149.5.2.3.2 for more information.

45.2.1.197 MultiGBASE-T1 SNR operating margin register (Register 1.2314)

Register 1.2314 contains the current SNR operating margin measured at the slicer input for the PMAs in the MultiGBASE-T1 set. It is reported with 0.1 dB of resolution to an accuracy of 0.5 dB within the range of –12.7 dB to 12.7 dB. The number is in offset binary notation, with 0.0 dB represented by 0x80, 12.7 dB represented by 0xFF, and –12.7 dB represented by 0x01. Implementation of this register is optional.

The assignment of bits in the MultiGBASE-T1 SNR operating margin register is shown in Table 45–155f.

Table 45–155f—MultiGBASE-T1 SNR operating margin register bit definitions

Bit(s)	Name	Description	R/W ^a
1.2314.15:8	MultiGBASE-T1 SNR operating margin	Value of current SNR operating margin in dB	RO
1.2314.7:0	Reserved	Value always 0	RO

^aRO = Read only

45.2.1.198 MultiGBASE-T1 minimum SNR margin register (Register 1.2315)

Register 1.2315 contains a latched copy of the lowest value observed in the MultiGBASE-T1 SNR operating margin register (1.2314) since the last read. It is reported with 0.1 dB of resolution to an accuracy of 0.5 dB within the range of –12.7 dB to 12.7 dB. The number is in offset binary notation, with 0.0 dB represented by 0x80, 12.7 dB represented by 0xFF, and –12.7 dB represented by 0x01. Implementation of this register is optional.

The assignment of bits in the MultiGBASE-T1 minimum SNR margin register is shown in Table 45–155g.

Table 45–155g—MultiGBASE-T1 minimum SNR margin register bit definitions

Bit(s)	Name	Description	R/W ^a
1.2315.15:8	MultiGBASE-T1 minimum SNR margin	Value of minimum observed SNR margin in dB	RO
1.2315.7:0	Reserved	Value always 0	RO

^aRO = Read only

45.2.1.199 MultiGBASE-T1 user defined data (Register 1.2316)

The assignment of bits for the MultiGBASE-T1 user defined data register is shown in Table 45–155h. The values of the bits in this register are outside the scope of this standard.

Table 45–155h—MultiGBASE-T1 user defined data register bit definitions

Bit(s)	Name	Description	R/W ^a
1.2316.15:0	MultiGBASE-T1 user defined data	16 bits of vendor specific data that the PHY sends to its link partner	R/W

^aR/W = Read/Write

45.2.1.199.1 MultiGBASE-T1 user defined data (1.2316.15:0)

Bits 1.2316.15:0 contain vendor specific data that the PHY may communicate to its link partner during training.

45.2.1.200 MultiGBASE-T1 link partner user defined data register (Register 1.2317)

The assignment of bits for the MultiGBASE-T1 link partner user defined data register is shown in 45–155i. The values of the bits in this register are outside the scope of this standard.

Table 45–155i—MultiGBASE-T1 link partner user defined data register bit definitions

Bit(s)	Name	Description	R/W ^a
1.2317.15:0	MultiGBASE-T1 link partner user defined data	16 bits of vendor specific data that the PHY may receive from its link partner	RO

^aRO = Read only

45.2.1.200.1 MultiGBASE-T1 link partner user defined data register (1.2317.15:0)

Bits 1.2317.15:0 contain vendor specific data that the PHY may receive from its link partner during training.

45.2.3 PCS registers

Change the rows for registers 3.2308 through 3.2317, insert new rows for registers 1.2318 to 1.2324 after row for register 1.2317 and change the appropriate reserved row in Table 45–176 as follows (unchanged rows not shown):

Table 45–176—PCS registers

Register address	Register name	Subclause
...		
3.2308	BASE-T1 OAM transmit	45.2.3.72
3.2309 through 3.2312	BASE-T1 OAM message	45.2.3.73
3.2313	BASE-T1 OAM receive	45.2.3.74
3.2314 through 3.2317	Link partner BASE-T1 OAM message	45.2.3.75
3.2318 through 3.2319	MultiGBASE-T1 OAM status message	45.2.3.76
3.2320 through 3.2321	Link partner MultiGBASE-T1 OAM status message	45.2.3.77
3.2322	MultiGBASE-T1 PCS control	45.2.3.78
3.2323	MultiGBASE-T1 PCS status 1	45.2.3.79
3.2324	MultiGBASE-T1 PCS status 2	45.2.3.80
3.2325 through 3.2326	Reserved	
...		

Change the titles, text, and tables in 45.2.3.72 through 45.2.3.75 as follows:

45.2.3.72 BASE-T1 OAM transmit register (Register 3.2308)

The assignment of bits in the BASE-T1 OAM transmit register is shown in Table 45–241.

Table 45–241—BASE-T1 OAM transmit register bit definitions

Bit(s)	Name	Description	R/W ^a
3.2308.15	BASE-T1 OAM message valid	This bit is used to indicate message data in registers 3.2308.11:8, 3.2309, 3.2310, 3.2311, and 3.2312 are valid and ready to be loaded. This bit shall self-clear when registers are loaded by the OAM transmit state machine. 1 = Message data in registers are valid 0 = Message data in registers are not valid	R/W, SC
3.2308.14	Toggle value	Toggle value to be transmitted with message. This bit is set by the state machine and cannot be overridden by the user.	RO
3.2308.13	BASE-T1 OAM message received	This bit shall self clear on read. 1 = BASE-T1 OAM message received by link partner 0 = BASE-T1 OAM message not received by link partner	RO, LH

Table 45–241—~~4000~~BASE-T1 OAM transmit register bit definitions (*continued*)

Bit(s)	Name	Description	R/W ^a
3.2308.12	Received message toggle value	Toggle value of message that was received by link partner as indicated in 3.2308.13.	RO
3.2308.11:8	Message number	User-defined message number to send	R/W
3.2308.7:4	Reserved	Value always 0	RO
3.2308.3	Ping received	Received PingTx value from latest good ~~4000~~ BASE-T1 OAM frame received	RO
3.2308.2	Ping transmit	Ping value to send to link partner	R/W
3.2308.1:0	Local SNR	00 = PHY link is failing and will drop link and relink within 2 ms to 4 ms after the end of the current ~~4000~~ BASE-T1 OAM frame. 01 = LPI refresh is insufficient to maintain PHY SNR. Request link partner to exit LPI and send idles (used only when EEE is enabled). 10 = PHY SNR is marginal. 11 = PHY SNR is good.	RO

^aRO = Read only, R/W = Read/Write, LH = Latching High, SC = Self-clearing

45.2.3.72.1 ~~4000~~BASE-T1 OAM message valid (3.2308.15)

Bit 3.2308.15 shall be set to one when the ~~4000~~BASE-T1 OAM message to be transmitted in registers 3.2309, 3.2310, 3.2311, and 3.2312 and the message number in 3.2308.11:8 are properly configured to be transmitted. ~~This register shall be cleared by the state machine~~ Bit 3.2308.15 self-clears to indicate whether the next ~~4000~~BASE-T1 OAM message can be written into the registers.

45.2.3.72.2 Toggle value (3.2308.14)

The state machine shall assign a value alternating between zero and one to associate with the ~~8-octet~~ 8-octet ~~4000~~BASE-T1 OAM message transmitted by the ~~4000~~BASE-T1-PHY. Bit 3.2308.14 should be read and recorded prior to setting 3.2308.15 to one. The recorded value can be correlated with 3.2308.12 as a confirmation that the ~~4000~~BASE-T1 OAM message is received by the link partner.

45.2.3.72.3 ~~4000~~BASE-T1 OAM message received (3.2308.13)

Bit 3.2308.13 shall indicate whether the most recently transmitted ~~4000~~BASE-T1 OAM message with a toggle bit value in 3.2308.12 was received, read, and acknowledged by the link partner. This variable shall clear on read.

45.2.3.72.4 Received message toggle value (3.2308.12)

Bit 3.2308.12 indicates the toggle bit value of the ~~4000~~BASE-T1 OAM message that was received, read, and most recently acknowledged by the link partner. This bit is valid only if 3.2308.13 is one.

45.2.3.72.5 Message number (3.2308.11:8)

Bits 3.2308.11:8 contain the ~~4000~~BASE-T1 OAM message number to be transmitted. This field is user defined but it is recommended that it be used to indicate the meaning of the ~~8-octet~~ 8-octet ~~4000~~BASE-T1

OAM message. If used this way, up to 16 different 8-octet messages can be exchanged. The message number is user defined and its definition is outside the scope of this standard.

45.2.3.72.6 Ping received (3.2308.3)

Bit 3.2308.3 represents the value of the most recent Ping RX received from the link partner (see 97.3.8.2.3).

45.2.3.72.7 Ping transmit (3.2308.2)

Bit 3.2308.2 represents the value to be sent to the link partner via the Ping TX function (see 97.3.8.2.4).

45.2.3.72.8 Local SNR (3.2308.1:0)

Bits 3.2308.1:0 are set by the ~~4000~~BASE-T1 PHY to indicate the status of the receiver. The definitions of good, marginal, when to request idles, and when to request retrain are implementation dependent.

45.2.3.73 ~~4000~~BASE-T1 OAM message register (Registers 3.2309 to 3.2312)

The ~~4000~~BASE-T1 OAM message register contains the 8-octet ~~4000~~BASE-T1 OAM message data to be transmitted. The 8-octet message data is user defined and its definition is outside the scope of this standard. See Table 45–242.

Table 45–242—~~4000~~BASE-T1 OAM message register bit definitions

Bit(s)	Name	Description	R/W ^a
3.2309.15:8	~~4000~~ BASE-T1 OAM message 1	Message octet 1. LSB transmitted first.	R/W
3.2309.7:0	~~4000~~ BASE-T1 OAM message 0	Message octet 0. LSB transmitted first.	R/W
3.2310.15:8	~~4000~~ BASE-T1 OAM message 3	Message octet 3. LSB transmitted first.	R/W
3.2310.7:0	~~4000~~ BASE-T1 OAM message 2	Message octet 2. LSB transmitted first.	R/W
3.2311.15:8	~~4000~~ BASE-T1 OAM message 5	Message octet 5. LSB transmitted first.	R/W
3.2311.7:0	~~4000~~ BASE-T1 OAM message 4	Message octet 4. LSB transmitted first.	R/W
3.2312.15:8	~~4000~~ BASE-T1 OAM message 7	Message octet 7. LSB transmitted first.	R/W
3.2312.7:0	~~4000~~ BASE-T1 OAM message 6	Message octet 6. LSB transmitted first.	R/W

^aR/W = Read/Write

45.2.3.74 ~~4000~~BASE-T1 OAM receive register (Register 3.2313)

The assignment of bits in the ~~4000~~BASE-T1 OAM receive register is shown in Table 45–243.

Table 45–243—~~4000~~BASE-T1 OAM receive register bit definitions

Bit(s)	Name	Description	R/W ^a
3.2313.15	Link partner ~~4000~~ BASE-T1 OAM message valid	This bit is used to indicate message data in registers 3.2313.11:8, 3.2314, 3.2315, 3.2316, and 3.2317 are stored and ready to be read. ~~This bit shall self-clear when register 3.2317 is read. See 45.2.3.74.1 for self-clearing behavior.~~ 1 = Message data in registers are valid 0 = Message data in registers are not valid	RO, SC
3.2313.14	Link partner toggle value	Toggle value received with message.	RO
3.2313.13:12	Reserved	Value always 0	RO
3.2313.11:8	Link partner message number	Message number from link partner	RO
3.2313.7:2	Reserved	Value always 0	RO
3.2313.1:0	Link partner SNR	00 = Link partner link is failing and will drop link and relink within 2 ms to 4 ms after the end of the current ~~4000~~ BASE-T1 OAM frame. 01 = LPI refresh is insufficient to maintain link partner SNR. Link partner requests local ~~device~~ PHY to exit LPI and send idles (used only when EEE is enabled). 10 = Link partner SNR is marginal. 11 = Link partner SNR is good.	RO

^aRO = Read only, SC = Self-clearing

45.2.3.74.1 Link partner ~~4000~~BASE-T1 OAM message valid (3.2313.15)

Bit 3.2313.15 shall be set to one when the ~~4000~~BASE-T1 OAM message from the link partner is stored into registers 3.2314, 3.2315, 3.2316, and 3.2317 and the message number in 3.2313.11:8. ~~This register shall be cleared~~ Bit 3.2313.15 shall self-clear when register 3.2317 is read.

45.2.3.74.2 Link partner toggle value (3.2313.14)

Bit 3.2313.14 indicates the toggle value associated with the ~~8-octet~~ 8-octet ~~4000~~BASE-T1 OAM message from the link partner.

45.2.3.74.3 Link partner message number (3.2313.11:8)

Bits 3.2313.11:8 contain the ~~4000~~BASE-T1 OAM message number from the link partner.

45.2.3.74.4 Link partner SNR (3.2313.1:0)

Bits 3.2313.1:0 indicate the status of the link partner receiver. The definitions of good, marginal, when to request idles, and when to request retrain are implementation dependent.

45.2.3.75 Link partner ~~1000~~BASE-T1 OAM message register (Registers 3.2314 to 3.2317)

The link partner ~~1000~~BASE-T1 OAM message register contains the ~~8-octet~~ 8-octet ~~1000~~BASE-T1 OAM message data from the link partner. ~~Register 3.2313-15 shall be cleared when register 3.2317 is read.~~ See Table 45–244.

Table 45–244—Link partner ~~1000~~BASE-T1 OAM message register bit definitions

Bit(s)	Name	Description	R/W ^a
3.2314.15:8	Link partner ~~1000~~ BASE-T1 OAM message 1	Message octet 1. LSB ~~transmitted~~ <u>received</u> first.	RO
3.2314.7:0	Link partner ~~1000~~ BASE-T1 OAM message 0	Message octet 0. LSB ~~transmitted~~ <u>received</u> first.	RO
3.2315.15:8	Link partner ~~1000~~ BASE-T1 OAM message 3	Message octet 3. LSB ~~transmitted~~ <u>received</u> first.	RO
3.2315.7:0	Link partner ~~1000~~ BASE-T1 OAM message 2	Message octet 2. LSB ~~transmitted~~ <u>received</u> first.	RO
3.2316.15:8	Link partner ~~1000~~ BASE-T1 OAM message 5	Message octet 5. LSB ~~transmitted~~ <u>received</u> first.	RO
3.2316.7:0	Link partner ~~1000~~ BASE-T1 OAM message 4	Message octet 4. LSB ~~transmitted~~ <u>received</u> first.	RO
3.2317.15:8	Link partner ~~1000~~ BASE-T1 OAM message 7	Message octet 7. LSB ~~transmitted~~ <u>received</u> first.	RO
3.2317.7:0	Link partner ~~1000~~ BASE-T1 OAM message 6	Message octet 6. LSB ~~transmitted~~ <u>received</u> first.	RO

^aRO = Read only

Insert 45.2.3.76 through 45.2.3.80 after 45.2.3.75 as follows:

45.2.3.76 MultiGBASE-T1 OAM status message register (Register 3.2318 and 3.2319)

The MultiGBASE-T1 OAM status message register contains octets 8 through 11 of the MultiGBASE-T1 OAM message data to be transmitted. See 149.3.9.2.12 for details on the OAM status message definition. See Table 45–244a.

Table 45–244a—MultiGBASE-T1 OAM status message register bit definitions

Bit(s)	Name	Description	R/W ^a
3.2318.15:8	MultiGBASE-T1 OAM status message 9	Message octet 9. LSB transmitted first.	R/W
3.2318.7:0	MultiGBASE-T1 OAM status message 8	Message octet 8. LSB transmitted first.	R/W
3.2319.15:8	MultiGBASE-T1 OAM status message 11	Message octet 11. LSB transmitted first.	R/W
3.2319.7:0	MultiGBASE-T1 OAM status message 10	Message octet 10. LSB transmitted first.	R/W

^aR/W = Read/Write

45.2.3.77 Link partner MultiGBASE-T1 OAM status message register (Register 3.2320 and 3.2321)

The link partner MultiGBASE-T1 OAM status message register contains octets 8 through 11 of the MultiGBASE-T1 OAM message data from the link partner. See 149.3.9.2.12 for details on the OAM status message definition. See Table 45–244b.

Table 45–244b—Link partner MultiGBASE-T1 OAM status message register bit definitions

Bit(s)	Name	Description	R/W ^a
3.2320.15:8	Link partner MultiGBASE-T1 OAM status message 9	Message octet 9. LSB received first.	RO
3.2320.7:0	Link partner MultiGBASE-T1 OAM status message 8	Message octet 8. LSB received first.	RO
3.2321.15:8	Link partner MultiGBASE-T1 OAM status message 11	Message octet 11. LSB received first.	RO
3.2321.7:0	Link partner MultiGBASE-T1 OAM status message 10	Message octet 10. LSB received first.	RO

^aRO = Read only

45.2.3.78 MultiGBASE-T1 PCS control register (Register 3.2322)

The assignment of bits in the MultiGBASE-T1 PCS control register is shown in Table 45–244c. The default value for each bit of the MultiGBASE-T1 PCS control register is chosen so that the initial state of the device upon power up or reset is a normal operational state without management intervention.

Table 45–244c—MultiGBASE-T1 PCS control register bit definitions

Bit(s)	Name	Description	R/W ^a
3.2322.15	PCS reset	1 = PCS reset 0 = Normal operation	R/W, SC
3.2322.14	Loopback	1 = Enable loopback mode 0 = Disable loopback mode	R/W
3.2322.13:0	Reserved	Value always 0	RO

^aRO = Read only, R/W = Read/Write, SC = Self-clearing

45.2.3.78.1 PCS reset (3.2322.15)

Resetting the MultiGBASE-T1 PCS is accomplished by setting bit 3.2322.15 to a one. This action shall set all MultiGBASE-T1 PCS registers to their default states. As a consequence, this action may change the internal state of the MultiGBASE-T1 PCS and the state of the physical link. This action may also initiate a reset in any other MMDs that are instantiated in the same package. Bit 3.2322.15 is self-clearing, and the MultiGBASE-T1 PCS shall return a value of one in bit 3.2322.15 when a reset is in progress; otherwise, it shall return a value of zero. The MultiGBASE-T1 PCS is not required to accept a write transaction to any of its registers until the reset process is completed. The control and management interface shall be restored to