

INTERNATIONAL STANDARD

ISO
10483-2

First edition
1996-02-01

Road vehicles — Intelligent power switches —

Part 2:

Low-side intelligent power switch

*Véhicules routiers — Sectionneurs de puissance intelligents —
Partie 2: Sectionneur de puissance intelligent en version d'aval*



Reference number
ISO 10483-2:1996(E)
AVA Documents
Document Sharing Hub

Contents

	Page
1 Scope	1
2 Normative references	1
3 Definitions	1
4 Functioning	3
5 Electrical specifications	6
6 Test methods	10

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 10483-2 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 3, *Electrical and electronic equipment*.

ISO 10483 consists of the following parts, under the general title *Road vehicles — Intelligent power switches*:

- *Part 1: High-side intelligent power switch*
- *Part 2: Low-side intelligent power switch*

Road vehicles — Intelligent power switches —

Part 2:

Low-side intelligent power switch

1 Scope

This part of ISO 10483 specifies the minimum requirements for 12 V and 24 V body system low-side intelligent power switches (LSIPS). These switches are intended primarily for automotive applications (for example, lamps, motors, relays, etc.).

The numerical values in parentheses refer to 24 V nominal vehicle supply voltage systems.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 10483. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 10483 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 7637-1:1990, *Road vehicles — Electrical disturbance by conduction and coupling — Part 1: Passenger cars and light commercial vehicles with nominal 12 V supply voltage — Electrical transient conduction along supply lines only.*

ISO 7637-2:1990, *Road vehicles — Electrical disturbance by conduction and coupling — Part 2: Commercial vehicles with nominal 24 V supply voltage — Electrical transient conduction along supply lines only.*

ISO 10483-1:1993, *Road vehicles — Intelligent power switches — Part 1: High-side intelligent power switch.*

3 Definitions

For the purposes of this part of ISO 10483, the following definitions apply.

3.1 intelligent power switch (IPS): Single solid-state on/off switch with

- self-protection;
- functional status information;
- positive logic level input.

3.2 low-side intelligent power switch (LSIPS): Single solid-state on/off switch where the switching part of the IPS is between ground and the load, and with

- self protection and automatic recovery;
- functional status information;
- positive logic level input.

3.2.1 battery-connected LSIPS (LSIPS-B): LSIPS where the control supply pin is connected to the load supply.

3.2.2 regulated control supply LSIPS (LSIPS-R): LSIPS where the control supply pin is connected to a separate control supply.

3.3 control supply voltage, V_{cs} : Voltage which supplies the control part of the LSIPS.

3.4 nominal current, I_{nom} : Current which produces a voltage drop of 0,5 V (0,5 V) across the load pin and the ground pin, at 85 °C case temperature and at a load supply voltage of 13 V (26 V).

NOTE 1 The nominal current is defined only for a consistent comparison between devices from different sources. In use the voltage drop will depend on the application.

3.5 maximum continuous current, I_{max} : Maximum current which does not activate self-protection at 85 °C case temperature, a load supply voltage of 13 V (26 V) and at the nominal voltage of the control supply.

3.6 maximum control current, I_{CM} : Maximum control current over the full range of temperature and voltage, and at maximum continuous current, I_{max} .

3.7 overcurrent, I_{ov} : Minimum value of load current which causes the LSIPS to change from its normal function to a current-limited mode of operation.

3.8 on resistance, R_{on} : Resistance of the device at nominal current conditions.

3.9 maximum continuous voltage, V_{MC} : Maximum continuous supply voltage at the load pin which does not destroy the switch over the total range of temperature in free air conditions [ISO 10483-1:1993, definition 3.3] with the input pin grounded, and over the total range of control supply voltage.

3.10 control breakdown voltage, V_{CBR} : Maximum continuous control supply voltage which does not destroy the switch over the total range of temperature in free air conditions and in an input and load condition.

3.11 supply quiescent current, I_{sq} : Total supply current (to the ground pin) when the load is short-circuited, the status output is an open circuit and the input is grounded.

3.12 open load condition: Condition when the load current is less than the threshold current, I_{ol} , which is between 10 % of the nominal current and 5 mA.

3.13 overload condition: Condition when the switch is in a self-protected state.

3.14 thermal protection: Ability of the LSIPS to protect itself against over-temperature by switching off the load current.

3.15 inductive load at nominal current, L_{nom} : Maximum inductance in series with a nominal resistance specified in 6.1.2 which can be driven without a freewheel diode.

3.16 inductive load at maximum current, L_{max} : Maximum inductance in series with the minimum resistance specified in 6.1.2 which can be driven without a freewheel diode.

3.17 propagation delay time for the open load, t_{pol} : Time between the falling edge of the input signal and rising edge of the status signal in the case of a permanent open load.

3.18 propagation delay time for overload, t_{povi} : Time between the falling edge of the input signal and rising edge of the status signal in the case of an overload.

3.19 nominal load pin clamping voltage, V_{ncv} : Voltage measured at the load pin after switching off its nominal current, I_{nom} , in an inductive load, defined in 3.15.

3.20 load pin clamping threshold voltage, V_{thcv} : Load pin voltage at which the LSIPS sinks 1 % of the nominal current or 5 mA, whichever is greater.

4 Functioning

4.1 Overview

The LSIPS has two main functions:

- a) the switching function;
- b) the overcurrent protection of the switch and an indication with a single status bit information of the state of the load and of the switch.

The switch may internally clamp over voltages resulting from switching of an inductive load. Clamp capabilities shall be specified by semiconductor manufacturers.

A LSIPS is a five-pin component as shown in figure 1 a) and 1 b).

4.1.1 Battery connected control supply LSIPS-B

See figure 1 a).

4.1.2 Regulated control supply LSIPS-R

See figure 1 b).

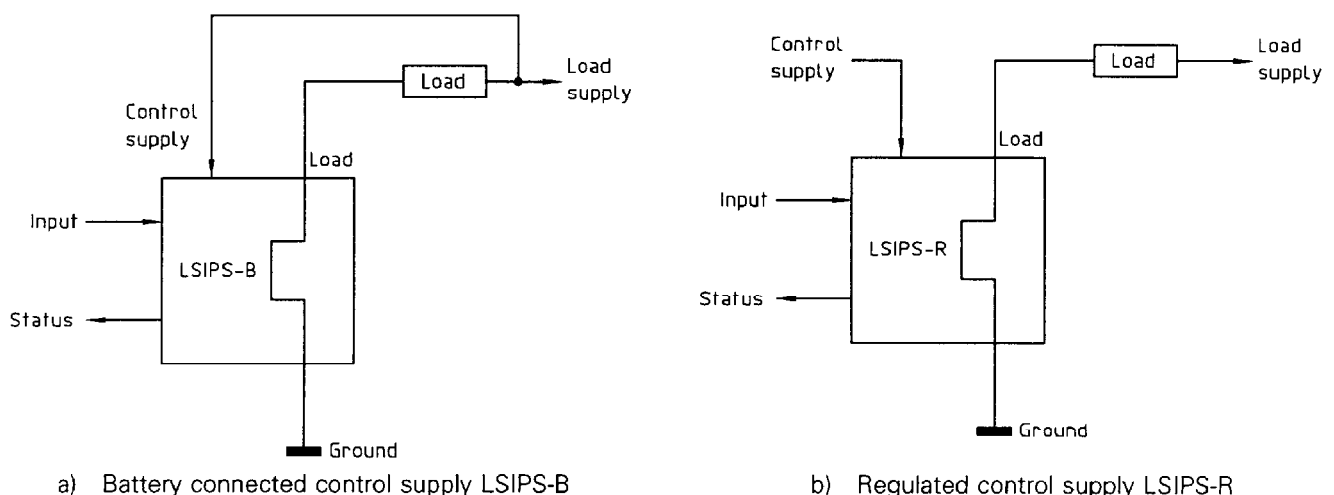


Figure 1 — Control supply

4.2 Input functionality

A logic level "0" on the input ensures that the switch is in the off state, except during clamping, and a logic level "1" on the input ensures that the switch is in the on state, except in overload conditions. When the input is not connected, the switch shall be in the off state.

4.3 Status functionality

4.3.1 General requirements

When the input is at the logic level "1", the status bit indicates with a logic level "0":

- open circuit of the load;
- overload.

Otherwise the status bit is at logic level "1".

A logic level "1" of the status output corresponds to a high impedance between status output and ground, and a logic level "0" of the status output corresponds to a low impedance between status output and ground.

4.3.2 Status strategy

4.3.2.1 Open load condition

The open load condition is indicated by a logic "0" on the status pin if the open load condition is present for a time exceeding t_1 ($1\text{ ms} < t_1 < 10\text{ ms}$). (See 4.3.3.)

The status signal will return to logic "1" if the open load condition disappears for a time exceeding t_1 .

4.3.2.2 Overload condition

An overload condition is indicated by a logic "0" on the status pin as soon as the LSIPS is in a self-protected state.

4.3.2.3 Discrimination between overload and open load

4.3.2.3.1 With external components

With external components it is possible to use the output of the status pin in conjunction with other information to differentiate between open load and overload.

In this case t_{pol} and t_{povl} are of the same order of magnitude.


4.3.2.3.2 Internally

If a feature is implemented within the device in order to distinguish between overload and open load, it should be by means of an increase of t_{pol} .


In this case t_{pol} shall exceed t_{povl} .

4.3.3 Description of status information

See figure 2.

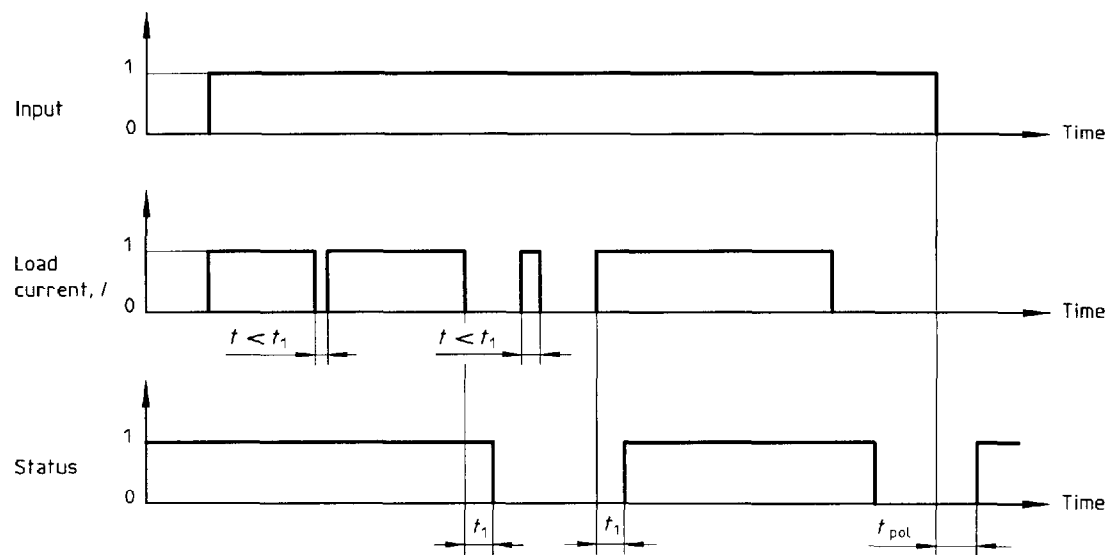

a) Open load

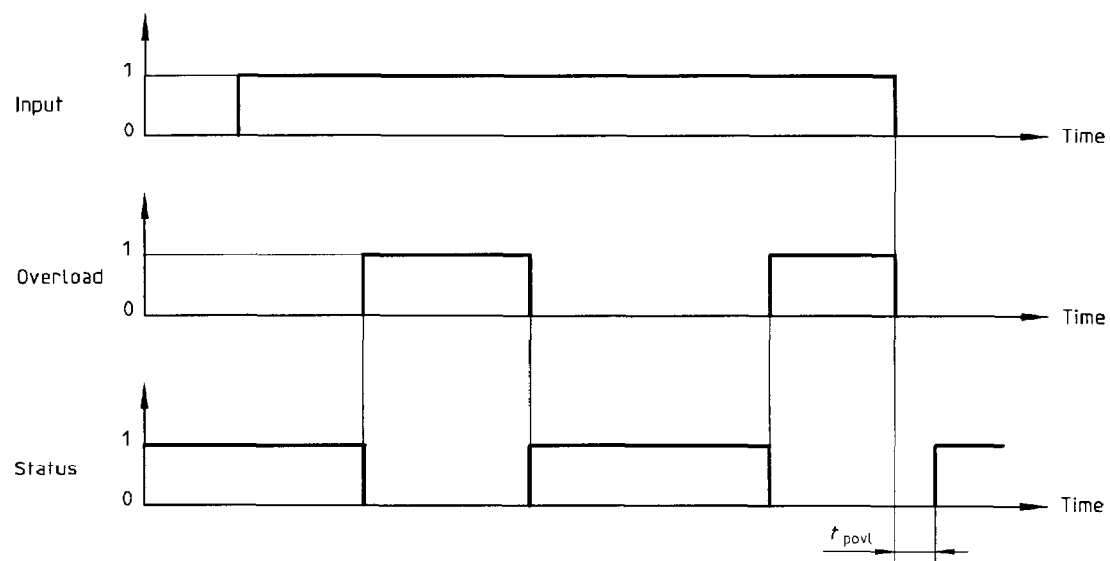

b) Overload

Figure 2 — Status information

4.4 Overcurrent

The overcurrent is the current level where a protection of the LSIPS by current limitation is activated in the switch.

The current depends on the load and for that reason the graph in figure 3 defines this value as a function of the type of load, where the overcurrent is in the unshaded part of the curve.

EXAMPLES

- For a lamp requiring a 6 A LSIPS, the minimum current limitation shall exceed 30 A for response time problem ($k = 5$).
- For a d.c. motor requiring a 20 A LSIPS, the minimum current limitation shall exceed 40 A to ensure surge response ($k = 2$).

An implication of the concept of overcurrent is that, when the device is switching the load models defined in 5.3, the output will not operate in a chopping mode, and the status pin will not indicate an overload.

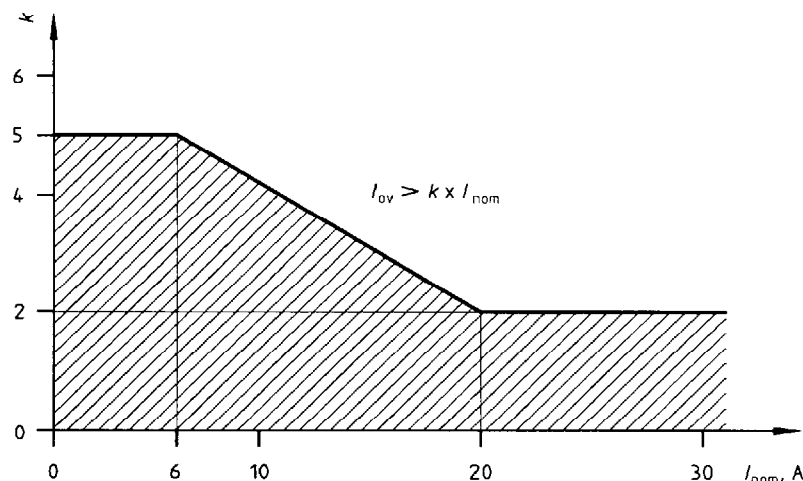


Figure 3 — Overcurrent

4.5 Failure mode

In the case of disconnection of the load supply pin, or the input pin, the device shall turn off.

In the case of disconnection of the ground pin, the semiconductor manufacturer shall specify the behaviour of the LSIPS.

5 Electrical specifications

5.1 Supply voltage range

5.1.1 For LSIPS-B

See table 1.