

# INTERNATIONAL STANDARD

**ISO/IEC  
8802-5**

**IEEE  
Std 802.5**

First edition  
1992-06-12

---

---

## **Information technology — Local and metropolitan area networks —**

### **Part 5: Token ring access method and physical layer specifications**

*Technologies de l'information — Réseaux locaux et urbains —*

*Partie 5: Méthode d'accès par anneau à jeton et spécifications pour la couche  
physique*



Reference number  
ISO/IEC 8802-5 : 1992 (E)  
IEEE Std 802.5-1992



Document Sharing Hub

The Institute of Electrical and Electronics Engineers, Inc.  
345 East 47th Street, New York, NY 10017-2394, USA

© 1992 by the Institute of Electrical and Electronics Engineers, Inc.  
All rights reserved. Published in 1992  
Printed in the United States of America

ISBN 1-55937-205-2

*No part of this publication may be reproduced in any form,  
in an electronic retrieval system or otherwise,  
without the prior written permission of the publisher.*

June 12, 1992

SH15131

International Standard ISO/IEC 8802-5 : 1992  
IEEE Std 802.5-1992

(Revision of ANSI/IEEE Std 802.5-1989)

# Information technology— Local and metropolitan area networks—

## Part 5: Token ring access method and physical layer specifications

Sponsor

Technical Committee on Computer Communications  
of the  
IEEE Computer Society

Approved March 19, 1992

IEEE Standards Board

**Abstract:** This Local and Metropolitan Area Network standard, ISO/IEC 8802-5 : 1992, is part of a family of local area network (LAN) standards dealing with the physical and data link layers as defined by the ISO Open System Interconnection Reference Model. Its purpose is to provide compatible interconnection of data processing equipment by means of a local area network using the token-passing ring access method. The frame format, including delimiters, addressing, and frame-check sequence, are defined, and medium access control (MAC) frames, timers, and priority stacks are defined. The MAC protocol is defined. The finite-state machine and state tables are supplemented with a prose description of the algorithms. The physical layer (PHY) functions of symbol encoding and decoding, symbol time, and latency buffering are defined. The services provided by the MAC to the station management (SMT) and the services provided by the PHY to SMT and the MAC are described. These services are defined in terms of service primitives and associated parameters. The 4 and 16 Mb/s, shielded twisted pair attachment of the station to the medium, including the medium interface connector (MIC) are also defined. The applications environment for the LAN is intended to be commercial and light industrial. The use of token ring LANs in home and heavy industrial environments, while not precluded, has not been considered in the development of the standard. A Protocol Implementation Conformance Statement (PICS) proforma is provided as an annex to the standard.

**Keywords:** data processing interconnection, local area network (LAN), medium access control (MAC), token ring



Adopted as an International Standard by the  
International Organization for Standardization  
and by the  
International Electrotechnical Commission



Published by  
The Institute of Electrical and Electronics Engineers, Inc.

## International Standard ISO/IEC 8802-5 : 1992

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75% of the national bodies casting a vote.

In 1985, ANSI/IEEE Std 802.5-1985 was adopted by ISO Technical Committee 97, *Information processing systems*, as draft International Standard ISO/DIS 8802-5. A further revision was subsequently approved by ISO/IEC JTC 1 in the form of this new edition, which is published as International Standard ISO/IEC 8802-5 : 1992.

For the purpose of assigning global addresses, the Institute of Electrical and Electronics Engineers, Inc., USA, has been designated by the ISO Council as the Registration Authority. Communications on this subject should be addressed to

Registration Authority for ISO/IEC 8802-5  
c/o The Institute of Electrical and Electronics Engineers, Inc.  
445 Hoes Lane  
P.O. Box 1331  
Piscataway, NJ 08855-1331  
USA

During the preparation of this International Standard, information was gathered on patents upon which application of the standard might depend. Relevant patents were identified as belonging to Willemijn Holding BV. However, ISO cannot give authoritative or comprehensive information about evidence, validity or scope of patent and like rights. The patent-holder has stated that licences will be granted under reasonable terms and conditions and communications on this subject should be addressed to


Willemijn Holding BV  
Weena 723  
P.O. Box 29193  
3001 GD Rotterdam  
The Netherlands



International Organization for Standardization/International Electrotechnical Commission  
Case postale 56 • CH-1211 Genève 20 • Switzerland

## Foreword to International Standard ISO/IEC 8802-5 : 1992

This standard is part of a family of standards for Local and Metropolitan Area Networks. The relationship between this standard and the other members of the family is shown below. (The numbers in the figure refer to ISO standard numbers.)

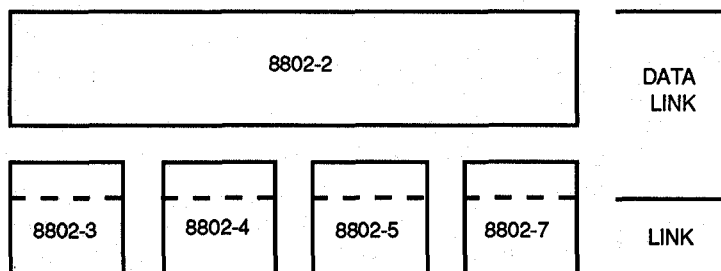

This family of standards deals with the physical and data link layers as defined by the ISO Open Systems Interconnection Basic Reference Model (ISO 7498 : 1984). The access standards define four types of medium access technologies and associated physical media, each appropriate for particular applications or system objectives. Other types are under investigation.

The standards defining these technologies are as follows:

- (1) ISO/IEC 8802-3 [ANSI/IEEE Std 802.3, 1992 Edition], a bus utilizing CSMA/CD as the access method,
- (2) ISO/IEC 8802-4 [ANSI/IEEE Std 802.4-1990], a bus utilizing token passing as the access method,
- (3) ISO/IEC 8802-5 [IEEE Std 802.5-1992], a ring utilizing token passing as the access method,
- (4) ISO 8802-7, a ring utilizing slotted ring as the access method.

ISO 8802-2 [ANSI/IEEE Std 802.2-1989], Logical Link Control protocol, is used in conjunction with the medium access standards.

The reader of this document is urged to become familiar with the complete family of standards.

## IEEE Std 802.5-1992

**IEEE Standards** documents are developed within the Technical Committees of the IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Board. Members of the committees serve voluntarily and without compensation. They are not necessarily members of the Institute. The standards developed within IEEE represent a consensus of the broad expertise on the subject within the Institute as well as those activities outside of IEEE which have expressed an interest in participating in the development of the standard.

Use of an IEEE Standard is wholly voluntary. The existence of an IEEE Standard does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the IEEE Standard. Furthermore, the viewpoint expressed at the time a standard is approved and issued is subject to change brought about through developments in the state of the art and comments received from users of the standard. Every IEEE Standard is subjected to review at least once every five years for revision or reaffirmation. When a document is more than five years old, and has not been reaffirmed, it is reasonable to conclude that its contents, although still of some value, do not wholly reflect the present state of the art. Users are cautioned to check to determine that they have the latest edition of any IEEE Standard.

Comments for revision of IEEE Standards are welcome from any interested party, regardless of membership affiliation with IEEE. Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments.

**Interpretations:** Occasionally questions may arise regarding the meaning of portions of standards as they relate to specific applications. When the need for interpretations is brought to the attention of IEEE, the Institute will initiate action to prepare appropriate responses. Since IEEE Standards represent a consensus of all concerned interests, it is important to ensure that any interpretation has also received the concurrence of a balance of interests. For this reason IEEE and the members of its technical committees are not able to provide an instant response to interpretation requests except in those cases where the matter has previously received formal consideration.

Comments on standards and requests for interpretations should be addressed to:


Secretary, IEEE Standards Board  
445 Hoes Lane, P.O. Box 1331  
Piscataway, NJ 08855-1331  
USA

|                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IEEE Standards documents are adopted by the Institute of Electrical and Electronics Engineers without regard to whether their adoption may involve patents on articles, materials, or processes. Such adoption does not assume any liability to any patent owner, nor does it assume any obligation whatever to parties adopting the standards documents. |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## Foreword to IEEE Std 802.5-1992

(This Foreword is not a part of this International Standard or of IEEE 802.5-1992.)

This standard is part of a family of standards for local and metropolitan area networks. The relationship between the standard and other members of the family is shown below. (The numbers in the figure refer to IEEE standard numbers.)

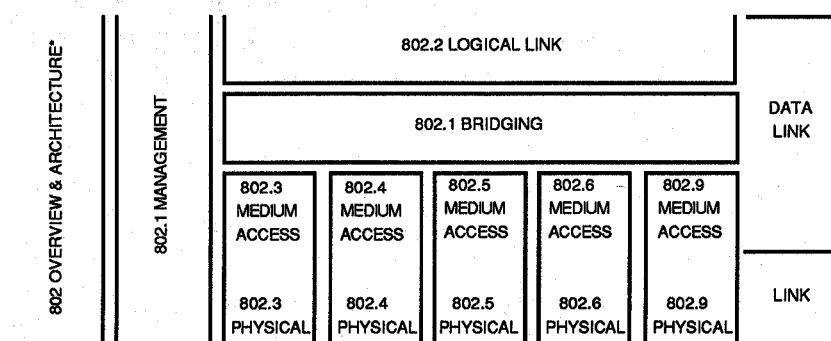

\* Formerly IEEE Std 802.1A.

This family of standards deals with the physical and data link layers as defined by the ISO Open Systems Interconnection Basic Reference Model (ISO 7498:1984). The access standards define several types of medium access technologies and associated physical media, each appropriate for particular applications or system objectives. Other types are under investigation.

The standards defining these technologies are as follows:

- IEEE Std 802<sup>†</sup> :

Overview and Architecture. This standard provides an overview to the family of IEEE 802 Standards. This document forms part of the 802.1 scope of work.

- IEEE Std 802.1D:

MAC Bridging. Specifies an architecture and protocol for the interconnection of IEEE 802 LANs below the MAC service boundary.

<sup>†</sup> The 802 Architecture and Overview Specification, originally known as IEEE Std 802.1A, has been renumbered as IEEE Std 802. This has been done to accommodate recognition of the base standard in a family of standards. References to IEEE Std 802.1A should be considered as references to IEEE Std 802.

- IEEE Std 802.1E: System Load Protocol. Specifies a set of services and protocol for those aspects of management concerned with the loading of systems on IEEE 802 LANs.
- ISO 8802-2 [ANSI/IEEE Std 802.2]: Logical Link Control
- ISO/IEC 8802-3 [ANSI/IEEE Std 802.3]: CSMA/CD Access Method and Physical Layer Specifications
- ISO/IEC 8802-4 [ANSI/IEEE Std 802.4]: Token Bus Access Method and Physical Layer Specifications
- ISO/IEC 8802-5 [IEEE Std 802.5]: Token Ring Access Method and Physical Layer Specifications
- IEEE Std 802.6: Metropolitan Area Network Access Method and Physical Layer Specifications

In addition to the family of standards are technical advisory groups as follows:

- IEEE Std 802.7: Broadband Technical Advisory and Physical Layer Topics and Recommended Practices
- P802.8: Fiber Optic Technical Advisory and Physical Layer Topics

The reader of this document is urged to become familiar with the complete family of standards.

### Conformance Test Methodology

A new standards series, identified by the number 1802, has been established to identify the conformance test methodology documents for the 802 family of standards. This makes the correspondence between the various 802 standards and their applicable conformance test requirements readily apparent. Thus the conformance test documents for 802.3 are numbered 1802.3, the conformance test documents for 802.5 will be 1802.5, and so on. Similarly, ISO will use 1802 to number conformance test standards for 8802 standards.

### ISO/IEC 8802-5 : 1992 (IEEE Std 802.5-1992)<sup>‡</sup>

This standard specifies that each octet of the information field shall be transmitted most significant bit (MSB) first. This convention is reversed from that used in the CSMA/CD and Token Bus standards, which are least significant bit (LSB) first transmission. While the transmission of MSB first is used for token ring, this does not imply that MSB transmission is preferable

<sup>‡</sup> This standard contains the following supplements: IEEE Std 802.5d-1992 (Interconnected Token Ring LANs) and IEEE Std 802.5g-1992 (Conformance Testing).

1802h

for any other local area network. Anyone considering interconnecting the token ring with other standard IEEE networks should keep in mind the need to perform bit reordering in the gateway between networks.

The following are now or have been voting members of the Token Ring Access Method Working Group (P802.5). Those individuals who have served as rapporteurs or editors are indicated by an asterisk next to their name:

**Robert A. Donnan, Chair**

H. Abramowicz  
Don Aelmore  
Charles Amann  
Steven C. Andersen  
A. Philip Arneth\*  
Floyd Backes  
Jarred J. Baker  
Rey Bautista  
Nicholas Beale\*  
Alan Beardsley\*  
Steve Belisle  
Daniel Boudreau  
Randall Blair  
Charles Brill  
Philip Brownlee  
Patrik Bulteel  
Dr. Werner Bux  
Robert R. Campbell  
Robert L. Carl  
Claude A. Cartee  
Hsin-Hwai Chen  
Ramon Co  
Michael H. Coden  
Thomas Coradetti  
Guy Crowles  
John DeCramer  
Rick Downs  
Hanooh Eldar  
Mohamed Elrefai  
Farzin Firoozmand  
Gunnar Forsberg  
Nathan Fritts  
Yoshihiko Fujii  
Ron W. Gibson  
Harry Gold\*  
Richard H. Gompertz  
Lisa Goulet  
Andrew Green  
Fred Greim  
Siegmar Gross  
Robert Grow  
Tom Gulick  
Lee C. Haas  
Nubuhiro Hamada  
Sharam Hakimi  
Floyd Halsey  
Charles F. Hanes\*  
Takeshi Harakawa  
James Harrer

Clarence C. Joh  
Arthur D. Jopling  
Dave Juhre  
Jiro Kashio  
Carrell Killebrew  
Lisa Kelley  
Bryan B. Kim  
Makoto Kuhno  
David M. Kollm  
Stan Kopec  
William F. Kous  
Robert Krebs  
Robert Krzyzanowski  
Eiji Kuje  
David Laffitte  
Bob Lapointe  
Katie D. Lee\*  
Choon Lee  
Laurie Lindsey  
Robert D. Love\*  
Carl Madison  
Alan C. Marshall\*  
Jeffrey V. Marshik\*  
Kelly P. McClellan  
Jerry McKamey  
John Melnick  
John Messenger\*  
Colin Mick  
Arthur Miller\*  
John E. Montague  
Steven Moustakas  
Bilal Murtaza  
Narayan Murthy  
Shigekatsu Nakao  
W. B. Neblett  
James Nelson  
Ollie Nilsson  
Andrew Norton  
Brian O'Connell  
Rasoul M. Oskouy  
Kathleen Otis  
Atul Pandya  
Guy Parker  
Dave Pearce  
Dave Pfahler  
Thanh Pham  
Jeffrey Pickering  
Richard Podgalsky  
Kirk Preiss\*

Claire Roden  
Bob Ross  
Floyd Ross  
Jacques A. Roth  
John Rovner\*  
Chris Roussel  
Don Roworth  
Mike Rubera  
Howard Rubin  
Said Saadeh  
Howard Salwen  
Haig A. Sarkissian  
Gordon Saussy  
W. L. Schumacker  
Tim Shafer  
Himanshu Shah  
David Sheehy  
Naoshi Shima  
Marc Shoquist  
W. S. Shung  
Somsubhra Sikdar  
Raymond Sit  
Bob Smith  
Robert Snyder  
Michael J. Sobieski  
Bob Southard  
Louis Stankaitas  
Leo Staschover  
Ed Sterling  
Tom Swarthout  
Richard Sweatt  
Andre Szczepanek  
D. T. W. Sze  
Hidenori Takahashi  
Tokio Takai  
Marco Tamilia  
Paul Tan  
V. Tarassov  
Lars Thernsjo  
Scott Thomas  
Nathan Tobol  
Jeff Tong  
Art Torino  
Akihisa Toyooka  
John Trites  
Paul A. Trudgett  
Bo Viklund  
John Q. Walker  
Chang-Jung Wang

Bryan Hatfield  
Carl G. Hayssen  
Tricia Hill  
J. Paul Hittel  
Tom Hogan  
Tetsuo Isayama  
Ben Wilson  
Peter Williams  
Izumi Y. Wilson  
Jacalyn Winkler\*

John Rance  
Ivan Reede  
Francis E. Retnasothie  
Everett O. Rigsbee III\*  
Andrew L. Ringwald\*  
Phil Robinson  
Albert Wong  
Howard D. Wright  
Kazuhiko Yamada

Frank Wang  
Ian Watson  
Kevin White  
R. O. Westlake  
Jim Weisert  
Kevin White  
Barzilai Yoram  
H. A. Zannini  
Marshall Zerbo  
Mo Zonoun

The following persons were on the balloting committee that approved IEEE Std 802.5-1992, IEEE Std 802.5d-1992 (Interconnected Token Ring LANs), and IEEE Std 802.5g-1992 (Conformance Testing) for submission to the IEEE Standards Board:

William B. Adams  
Don Aelmore  
Kit Athul  
Yong Myung Baeg  
Alan L. Bridges  
George Carson  
Brian J. Casey  
George C. Chachis  
Robert A. Ciampa  
Gerald W. Cichanowski  
Michael H. Coden  
Robert Crowder  
Robert Donnan  
Sourav Dutta  
John E. Emrich  
Philip H. Enslow  
Changxin Fan  
John W. Fendrich  
Harold C. Folts  
Harvey A. Freeman  
Patrick Gonia  
Abraham Grund  
Sandor V. Halasz  
Joseph L. Hammond  
Lee A. Hollaar  
Ivy P. Hsu

Paul L. Hutton  
Raj Jain  
Jack R. Johnson  
Reijo Juvonen  
Robert W. Klessig  
Jens Kolind  
Jon Kramp  
Michael Lawler  
Jai Yong Lee  
F. C. Lim  
Randolph S. Little  
Donald S. Little  
Eduardo G. Marmol  
William McDonald  
Richard H. Miller  
David S. Millman  
C. B. Madhar Mishra  
Wen Hsien Lim Moh  
John E. Montague  
Kinji Mori  
Gerald Moseley  
Charles E. Neblock  
Ruth Nelson  
Arne A. Nilsson  
Donal O'Mahony  
Charles Oestereicher  
Andreas Pfitzmann

Rafat Pirzada  
Urdo W. Pooch  
Thad L. D. Regulinski  
John P. Riganati  
Gary S. Robinson  
Philip T. Robinson  
Victor Rozentouler  
Norman Schneidewind  
Jeffrey R. Schwab  
Donald A. Sheppard  
David M. Siefert  
Robert K. Southard  
Benjamin J. Stoppe, Jr.  
Fred J. Strauss  
Efsthathios Sykas  
Steven R. Taylor  
Geoffrey O. Thompson  
Robert Tripi  
James T. Vorhies  
Donald F. Weir  
Raymond Wenig  
Michael Willett  
Paul A. Willis  
Jerry A. Wyatt  
Oren Yuen  
Stephen Zebrowski

When the IEEE Standards Board approved this standard on March 19, 1992, it had the following membership:

**Marco W. Migliaro, *Chair***

**Donald C. Loughry, *Vice Chair***

**Andrew G. Salem, *Secretary***

Dennis Bodson  
Paul L. Borrill  
Clyde Camp  
Donald C. Fleckenstein  
Jay Forster\*  
David F. Franklin  
Ramiro Garcia  
Thomas L. Hannan

Donald N. Heirman  
Ben C. Johnson  
Walter J. Karplus  
Ivor N. Knight  
Joseph L. Koepfinger\*  
Irving Kolodny  
D. N. "Jim" Logothetis  
Lawrence V. McCall

Donald T. Michael\*  
John L. Rankine  
Wallace S. Read  
Ronald H. Reimer  
Gary S. Robinson  
Martin V. Schneider  
Terrance R. Whittemore  
Donald W. Zipse

\*Member Emeritus

Also included are the following nonvoting IEEE Standards Board liaisons:

Satish K. Aggarwal  
James Beall  
Richard B. Engelman  
Stanley Warshaw

Paula M. Kelty  
*IEEE Standards Project Editor*

# Contents

| SECTION                                                       | PAGE |
|---------------------------------------------------------------|------|
| 1. General .....                                              | 15   |
| 1.1 Scope .....                                               | 15   |
| 1.2 Definitions .....                                         | 16   |
| 1.3 Abbreviations .....                                       | 19   |
| 1.4 References .....                                          | 21   |
| 1.5 Conformance Requirements .....                            | 22   |
| 1.5.1 Static Conformance Requirements .....                   | 22   |
| 1.5.2 Dynamic Conformance Requirements .....                  | 23   |
| 2. General Description .....                                  | 25   |
| 3. Formats and Facilities .....                               | 29   |
| 3.1 Formats .....                                             | 29   |
| 3.1.1 Token Format .....                                      | 29   |
| 3.1.2 Frame Format .....                                      | 29   |
| 3.1.3 Fill .....                                              | 30   |
| 3.2 Field Descriptions .....                                  | 30   |
| 3.2.1 Starting Delimiter (SD) .....                           | 30   |
| 3.2.2 Access Control (AC) .....                               | 30   |
| 3.2.3 Frame Control (FC) .....                                | 31   |
| 3.2.4 Destination and Source Address (DA and SA) Fields ..... | 32   |
| 3.2.5 Routing Information (RI) Field .....                    | 35   |
| 3.2.6 Information (INFO) Field .....                          | 35   |
| 3.2.7 Frame-Check Sequence (FCS) .....                        | 37   |
| 3.2.8 Ending Delimiter (ED) .....                             | 37   |
| 3.2.9 Frame Status (FS) .....                                 | 38   |
| 3.3 Medium Access Control (MAC) Frames .....                  | 38   |
| 3.3.1 Vector Description .....                                | 39   |
| 3.3.2 Subvector Descriptions .....                            | 41   |
| 3.3.3 Table of MAC Frames .....                               | 44   |
| 3.4 Timers .....                                              | 44   |
| 3.4.1 Timer, Return to Repeat (TRR) .....                     | 44   |
| 3.4.2 Timer, Holding Token (THT) .....                        | 44   |
| 3.4.3 Timer, Queue PDU (TQP) .....                            | 44   |
| 3.4.4 Timer, Valid Transmission (TVX) .....                   | 44   |
| 3.4.5 Timer, No Token (TNT) .....                             | 44   |
| 3.4.6 Timer, Active Monitor (TAM) .....                       | 45   |
| 3.4.7 Timer, Standby Monitor (TSM) .....                      | 45   |
| 3.4.8 Timer, Error Report (TER) .....                         | 45   |
| 3.4.9 Timer, BCN Transmit (TBT) .....                         | 45   |
| 3.4.10 Timer, BCN Receive (TBR) .....                         | 45   |
| 3.5 Flags .....                                               | 45   |
| 3.5.1 I Flag .....                                            | 45   |
| 3.5.2 SFS Flag .....                                          | 45   |

| SECTION                                            | PAGE |
|----------------------------------------------------|------|
| 3.5.3 MA Flag .....                                | 45   |
| 3.5.4 SMP Flag .....                               | 45   |
| 3.5.5 NN Flag .....                                | 45   |
| 3.5.6 BR Flag .....                                | 45   |
| 3.5.7 ETR Flag .....                               | 45   |
| 3.5.8 NOT_MA Flag .....                            | 48   |
| 3.6 Priority Registers and Stacks .....            | 48   |
| 3.6.1 Pr and Rr Registers .....                    | 48   |
| 3.6.2 Sr and Sx Stacks .....                       | 48   |
| 3.7 Latency Buffer .....                           | 48   |
| 3.8 Counters .....                                 | 48   |
| 3.8.1 Line Error .....                             | 48   |
| 3.8.2 Internal Error .....                         | 48   |
| 3.8.3 Burst Error .....                            | 48   |
| 3.8.4 AC Error .....                               | 48   |
| 3.8.5 Abort Delimiter Transmitted (AD_TRANS) ..... | 49   |
| 3.8.6 Lost Frame Error (LOST_FR) .....             | 49   |
| 3.8.7 Receive Congestion Error (RCV_CON) .....     | 49   |
| 3.8.8 Frame Copied Error (FR_COPIED) .....         | 49   |
| 3.8.9 Frequency Error (FREQ) .....                 | 49   |
| 3.8.10 Token Error .....                           | 49   |
| 3.8.11 Frame Count (FR_CNT) .....                  | 49   |
| 4. Token Ring Protocols .....                      | 51   |
| 4.1 Overview .....                                 | 51   |
| 4.1.1 Frame Transmission .....                     | 51   |
| 4.1.2 Token Transmission .....                     | 51   |
| 4.1.3 Stripping .....                              | 51   |
| 4.1.4 Frame Reception .....                        | 51   |
| 4.1.5 Priority Operation .....                     | 52   |
| 4.1.6 Beacons and Neighbor Notification .....      | 53   |
| 4.1.7 Error Reporting .....                        | 55   |
| 4.1.8 Administration of Ring Parameters .....      | 55   |
| 4.1.9 Configuration Control .....                  | 55   |
| 4.1.10 Early Token Release (ETR) .....             | 55   |
| 4.2 Specification .....                            | 55   |
| 4.2.1 Receive Actions .....                        | 56   |
| 4.2.2 Operational Finite-State Machine .....       | 58   |
| 4.2.3 Standby Monitor Finite-State Machine .....   | 62   |
| 4.2.4 Active Monitor Finite-State Machine .....    | 67   |
| 5. Physical Layer .....                            | 71   |
| 5.1 Symbol Encoding .....                          | 71   |
| 5.2 Symbol Decoding .....                          | 72   |
| 5.3 Data Signaling Rates .....                     | 73   |
| 5.4 Symbol Timing .....                            | 73   |

| SECTION                                                         | PAGE |
|-----------------------------------------------------------------|------|
| 5.5 Latency Buffer .....                                        | 73   |
| 5.5.1 Assured Minimum Latency .....                             | 73   |
| 5.5.2 Phase Jitter Compensation .....                           | 73   |
| 6. Service Specifications .....                                 | 75   |
| 6.1 MAC to LLC Service .....                                    | 75   |
| 6.2 PHY to MAC Service .....                                    | 75   |
| 6.2.1 Interactions .....                                        | 75   |
| 6.2.2 Detailed Service Specifications .....                     | 76   |
| 6.3 MAC to SMT Interaction .....                                | 77   |
| 6.3.1 Overview of MAC Interaction .....                         | 77   |
| 6.3.2 MAC Attributes .....                                      | 78   |
| 6.3.3 MAC Transients .....                                      | 80   |
| 6.4 PHY to SMT Interaction .....                                | 83   |
| 6.4.1 Overview of PHY Management Interaction .....              | 83   |
| 6.4.2 PHY Transients .....                                      | 83   |
| 7. Station Attachment Specifications .....                      | 85   |
| 7.1 Scope .....                                                 | 85   |
| 7.2 Overview .....                                              | 85   |
| 7.3 Coupling of the Station to the Ring .....                   | 86   |
| 7.4 Ring Access Control .....                                   | 86   |
| 7.4.1 Current and Voltage Limits .....                          | 86   |
| 7.4.2 Insertion/Bypass Transfer Timing .....                    | 88   |
| 7.5 Signal Characteristics .....                                | 88   |
| 7.5.1 The Transmitter .....                                     | 88   |
| 7.5.2 The Channel .....                                         | 89   |
| 7.5.3 The Receiver .....                                        | 90   |
| 7.5.4 Error Rate .....                                          | 92   |
| 7.6 Reliability .....                                           | 93   |
| 7.7 Safety Requirements .....                                   | 93   |
| 7.8 Electromagnetic Emanation .....                             | 93   |
| 7.9 Medium Interface Connector (MIC) .....                      | 94   |
| 7.9.1 Medium Interface Connector—Contactor Detail .....         | 94   |
| 7.9.2 Medium Interface Connector—Locking Mechanism Detail ..... | 94   |

| FIGURES AND TABLE                                                        | PAGE |
|--------------------------------------------------------------------------|------|
| Fig 2-1 Relation of OSI Reference Model to the LAN Model .....           | 25   |
| Fig 2-2 Token Ring Configuration .....                                   | 26   |
| Fig 2-3 Relationship of Data Stations, Servers, and System Manager ..... | 27   |
| Fig 3-1 MAC Frame Information Field Structure .....                      | 35   |
| Fig 4-1 An Example of a Failure Domain .....                             | 54   |
| Fig 4-2 Receive Action Table .....                                       | 57   |
| Fig 4-3 Operational Finite-State Machine .....                           | 59   |
| Fig 4-4 Repeat State Loop Table .....                                    | 60   |
| Fig 4-5 Standby Monitor Finite-State Machine .....                       | 64   |
| Fig 4-6 Standby State Transition Loop Table .....                        | 66   |
| Fig 4-7 Active Monitor Finite-State Machine .....                        | 68   |
| Fig 5-1 Example of Symbol Encoding .....                                 | 72   |
| Fig 7-1 Partitioning of PHY and Medium .....                             | 85   |
| Fig 7-2 Example of Station Connection to the Medium .....                | 87   |
| Fig 7-3 Receive Signal Eye Pattern .....                                 | 90   |
| Fig 7-4 Medium Interface Connector—Isometric View .....                  | 93   |
| Fig 7-5 Medium Interface Connector—Contact Detail .....                  | 95   |
| Fig 7-6 Medium Interface Connector—Locking Mechanism Detail .....        | 96   |
| Table 3-1 MAC Frames .....                                               | 46   |

| ANNEXES                                                 | PAGE |
|---------------------------------------------------------|------|
| Annex A - Address Structuring (Informative) .....       | 97   |
| Annex B - LLC Type 3 Support (Informative) .....        | 98   |
| Annex C - PICS Proforma (Normative) .....               | 99   |
| C1. Introduction .....                                  | 99   |
| C2. Abbreviations and Special Symbols .....             | 99   |
| C2.1 Status Symbols .....                               | 99   |
| C2.2 Abbreviations .....                                | 99   |
| C3. Instructions for Completing the PICS Proforma ..... | 100  |
| C3.1 General Structure for the PICS Proforma .....      | 100  |
| C3.2 Additional Information .....                       | 100  |
| C3.3 Exception Information .....                        | 101  |
| C3.4 Conditional Status .....                           | 101  |
| C4. Identification .....                                | 102  |
| C4.1 Implementation Identification .....                | 102  |
| C4.2 Protocol Summary .....                             | 102  |
| C5. Major Capabilities .....                            | 103  |
| C6. PICS Proforma for the MAC Sublayer .....            | 103  |
| C6.1 Frame Formats .....                                | 103  |
| C6.2 Destination and Source MAC Address Fields .....    | 103  |
| C6.3 Frame Parameters .....                             | 104  |
| C6.4 MAC Frames .....                                   | 105  |
| C6.5 MAC Frame Subvectors .....                         | 106  |
| C6.6 Timers .....                                       | 108  |
| C6.7 Flags .....                                        | 109  |
| C6.8 Priority Registers and Stacks .....                | 109  |
| C6.9 Counters .....                                     | 109  |
| C7. PICS Proforma for the Physical Layer .....          | 110  |
| C7.1 Symbol Encoding and Decoding .....                 | 110  |
| C7.2 Data Signaling Rate .....                          | 110  |
| C7.3 Symbol Timing .....                                | 110  |
| C7.4 Latency Buffer .....                               | 110  |
| C8. Station Attachment Specifications .....             | 111  |
| C8.1 Coupling of the Station to the Ring .....          | 111  |
| C8.2 Transmitter Characteristics .....                  | 111  |
| C8.3 Receiver Characteristics .....                     | 111  |
| C8.4 Medium Interface Connector .....                   | 111  |

# Information technology— Local and metropolitan area networks—

## Part 5: Token ring access method and physical layer specifications

### 1. General

**1.1 Scope.** For the purpose of compatible interconnection of data processing equipment via a local area network (LAN) using the token ring access method, this standard

- (1) Defines the frame format, including delimiters, addressing, routing information, and frame-check sequence (FCS), to allow operation on a single ring or on multiple rings connected by source routing or transparent bridges, and introduces medium access control (MAC) frames, timers, counters, and priority stacks (see Section 3);
- (2) Defines the MAC protocol. The finite-state machine and state tables are supplemented with a prose description of the algorithms (see Section 4);
- (3) Defines the physical layer (PHY) functions of symbol encoding and decoding, symbol timing, and latency buffering (see Section 5);
- (4) Describes the services provided by the MAC to the station management (SMT) and the logical link control sublayer (LLC) and the services provided by the PHY to SMT and the MAC. These services are defined in terms of service primitives and associated parameters (see Section 6);
- (5) Defines the 4 and 16 Mb/s, shielded twisted pair attachment of the station to the medium including the definition of the medium interface connector (MIC) (see Section 7);
- (6) Includes the PICS proforma in compliance with the relevant requirements, and in accordance with the relevant guidance, given in ISO 9646-2 [7]<sup>1</sup> (see Annex C).

The definition of suitable media (twisted pair, coaxial cable, and optical fiber) for connecting stations that meet the attachment standard specified herein is a subject for future consideration. Until such time as these media are specified, the

<sup>1</sup> The numbers in the brackets correspond to those of the references in 1.4.

specifications in Section 7 shall define the performance bounds to which an operating network, including media and trunk coupling unit(s) (TCUs), shall conform.

A particular emphasis of this standard is to specify the homogeneous externally visible characteristics needed for interconnection compatibility, while avoiding unnecessary constraints upon and changes to internal design and implementation of the heterogeneous processing equipment to be interconnected.

The applications environment for the LAN is intended to be commercial and light industrial. The use of token ring LANs in home and heavy industrial environments, while not precluded, has not been considered in the development of this standard.

## 1.2 Definitions

**abort sequence.** A sequence that terminates the transmission of a frame prematurely.

**accumulated jitter.** The jitter measured against the clock of the active monitor. Like alignment jitter, this is not a type of jitter but a way to measure total jitter growth throughout the ring. It is normally used to determine the required size of the elastic buffer.

**alignment jitter.** The jitter measured against the clock of the upstream adapter. This is not a type of jitter per se; rather, it is a way to measure jitter. When "zero transferred jitter" is specified, the jitter measured is alignment jitter.

**broadcast transmission.** A transmission addressed to all stations.

**channel.** The channel is the transmission path from the MIC at the transmitter to the first MIC at the receiver. It may include TCUs and connectors in addition to transmission line.

**configuration report server (CRS).** A function that controls the configuration of the ring. It receives configuration information from the stations on the ring and either forwards them to the network manager or uses them to maintain a configuration of the ring. It can also, when requested by the network manager, check the status of stations on the ring, change operational parameters of stations on the ring, and remove stations from the ring.

**correlated jitter.** The portion of the total jitter that is related to the data pattern. Since every adapter receives the same *pattern*, this jitter is *correlated* among all adapters and therefore grows in a *systematic* way along the ring. Correlated jitter is also called *pattern jitter* or *systematic jitter*.

**differential Manchester encoding.** A signaling method used to encode clock and data bit information into bit symbols. Each bit symbol is split into two halves, where the second half is the inverse symbol of the first half. A 0 bit is represented by a polarity change at the start of the bit time. A 1 bit is represented by no polarity change at the start of the bit time. Differential Manchester encoding is polarity-independent.

**fill.** A bit sequence that may be either 0 bits or 1 bits or any combination thereof.

**frame.** A transmission unit that carries a protocol data unit (PDU) on the ring.

**jitter.** The time-varying difference between the phase of the recovered clock and the phase of the source clock. Jitter is measured in fractions of a clock cycle, or unit interval (UI).

**logical link control (sublayer)(LLC).** That part of the data link layer that supports media-independent data link functions, and uses the services of the MAC to provide services to the network layer.

**medium.** The material on which the data may be represented. Twisted pairs, coaxial cables, and optical fibers are examples of media.

**medium access control (sublayer)(MAC).** The portion of the data station that controls and mediates the access to the ring.

**medium interface connector (MIC).** The connector between the station and TCU at which all transmitted and received signals are specified.

**monitor.** The monitor is that function that recovers from various error situations. It is contained in each ring station; however, only the monitor in one of the stations on a ring is the *active monitor* at any point in time. The monitor function in all other stations on the ring is in standby mode.

**multiple frame transmission.** A transmission where more than one frame is transmitted when a token is captured.

**physical (layer)(PHY).** The layer responsible for interfacing with the medium, detecting and generating signals on the medium, and converting and processing signals received from the medium and the MAC.

**protocol data unit (PDU).** Information delivered as a unit between peer entities that contains control information and, optionally, data.

**protocol implementation conformance statement (PICS).** A statement of which capabilities and options have been implemented for a given Open Systems Interconnection protocol.

**repeat.** The action of a station in receiving a bit stream (for example, frame, token, or fill) from the previous station and placing it on the medium to the next station. The station repeating the bit stream may copy it into a buffer or modify control bits as appropriate.

**repeater.** A device used to extend the length, topology, or interconnectivity of the transmission medium beyond that imposed by a single transmission segment.

**ring error monitor (REM).** A function that collects ring error data from ring stations. The REM may log the received errors, or analyze this data and record statistics on the errors.

**ring latency.** In a token ring MAC system, the time (measured in bit times at the data transmission rate) required for a signal to propagate once around the ring.

The ring latency time includes the signal propagation delay through the ring medium plus the sum of the propagation delays through each station connected to the token ring.

**ring parameter server (RPS).** That function that is responsible for initializing a set of operational parameters in ring stations on a particular ring.

**routing information.** A field, carried in a frame, used by source routing transparent bridges that provides source routing operation in a bridged LAN.

**service data unit (SDU).** Information delivered as a unit between adjacent entities that may also contain a PDU of the upper layer.

**source routing.** A mechanism to route frames, through a bridged LAN. Within the source routed frame, the station specifies the route that the frame will traverse.

**station (or data station).** A physical device that may be attached to a shared medium LAN for the purpose of transmitting and receiving information on that shared medium. A data station is identified by a destination address (DA).

**static phase offset.** The constant difference between the phase of the recovered clock and the optimal sampling position of the received data.

**station management (SMT).** The conceptual control element of a station that interfaces with all of the layers of the station and is responsible for the setting and resetting of control parameters, obtaining reports of error conditions, and determining if the station should be connected to or disconnected from the medium.

**token.** The symbol of authority that is passed between stations using a token access method to indicate which station is currently in control of the medium.

**transferred jitter.** The amount of jitter in the recovered clock of the upstream adapter. Transferred jitter is important because each adapter must both limit the amount of jitter it generates, and track the jitter delivered by the upstream adapter.

**transmit.** The action of a station generating a frame, token, abort sequence, or fill and placing it on the medium to the next station. In use, this term contrasts with *repeat*.

**transparent bridging.** A bridging mechanism, in a bridged LAN, that is transparent to the end stations.

**trunk cable.** The transmission cable that interconnects two TCUs.

**trunk coupling unit (TCU).** A physical device that enables a station to connect to a trunk cable. The TCU contains the means for inserting the station into the ring or, conversely, bypassing the station.

**uncorrelated jitter.** The portion of the total jitter that is independent of the data pattern. This jitter is generally caused by noise that is uncorrelated among adapters and therefore grows in a nonsystematic way along the ring. Uncorrelated jitter is also called *noise jitter* or *nonsystematic jitter*.

**unit interval (UI).** One half of a bit time. 125 ns for 4 Mb/s transmission and 31.25 ns for 16 Mb/s transmission. UI is used in the specification of jitter.

**upstream neighbor's address (UNA).** The address of the station functioning upstream from a specific station.

### 1.3 Abbreviations

|      |   |                                  |
|------|---|----------------------------------|
| A    | = | address-recognized bit           |
| AC   | = | access control (field)           |
| AD   | = | abort delimiter                  |
| AMP  | = | active monitor present           |
| BCN  | = | beacon                           |
| BR   | = | beacon receive                   |
| C    | = | frame-copied bit                 |
| CL   | = | claim                            |
| CON  | = | congestion                       |
| CNT  | = | count                            |
| CRS  | = | configuration report server      |
| DA   | = | destination address              |
| DAT  | = | duplicate address test           |
| DC   | = | destination class                |
| E    | = | error-detected bit               |
| ED   | = | ending delimiter                 |
| EFS  | = | end-of-frame sequence            |
| ETR  | = | early token release              |
| FA   | = | functional address               |
| FAI  | = | functional address indicator     |
| FC   | = | frame control (field)            |
| FCS  | = | frame-check sequence             |
| FR   | = | frame                            |
| FS   | = | frame status (field)             |
| FSM  | = | finite state machine             |
| I    | = | intermediate frame bit           |
| INIT | = | initialization                   |
| LAN  | = | local area network               |
| LLC  | = | logical link control (sublayer)  |
| LTH  | = | length bits                      |
| M    | = | monitor bit                      |
| MA   | = | my (station's) address           |
| MAC  | = | medium access control (sublayer) |
| MIC  | = | medium interface connector       |
| MVID | = | major vector identification      |
| NN   | = | neighbor notification            |
| P    | = | priority (of the AC)             |
| PDU  | = | protocol data unit               |
| PHY  | = | physical (layer)                 |

|      |   |                                               |
|------|---|-----------------------------------------------|
| PICS | = | protocol implementation conformance statement |
| Pm   | = | priority of queued PDU                        |
| Pr   | = | last priority value received                  |
| PRG  | = | purge                                         |
| Px   | = | the greater value of Pm or Rr                 |
| R    | = | reservation (of the AC)                       |
| RI   | = | routing information                           |
| RII  | = | routing information indicator                 |
| REM  | = | ring error monitor                            |
| RPS  | = | ring parameter server                         |
| RPT  | = | report                                        |
| RQ   | = | request                                       |
| Rr   | = | last reservation value received               |
| RUA  | = | received upstream neighbor's address          |
| SA   | = | source address                                |
| SC   | = | source class                                  |
| SD   | = | starting delimiter                            |
| SDU  | = | service data unit                             |
| SFS  | = | start-of-frame sequence                       |
| SMP  | = | standby monitor present                       |
| SMT  | = | station management                            |
| Sr   | = | highest stacked received priority             |
| SRT  | = | source routing transparent                    |
| SV   | = | subvector                                     |
| SVI  | = | subvector identifier                          |
| SVL  | = | subvector length                              |
| SUA  | = | stored upstream neighbor's address            |
| Sx   | = | highest stacked transmitted priority          |
| TA   | = | transmit asymmetry                            |
| TAM  | = | timer, active monitor                         |
| TBT  | = | timer, BCN transmit                           |
| TBR  | = | timer, BCN receive                            |
| TCU  | = | trunk coupling unit                           |
| TER  | = | timer, error report                           |
| THT  | = | timer, holding token                          |
| TK   | = | token                                         |
| TNT  | = | timer, no token                               |
| TQP  | = | timer, queue PDU                              |
| TRR  | = | timer, return to repeat                       |
| TSM  | = | timer, standby monitor                        |
| TVX  | = | timer, valid transmission                     |
| TX   | = | transmit                                      |
| UI   | = | unit interval                                 |
| UNA  | = | upstream neighbor's address                   |
| VI   | = | vector identifier                             |
| VL   | = | vector length                                 |

**1.4 References.** The following standards contain provisions which, through reference in this text, constitute provisions of ISO/IEC 8802-5:1992. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on ISO/IEC 8802-5:1992 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of ISO and IEC maintain registers of currently valid International Standards.

[1] CISPR Publication 22:1985, Limits and Methods of Measurement of Radio Interference Characteristics of Information Technology Equipment.<sup>2</sup>

[2] IEC Publication 435:1983, Safety of data processing equipment.

[3] IEC Publication 950:1986, Safety of information technology equipment including electrical business equipment.

[4] ISO 7498:1984, Information processing systems—Open Systems Interconnection—Basic Reference Model.<sup>3</sup>

[5] ISO/IEC 7498-4:1989, Information processing systems—Basic Reference Model—Part 4: Management framework.

[6] ISO/IEC 9646-1:1991, Information technology—OSI conformance testing methodology and framework—Part 1: General concepts.

[7] ISO 9646-2:1991, Information technology—OSI conformance testing methodology and framework—Part 2: Abstract test suite specification.

[8] ISO/IEC DIS 10038 DAM 2, MAC Bridging, Source Routing Supplement.<sup>4</sup>

[9] ISO/IEC 10039:1991 Information processing systems—Open Systems Interconnection—Local area networks—MAC service definition.

2 CISPR and IEC publications are available from the International Electrotechnical Commission, 3 rue de Varembe, Case Postal 131, CH-1211, Genève 20, Switzerland/Suisse. These publications are also available in the United States from the Sales Department, American National Standards Institute, 11 West 42nd Street, 13th Floor, New York, NY 10036 USA.

3 ISO and IEC publications are available from ISO, Case Postal 56, 1 rue de Varembe, CH-1211 Genève 20, Switzerland/Suisse. These publications are also available in the United States from the Sales Department, American National Standards Institute, 11 West 42nd Street, 13th Floor, New York, NY 10036 USA.

4 ISO/IEC 10038:....AMD1:...., to be approved and published.

**1.5 Conformance Requirements** The supplier of a protocol implementation which is claimed to conform to this standard shall complete a copy of the PICS proforma in Appendix C and shall provide the information necessary to identify both the supplier and the implementation.

### 1.5.1 Static Conformance Requirements

**1.5.1.1 Medium Access Control Sublayer.** An implementation claiming conformance to this standard

- (1) Shall implement the token format, the frame format, associated address formats and fields, and MAC frame vectors and subvectors as defined in 3.1, 3.2 and 3.3.
- (2) Shall use at least one of the following: 48-bit universally administered addresses, 48-bit locally administered addresses, or a 16-bit locally administered addresses. Note that the implementation may support any or all three address formats.
- (3) Shall exhibit external behavior corresponding to the timer values specified in 3.4.
- (4) Shall exhibit external behavior corresponding to the flags specified in 3.5. Note that the Early Token Release function is optional (3.5.7).
- (5) Shall exhibit external behavior corresponding to the priority registers and stacks specified in 3.6.
- (6) May, optionally, implement capabilities corresponding to the counters defined in 3.8. Note that the Frame Count function, 3.8.11, is mandatory if the Early Token Release function is implemented.
- (7) Shall recognize the first bit of the source address as the indication of the presence of the routing information field in the frame format. Note that the ability to generate or process frames with source routing information is optional.

**1.5.1.2 Physical Layer.** An implementation claiming conformance to this standard shall

- (1) Add latency as defined in 3.7 and 5.5.1.
- (2) Encode and decode symbols as defined in 5.1 and 5.2.
- (3) Use a data signaling rate at either 4 or 16 Mb/s as defined in 5.3. Note that the implementation may support both data signaling rates.
- (4) Time the symbols with a phase and frequency lock as defined in 5.4.
- (5) Compensate for phase jitter with accumulated bit jitter amplitude as defined in 5.5.2.
- (6) Couple to the trunk with a ring access control mechanism as defined in 7.3 and 7.4.
- (7) Transmit differential Manchester signals with the characteristics defined in 7.5.1 when the channel operates as defined in 7.5.2. Either of the two transmitter signal waveforms may be used.

- (8) Receive differential Manchester signals with the characteristics as defined in 7.5.3 when connected to the channel defined in clause 7.5.2 and a transmitter defined in 7.5.1.
- (9) Use a medium interface connector as defined in 7.9.
- (10) Provide an output error rate to the station as described in 7.5.4.

**1.5.2 Dynamic Conformance Requirements.** An implementation claiming conformance to this standard shall perform the following actions as represented in abstract form by the finite-state machine transitions in Figs 4-2 through 4-7. The station shall

- (1) Receive frames and perform the actions indicated in Fig 4-2.
- (2) Receive and utilize tokens for the transmission of queued PDUs as described in Fig 4-3.
- (3) Transmit queued PDUs as frames as described in Fig 4-3.
- (4) Strip frames as described in Fig 4-3.
- (5) Transmit tokens as described in Fig 4-3 (Note that the implementation of the ETR flag is optional, see 3.5.7).
- (6) Perform the priority operation as described in Fig 4-3.
- (7) Perform actions indicated in Fig 4-4.
- (8) Queue DAT\_PDU, SMP\_PDU, and RQ\_INIT\_PDU under the conditions described in Fig 4-4 for transmission by Fig 4-3.
- (9) Autonomously transmit CL\_TK and FR\_BCN frames under the conditions described in Fig 4-5.
- (10) Enter BYPASS under the conditions described in Fig 4-5.
- (11) Assume ACTIVE MONITOR STATE under the conditions described in Fig 4-5.
- (12) Queue the PDUs of Fig 4-6 as indicated for transmission by Fig 4-3.
- (13) Autonomously transmit fill and PURGE PDUs as indicated in Fig 4-7.
- (14) Queue the PDUs of Fig 4-7 as indicated for transmission by Fig 4-3.
- (15) Enter STANDBY MONITOR STATE under the conditions described in Fig 4-7.
- (16) Enter BYPASS under the conditions described in Fig 4-7.



## 2. General Description

There are two important ways to view local area network design: architectural, which emphasizes the logical divisions of the system and how they fit together, and implementational, which emphasizes the actual components, their packaging, and their interconnection.

This standard presents the architectural view, emphasizing the large-scale separation of the system into two parts: the MAC of the data link layer and the PHY. These layers are intended to correspond closely to the lowest layers of the ISO Basic Reference Model of OSI (ISO 7498 [4]). The LLC and MAC together encompass the functions intended for the data link layer of the OSI model.

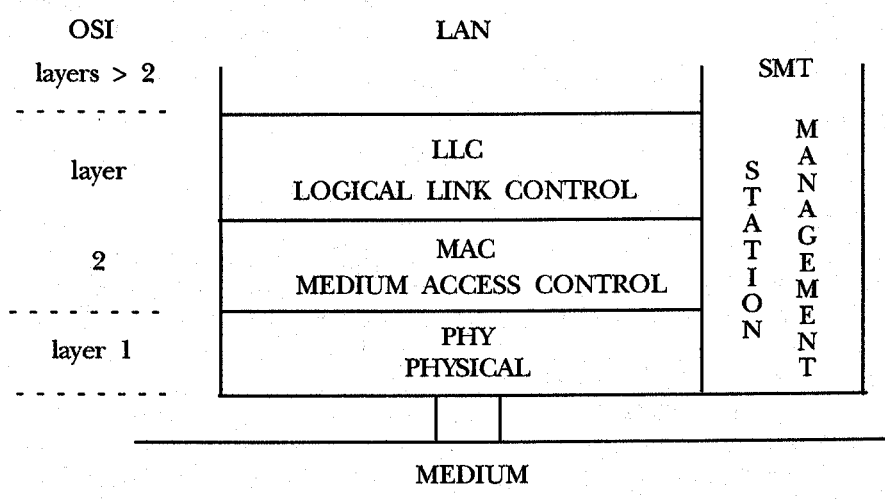


**Fig 2-1**  
**Relation of the OSI Reference Model to the LAN Model**

An architectural organization of the standard has the advantages of clarity (a clean overall division of the design along architectural lines makes the standard clearer) and flexibility (segregation of the access-method-dependent aspects of the MAC and PHY allows the LLC to apply to a variety of LAN access methods).

It should be noted that the exact relationship of the layers described in this standard to the layers defined by the OSI Reference Model is for further study.

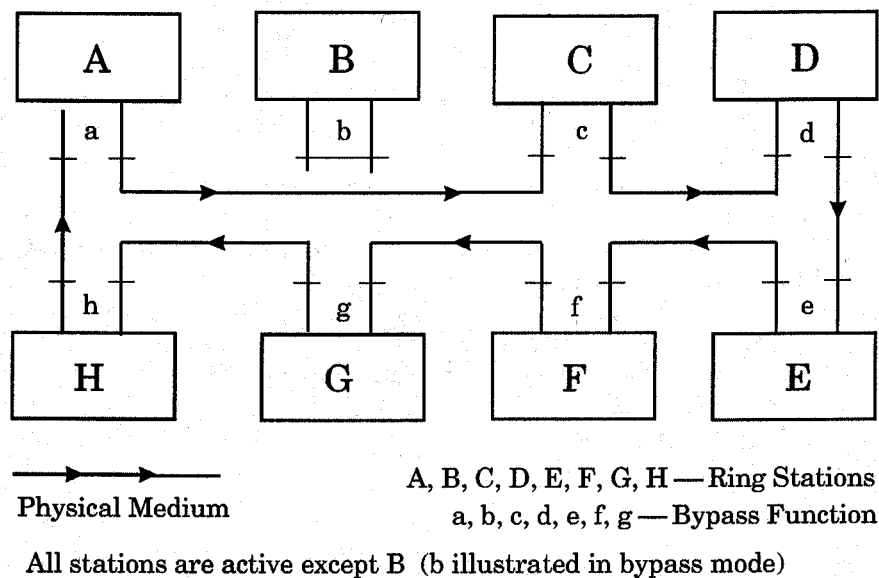


**Fig 2-2**  
**Token Ring Configuration**

A token ring consists of a set of stations serially connected by a transmission medium (see Fig 2-2). Information is transferred sequentially, bit by bit, from one active station to the next. Each station generally regenerates and repeats each bit and serves as the means for attaching one or more devices (terminals, work stations) to the ring for the purpose of communicating with other devices on the network. A given station (the one that has access to the medium) transfers information onto the ring, where the information circulates from one station to the next. The addressed destination station(s) *copies* the information as it passes. Finally, the station that transmitted the information effectively removes the information from the ring.


A station gains the right to transmit its information onto the medium when it detects a token passing on the medium. The token is a control signal comprised of a unique signaling sequence that circulates on the medium following each information transfer. Any station, upon detection of an appropriate token, may

capture the token by modifying it to a SFS and appending appropriate control and status fields, address fields, information field, FCS, and the EFS. At the completion of its information transfer and after appropriate checking for proper operation, the station initiates a new token, which provides other stations the opportunity to gain access to the ring.

A THT controls the maximum period of time a station shall use (occupy) the medium before passing the token.

Multiple levels of priority are available for independent and dynamic assignment depending upon the relative class of service required for any given message, for example, synchronous (real-time voice), asynchronous (interactive), immediate (network recovery). The allocation of priorities shall be by mutual agreement among users of the network.

Error detection and recovery mechanisms are provided to restore network operation in the event that transmission errors or medium transients (for example, those resulting from station insertion or removal) cause the access method to deviate from normal operation. Detection and recovery for these cases utilize a network monitoring function that is performed in a specific station with back-up capability in all other stations that are attached to the ring.

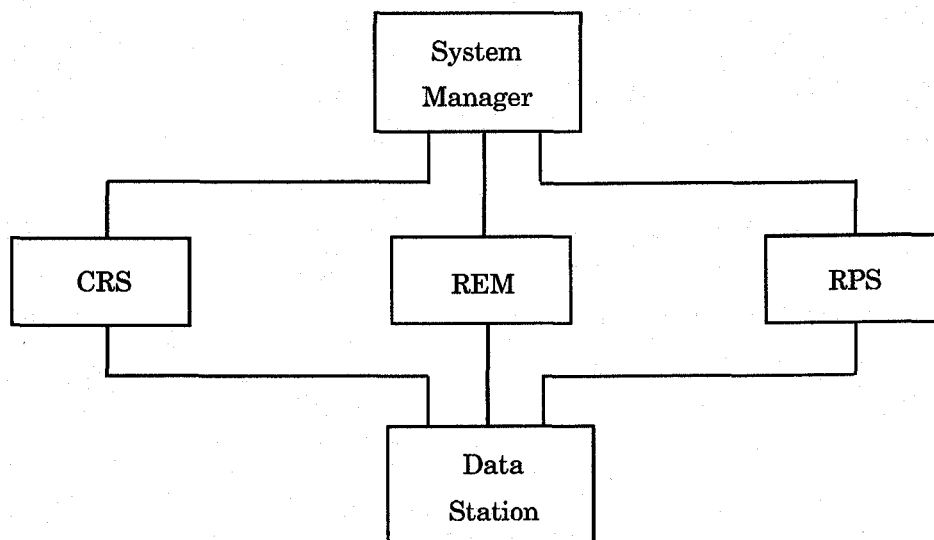

Servers:      CRS    -    Configuration Report Server  
                 REM    -    Ring Error Monitor  
                 RPS    -    Ring Parameter Server

**Fig 2-3**  
**Relationship of Data Stations, Servers, and System Manager**

Each ring in a token ring network has a set of server stations (*servers*) that are the means through which the systems manager manages the stations in a token ring system. Such arrangement is depicted in Fig 2-3.

Servers are data collection points on each ring where reports from the data stations are gathered. Servers then communicate the necessary information to the systems manager for the purpose of managing a token ring system.

Data stations communicate with the servers by reporting errors that are detected such as lost token, FCS error, or lost frames, requesting operating parameters when inserting into the ring, reporting changes in configuration due to insertion or removal of stations (UNA changes), responding to requests for various status information, and removal from the ring when requested.

The station-to-server message format and content is specified in Section 3; and the protocol for message exchange is specified in Section 4.


The specification of the format and protocol for the information interchange between the servers and the systems manager is not covered by this standard. However, the objects (parameters, events, and actions) specified in 6.3 and 6.4 are the elements of such communication.

### 3. Formats and Facilities

**3.1 Formats.** There are two basic formats used in token rings: tokens and frames. In the following discussion, the figures depict the formats of the fields *in the sequence they are transmitted on the medium*, with the left-most bit or symbol transmitted first.

Processes that require comparison of fields or bits perform that comparison upon those fields or bits *as depicted*, with the left-most bit or symbol compared first and, for the purpose of comparison, considered most significant.


#### 3.1.1 Token Format



SD = Starting Delimiter (1 octet)  
AC = Access Control (1 octet)  
ED = Ending Delimiter (1 octet)

The token shall be the means by which the right to transmit (as opposed to the normal process of repeating) is passed from one station to another.

#### 3.1.2 Frame Format

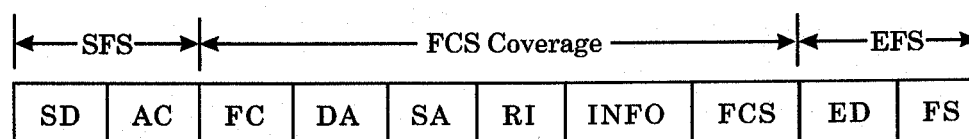


|                                     |                                                    |
|-------------------------------------|----------------------------------------------------|
| SFS = Start-of-Frame Sequence       | RI = Routing Information                           |
| SD = Starting Delimiter (1 octet)   | (0 to 30 octets) <sup>5</sup>                      |
| AC = Access Control (1 octet)       | INFO = Information (0 or more octets) <sup>6</sup> |
| FC = Frame Control (1 octet)        | FCS = Frame-Check Sequence (4 octets)              |
| DA = Destination Address            | EFS = End-of-Frame Sequence                        |
| (2 or 6 octets)                     | ED = Ending Delimiter (1 octet)                    |
| SA = Source Address (2 or 6 octets) | FS = Frame Status (1 octet)                        |

<sup>5</sup> Note that the RI field is not present in prior IEEE 802.5 standards.

<sup>6</sup> See 3.2.6 for limitation of information field length.

The frame format shall be used for transmitting both MAC and LLC messages to the destination station(s). It may or may not have an information field.

### 3.1.2.1 Abort Sequence




This sequence shall be used for the purpose of terminating the transmission of a frame prematurely. The abort sequence may occur anywhere in the bit stream; that is, receiving stations shall be able to detect an abort sequence even if it does not occur on octet boundaries.

**3.1.3 Fill.** When a station is transmitting (as opposed to repeating), it shall transmit fill preceding or following frames, tokens, or abort sequences to avoid what would otherwise be an inactive or indeterminate transmitter state.

Fill may be either 0 or 1 bits or any combination thereof and may be *any number* of bits in length, within the constraints of the THT.

**3.2 Field Descriptions.** The following is a detailed description of the individual fields in the tokens and frames.

### 3.2.1 Starting Delimiter (SD)




J = non-data J  
K = non-data K  
0 = zero bit

(For a discussion of non-data symbols, see 5.1.)

A frame or token shall be started with these eight symbols. If otherwise, it shall not be considered valid.

### 3.2.2 Access Control (AC)



PPP = priority bits  
T = token bit  
M = monitor bit  
RRR = reservation bits

**3.2.2.1 Priority Bits.** The priority bits shall indicate the priority of a token and, therefore, which stations are allowed to use the token. In a multiple-priority system, stations use different priorities depending on the priority of the PDU to be transmitted.

The eight levels of priority increase from the lowest (000) to the highest (111) priority. For purposes of comparing priority values, the priority shall be transmitted most significant bit first; for example, 110 has higher priority than 011 (left-most bit transmitted first).

**3.2.2.2 Token Bit.** The token bit is a 0 in a token and a 1 in a frame. When a station with a PDU to transmit detects a token that has a priority equal to or less than the PDU to be transmitted, it may change the token to a SFS and transmit the PDU.


**3.2.2.3 Monitor (M) Bit.** The M bit is used to prevent a token that has a priority greater than 0 or any frame from continuously circulating on the ring. If an active monitor detects a frame or a high priority token with the M bit equal to 1, the frame is aborted.

This bit shall be transmitted as 0 in all frames and tokens. The active monitor inspects and modifies this bit. All other stations shall repeat this bit as received.

**3.2.2.4 Reservation Bits.** The reservation bits allow stations with high priority PDUs to request (in frames or tokens as they are repeated) that the next token be issued at the requested priority. The precise protocol for setting these bits is described in 4.2.2.

The eight levels of reservation increase from 000 to 111. For purposes of comparing reservation values, the reservation shall be transmitted most significant bit first; for example, 110 has higher priority than 011 (left-most bit transmitted first).

### 3.2.3 Frame Control (FC)



FF = frame-type bits  
ZZZZZZ = control bits

The FC field defines the type of the frame and certain MAC and information frame functions

**3.2.3.1 Frame-type Bits.** The frame-type bits shall indicate the type of the frame as follows:

- 00 = MAC frame (contains a MAC PDU)
- 01 = LLC frame (contains an LLC PDU)
- 1x = undefined format (reserved for future use)

**MAC Frames.** If the frame-type bits indicate a MAC frame, all stations on the ring shall interpret and, based on the finite state of the station, act on the ZZZZZZ control bits.


**LLC Frames.** If the frame-type bits indicate an LLC frame, the ZZZZZZ bits are designated as rrrYYY. The rrr bits are reserved and shall be transmitted as 0's in all transmitted frames and ignored upon reception. The YYY bits may be used to carry the priority (Pm) of the PDU from the source LLC entity to the target LLC entity or entities. Note that P (the priority in the AC field of a frame) is less than or equal to Pm when the frame is transmitted onto the ring.

**Undefined Format.** The value "1x" is reserved for frame types that may be defined in the future. However, although currently undefined, any future frame formats shall adhere to the following conditions:

- (1) The format shall be delimited by the 2-octet SFS field and the 2-octet EFS field, as defined in this standard. Additional fields may follow the EFS field.
- (2) The position of the FC field shall be unchanged.
- (3) The SFS and EFS of the format shall be separated by an integral number of octets. This number shall be at least 1 (that is, the FC field) and the maximum length is subject to the constraints of the THT.
- (4) All symbols between the SFS and EFS shall be 0 and 1 bits.
- (5) All stations on the ring check for data symbols and an integral number of octets between the SFS and EFS fields. The error-detected (E) bit of formats that are repeated shall be set to 1 when a non-data symbol or a non-integral number of octets is detected between the SFS and EFS fields.
- (6) All bit errors that occur in the FC field that have a hamming distance of less than four must be detectable by stations using this format and shall not be accepted by any other station conforming to this standard.

**3.2.4 Destination and Source Address (DA and SA) Fields.** Each frame shall contain two address fields: the destination (station) address and the source (station) address, in that order. Addresses may be either 2 or 6 octets in length; however, all stations of a specific LAN shall have addresses of equal length.

**3.2.4.1 Destination Address (DA).** The DA identifies the station(s) for which the information field of the frame is intended. Included in the DA is a bit to indicate whether the DA is an individual or group address and, for 6-octet addresses only, the second bit indicates whether it is a universally or locally administered address.

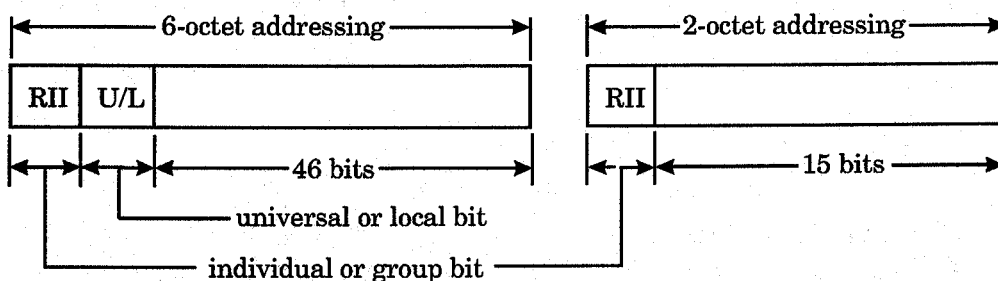

**Individual and Group Addresses.** The first bit transmitted of the DA distinguishes individual from group addresses:

0 = individual address

1 = group address

Individual addresses identify a particular station on the LAN and shall be distinct from all other individual station addresses on the same LAN (in the case of local administration), or from the individual addresses of other LAN stations on a global basis (in the case of universal administration).


A group address shall be used to address a frame to multiple destination stations. Group addresses may be associated with zero or more stations on a given LAN. In general, a group address is an address associated by convention with a group of logically related stations.

**Broadcast Address.** The group address consisting of 16 or 48 1's (for 2- or 6-octet addressing, respectively) shall constitute a broadcast address, denoting the set of all stations on a given LAN. Stations using 48-bit addressing must also recognize X'C0 00 FF FF FF FF' as a broadcast address in MAC frames.

**Null Address.** An address of 16 or 48 0's (for 2- or 6-octet addressing, respectively) shall be considered a null address. It will mean the frame is not addressed to any particular station.

**Functional Addresses (FAs).** FAs are a subset of locally administered group addresses. They are bit-significant addresses used to identify well-known functional entities. The Functional Address Indicator (FAI) identifies a FA versus a conventional group MAC address. This indicator is set to a B'1' for conventional group addresses and B'0' for FAs.

### 2-Octet Addressing

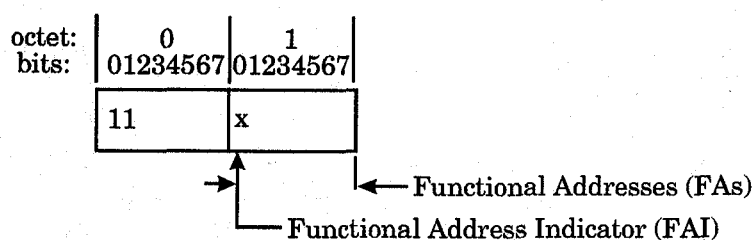

### 6-Octet Addressing

