
**Information technology —
Telecommunications and information
exchange between systems — Local and
metropolitan area networks — Specific
requirements —**

**Part 11:
Wireless LAN medium access control
(MAC) and physical layer (PHY)
specifications**

**AMENDMENT 3: Enhancements for very
high throughput in the 60 GHz band
(adoption of IEEE Std 802.11ad-2012)**

*Technologies de l'information — Télécommunications et échange
d'information entre systèmes — Réseaux locaux et métropolitains —
Exigences spécifiques —*

*Partie 11: Spécifications du contrôle d'accès du milieu sans fil (MAC) et
de la couche physique (PHY)*

*AMENDEMENT 3: Améliorations pour un très haut débit de traitement
dans la bande de fréquence 60 GHz (adoption de la norme IEEE Std
802.11ad-2012)*



Reference number
ISO/IEC/IEEE 8802-11:2012/Amd.3:2014(E)



Documents

Document Sharing Hub

© IEEE 2012

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

IEEE Standards documents are developed within the IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (IEEE-SA) Standards Board. The IEEE develops its standards through a consensus development process, approved by the American National Standards Institute, which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of the Institute and serve without compensation. While the IEEE administers the process and establishes rules to promote fairness in the consensus development process, the IEEE does not independently evaluate, test, or verify the accuracy of any of the information contained in its standards.

The main task of ISO/IEC JTC 1 is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is called to the possibility that implementation of this standard may require the use of subject matter covered by patent rights. By publication of this standard, no position is taken with respect to the existence or validity of any patent rights in connection therewith. ISO/IEEE is not responsible for identifying essential patents or patent claims for which a license may be required, for conducting inquiries into the legal validity or scope of patents or patent claims or determining whether any licensing terms or conditions provided in connection with submission of a Letter of Assurance or a Patent Statement and Licensing Declaration Form, if any, or in any licensing agreements are reasonable or non-discriminatory. Users of this standard are expressly advised that determination of the validity of any patent rights, and the risk of infringement of such rights, is entirely their own responsibility. Further information may be obtained from ISO or the IEEE Standards Association.

Amendment 3 to ISO/IEC/IEEE 8802-11 was prepared by the LAN/MAN Standards Committee of the IEEE Computer Society (as IEEE Std 802.11ad-2012). It was adopted by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 6, *Telecommunications and information exchange between systems*, in parallel with its approval by the ISO/IEC national bodies, under the “fast-track procedure” defined in the Partner Standards Development Organization cooperation agreement between ISO and IEEE. IEEE is responsible for the maintenance of this document with participation and input from ISO/IEC national bodies.

(blank page)

IEEE Standard for Information technology—
Telecommunications and information exchange between systems
Local and metropolitan area networks—
Specific requirements

Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications

Amendment 3: Enhancements for Very High Throughput in the 60 GHz Band

IEEE Computer Society

Sponsored by the
LAN/MAN Standards Committee

IEEE
3 Park Avenue
New York, NY 10016-5997
USA

28 December 2012

IEEE Std 802.11ad™-2012
(Amendment to
IEEE Std 802.11™-2012,
as amended by IEEE Std 802.11ae™-2012
and IEEE Std 802.11aa™-2012)

IEEE Std 802.11ad™-2012

(Amendment to
IEEE Std 802.11™-2012,
as amended by IEEE Std 802.11ae™-2012
and IEEE Std 802.11aa™-2012)

**IEEE Standard for Information technology—
Telecommunications and information exchange between systems
Local and metropolitan area networks—
Specific requirements**

**Part 11: Wireless LAN Medium Access Control
(MAC) and Physical Layer (PHY) Specifications**

**Amendment 3: Enhancements for
Very High Throughput in the 60 GHz Band**

Sponsor

**LAN/MAN Standards Committee
of the
IEEE Computer Society**

Approved 19 October 2012

IEEE-SA Standards Board

Abstract: This amendment defines modifications to both the IEEE 802.11 physical layers (PHYs) and the IEEE 802.11 medium access control layer (MAC) to enable operation in frequencies around 60 GHz and capable of very high throughput.

Keywords: 60 GHz, A-BFT, announcement transmission interval, association beamforming training time, ATI, beacon transmission interval, beamforming, BTI, CBAP, clustering, contention-based access period, directional multi-gigabit, DMG, dynamic allocation of service period, dynamic extension of service period, dynamic truncation of service period, fast session transfer, FST, GCMP, IEEE 802.11ad, millimeter-wave, multi-band operation, PBSS, PBSS control point, PCP, personal basic service set, relay operation, service period, SP, spatial sharing

The Institute of Electrical and Electronics Engineers, Inc.
3 Park Avenue, New York, NY 10016-5997, USA

Copyright © 2012 by The Institute of Electrical and Electronics Engineers, Inc.
All rights reserved. Published 28 December 2012. Printed in the United States of America.

IEEE and 802 are registered trademarks in the U.S. Patent & Trademark Office, owned by The Institute of Electrical and Electronics Engineers, Incorporated.

Print: ISBN 978-0-7381-8109-7 STD97302
PDF: ISBN 978-0-7381-8096-0 STDPD97302

IEEE prohibits discrimination, harassment and bullying. For more information, visit <http://www.ieee.org/web/aboutus/whatis/policies/p9-26.html>.
No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

Notice and Disclaimer of Liability Concerning the Use of IEEE Documents: IEEE Standards documents are developed within the IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (IEEE-SA) Standards Board. IEEE develops its standards through a consensus development process, approved by the American National Standards Institute, which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of the Institute and serve without compensation. While IEEE administers the process and establishes rules to promote fairness in the consensus development process, IEEE does not independently evaluate, test, or verify the accuracy of any of the information or the soundness of any judgments contained in its standards.

Use of an IEEE Standard is wholly voluntary. IEEE disclaims liability for any personal injury, property or other damage, of any nature whatsoever, whether special, indirect, consequential, or compensatory, directly or indirectly resulting from the publication, use of, or reliance upon any IEEE Standard document.

IEEE does not warrant or represent the accuracy or content of the material contained in its standards, and expressly disclaims any express or implied warranty, including any implied warranty of merchantability or fitness for a specific purpose, or that the use of the material contained in its standards is free from patent infringement. IEEE Standards documents are supplied "AS IS."

The existence of an IEEE Standard does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the IEEE standard. Furthermore, the viewpoint expressed at the time a standard is approved and issued is subject to change brought about through developments in the state of the art and comments received from users of the standard. Every IEEE standard is subjected to review at least every ten years. When a document is more than ten years old and has not undergone a revision process, it is reasonable to conclude that its contents, although still of some value, do not wholly reflect the present state of the art. Users are cautioned to check to determine that they have the latest edition of any IEEE standard.

In publishing and making its standards available, IEEE is not suggesting or rendering professional or other services for, or on behalf of, any person or entity. Nor is IEEE undertaking to perform any duty owed by any other person or entity to another. Any person utilizing any IEEE Standards document, should rely upon his or her own independent judgment in the exercise of reasonable care in any given circumstances or, as appropriate, seek the advice of a competent professional in determining the appropriateness of a given IEEE standard.

Translations: The IEEE consensus development process involves the review of documents in English only. In the event that an IEEE standard is translated, only the English version published by IEEE should be considered the approved IEEE standard.

Official Statements: A statement, written or oral, that is not processed in accordance with the IEEE-SA Standards Board Operations Manual shall not be considered the official position of IEEE or any of its committees and shall not be considered to be, nor be relied upon as, a formal position of IEEE. At lectures, symposia, seminars, or educational courses, an individual presenting information on IEEE standards shall make it clear that his or her views should be considered the personal views of that individual rather than the formal position of IEEE.

Comments on Standards: Comments for revision of IEEE Standards documents are welcome from any interested party, regardless of membership affiliation with IEEE. However, IEEE does not provide consulting information or advice pertaining to IEEE Standards documents. Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments. Since IEEE standards represent a consensus of concerned interests, it is important to ensure that any responses to comments and questions also receive the concurrence of a balance of interests. For this reason, IEEE and the members of its societies and Standards Coordinating Committees are not able to provide an instant response to comments or questions except in those cases where the matter has previously been addressed. Any person who would like to participate in evaluating comments or revisions to an IEEE standard is welcome to join the relevant IEEE working group at <http://standards.ieee.org/develop/wg/>.

Comments on standards should be submitted to the following address:

Secretary, IEEE-SA Standards Board
445 Hoes Lane
Piscataway, NJ 08854
USA

Photocopies: Authorization to photocopy portions of any individual standard for internal or personal use is granted by The Institute of Electrical and Electronics Engineers, Inc., provided that the appropriate fee is paid to Copyright Clearance Center. To arrange for payment of licensing fee, please contact Copyright Clearance Center, Customer Service, 222 Rosewood Drive, Danvers, MA 01923 USA; +1 978 750 8400. Permission to photocopy portions of any individual standard for educational classroom use can also be obtained through the Copyright Clearance Center.

Notice to users

Laws and regulations

Users of IEEE Standards documents should consult all applicable laws and regulations. Compliance with the provisions of any IEEE standards document does not imply compliance to any applicable regulatory requirements. Implementers of the standard are responsible for observing or referring to the applicable regulatory requirements. IEEE does not, by the publication of its standards, intend to urge action that is not in compliance with applicable laws, and these documents may not be construed as doing so.

Copyrights

This document is copyrighted by the IEEE. It is made available for a wide variety of both public and private uses. These include both use, by reference, in laws and regulations, and use in private self-regulation, standardization, and the promotion of engineering practices and methods. By making this document available for use and adoption by public authorities and private users, the IEEE does not waive any rights in copyright to this document.

Updating of IEEE documents

Users of IEEE standards should be aware that these documents may be superseded at any time by the issuance of new editions or may be amended from time to time through the issuance of amendments, corrigenda, or errata. An official IEEE document at any point in time consists of the current edition of the document together with any amendments, corrigenda, or errata then in effect. In order to determine whether a given document is the current edition and whether it has been amended through the issuance of amendments, corrigenda, or errata, visit the [IEEE-SA website](http://standards.ieee.org/about/sasb/patcom/patents.html) or contact the IEEE at the address listed previously. For more information about the IEEE Standards Association or the IEEE standards development process, visit the [IEEE-SA website](http://standards.ieee.org).

Errata

Errata, if any, for this and all other standards can be accessed at the following URL: <http://standards.ieee.org/findstds/errata/index.html>. Users are encouraged to check this URL for errata periodically.

Patents

Attention is called to the possibility that implementation of this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken by the IEEE with respect to the existence or validity of any patent rights in connection therewith. A patent holder or patent applicant has filed a statement of assurance via an Accepted Letter of Assurance, then the statement is listed on the IEEE-SA website <http://standards.ieee.org/about/sasb/patcom/patents.html>. Letters of Assurance may indicate whether the Submitter is willing or unwilling to grant licenses under patent rights without compensation or under reasonable rates, with reasonable terms and conditions that are demonstrably free of any unfair discrimination to applicants desiring to obtain such licenses.

Essential Patent Claims may exist for which a Letter of Assurance has not been received. The IEEE is not responsible for identifying Essential Patent Claims for which a license may be required, for conducting inquiries into the legal validity or scope of Patents Claims, or determining whether any licensing terms or conditions provided in connection with submission of a Letter of Assurance, if any, or in any licensing agreements are reasonable or nondiscriminatory. Users of this standard are expressly advised that determination of the validity of any patent rights, and the risk of infringement of such rights, is entirely their own responsibility. Further information may be obtained from the IEEE Standards Association.

Participants

At the time this amendment was submitted to the IEEE-SA Standards Board for approval, the IEEE 802.11 Working Group had the following officers:

Bruce P. Kraemer, *Chair*
Jon Walter Rosdahl and **Adrian P. Stephens**, *Vice-Chairs*
Stephen McCann, *Secretary*

At the time this amendment was sent to sponsor ballot, the Task Group ad had the following officers:

Eldad Perahia, *Chair*
James Yee, *Vice-Chair*
Carlos Cordeiro, *Technical Editor*

At the time this amendment was sent to sponsor ballot, the IEEE 802.11 Working Group had the following membership:

Osama S. Aboulmagd	Liwen Chu	Guido R. Hiertz
Santosh P. Abraham	John Coffey	Garth D. Hillman
Roberto Aiello	Kenneth Coop	David Howard
Carlos H. Aldana	Subir Das	Jing-Rong Hsieh
Thomas Alexander	Rolf J. de Vegt	Ju-Lan Hsu
Peiman Amini	Hossein Dehghan	David Hunter
David C. Andrus	Theodorus Denteneer	Akio Iso
Sirikiat Lek Ariyavisitakul	Thomas Derham	Mitsuru Iwaoka
Lee R. Armstrong	Offie Drennan	Wynona Jacobs
Yusuke Asai	Chunjie Duan	Byung Jang Jeong
Alex Ashley	Roger P. Durand	Wuncheol Jeong
Torrey Atcitty	Peter Ecclesine	Jorjeta G. Jetcheva
Kwok Shum Au	Richard Edgar	Junho Jo
Vijay Auluck	Marc Emmelmann	Vince Jones
Stefan Aust	Leonid Epstein	Avinash Joshi
Geert A. Awater	Vinko Erceg	Padam Kafle
David Bagby	Ping Fang	Carl W. Kain
Michael Bahr	Stanislav Filin	Naveen K. Kakani
Gabor Bajko	Matthew J. Fischer	Byeongwoo Kang
Raja Banerjea	George Flammer	Hyunduk Kang
John R. Barr	Colin Frank	Assaf Y. Kasher
Tuncer Baykas	Noriyasu Fukatsu	Shuzo Kato
Alan Berkema	Patrick Fung	Richard H. Kennedy
Anirudh Bhatt	Mohamed Ghamri-Doudane	John Kenney
Bijoy Bhukania	James P. K. Gilb	Stuart J. Kerry
Ted Booth	Claude Giraud	Prithpal Khakuria
Philippe Boucachard	Reinhard Gloger	Thet Khine
Andre Bourdoux	Danling Gong	Bonghoe Kim
Gregory Breit	Michelle Gong	Byoung-Hoon Kim
G. Bumiller	David Goodall	Eun Sun Kim
George Calcev	Elad Gottlib	Jinkyong Kim
Chris Calvert	Sudheer A. Grandhi	Joonsuk Kim
Ruben Salazar Cardozo	Michael Grigat	Suhwook Kim
William Carney	David Halasz	Youhan Kim
Philippe Chambelin	Mark Hamilton	Youngsoo Kim
Kim Chang	Christopher J. Hansen	Yunjoo Kim
Clint F. Chaplin	Hiroshi Harada	Shoichi Kitazawa
Minho Cheong	Dan N. Harkins	Jarkko Knecht
Inhwan Choi	Brian D. Hart	Mark M. Kobayashi
In-Kyeong Choi	Ahmadreza Hedayat	Fumihide Kojima
Jee-Yon Choi	Robert F. Heile	Tom Kolze

Timo Koskela
 Richi Kudo
 Thomas M. Kurihara
 Joseph Kwak
 Pascal Lagrange
 Paul Lambert
 Zhou Lan
 Leonardo Lanante
 James Lansford
 Daewon Lee
 Donghun Lee
 Jae Seung Lee
 Jihyun Lee
 Wooyong Lee
 Yuro Lee
 Zhongding Lei
 Wai Kong Leung
 Bin Li
 Honggang Li
 Yunzhou Li
 Erik Lindskog
 Jeremy Link
 Lu Liru
 Der-Zheng Liu
 Jianhan Liu
 Siyang Liu
 Yong Liu
 Peter Loc
 Yi Luo
 Zhendong Luo
 Kaiying Lv
 Bradley Lynch
 Michael Lynch
 Jouni K. Malinen
 Hiroshi Mano
 Bill Marshall
 Kenichi Maruhashi
 Avi Masour
 Stephen McCann
 Simone Merlin
 Murat Mese
 James Miller
 Robert R. Miller
 Fanny Mlinarsky
 Apurva Mody
 Emmanuel Monnerie
 Michael Montemurro
 Rajendra T. Moorti
 Hitoshi Morioka
 Yuichi Morioka
 Daniel Camps Mur
 Andrew Myles
 Yukimasa Nagai
 Hiroki Nakano
 Sai Shankar Nandagopalan
 Pradeep Nemavat

Chiu Ngo
 Paul Nikolich
 Knut Odman
 Hiroyo Ogawa
 Jong-Ee Oh
 Kazuyasu Okada
 David Olson
 Satoshi Oyama
 Santosh Ghanshyam Pandey
 Thomas Pare
 Jaewoo Park
 Minyoung Park
 Seung-Hoon Park
 Taejoon Park
 Sandhya Patil
 James E. Petranovich
 Albert Petrick
 John Petro
 Krishna Madhavan Pillai
 Riku Pirhonen
 Juho Pirskanen
 Vishakan Ponnampalam
 Ron Porat
 Henry S. Ptasinski
 Ivan Pustogarov
 Satish Putta
 Emily H. Qi
 Huyu Qu
 Jim E. Raab
 Harish Ramamurthy
 Jayaram Ramasastry
 Ivan Reede
 Edward Reuss
 Alex Reznik
 Maximilian Riegel
 Mark Rison
 Dongwook Roh
 Alexander Safonov
 Kazuyuki Sakoda
 Hemanth Sampath
 Sigurd Schelstraete
 Cristina Seibert
 Yongho Seok
 Kunal Shah
 Huairong Shao
 Nir Shapira
 Stephen J. Shellhammer
 Ian Sherlock
 Wei Shi
 Nobuhiko Shibagaki
 Shusaku Shimada
 Chang Sub Shin
 Thomas M. Siep
 Michael Sim
 Dwight Smith
 Graham Kenneth Smith
 IllSoo Sohn

Chunyi Song
 Robert Stacey
 Dorothy Stanley
 Chin-Sean Sum
 Bo Sun
 Chen Sun
 Mohammad H. Taghavi
 Kazuaki Takahashi
 Mineo Takai
 Jerry Thrasher
 Jens Tingleff
 James D. Tomcik
 Ichihiko Toyoda
 Solomon B. Trainin
 Ha Nguyen Tran
 Masahiro Umehira
 Richard D. J. Van Nee
 Allert Van Zelst
 Prabodh Varshney
 Ganesh Venkatesan
 Sameer Vermani
 Dalton T. Victor
 Gabriel Villardi
 Bhupender Virk
 George A. Vlantis
 Sanjay Wadhwa
 Chao-Chun Wang
 James June Wang
 Junyi Wang
 Qi Wang
 Lisa Ward
 Fujio Watanabe
 Lei Wen
 Menzo M. Wentink
 Nicholas West
 Pyo Chang Woo
 James Worsham
 Harry R. Worstell
 Tianyu Wu
 Akira Yamada
 Xun Yang
 Huanchun Ye
 Jung Yee
 Peter Yee
 Su Khiong Yong
 Christopher Young
 Heejung Yu
 Artur Zaks
 Hongyuan Zhang
 Junjian Zhang
 Ning Zhang
 Xin Zhang
 Mu Zhao
 Qiang Zhao
 Jun Zheng
 Chunhui Zhu

The following members of the individual balloting committee voted on this amendment. Balloters may have voted for approval, disapproval, or abstention.

Tomoko Adachi	Noriyuki Ikeuchi	Satoshi Obara
Thomas Alexander	Yasuhiko Inoue	Knut Odman
Nobumitsu Amachi	Sergiu Iordanescu	Robert O'Hara
Mark Anderson	Paul Isaacs	Satoshi Oyama
Butch Anton	Akio Iso	Stephen Palm
Lee R. Armstrong	Atsushi Ito	Eldad Perahia
Alex Ashley	Raj Jain	James E. Petranovich
Arthur Astrin	Junghoon Jee	Brian Phelps
Kwok Shum Au	Michael Johas Teener	Riku Pirhonen
Taehan Bae	Haeyoung Jun	Vishakan Ponnampalam
Madhusudan Banavara	Padam Kafle	Venkatesha Prasad
Raja Banerjea	Tal Kaitz	Emily H. Qi
Mathilde Benveniste	Naveen K. Kakani	Sridhar Rajagopal
Harry Bims	Shinkyoo Kaku	R. K. Rannow
Nancy Bravin	Masahiko Kaneko	Ivan Reede
John Buffington	Noh-Gyoung Kang	Edward Reuss
William Bush	Piotr Karocki	Maximilian Riegel
William Byrd	Assaf Y. Kasher	Mark Rison
Peter Calderon	Stuart J. Kerry	Benjamin Rolfe
Radhakrishna Canchi	Brian Kiernan	Jon Walter Rosdahl
William Carney	Yongbum Kim	Herbert Ruck
Dave Cavalcanti	Youhan Kim	Randall Safier
Clint F. Chaplin	Jarkko Knecht	John Santhoff
Wei-Peng Chen	Bruce P. Kraemer	Shigenobu Sasaki
Yi-Ming Chen	Thomas M. Kurihara	Bartien Sayogo
Keith Chow	Hyukchoon Kwon	Ian Sherlock
Ken Clements	Paul Lambert	Wei Shi
Charles Cook	Jeremy Landt	Shusaku Shimada
Todor Cooklev	James Lansford	Takashi Shono
Carlos Cordeiro	Joseph Levy	Gil Shultz
Joseph Decuir	Jan-Ray Liao	Thomas M. Siep
Patrick Diamond	Arthur Light	Graham Kenneth Smith
Thomas Dineen	Ru Lin	Kapil Sood
John Dorsey	Erik Lindskog	Amjad Soomro
Sourav Dutta	Daniel Lubar	Manikantan Srinivasan
Peter Ecclesine	William Lumpkins	Robert Stacey
Richard Eckard	Greg Luri	Dorothy Stanley
Richard Edgar	Bradley Lynch	Kevin Stanton
Stanislav Filin	Michael Lynch	Thomas Starai
Matthew J. Fischer	Elvis Maculuba	Adrian P. Stephens
Michael Fischer	Jouni K. Malinen	Walter Struppler
Matthew Gast	Roger Marks	Guenael Strutt
Devon Gayle	Jeffery Masters	Mark Sturza
Pieter-Paul Giesberts	Stephen McCann	Chin-Sean Sum
James P. K. Gilb	Michael McInnis	Bo Sun
Reinhard Gloger	Steven Methley	Chen Sun
Sudheer A. Grandhi	Gary Michel	Mohammad H. Taghavi
Randall Groves	Michael Montemurro	Jun Ichi Takada
Michael Gundlach	Jose Morales	Joseph Tardo
Chris Guy	Kenichi Mori	Jens Tingleff
Mark Hamilton	Ronald Murias	Fei Tong
Christopher J. Hansen	Rick Murphy	Ichihiko Toyoda
Brian D. Hart	Peter Murray	Solomon B. Trainin
Jerome Henry	Andrew Myles	Ha Nguyen Tran
Marco Hernandez	Nabil Nasser	Mark-Rene Uchida
Guido R. Hiertz	Michael S. Newman	Dmitri Varsanofiev
Chung-Hsien Hsu	Nick S. A. Nikjoo	Prabodh Varshney
David Hunter	Paul Nikolich	John Vergis
Tetsushi Ikegami	John Notor	Bhupender Virk

George A. Vlantis
James June Wang
Lei Wang
Lisa Ward

Karl Weber
Hung-Yu Wei
Ludwig Winkel
Harry R. Worstell
James Yee

Oren Yuen
Dezhi Zhang
Xin Zhang
Daidi Zhong

When the IEEE-SA Standards Board approved this amendment on 19 October 2012, it had the following membership:

Richard H. Hulett, *Chair*
John Kulick, *Vice Chair*
Robert M. Grow, *Past Chair*
Konstantinos Karachalios, *Secretary*

Satish Aggarwal
Masayuki Ariyoshi
Peter Balma
William Bartley
Ted Burse
Clint Chaplin
Wael Diab
Jean-Philippe Faure

Alexander Gelman
Paul Houzé
Jim Hughes
Young Kuyn Kim
Joseph L. Koepfinger*
David J. Law
Thomas Lee
Hung Ling

Oleg Logvinov
Ted Olsen
Gary Robinson
Jon Walter Rosdahl
Mike Seavey
Yatin Trivedi
Phil Winston
Yu Yuan

*Member Emeritus

Also included are the following nonvoting IEEE-SA Standards Board liaisons:

Richard DeBlasio, *DOE Representative*
Michael Janezic, *NIST Representative*

Michelle Turner
IEEE Standards Program Manager, Document Development

Kathryn Bennett
IEEE Standards Program Manager, Technical Program Development

Introduction

This introduction is not part of IEEE Std 802.11ad-2012, IEEE Standard for Information technology—Telecommunications and information exchange between systems—Local and metropolitan area networks—Specific requirements—Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications—Amendment 3: Enhancements for Very High Throughput in the 60 GHz Band.

This amendment defines standardized modifications to both the IEEE 802.11 physical layers (PHYs) and the IEEE 802.11 medium access control layer (MAC) to enable operation in frequencies around 60 GHz and capable of very high throughput.

Contents

1.	Overview	2
1.3	Supplementary information on purpose	2
2.	Normative references	2
3.	Definitions, acronyms, and abbreviations	2
3.1	Definitions	2
3.2	Definitions specific to IEEE 802.11	4
3.3	Abbreviations and acronyms	6
4.	General description	9
4.3	Components of the IEEE 802.11 architecture	9
4.3.1	General	9
4.3.2a	The personal BSS (PBSS) as an ad hoc network	9
4.3.4	Distribution system (DS) concepts	9
4.3.7	QoS BSS: The QoS network	11
4.3.17	DMG STA	13
4.3.18	DMG relay	13
4.4	Logical service interfaces	13
4.4.1	General	13
4.4.2a	PBSS control point service (PCPS)	14
4.4.3	DSS	14
4.5	Overview of the services	15
4.5.1	General	15
4.5.3	Services that support the distribution service and the PCP service	16
4.5.4	Access control and data confidentiality services	16
4.7	Differences between among ESS, PBSS, and IBSS LANs	16
4.9	Reference model	18
4.9.3	Reference model for supporting multiple MAC sublayers	18
4.9.4	Reference model for multi-band operation	19
4.10	IEEE Std 802.11 and IEEE Std 802.1X-2004	21
4.10.4a	PBSS functional model description	21
4.11	Generic advertisement service (GAS)	22
5.	MAC service definition	23
5.1	Overview of MAC services	23
5.1.5	MAC data service architecture	23
5.2	MAC data service specification	24
5.2.2	MA-UNITDATA.request	24
6.	Layer management	25
6.3	MLME SAP interface	25
6.3.3	Scan	25
6.3.4	Synchronization	28
6.3.5	Authenticate	29
6.3.7	Associate	31
6.3.8	Reassociate	36

6.3.11	Start.....	43
6.3.12	Stop.....	45
6.3.26	TS management interface.....	46
6.3.29	Block Ack.....	55
6.3.71	Network discovery and selection support.....	59
6.3.88	AP PeerKey management.....	61
6.3.89	On-channel Tunneling operation.....	61
6.3.90	Multi-band operation.....	63
6.3.91	DMG relay operation.....	71
6.3.92	Quieting adjacent BSS operation.....	78
6.3.93	DMG beamforming.....	82
6.3.94	PN event report.....	84
6.5	PLME SAP interface.....	86
6.5.8	PLME-TXTIME.confirm.....	86
6.5.9	PLME-DMGTESTMODE.request.....	86
6.5.10	PLME-DMGTESTOUTPUT.request.....	88
7.	PHY service specification.....	91
7.3	Detailed PHY service specifications.....	91
7.3.4	Basic service and options.....	91
7.3.5	PHY-SAP detailed service specification.....	91
8.	Frame formats.....	93
8.2	MAC frame formats.....	93
8.2.3	General frame format.....	93
8.2.4	Frame fields.....	93
8.2.5	Duration/ID field (QoS STA).....	100
8.3	Format of individual frame types.....	101
8.3.1	Control frames.....	101
8.3.2	Data frames.....	108
8.3.3	Management frames.....	111
8.3.4	Extension frames.....	114
8.4	Management and Extension frame body components.....	118
8.4.1	Fields that are not information elements.....	118
8.4.2	Information elements.....	123
8.4a	Fields used in Management and Extension frame bodies and Control frames.....	177
8.4a.1	Sector Sweep field.....	177
8.4a.2	Dynamic Allocation Info field.....	178
8.4a.3	Sector Sweep Feedback field.....	179
8.4a.4	BRP Request field.....	179
8.4a.5	Beamforming Control field.....	180
8.4a.6	Beamformed Link Maintenance field.....	182
8.5	Action frame format details.....	183
8.5.3	QoS Action frame details.....	183
8.5.5	Block Ack Action frame details.....	188
8.5.7	Radio Measurement action details.....	189
8.5.8	Public Action details.....	190
8.5.11	Protected Dual of Public Action frames.....	194
8.5.13	TDLS Action field formats.....	194
8.5.19	Robust AV Streaming Action frame details.....	195
8.5.20	DMG Action frame details.....	195
8.5.21	FST Action frame details.....	210

8.5.22	Unprotected DMG Action frame details	215
8.6	Aggregate MPDU (A-MPDU).....	218
8.6.1	A-MPDU format.....	218
8.6.3	A-MPDU contents	219
9.	MAC sublayer functional description	221
9.2	MAC architecture	221
9.2.1	General.....	221
9.2.2	DCF	222
9.2.4	Hybrid coordination function (HCF)	222
9.2.7	Fragmentation/defragmentation overview.....	222
9.3	DCF	223
9.3.1	General.....	223
9.3.2	Procedures common to the DCF and EDCAF.....	223
9.3.3	Random backoff time	228
9.3.4	DCF access procedure	228
9.3.6	Group addressed MPDU transfer procedure.....	231
9.5	Fragmentation.....	231
9.7	Multirate support	231
9.7.1	Overview	231
9.7.5a	Multirate support for DMG STAs	232
9.7.8	Modulation classes	234
9.11	A-MSDU operation	234
9.12	A-MPDU operation	235
9.12.1	A-MPDU contents	235
9.12.2	A-MPDU length limit rules	235
9.12.3	Minimum MPDU Start Spacing	235
9.12.4	A-MPDU aggregation of group addressed data frames.....	236
9.13	PPDU duration constraint	237
9.13a	DMG A-PPDU operation	237
9.18	Operation across regulatory domains	237
9.18.2	Operation upon entering a regulatory domain.....	237
9.18.6	Operation with coverage classes.....	238
9.19	HCF	238
9.19.1	General.....	238
9.19.2	HCF contention-based channel access (EDCA).....	239
9.21	Block Acknowledgment (Block Ack)	240
9.21.1	Introduction	240
9.21.2	Setup and modification of the Block Ack parameters.....	240
9.21.3	Data and acknowledgment transfer using immediate Block Ack policy and delayed Block Ack policy.....	241
9.21.6	Selection of BlockAck and BlockAckReq variants.....	241
9.21.7	HT-immediate Block Ack extensions.....	242
9.24	MAC frame processing.....	243
9.24.3	Duration/ID field processing	243
9.25	Reverse Direction protocol	243
9.25.0a	General.....	243
9.25.1	Reverse Direction (RD) exchange sequence	244
9.25.2	Support for RD	244
9.25.3	Rules for RD initiator	244
9.25.4	Rules for RD responder	245
9.26	PSMP operation.....	246
9.26.0a	General.....	246

9.32	Mesh forwarding framework	247
9.33	DMG channel access	247
9.33.1	General.....	247
9.33.2	Access periods within a beacon interval.....	247
9.33.3	ATI transmission rules.....	248
9.33.4	DTI transmission rules.....	250
9.33.5	Contention-based access period (CBAP) transmission rules	250
9.33.6	Channel access in scheduled DTI.....	251
9.33.7	Dynamic allocation of service period	259
9.33.8	Dynamic truncation of service period	263
9.33.9	Dynamic extension of service period	264
9.33.10	Updating multiple NAV timers	265
9.34	DMG PCP/AP clustering.....	268
9.34.1	General.....	268
9.34.2	Cluster formation	269
9.34.3	Cluster maintenance	273
9.34.4	Cluster report and re-scheduling.....	276
9.34.5	Decentralized PCP/AP cluster request	277
9.35	DMG beamforming	278
9.35.1	General.....	278
9.35.2	Sector-level sweep (SLS) phase	281
9.35.3	Beam Refinement Protocol (BRP) phase	289
9.35.4	Beamforming in BTI	293
9.35.5	Beamforming in A-BFT	294
9.35.6	Beamforming in DTI	298
9.35.7	Beam tracking.....	311
9.35.8	State machines	313
9.36	DMG Block Ack with flow control.....	314
9.36.1	General.....	314
9.36.2	DMG Block Ack architecture with flow control	314
9.36.3	Scoreboard context control with flow control	316
9.36.4	Receive Reordering Buffer with flow control operation	316
9.36.5	Generation and transmission of BlockAck by a STA with flow control.....	318
9.36.6	Originator's behavior with flow control support.....	318
9.37	DMG link adaptation	318
9.37.1	General.....	318
9.37.2	DMG TPC.....	319
9.37.3	Fast link adaptation.....	320
9.38	DMG dynamic tone pairing (DTP).....	321
9.39	DMG relay operation.....	322
9.39.1	General.....	322
9.39.2	Link switching type	322
9.39.3	Link cooperating type	326
9.39.4	Relay link adaptation	328
10.	MLME	329
10.1	Synchronization	329
10.1.1	General.....	329
10.1.2	Basic approach.....	329
10.1.3	Maintaining synchronization	329
10.1.4	Acquiring synchronization, scanning	335
10.1.5	Adjusting STA timers	341
10.1.7	Terminating a network.....	341

10.2	Power management.....	342
10.2.1	Power management in an non-DMG infrastructure network	342
10.2.4	SM power save	342
10.2.5	Power management in a PBSS and DMG infrastructure BSS	342
10.3	STA authentication and association	349
10.3.1	State variables.....	349
10.3.2	State transition diagram for nonmesh STAs.....	350
10.3.3	Frame filtering based on STA state	351
10.3.4	Authentication and deauthentication	353
10.3.5	Association, reassociation, and disassociation	354
10.3.6	Additional mechanisms for an AP collocated with a mesh STA	363
10.3.7	Communicating PBSS information	363
10.4	TS operation	363
10.4.1	Introduction	363
10.4.2	TSPEC Construction.....	365
10.4.3	TS life cycle.....	365
10.4.4	TS Setup	366
10.4.7	Failed TS Setup	369
10.4.8	Data Transfer	369
10.4.9	TS Deletion.....	370
10.4.10	TS Timeout.....	370
10.4.13	DMG allocation formats.....	372
10.4.14	PTP TS Operation.....	373
10.5	Block Ack operation.....	373
10.5.2	Setup and modification of the Block Ack parameters.....	373
10.7	DLS operation.....	374
10.7.1	General.....	374
10.8	TPC procedures	375
10.8.1	General.....	375
10.8.2	Association based on transmit power capability	375
10.8.4	Specification of regulatory and local maximum transmit power levels	375
10.8.6	Adaptation of the transmit power	376
10.9	DFS procedures	376
10.9.1	General.....	376
10.9.2	Association based on supported channels	377
10.9.3	Quieting channels for testing	377
10.9.7	Requesting and reporting of measurements	377
10.9.8	Selecting and advertising a new channel.....	378
10.11	Radio measurement procedures.....	379
10.11.6	Requesting and reporting of measurements.....	379
10.11.8	Triggered autonomous reporting	379
10.11.11	Link Measurement	379
10.11.14	Multiple BSSID Set	380
10.11.16	Access Delay Measurement.....	380
10.22	Tunneled direct-link setup.....	380
10.22.1	General.....	380
10.23	Wireless network management procedures	380
10.23.14	Channel usage procedures	380
10.23.15	Group addressed transmission service.....	381
10.24	WLAN interworking with external networks procedures	382
10.24.3	Interworking procedures: generic advertisement service (GAS).....	382
10.27	Procedures to manage OBSS.....	382
10.28	DMG beamformed link and BSS maintenance	382
10.28.1	Beamformed link maintenance	382

10.28.2	PCP Handover	385
10.29	DMG BSS peer and service discovery	387
10.29.1	Information Request and Response	387
10.29.2	Peer Service Discovery	387
10.30	Changing DMG BSS parameters	388
10.30.1	General	388
10.30.2	Moving the TBTT	388
10.30.3	Changing beacon interval duration	389
10.30.4	Maintaining synchronization in a PCP/AP cluster	390
10.30.5	Recommending DMG BSS parameters to the PCP/AP	390
10.31	Spatial sharing and interference mitigation for DMG STAs	391
10.31.1	General	391
10.31.2	Spatial sharing and interference assessment	391
10.31.3	Achieving spatial sharing and interference mitigation	393
10.31.4	PBSS and infrastructure BSS stability in OBSS scenarios	394
10.32	Multi-band operation	394
10.32.1	General	394
10.32.2	FST setup protocol	396
10.32.3	FST teardown	405
10.32.4	On-channel Tunneling (OCT) operation	405
10.32.5	FST payload	407
10.33	MMSL cluster operation	407
10.33.1	Introduction	407
10.33.2	MMSL cluster setup	408
10.34	DMG coexistence with non-IEEE-802.11 systems	409
10.35	DMG relay procedures	410
10.35.1	General	410
10.35.2	Common relay setup procedures	411
10.35.3	Relay operation-type change procedure	412
10.35.4	Relay teardown	413
10.36	Quieting adjacent DMG BSSs	413
10.36.1	General	413
10.36.2	Procedure at the requester AP	414
10.36.3	Procedure at the responder AP	414
10.37	DMG beamforming	414
10.38	DMG MAC sublayer parameters	417
11.	Security	419
11.1	Framework	419
11.1.2	Security methods	419
11.1.3	RSNA equipment and RSNA capabilities	419
11.1.4	RSNA establishment	419
11.4	RSNA confidentiality and integrity protocols	421
11.4.1	Overview	421
11.4.3	CTR with CBC-MAC Protocol (CCMP)	421
11.4.4	Broadcast/Multicast Integrity Protocol (BIP)	421
11.4.5	GCM with Galois Message Authentication Code (GMAC) Protocol (GCMP) ...	421
11.5	RSNA security association management	427
11.5.1	Security associations	427
11.5.2	RSNA selection	428
11.5.7a	RSNA policy selection in a PBSS	428
11.5.8	RSNA management of the IEEE 802.1X Controlled Port	428
11.5.11a	RSNA authentication in a PBSS	429

11.5.14a	RSNA key management in a PBSS	429
11.5.15	RSNA security association termination.....	429
11.5.18	RSNA rekeying.....	429
11.5.19	Multi-band RSNA	430
11.6	Keys and key distribution	433
11.6.2	EAPOL-Key frames	433
11.6.6	4-Way Handshake.....	434
11.7	Mapping EAPOL keys to IEEE 802.11 keys	435
11.7.8	Mapping PTK to GCMP keys	435
13.	MLME mesh procedures	437
13.1	Mesh STA dependencies	437
21.	Directional multi-gigabit (DMG) PHY specification	439
21.1	DMG PHY introduction	439
21.1.1	Scope	439
21.1.2	DMG PHY functions	439
21.2	DMG PHY service interface.....	440
21.2.1	Introduction	440
21.2.2	TXVECTOR and RXVECTOR parameters	440
21.2.3	TXSTATUS parameters	442
21.3	Common parameters.....	443
21.3.1	Channelization	443
21.3.2	Transmit mask	443
21.3.3	Common requirements	443
21.3.4	Timing-related parameters.....	446
21.3.5	Mathematical conventions in the signal description.....	447
21.3.6	Common preamble	448
21.3.7	HCS calculation for headers of control PHY, OFDM PHY, and SC PHY	451
21.3.8	Common LDPC parity matrices	451
21.3.9	Scrambler.....	453
21.3.10	Received channel power indicator (RCPI) measurement.....	454
21.4	DMG control PHY.....	454
21.4.1	Introduction	454
21.4.2	Frame format	454
21.4.3	Transmission.....	455
21.4.4	Performance requirements	458
21.5	DMG OFDM PHY	459
21.5.1	Introduction	459
21.5.2	Frame format	459
21.5.3	Transmission.....	459
21.5.4	Performance requirements	468
21.6	DMG SC PHY	470
21.6.1	Introduction	470
21.6.2	Frame format	470
21.6.3	Transmission.....	470
21.6.4	Performance requirements	477
21.7	DMG low-power SC PHY.....	478
21.7.1	Introduction	478
21.7.2	Transmission.....	479
21.8	PLCP transmit procedure.....	482
21.9	PLCP receive procedure	485

21.10	Beamforming	487
21.10.1	Beamforming concept.....	487
21.10.2	Beamforming PHY frame format.....	487
21.11	Golay sequences	490
21.12	DMG PLME	491
21.12.1	PLME_SAP sublayer management primitives	491
21.12.2	DMG PHY MIB	491
21.12.3	TXTIME calculation.....	492
21.12.4	PHY characteristics	492
21.13	DMG PMD sublayer.....	494
21.13.1	Scope and field of application	494
21.13.2	Overview of service.....	494
21.13.3	Overview of interactions	494
21.13.4	Basic service and options	494
21.13.5	PMD_SAP detailed service specification.....	495
Annex B (normative) Protocol Implementation Conformance Statement (PICS) proforma.....		499
B.4	PICS proforma	499
B.4.3	IUT configuration	499
B.4.4	MAC protocol.....	500
B.4.14	QoS base functionality.....	505
B.4.15	QoS enhanced distributed channel access (EDCA).....	506
B.4.17	Radio management extensions	507
B.4.26	DMG features	508
Annex C (normative) ASN.1 encoding of the MAC and PHY MIB		517
C.3	MIB Detail.....	517
Annex E (normative) Country elements and operating classes		539
E.1	Country information and operating classes	539
Annex H (normative) Usage of Ethertype 89-0d.....		541
Annex L (informative) Examples of encoding a frame for OFDM PHYs and DMG PHYs.....		543
L.4	DMG example data vectors	543
L.5	DMG Example 1 – CPHY encoding	544
L.5.1	CPHY preamble.....	544
L.5.2	CPHY header.....	545
L.5.3	CPHY payload.....	547
L.6	DMG Example 2 – SC PHY encoding	548
L.6.1	sC PHY Preamble.....	548
L.6.2	SC PHY header.....	549
L.6.3	SC PHY payload.....	552
L.7	DMG Example 3 – OFDM PHY encoding	557
L.7.1	OFDM PHY preamble.....	557
L.7.2	OFDM PHY header coding	558
L.7.3	OFDM PHY header modulation.....	560
L.7.4	OFDM PHY payload coding	561
L.7.5	OFDM PHY MCS14 payload modulation	562
L.7.6	OFDM PHY MCS17 payload modulation	564

L.7.7	OFDM PHY MCS19 payload modulation	566
L.7.8	OFDM PHY MCS23 payload modulation	568
L.8	DMG Example 4 – LP SC PHY encoding	569
L.8.1	LP SC PHY preamble	569
L.8.2	LP SC PHY header	570
L.8.3	LP SC PHY MCS26 payload	573
L.8.4	LP SC PHY MCS30 payload	574
Annex M (informative) RSNA reference implementations and test vectors		577
M.11	GCMP	577
M.11.1	Test vector	577
M.11.2	Example of encryption C code	579
Annex N (informative) Admission control		593
N.3	Guidelines and reference design for sample scheduler and admission control unit	593
N.3.3	Reference design for sample scheduler and admission control unit	593
Annex Y (informative) Functions of the centralized coordination service root (CCSR)		595
Annex Z (informative) TSPEC aggregation for DMG BSSs		597

Tables

Table 6-1—Supported TS management primitives	46
Table 7-4—Vector descriptions	91
Table 8-0a—Maximum MSDU and A-MSDU sizes	93
Table 8-1—Valid type and subtype combinations	94
Table 8-1a—Control Frame Extension	94
Table 8-2—To/From DS combinations in data frame	95
Table 8-3—Duration/ID field encoding	97
Table 8-4a—QoS Control field for frames transmitted within a DMG PPDU	98
Table 8-5—TID subfield	98
Table 8-6—Ack Policy subfield in QoS Control field of QoS data frames	99
Table 8-16—BlockAckReq frame variant encoding	102
Table 8-15—BAR Ack Policy subfield	102
Table 8-18—BlockAck frame variant encoding	103
Table 8-17—BA Ack Policy subfield	103
Table 8-19—Address field contents	108
Table 8-20—Beacon frame body	111
Table 8-22—Association Request frame body	111
Table 8-23—Association Response frame body	112
Table 8-24—Reassociation Request frame body	112
Table 8-25—Reassociation Response frame body	113
Table 8-26—Probe Request frame body	113
Table 8-27—Probe Response frame body	114
Table 8-28—Authentication frame body	114
Table 8-33a—DMG Beacon frame body	115
Table 8-37—Status codes	119
Table 8-38—Category values	120
Table 8-53a—Band ID field	122
Table 8-53b—The BSS Type subfield	122
Table 8-54—Element IDs	123
Table 8-59—Measurement Type definitions for measurement requests	125
Table 8-80a—Optional Subelement IDs for directional channel quality request	126
Table 8-80b—Reporting Condition for Directional Channel Quality Report	127
Table 8-81—Measurement Type definitions for measurement reports	129
Table 8-98a—Optional Subelement IDs for directional channel quality report	130
Table 8-98b—Optional Subelement IDs for directional measurement report	131
Table 8-98c—Optional Subelement IDs for directional statistics report	133
Table 8-99—Cipher suite selectors	133
Table 8-100—Cipher suite usage	133
Table 8-103—Capabilities field	134
Table 8-107—Direction subfield encoding	135
Table 8-108—Access Policy subfield	135
Table 8-110a—Reliability subfield values	137
Table 8-122—Timeout Interval Type field value	138
Table 8-183f—Subfields of the A-MPDU Parameters field	142
Table 8-183g—FBCK-REQ field description	147
Table 8-183h—FBCK-TYPE field description	148
Table 8-183i—AllocationType field values	150
Table 8-183k—Allocation Period values	153
Table 8-183j—Allocation Format values	153
Table 8-183l—TSCONST Period values	154
Table 8-183m—Channel Measurement Feedback element format	155
Table 8-183n—Channel measurement	157

Table 8-183o—STA Role field values	158
Table 8-183p—Activity field values	162
Table 8-183q—Session Type field format.....	165
Table 8-183r—DTP Report element format.....	166
Table 8-183s—MMS Element Owner field definition.....	172
Table 8-183t—Single AID field definition.....	173
Table 8-183u—LLC Header Copy field size.....	174
Table 8-190a—Encoding of BeamLink Maintenance Unit Index	182
Table 8-192a—Encoding of the ADDTS Request frame variant	183
Table 8-192b—Encoding of the ADDTS Response frame variant	183
Table 8-190b—The Beamformed Link Maintenance negotiation.....	183
Table 8-193—Basic ADDTS Request frame variant Action field format.....	184
Table 8-193a—DMG ADDTS Request frame variant Action field format	184
Table 8-194—Basic ADDTS Response frame variant Action field format	186
Table 8-194a—DMG ADDTS Response frame variant Action field format.....	186
Table 8-195—DELTS frame Action field format	187
Table 8-203—ADDBA Request frame Action field format.....	188
Table 8-204—ADDBA Response frame Action field format	188
Table 8-205—DELBA frame Action field format	189
Table 8-208—Optional Subelement IDs for Link Measurement Report frame	189
Table 8-210—Public Action field values	190
Table 8-216—GAS Initial Request frame body format.....	190
Table 8-217—GAS Initial Response frame body format	191
Table 8-218—GAS Comeback Request frame body format.....	191
Table 8-219—GAS Comeback Response frame body format.....	192
Table 8-220—Information for TDLS Discovery Response frame	192
Table 8-221e—QAB Response frame Action field format	193
Table 8-221d—QAB Request frame Action field format	193
Table 8-228—Public Action field values defined for Protected Dual of Public Action frames.....	194
Table 8-239—Information for TDLS Setup Request Action field	194
Table 8-240—Information for TDLS Setup Response Action field.....	194
Table 8-249—Information for TDLS Discovery Request Action field.....	195
Table 8-281b—DMG Action field values	195
Table 8-281c—Power Save Configuration Request frame Action field format.....	196
Table 8-281e—Information Request frame Action field format	197
Table 8-281d—Power Save Configuration Response frame Action field format	197
Table 8-281f—Information Response frame Action field format	198
Table 8-281g—Handover Request frame Action field format	199
Table 8-281h—Handover Response frame Action field format.....	200
Table 8-281i—Relay Search Request frame Action field format.....	201
Table 8-281j—Relay Search Response frame Action field format	201
Table 8-281k—Multi-relay Channel Measurement Request frame Action field format.....	202
Table 8-281l—Multi-relay Channel Measurement Report frame Action field format.....	203
Table 8-281m—RLS Request frame Action field format	204
Table 8-281o—RLS Announcement frame Action field format	205
Table 8-281n—RLS Response frame Action field format	205
Table 8-281p—RLS Teardown frame Action field format	206
Table 8-281q—Relay ACK Request frame Action field format	206
Table 8-281r—Relay ACK Response frame Action field format	207
Table 8-281s—TPA Request frame Action field format.....	208
Table 8-281t—TPA Response frame Action field format.....	208
Table 8-281u—TPA Report frame Action field format	209
Table 8-281v—ROC Request frame Action field format.....	209
Table 8-281w—ROC Response frame Action field format	210

Table 8-281y—FST Setup Request frame Action field format	211
Table 8-281x—FST Action field values.....	211
Table 8-281z—FST Setup Response frame Action field format.....	212
Table 8-281aa—FST Tear Down frame Action field format	213
Table 8-281ab—FST Ack Request frame Action field format	213
Table 8-281ac—FST Ack Response frame Action field format	214
Table 8-281ad—On-channel Tunnel Request frame Action field format	215
Table 8-281af—Announce frame Action field format	216
Table 8-281ae—Unprotected DMG Action field values	216
Table 8-281ag—BRP frame Action field format	217
Table 8-282—MPDU delimiter fields (non-DMG).....	218
Table 8-282a—MPDU delimiter fields (DMG)	218
Table 8-284—A-MPDU contents in the data enabled immediate response context	219
Table 8-287—A-MPDU contents MPDUs in the control response context.....	220
Table 9-4—Modulation classes	234
Table 9-16—Mandatory and optional procedures in the Beamforming mechanism.....	279
Table 10-1a—Power management states for an Awake BI.....	343
Table 10-1b—Power management states for a Doze BI.....	344
Table 10-2a—Types of Block Ack agreement based on capabilities and ADDBA conditions for DMG STAs	374
Table 10-4—Allowed Measurement Requests	378
Table 10-6—Allowed Measurement Requests	379
Table 10-15—Exceptions for the initiator	399
Table 10-16—FST status at state transition.....	401
Table 10-17—Setting of Single AID field.....	408
Table 10-18—DMG MAC sublayer parameter values	417
Table 11-4—Cipher suite key lengths	433
Table 11-6—KDE.....	433
Table 21-1—TXVECTOR and RXVECTOR parameters	440
Table 21-2—TXSTATUS parameters	442
Table 21-3—Receiver sensitivity	445
Table 21-4—Timing-related parameters	446
Table 21-5—Frequently used parameters.....	446
Table 21-6—Rate 1/2 LDPC code matrix (Each nonblank element i in the table is the cyclic permutation matrix P_i of size $Z \times Z$; blank entries represent the zero matrix of size $Z \times Z$)	452
Table 21-7—Rate 5/8 LDPC code matrix (Each nonblank element i in the table is the cyclic permutation matrix P_i of size $Z \times Z$; blank entries represent the zero matrix of size $Z \times Z$)	452
Table 21-8—Rate 3/4 LDPC code matrix (Each nonblank element i in the table is the cyclic permutation matrix P_i of size $Z \times Z$; blank entries represent the zero matrix of size $Z \times Z$)	453
Table 21-9—Rate 13/16 LDPC code matrix (Each nonblank element i in the table is the cyclic permutation matrix P_i of size $Z \times Z$; blank entries represent the zero matrix of size $Z \times Z$)	453
Table 21-10—Modulation and coding scheme for the control PHY	454
Table 21-11—Control PHY header fields	456
Table 21-12—EVM requirement for control PHY	458
Table 21-13—OFDM header fields	459
Table 21-14—Modulation and coding scheme for OFDM	461
Table 21-15—LDPC code rates.....	463
Table 21-16—EVM requirements for OFDM	469
Table 21-17—SC header fields.....	470
Table 21-18—Modulation and coding scheme for SC	472

Table 21-19—LDPC code rates	473
Table 21-20—Values of NCBPB	476
Table 21-21—EVM requirements for SC PHY	477
Table 21-22—Low-power SC modulation and coding schemes	479
Table 21-23—Zero filling for SC BRP packets.....	488
Table 21-24—The sequence Ga128(n).....	490
Table 21-25—The sequence Gb128(n).....	490
Table 21-26—The sequence Ga64(n).....	491
Table 21-27—The sequence Gb64(n).....	491
Table 21-28—The sequence Ga32(n).....	491
Table 21-29—The sequence Gb32(n).....	491
Table 21-31—DMG PHY characteristics.....	492
Table 21-30—DMG PHY MIB attribute default values	492
Table 21-32—PMD_SAP peer-to-peer service primitives	494
Table 21-33—PMD_SAP sublayer-to-sublayer service primitives.....	495
Table E-1—Operating classes in the United States	539
Table E-2—Operating classes in Europe	539
Table E-3—Operating classes in Japan	539
Table E-4—Global operating classes	540
Table H-1—Payload Type field values	541
Table L-43—CPHY header settings	546
Table L-44—SC PHY header settings.....	550
Table L-45—OFDM PHY header settings	559
Table L-46—LP SC PHY header settings	571

Figures

Figure 4-3a—CCSS and ECPAC	11
Figure 4-10a—DMG relay in a DMG BSS	14
Figure 4-11—Complete IEEE 802.11 architecture.....	15
Figure 4-12—IEEE 802.11 architecture (again).....	17
Figure 4-13a—Logical architecture of a PBSS	17
Figure 4-16a—Reference model for supporting multiple MAC sublayers	18
Figure 4-16b—Reference model for a multi-band capable device (transparent FST).....	19
Figure 4-16c—Reference model for a multi-band capable device (nontransparent FST).....	20
Figure 4-23a—Example of RSNA setup in a PBSS	22
Figure 5-2—MAC data plane architecture (transparent FST)	24
Figure 6-25b—Operation of OCT	61
Figure 6-27—PN23 Generator.....	88
Figure 8-2—Frame Control field <u>when Type is not equal to 1 or Subtype is not equal to 6</u>	93
Figure 8-2a—Frame Control field when Type is equal to 1 and Subtype is equal to 6	94
Figure 8-28b—BA information field (Extended Compressed BlockAck)	103
Figure 8-29a—Poll frame format	104
Figure 8-29b—SPR frame format.....	104
Figure 8-29c—Grant frame format.....	105
Figure 8-29d—DMG CTS frame format.....	105
Figure 8-29f—SSW frame format	106
Figure 8-29g—SSW-Feedback frame format.....	106
Figure 8-29e—DMG DTS frame format	106
Figure 8-29h—SSW-ACK frame format.....	107
Figure 8-29i—Grant ACK frame format	107
Figure 8-32— <u>Basic</u> A-MSDU subframe structure	109
Figure 8-33a—Short A-MSDU subframe structure.....	110
Figure 8-34a—DMG Beacon frame format.....	114
Figure 8-34b—Beacon Interval Control field.....	116
Figure 8-34c—Clustering Control field format if the Discovery Mode field is 0	117
Figure 8-34d—Clustering Control field format if the Discovery Mode field is 1	117
Figure 8-38—Capability Information field (non-DMG STA).....	118
Figure 8-38a—Capability Information field (DMG STA)	118
Figure 8-80b—Relay Capable STA Info field.....	121
Figure 8-80c—DMG Parameters.....	122
Figure 8-139a—Measurement request field format for directional channel quality request.....	125
Figure 8-139b—Directional Channel Quality Reporting Information data field format.....	126
Figure 8-139c—Measurement Request field format for directional measurement request.....	127
Figure 8-139d—Measurement Request field format for directional statistics request.....	128
Figure 8-139e—Directional Statistics Bitmap field format.....	128
Figure 8-182a—Measurement report field format for directional channel quality report.....	129
Figure 8-182b—Measurement Report field format for directional measurement report	130
Figure 8-182c—Measurement Results field format	131
Figure 8-182d—Measurement Report field format for directional statistics report.....	132
Figure 8-196—TSPEC element format (non-DMG)	134
Figure 8-196a—TSPEC element format (DMG).....	134
Figure 8-198a—DMG Attributes field format.....	136
Figure 8-321—Nontransmitted BSSID Capability element format	139
Figure 8-321a—DMG BSS Control field format	139
Figure 8-401l—DMG BSS Parameter Change element format	140
Figure 8-401m—Change Type Bitmap field format	140
Figure 8-401o—DMG STA Capability Information field format	141
Figure 8-401n—DMG Capabilities element format.....	141

Figure 8-401p—A-MPDU parameters field format	142
Figure 8-401q—Supported MCS Set field format.....	143
Figure 8-401r—DMG PCP/AP Capability Information field format	144
Figure 8-401s—DMG Operation element format	145
Figure 8-401t—DMG Operation Information field format.....	145
Figure 8-401u—DMG BSS Parameter Configuration field format.....	145
Figure 8-401v—DMG Beam Refinement element format	146
Figure 8-401w—FBCK-REQ field format	147
Figure 8-401x—FBCK-TYPE field format.....	148
Figure 8-401z—Extended Schedule element format.....	149
Figure 8-401aa—Allocation field format	149
Figure 8-401y—Wakeup Schedule element format	149
Figure 8-401ab—Allocation Control field format.....	150
Figure 8-401ac—STA availability element format	151
Figure 8-401ad—STA Info field format.....	151
Figure 8-401ae—DMG TSPEC element format	152
Figure 8-401af—DMG Allocation Info field format.....	152
Figure 8-401ag—Traffic Scheduling Constraint field format	154
Figure 8-401ah—Constraint subfield format.....	154
Figure 8-401ai—Next DMG ATI element format.....	155
Figure 8-401aj—Awake Window element format	157
Figure 8-401ak—Multi-band element format	158
Figure 8-401al—Multi-band Control field format	158
Figure 8-401an—ADDBA Extension element format	160
Figure 8-401am—Multi-band Connection Capability field format.....	160
Figure 8-401ap—Next PCP List element format	161
Figure 8-401aq—PCP Handover element format.....	161
Figure 8-401ao—ADDBA Capabilities field format.....	161
Figure 8-401ar—DMG Link Margin element format.....	162
Figure 8-401as—DMG Link Adaptation Acknowledgment element format	163
Figure 8-401at—Switching Stream element format	163
Figure 8-401au—Switching parameters field format	164
Figure 8-401aw—Session Control field format.....	165
Figure 8-401av—Session Transition element format	165
Figure 8-401ax—Cluster Report element format	167
Figure 8-401ay—Cluster Report Control field format	167
Figure 8-401az—Relay capabilities element format	168
Figure 8-401ba—Relay Capabilities Info field format.....	168
Figure 8-401bb—Relay Transfer Parameter Set element format	169
Figure 8-401bc—Relay Transfer Parameter field format.....	169
Figure 8-401bd—Quiet Period Request element format	170
Figure 8-401be—Quiet Period Response element format	171
Figure 8-401bf—BeamLink Maintenance element format	171
Figure 8-401bg—MMS element format.....	172
Figure 8-401bh—MMS Control field format	172
Figure 8-401bj—ECPAC Policy element format	174
Figure 8-401bi—Upper layer protocol identification (U-PID) element format	174
Figure 8-401bk—ECPAC Policy Detail field format.....	175
Figure 8-401bm—Antenna Sector ID Pattern element format.....	176
Figure 8-401bl—Cluster Time Offset element format	176
Figure 8-401bn—Sequence Generator 1	177
Figure 8-401bo—Sequence Generator 2	177
Figure 8-431a—SSW field format.....	177
Figure 8-431b—Dynamic Allocation Info field format	178

Figure 8-431c—SSW Feedback field format when transmitted as part of an ISS	179
Figure 8-431d—SSW Feedback field format when not transmitted as part of an ISS	179
Figure 8-431e—BRP Request field format	180
Figure 8-431f—BF Control field format when both IsInitiatorTXSS and IsResponderTXSS subfields are equal to 1 and the BF Control field is transmitted in Grant or Grant ACK frames	181
Figure 8-431g—BF Control field format in all other cases	181
Figure 8-431h—Beamformed Link Maintenance field format	182
Figure 8-502f—DTP Request frame Action field format	200
Figure 8-502g—DTP Report frame Action field format	200
Figure 8-502h—Channel Measurement Info field format	203
Figure 8-502i—Relay Operation Type field format	210
Figure 8-502j—Definition of OCT MMPDU	215
Figure 8-505—MPDU delimiter (non-DMG)	218
Figure 8-505a—MPDU delimiter (DMG)	218
Figure 9-1—MAC architecture	221
Figure 9-12a—Example topology of NAV setting in DMG STAs	229
Figure 9-12b—Backoff procedure for DMG STAs	229
Figure 9-43—Example of access periods within a beacon interval	248
Figure 9-44—Example of frame exchanges during the ATI	248
Figure 9-45—The guard time	255
Figure 9-46—Example of dynamic allocation of service period mechanism	261
Figure 9-47—Decentralized PCP/AP clustering for 3 PCPs/APs	270
Figure 9-48—An example of beamforming training	278
Figure 9-49—An example of SLS	282
Figure 9-50—An example of SLS	282
Figure 9-51—Initiator TXSS or Initiator RXSS	284
Figure 9-52—Responder TXSS or Responder RXSS	286
Figure 9-53—An example of a beam refinement transaction	290
Figure 9-54—Example of BRP setup subphase procedure (SLS in BTI and A-BFT)	292
Figure 9-55—Example of BRP setup subphase procedure (SLS in DTI)	293
Figure 9-56—A-BFT structure	295
Figure 9-57—SSW slot (aSSSlotTime) definition	295
Figure 9-58—Example of time allocation for the MIDC subphase with MID and BC subphases	300
Figure 9-59—Example of time allocation for the MIDC subphase with the MID subphase only	300
Figure 9-60—Example of the use of the BRP setup subphase to set up the subsequent MIDC subphase in the A-BFT and DTI	301
Figure 9-61—Example of the use of the BRP setup subphase to set up the subsequent MIDC subphase in the DTI	301
Figure 9-62—Conceptual flow of a sample MIDC subphase execution with MID and BC subphases for the initiator link	302
Figure 9-63—Examples of the use of the MID Extension field during the execution of the MID subphase	305
Figure 9-64—Beam combining	306
Figure 9-65—Conceptual flow of a sample MIDC subphase execution with only the MID subphase for the initiator link	306
Figure 9-66—Example of the use of the BRP setup subphase to set up the subsequent I-MID subphase ..	307
Figure 9-67—Example beam refinement transaction (receive training)	310
Figure 9-68—Example beam refinement transaction (transmit training)	310
Figure 9-69—Example beam refinement transaction (combination of receive and transmit training)	311
Figure 9-70—Example of a beam tracking procedure with the initiator requesting TRN-R	312
Figure 9-71—Example of a beam tracking procedure with the initiator requesting TRN-T	312
Figure 9-72—SLS phase state machine (initiator)	313
Figure 9-73—SLS phase state machine (responder)	314
Figure 9-74—DMG Block Ack architecture	315

Figure 9-75—Flow control and its associated parameters as a function of receiver buffer size	315
Figure 9-76—Example of the fast link adaptation procedure	321
Figure 9-77—Example of Normal mode operation with FD-AF relay	324
Figure 9-78—Example of the operation with HD-DF relay	325
Figure 9-79—TPA mechanism	326
Figure 9-80—Example of data transmission in an SP with link cooperating relay	328
Figure 10-1a—Example of DMG Beacon transmission by PCP/AP during the BTI	331
Figure 10-3a—Active scanning for DMG STAs	339
Figure 10-3b—PCP Factor for a DMG STA	339
Figure 10-5a—State transition diagram of non-PCP/non-AP STA in Active and Power Save Mode	345
Figure 10-5b—State Transition Diagram of PCP Power Management Mode	348
Figure 10-5c—Example operation of PPS mode	349
Figure 10-6—Relationships between state and services	350
Figure 10-28—Example of beamformed link maintenance	384
Figure 10-29—Moving the TBTT position	389
Figure 10-30—Changing beacon interval duration	390
Figure 10-31—Example of spatial sharing assessment	392
Figure 10-32—Example of spatial sharing between SP1 and SP2	393
Figure 10-33—Procedure of the FST setup protocol	397
Figure 10-34—States of the FST setup protocol	398
Figure 10-35—On-channel tunneling procedure	406
Figure 10-36—Quieting adjacent BSS operation	415
Figure 10-37—Beamforming training procedure in the DTI	416
Figure 10-38—Beamforming training when joining an infrastructure BSS or PBSS	416
Figure 11-23a—Expanded GCMP MPDU	422
Figure 11-23b—GCMP encapsulation block diagram	423
Figure 11-23c—Nonce construction	424
Figure 11-23d—GCMP decapsulation block diagram	425
Figure 11-39a—Multi-band GTK KDE	433
Figure 11-39b—Multi-band Key ID KDE	433
Figure 21-1—Transmit mask	443
Figure 21-2—Packet structure	447
Figure 21-3—Illustration of windowing function	448
Figure 21-4—SC preamble	449
Figure 21-5—Channel Estimation field for SC packets	450
Figure 21-6—Channel Estimation field for OFDM packets	450
Figure 21-7—Data scrambler	453
Figure 21-8—Control PHY frames	455
Figure 21-9—Control PHY preamble	455
Figure 21-10—OFDM frame format	459
Figure 21-11—64-QAM modulation mapping	465
Figure 21-12—SC frame format	470
Figure 21-13—BPSK constellation bit encoding	475
Figure 21-14—QPSK constellation bit encoding	475
Figure 21-15—16-QAM constellation bit encoding	476
Figure 21-16—Block transmission	477
Figure 21-17—Blocking for low-power SC	482
Figure 21-18—PLCP transmit procedure	483
Figure 21-19—Typical Tx state machine (Training Length=0 is assumed; some optional features such as SC low-power PHY are not shown)	484
Figure 21-20—PLCP receive procedure	485
Figure 21-21—Typical Rx state machine (some optional features such as low-power SC PHY are not shown)	486
Figure 21-22—BRP packet structure	487

Figure 21-23—TRN-R field definition.....	489
Figure 21-24—TRN-T field definition	489
Figure 21-25—PMD layer reference model	494
Figure L-1—CPHY preamble expressed in Ga128 and Gb128 sequences	544
Figure Z-1—Example of TSPEC aggregation (SPCA and EDCA access policies).....	597

IEEE Standard for Information technology—
Telecommunications and information exchange between systems
Local and metropolitan area networks—
Specific requirements

Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications

Amendment 3: Enhancements for Very High Throughput in the 60 GHz Band

IMPORTANT NOTICE: IEEE Standards documents are not intended to ensure safety, health, or environmental protection or ensure against interference with or from other devices or networks. Implementers of IEEE Standards documents are responsible for determining and complying with all appropriate safety, security, environmental, health, and interference protection practices and all applicable laws and regulations.

This IEEE document is made available for use subject to important notices and legal disclaimers. These notices and disclaimers appear in all publications containing this document and may be found under the heading “Important Notice” or “Important Notices and Disclaimers Concerning IEEE Documents.” They can also be obtained on request from IEEE or viewed at <http://standards.ieee.org/IPR/disclaimers.html>.

(This amendment is based on IEEE Std 802.11™-2012, as amended by IEEE Std 802.11ae™-2012 and IEEE Std 802.11aa™-2012.)

NOTE—The editing instructions contained in this amendment define how to merge the material contained therein into the existing base standard and its amendments to form the comprehensive standard. The editing instructions are shown in **bold italic**. Four editing instructions are used: change, delete, insert, and replace. **Change** is used to make corrections in existing text or tables. The editing instruction specifies the location of the change and describes what is being changed by using ~~strike through~~ (to remove old material) and underscore (to add new material). **Delete** removes existing material. **Insert** adds new material without disturbing the existing material. Deletions and insertions may require renumbering. If so, renumbering instructions are given in the editing instruction. **Replace** is used to make changes in figures or equations by removing the existing figure or equation and replacing it with a new one. Editing instructions, change markings, and this NOTE will not be carried over into future editions because the changes will be incorporated into the base standard.¹

¹Notes in text, tables, and figures are given for information only and do not contain requirements needed to implement the standard.

1. Overview

1.3 Supplementary information on purpose

Change the first list item of the dashed list in 1.3 as follows:

- Describes the functions and services required by an IEEE 802.11™-compliant device to operate within independent, personal, and infrastructure networks as well as the aspects of STA mobility (transition) within those networks.

Insert the following list item at the end of the dashed list in 1.3:

- Defines the PHY signaling, MAC, and beamforming procedures required for operation with directional antenna patterns.

2. Normative references

Insert the following references into Clause 2 in alphanumeric order:

ITU-T Recommendation O.150, General requirements for instrumentation for performance measurements on digital transmission equipment.²

NIST Special Publication 800-38D, Recommendation for Block Cipher Modes of Operation: Galois/Counter Mode (GCM) and GMAC, Morris Dworkin, November 2007.³

3. Definitions, acronyms, and abbreviations

3.1 Definitions

Delete the following definitions from 3.1 (note that both definitions are reinserted with changes into 3.2):

downlink

uplink

Change the following definitions in 3.1 as follows:

coordination function: The logical function that determines when a station (STA) operating within a basic service set (BSS) is permitted to transmit protocol data units (PDUs) via the wireless medium (WM). The coordination function within a BSS might have one hybrid coordination function (HCF), or it might have one HCF and one point coordination function (PCF) and has one distributed coordination function (DCF). A quality-of-service (QoS) BSS has one DCF and one HCF. In addition, a directional multi-gigabit (DMG) STA has a DMG channel access function that includes the beacon transmission interval (BTI), the association beamforming training (A-BFT), the announcement transmission interval (ATI), and the service period channel access (SPCA).

²ITU publications are available from the International Telecommunications Union (<http://www.itu.int/>).

³NIST publications are available from the National Institute of Standards and Technology (<http://csrc.nist.gov/>).

scheduled service period (SP): The SP that is scheduled by the quality-of-service (QoS) access point (AP) or the personal basic service set (PBSS) control point (PCP). Scheduled SPs start at fixed intervals of time.

Insert the following definitions into 3.1 in alphabetic order:

access period: A time period during a beacon interval established in a directional multi-gigabit (DMG) basic service set (BSS) that has associated channel access rules.

antenna weight vector (AWV): A vector of weights describing the excitation (amplitude and phase) for each element of an antenna array.

average noise plus interference power indicator (ANPI): A medium access control (MAC) indication of the average noise plus interference power measured on a channel that meets the two simultaneous conditions: 1) the station (STA) is not transmitting a frame, and 2) the station (STA) is not receiving a frame addressed to itself.

contention-based access period (CBAP): The time period within the data transfer interval (DTI) of a directional multi-gigabit (DMG) basic service set (BSS) where enhanced distributed channel access (EDCA) is used.

directional multi-gigabit (DMG): Pertaining to operation in a frequency band containing a channel with the Channel starting frequency above 45 GHz.

NOTE—The Channel starting frequency for 802.11 stations (STAs) is defined in Annex E.

fast session transfer (FST): The transfer of a session from a channel to another channel, in the same or different frequency bands. The term “session” refers to non-physical layer state information kept by a pair of stations (STAs) that communicate directly (i.e., excludes forwarding).

multiple medium access control (MAC) station management entity (SME) (MM-SME): Component of station management that manages multiple cooperating stations (STAs).

non-personal basic service set control point (non-PCP) station (STA): A STA that is not a PCP.

non-personal basic service set control point (non-PCP)/non-access point (non-AP) station (STA): A STA that is not a PCP and that is not an AP.

personal basic service set (PBSS): A directional multi-gigabit (DMG) basic service set (BSS) that includes one PBSS control point (PCP), and in which access to a distribution system (DS) is not present but an intra-PBSS forwarding service is optionally present.

personal basic service set (PBSS) control point (PCP): An entity that contains one station (STA) and coordinates access to the wireless medium (WM) by STAs that are members of a PBSS.

personal basic service set (PBSS) control point (PCP)/access point (AP): A station (STA) that is at least one of a PCP or an AP.

peer-to-peer traffic specification (PTP TSPEC): The quality-of-service (QoS) characteristics of a data flow between non-access point (non-AP) QoS stations (STAs).

sector: A transmit or receive antenna pattern corresponding to a Sector ID.

spatial sharing (SPSH): Use of a frequency channel by multiple stations (STAs) located in the same vicinity, and whose directional transmissions may overlap in time.

3.2 Definitions specific to IEEE 802.11

Change the following definition in 3.2:

bufferable unit (BU): An MSDU, A-MSDU (HT STAs and DMG STAs only) or bufferable MMPDU that is buffered to operate the power saving protocol.

Insert the following definitions into 3.2 in alphabetic order:

beacon header interval (BHI): The contiguous period of time that starts at the target beacon transmission time (TBTT) of a beacon interval of a directional multi-gigabit (DMG) basic service set (BSS) and that ends no later than the beginning of the data transfer interval (DTI) of the beacon interval.

beacon transmission interval (BTI): The time interval between the start of the first Directional Multi-gigabit (DMG) Beacon frame transmission by a DMG station (STA) in a beacon interval to the end of the last DMG Beacon frame transmission by the DMG STA in the same beacon interval.

centralized coordination service root (CCSR): An entity that provides synchronization and configuration services to synchronization access points (S-APs).

centralized coordination service set (CCSS): The collection of one centralized coordination service root (CCSR) and a set of one or more synchronization access points (S-APs) that are stationary with respect to their local environment while operating and are connected to the CCSR.

destination directional multi-gigabit (DMG) station (STA): A DMG STA identified by the destination association identifier (AID) field contained in a Grant frame or Extended Schedule element that caused the allocation of a service period (SP) or a contention-based access period (CBAP).

directional multi-gigabit (DMG) access point (AP): An AP whose radio transmitter is capable of transmitting and receiving DMG physical layer convergence procedure (PLCP) protocol data units (PPDUs).

directional multi-gigabit (DMG) antenna: A DMG antenna is a phased array, a single element antenna, or a set of switched beam antennas covered by a quasi-omni antenna pattern.

directional multi-gigabit (DMG) basic service set (BSS): A BSS in which DMG Beacon frames are transmitted by DMG stations (STAs).

directional multi-gigabit (DMG) frame: A frame transmitted or received within a DMG physical layer convergence procedure (PLCP) protocol data unit (PPDU).

directional multi-gigabit (DMG) physical layer convergence procedure (PLCP) protocol data unit (PPDU): A Clause 21 PPDU transmitted or received using the Clause 21 physical layer (PHY).

directional multi-gigabit (DMG) station (STA): A STA whose radio transmitter is capable of transmitting and receiving DMG physical layer convergence procedure (PLCP) protocol data units (PPDUs).

directional transmission: A transmission that does not use an omnidirectional antenna pattern or quasi-omni antenna pattern.

downlink: A unidirectional link from an access point (AP) to one or more non-AP stations (STAs) or a unidirectional link from a non-AP destination directional multi-gigabit (DMG) STA to a non-AP source DMG STA.

extended centralized personal basic service set (PBSS) control point (PCP)/access point (AP) cluster (ECPAC): The collection of 1) a single centralized coordination service set (CCSS), 2) the set of centralized PCP/AP clusters such that each synchronization AP (S-AP) of a centralized PCP/AP cluster is within the CCSS, and 3) all stations (STAs) within the basic service sets (BSSs) of the S-APs and member PCPs/APs of the centralized PCP/AP clusters.

multiple medium access control (MAC) sublayers link (MMSL): A link between two stations (STAs), wherein one of the STAs is coordinated by a multiple MAC station management entity (MM-SME) that delivered a Multiple MAC Sublayers (MMS) element to the peer STA.

multiple medium access control (MAC) sublayers link cluster: All multiple MAC sublayers links between a pair of stations (STAs).

personal basic service set (PBSS) control point (PCP)/access point (AP) cluster: One directional multi-gigabit (DMG) synchronization PCP or DMG synchronization AP, plus zero or more neighboring DMG PCPs, DMG APs (or a mixture of both) that join as member PCPs/APs to the synchronization PCP or synchronization AP.

quasi-omni antenna pattern: A directional multi-gigabit (DMG) antenna operating mode with the widest beamwidth attainable.

receive sector sweep (RXSS): Reception of Sector Sweep (SSW) frames via different sectors, in which a sweep is performed between consecutive receptions.

source directional multi-gigabit (DMG) station (STA): A DMG STA identified by the source association identifier (AID) field contained in a Grant frame or Extended Schedule element that caused the allocation of a service period (SP) or contention-based access period (CBAP).

sweep: A sequence of transmissions, separated by a short beamforming interframe space (SBIFS) interval, in which the antenna configuration at the transmitter or receiver is changed between transmissions.

synchronization access point (AP) (S-AP): An AP that provides synchronization and other services to a personal basic service set (PBSS) control point (PCP)/AP Cluster.

synchronization personal basic service set (PBSS) control point (PCP) (S-PCP): A PCP that provides synchronization and other services to a PCP/access point (AP) Cluster.

synchronization personal basic service set (PBSS) control point (PCP) (S-PCP)/synchronization access point (AP) (S-AP): A station (STA) that is at least one of an S-PCP or an S-AP.

transmit sector sweep (TXSS): Transmission of multiple Sector Sweep (SSW) or Directional Multi-gigabit (DMG) Beacon frames via different sectors, in which a sweep is performed between consecutive transmissions.

transmit sector sweep contention-based access period (TXSS CBAP): A CBAP that is available to all stations (STAs) in an extended centralized personal basic service set (PBSS) control point (PCP)/access point (AP) cluster outside which TXSSs in the data transfer interval (DTI) can be prohibited.

uplink: A unidirectional link from a non-access point (non-AP) station (STA) to an access point (AP) or a unidirectional link from a non-AP source directional multi-gigabit (DMG) STA to a non-AP destination DMG STA.

3.3 Abbreviations and acronyms

Insert the following abbreviations into 3.3 in alphabetic order:

A-BFT	association beamforming training
ANIP	average noise plus interference power indicator
ATI	announcement transmission interval
AWV	antenna weight vector
BC	beam combining
BF	beamforming
BHI	beacon header interval
BRP	beam refinement protocol
BRPFS	beam refinement protocol interframe space
BTI	beacon transmission interval
CBAP	contention-based access period
CCSR	centralized coordination service root
CCSS	centralized coordination service set
CPHY	control physical layer
DMG	directional multi-gigabit
DTP	dynamic tone pairing
DTI	data transfer interval
ECPAC	extended centralized PCP/AP cluster
FD-AF	full-duplex amplify-and-forward
FST	fast session transfer
FSTS	fast session transfer session
GCM	Galois/Counter Mode
GCMP	Galois/Counter Mode with GMAC Protocol
GMAC	Galois Message Authentication Code
GP	grant period
HD-DF	half-duplex decode-and-forward
ISS	initiator sector sweep
LBIFS	long beamforming interframe space
LP	low power
MBIFS	medium beamforming interframe space
MID	multiple sector identifier
MIDC	multiple sector identifier capture
MM-SME	multiple MAC station management entity
MMS	multiple MAC sublayers
MMSL	multiple MAC sublayers link
OCT	on-channel tunneling
PBSS	personal basic service set
PCP	PBSS control point
PCPS	PBSS control point service
PP	polling period
PTP TSPEC	peer-to-peer traffic specification
QAB	quieting adjacent BSS
RLS	relay link setup

ROC	relay operation type change
RSS	responder sector sweep
RDS	relay DMG STA
REDS	relay endpoint DMG STA
RXSS	receive sector sweep
S-AP	synchronization access point
SBIFS	short beamforming interframe space
SC	single carrier
SEMM	SPCA-EDCA mixed mode
SLS	sector-level sweep
SPCA	service period channel access
S-PCP	synchronization PBSS control point
SPR	service period request
SPSH	spatial sharing
SSW	sector sweep
TDDTI	time division data transfer interval
TPA	transmission time-point adjustment
TRN-R	receive training
TRN-T	transmit training
TXSS	transmit sector sweep

4. General description

4.3 Components of the IEEE 802.11 architecture

4.3.1 General

Change the third paragraph of 4.3.1 as follows:

It is useful to think of the ovals used to depict a BSS as the coverage area within which the member STAs of the BSS may remain in communication. In the case of transmissions such as in a directional multi-gigabit (DMG) BSS, the individual coverage area of a transmission from one member STA to another can be thought of as a cone and hence is referred to as a directional transmission. The collection of all possible directional transmissions by a member STA defines the coverage area. (The concept of area, while not precise, is often good enough.) This area is called the Basic Service Area (BSA). If a STA moves out of its BSA, it can no longer directly communicate with other STAs present in the BSA.

Insert the following subclause, 4.3.2a, after 4.3.2:

4.3.2a The personal BSS (PBSS) as an ad hoc network

Similar to the IBSS, the PBSS is a type of IEEE 802.11 LAN in which STAs communicate directly with each other.

In contrast to the IBSS, in the PBSS one STA assumes the role of the PBSS control point (PCP). The PCP provides the basic timing for the PBSS through DMG Beacon and Announce frames as well as allocation of service periods and contention-based access periods.

A PBSS can be established only by DMG STAs. Not every DMG BSS is a PBSS. A DMG BSS can be a PBSS, an infrastructure BSS, or an IBSS.

4.3.4 Distribution system (DS) concepts

4.3.4.3 Robust security network association (RSNA)

Change the third and fourth paragraphs of 4.3.4.3 as follows:

The first component is an IEEE 802.1X port access entity (PAE). PAEs are present on all STAs in an RSNA and control the forwarding of data to and from the medium access control (MAC). An AP always implements the Authenticator PAE and Extensible Authentication Protocol (EAP) Authenticator roles, and a non-AP STA always implements the Supplicant PAE and EAP peer roles. In an IBSS or PBSS, each STA implements both the Authenticator PAE and Supplicant PAE roles and both EAP Authenticator and EAP peer roles.

A second component is the Authentication Server (AS). The AS may authenticate the elements of the RSNA itself, i.e., the STAs may provide material that the RSNA elements can use to authenticate each other. The AS communicates through the IEEE 802.1X Authenticator with the IEEE 802.1X Supplicant on each STA, enabling the STA to be authenticated to the AS and vice versa. An RSNA depends upon the use of an EAP method that supports mutual authentication of the AS and the STA, such as those that meet the requirements in IETF RFC 4017. In certain applications, the AS may be integrated into the same physical device as the AP, or into a STA in an IBSS or PBSS.

Insert the following subclause, 4.3.4.4, after 4.3.4.3:

4.3.4.4 Centralized Coordination Service Set (CCSS) and Extended Centralized PCP/AP Cluster (ECPAC) within the DMG

PCP/AP clustering is a protocol between a DMG Synchronization PCP/AP (S-PCP/S-AP) and other DMG PCP/APs within the cluster, known as member PCP/APs, and the protocol is used to improve spatial sharing and interference mitigation among the DMG BSSs of the S-PCP/S-AP and member PCP/APs. PCP/AP clustering allows a PCP/AP within a cluster to schedule transmissions in nonoverlapping time periods with respect to other PCP/APs within the same cluster. There are two types of clustering:

- Decentralized PCP/AP clustering involves a single S-PCP/S-AP in the BSA of the S-PCP/S-AP.
- Centralized PCP/AP clustering is where there can be multiple S-APs in the BSA of any one S-AP and all S-APs are coordinated via a single centralized coordination service set (CCSS).

New architectural entities are introduced to support centralized PCP/AP clustering as follows. A CCSS comprises a centralized coordination service root (CCSR) and a set of one or more synchronization APs that are stationary with respect to their local environment while operating and are connected to the CCSR via, for instance, one of the following:

- The wireless medium to an associated STA that contains the CCSR
- The DS to an AP (or beyond, to a STA associated to the AP)
- A combination of distribution service, portal, and external network

The CCSR is the entity that provides coordination services for the CCSS, such as selecting the target Beacon transmission time of S-APs within the CCSS to minimize interference (see Annex Y for a more detailed description of the functions of the CCSR). The CCSR might logically reside within an S-AP or in another entity as long as it has a globally administered MAC address as defined in 9.2 of IEEE Std 802-2001. A CCSS is suited to an area and a frequency band having propagation characteristics so that the BSAs of the S-APs within a CCSS cover the area, yet transmissions within the area are isolated to a high degree.

An extended centralized PCP/AP cluster (ECPAC) comprises a single CCSS and the set of centralized PCP/AP clusters so that each S-AP of a centralized PCP/AP cluster is within the CCSS. The ECPAC also includes all STAs within the BSSs of the S-APs and member PCPs/APs of the centralized PCP/AP clusters. This is shown by example in Figure 4-3a, wherein

- STA3a and STA3b are two STAs coordinated by a one MM-SME component
- STA4a and STA4b are two STAs coordinated by a second MM-SME component
- The CCSR happens to be located in an external network

There are no S-PCPs in an ECPAC since a PCP has no mechanism to communicate with the CCSR.

The CCSS is unrelated to an ESS in the sense that a CCSS might contain whole ESSs, subsets of ESSs, or some combination thereof.

Decentralized PCP/AP clustering does not involve the use of the CCSS, CCSR, and ECPAC entities.

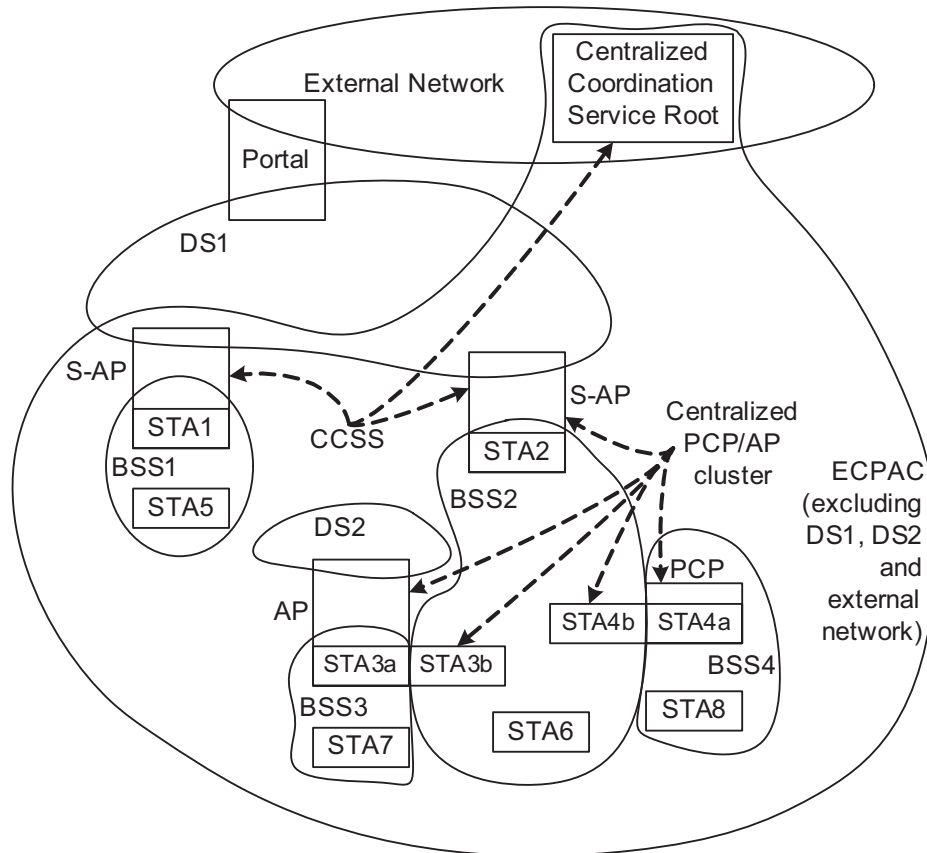


Figure 4-3a—CCSS and ECPAC

4.3.7 QoS BSS: The QoS network

Change 4.3.7 as follows:

The IEEE 802.11 QoS facility provides MAC enhancements to support LAN applications with QoS requirements. The QoS enhancements are available to QoS STAs associated with a QoS access point or PCP in a QoS BSS. A subset of the QoS enhancements is available for use between STAs that are members of the same QoS IBSS. Similarly, a subset of the QoS enhancements is available for use between neighbor peer mesh STAs. A mesh BSS is one type of QoS BSS, and it is described in 4.3.15. For a QoS STA that is a non-DMG STA, because a nonmesh QoS STA implements a superset of STA functionality, as defined in this standard, the STA might associate with a non-QoS access point in a non-QoS BSS, to provide non-QoS MAC data service when there is no QoS BSS with which to associate. As a mesh STA does not implement the necessary service, the mesh STA does not associate with any access point.

A STA within a DMG BSS is a QoS STA; hence a DMG BSS is a QoS BSS.

The enhancements that distinguish QoS STAs from non-QoS STAs and QoS APs from non-QoS APs are collectively termed the *QoS facility*. Which of the QoS-specific mechanisms a QoS STA supports might vary among QoS implementations, as well as between QoS STAs and QoS APs, over ranges specified in subsequent clauses. All service primitives, frame formats, coordination function and frame exchange rules, and management interface functions except for the Block Acknowledgment (Block Ack) function, direct-link setup (DLS), and automatic power-save delivery (APSD) are part of the core QoS facilities. A QoS STA

or QoS AP implements those core QoS facilities necessary for its QoS functions to interoperate with other QoS STAs. Functions such as the Block Ack, DLS, and APSD are separate from the core QoS facilities; and the presence of these functions is indicated by STAs separately from the core QoS facilities.

For infrastructure BSS, and IBSS, this standard provides four ~~two~~ mechanisms for the support of applications with QoS requirements.

The first mechanism, designated the *enhanced distributed channel access* (EDCA), delivers traffic based on differentiating user priorities (UPs). This differentiation is achieved by varying the following for different UP values:

- Amount of time a STA senses the channel to be idle before backoff or transmission, or
- The length of the contention window to be used for the backoff, or
- The duration a STA may transmit after it acquires the channel.

These transmissions may also be subject to certain channel access restrictions in the form of admission control. A DMG STA uses EDCA only within a contention-based access period (CBAP). Details of this mechanism are provided in 9.19.2 and, for DMG STAs, additional details are provided in 9.33.4, 9.33.5, and 9.33.6.3.

The second mechanism, designated the *hybrid coordination function* (HCF) *controlled channel access* (HCCA), is not applicable to DMG STAs and allows for the reservation of transmission opportunities (TXOPs) with the hybrid coordinator (HC). A STA based on its requirements requests the HC for TXOPs, both for its own transmissions as well as for transmissions from the AP to itself.¹³ The request is initiated by the station management entity (SME) of the STA. The HC, which is collocated at the AP, either accepts or rejects the request based on an admission control policy. If the request is accepted, the HC schedules TXOPs for both STAs (both the AP and the non-AP STA). For transmissions from the non-AP STA, the HC polls the STA based on the parameters supplied by the STA at the time of its request. For transmissions to the STA, the AP directly obtains TXOPs from the collocated HC and delivers the queued frames to the STA, again based on the parameters supplied by the STA. Details of the mechanism are provided in 9.19.3 and 10.4. This mechanism may be used for applications such as voice and video, which may need periodic service from the HC. If the application constraints dictate the use of this mechanism, the application initiates this mechanism by using the management service primitives.

The third mechanism, designated the *service period* (SP) *access* or *service period channel access* (SPCA), is applicable only to the DMG STAs and allows for the reservation of channel time by the PCP/AP. A non-PCP/non-AP STA requests the PCP/AP for SPs, which can be used for transmission to any other STA in the BSS. The request is initiated by the SME of the non-PCP/non-AP STA. The PCP/AP either accepts or rejects the request based on an admission control policy. If the request is accepted, the PCP/AP uses the Extended Schedule element to schedule SPs for communication between the source and destination DMG STAs indicated within the request. Details of this mechanism are provided in 9.33.6.2, 9.33.6.4, 9.33.6.6, and 10.4.

The fourth mechanism, designated as *dynamic allocation*, is applicable only to the DMG STAs and allows for near-real-time reservation of channel time with the PCP/AP. This type of access is used in addition to the service period and contention-based access period mechanisms. A PCP/AP can poll a STA and receive requests for channel time allocation. Based on the received requests, the PCP/AP can accept a request and immediately allocate (within the same beacon interval) channel time for the STA to communicate with another STA by using a Grant frame. Details of this mechanism are provided in 9.33.7, 9.33.8, and 9.33.9.

Non-QoS STAs may associate in a QoS BSS, if allowed to associate by the AP. All individually addressed frames that are sent to non-QoS STAs by an AP do not use the frame formats associated with the QoS facility.

A QoS STA associated in a non-QoS BSS acts as a non-QoS STA.

Insert the following subclauses, 4.3.17 and 4.3.18 (including Figure 4-10a), after 4.3.15.5.13:

4.3.17 DMG STA

The IEEE 802.11 DMG STA provides PHY and MAC features that can support a throughput of 1 Gb/s and greater, as measured at the MAC data service access point (SAP). A DMG STA supports DMG features as identified in Clause 9, Clause 10, and Clause 21. A DMG STA operates in a DMG BSS and supports transmission and reception of frames that are compliant with PHY specifications as defined in Clause 21. A DMG STA is also a QoS STA. The basic channel access of a DMG STA (see 9.33) allows it to operate in an Infrastructure BSS, in an IBSS, and in a PBSS. Certain DMG features such as service period allocation are available only to DMG STAs that are associated with an AP or with a PCP, while other DMG features such as EDCA operation in a PBSS do not require association. A DMG STA supports beamforming (BF) as described in 9.35 and 21.10 and GCM encryption as described in 11.4.5.

A DMG STA supports the PHY signaling as described in 21.4, 21.5, 21.6, and 21.7. At a minimum, a DMG STA supports the mandatory modulation and coding scheme (MCS) and PLCP protocol data unit (PPDU) formats described in 21.4 and 21.6. A DMG STA has PHY features that include a low-density parity check (LDPC) encoding, a preamble making use of Golay sequences, and beamforming. The PPDU are always transmitted with the same channel spacing as described in Annex E.

A DMG STA supports MAC features that provide channel access in an environment in which transmissions use a directional antenna pattern. A DMG STA has MAC features that include frame aggregation, Block Ack features, service periods, contention-based access periods, DMG protected period, PCP/AP clustering, dynamic channel time management, reverse direction, spatial sharing, beamforming, and operation (fast session transfer) in a multi-band device. A DMG STA is not a mesh STA. A DMG STA follows the same channel access rules irrespective of the type of BSS in which it operates.

4.3.18 DMG relay

The 802.11 DMG relay function allows a source relay endpoint DMG STA (REDS) to transmit frames to a destination REDS with the assistance of another DMG STA, the relay DMG STA (RDS), as shown in Figure 4-10a. Relaying can improve the reliability of communication in a DMG BSS in the case the direct link between the source REDS and the destination REDS has poor quality or is disrupted. Following the DMG relay setup procedures, a source REDS can discover and select an appropriate RDS to act as the relay for a particular destination REDS, prior to data frame transmission using the relay. A relay operating as a link switching type of relay uses the RDS to forward frames between the source and destination REDS if the direct link between the REDS is disrupted. In a link cooperating type of relay operation, the RDS simultaneously repeats the transmission of frames between the source and destination REDS, which can possibly increase the signal quality received at the destination REDS.

4.4 Logical service interfaces

4.4.1 General

Change the second paragraph of 4.4.1 as follows:

IEEE Std 802.11 explicitly does not specify the details of DS implementations. Instead, IEEE Std 802.11 specifies *services*. The services are associated with different components of the architecture. There are three ~~two~~ categories of IEEE 802.11 service: the station service (SS), the PCP service (PCPS), and the distribution system service (DSS). These ~~Both~~ categories of service are used by the IEEE 802.11 MAC sublayer.

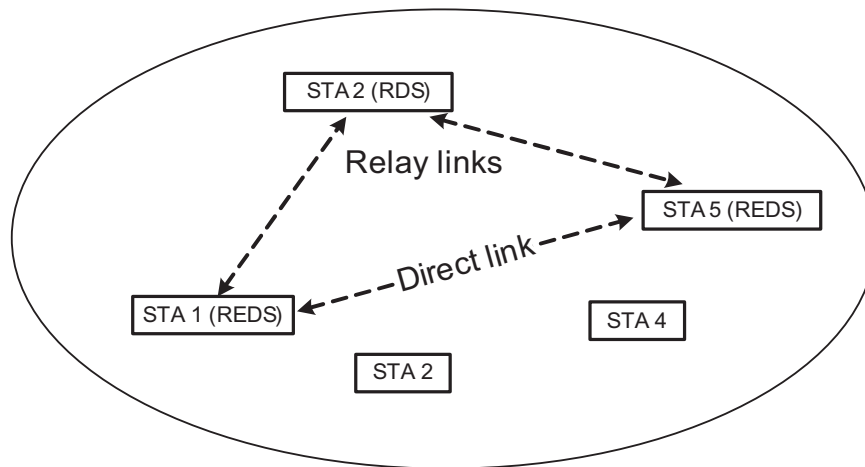


Figure 4-10a—DMG relay in a DMG BSS

Change the last paragraph of 4.4.1 as follows:

This set of services is divided into ~~three~~ two groups: the SS, ~~the PCPS~~, and the DSS. The SS is part of every STA. The PCPS is provided by the PCP of a PBSS. The DSS are provided by the DS.

Insert the following subclause, 4.4.2a, after 4.4.2:

4.4.2a PBSS control point service (PCPS)

The service provided by the PCP of a PBSS is known as the PCPS. Since all STAs within a PBSS can operate as a PCP, every STA within the PBSS is capable of providing PCPS should it become the PCP of the PBSS. Non-PCP STAs do not provide PCPS.

The services that comprise the PCPSs are the following:

- a) Association
- b) Disassociation
- c) Reassociation
- d) QoS traffic scheduling

PCPSs are specified for use by MAC sublayer entities.

4.4.3 DSS

Change the last paragraph of 4.4.3 as follows:

Figure 4-11 combines the components from previous figures with ~~both the three~~ both the three types of services to show the complete IEEE 802.11 architecture.

Replace Figure 4-11 with the following figure:

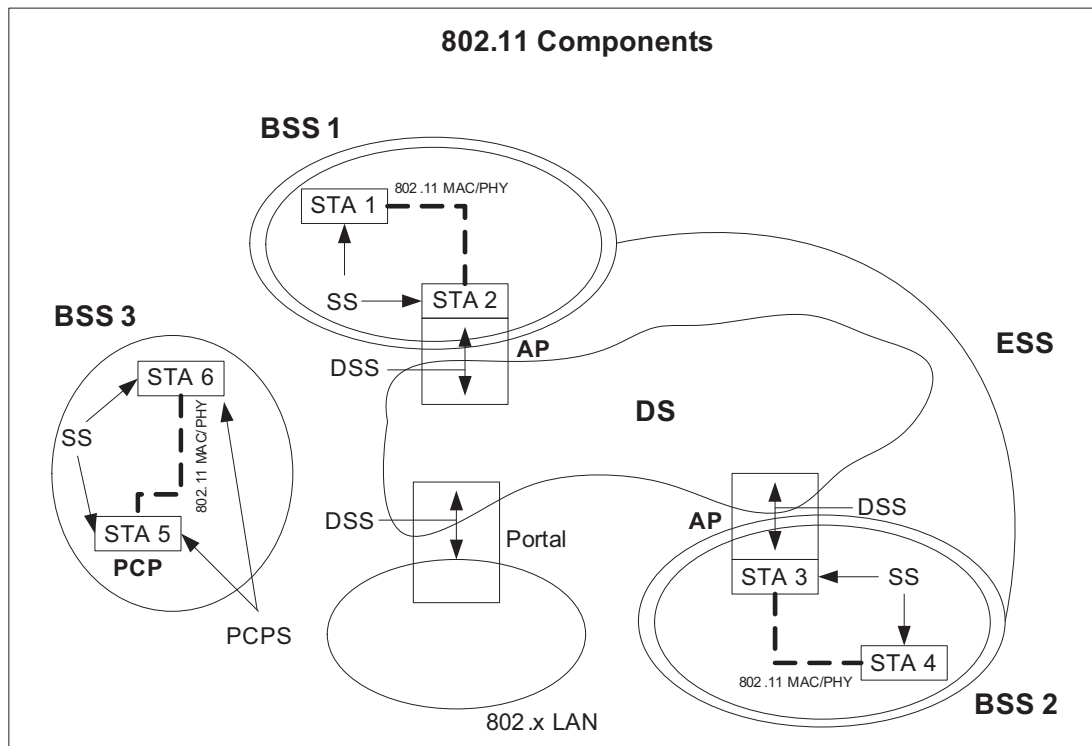


Figure 4-11—Complete IEEE 802.11 architecture

4.5 Overview of the services

4.5.1 General

Change the second paragraph of 4.5.1 as follows:

This subclause presents the services, an overview of how each service is used, and a description of how each service relates to other services and the IEEE 802.11 architecture. The services are presented in an order designed to help build an understanding of the operation of an IEEE 802.11 ESS-network. As a result, the services that comprise the SS and DSS are intermixed in order (rather than being grouped by category). The services that comprise the PCPS are a subset of the services provided by the SS and DSS.

Change the fourth and fifth paragraphs of 4.5.1 as follows:

The IEEE 802.11 MAC sublayer uses ~~three~~ four types of messages—*data*, *management*, *extension*, and *control* (see Clause 8). The data messages are handled via the MAC data service path.

MAC management messages and MAC extension messages (see 8.3.4) are used to support the IEEE 802.11 services and are handled via the MAC management service path.

Change the last paragraph of 4.5.1 as follows:

The examples here assume an ESS network environment. The differences ~~between~~ among the ESS, the PBSS, and the IBSS network environments are discussed separately in 4.7.

Change the title of 4.5.3 as follows:

4.5.3 Services that support the distribution service and the PCP service

4.5.4 Access control and data confidentiality services

4.5.4.2 Authentication

Change the sixth paragraph of 4.5.4.2 as follows:

SAE authentication or Open System 802.11 authentication is used by non-DMG STAs in an RSN for infrastructure BSS. SAE authentication, Open System 802.11 authentication, or no 802.11 authentication is used in an RSN for IBSS. SAE authentication is used in an MBSS. An RSNA disallows the use of Shared Key 802.11 authentication. In an RSN for DMG BSS, Open System 802.11 authentication is not used (11.1.4).

4.5.4.4 Data confidentiality

Change the third and fourth paragraphs of 4.5.4.4 as follows (note that footnote 19 remains unchanged):

IEEE Std 802.11 provides several cryptographic algorithms to protect data traffic, including WEP, TKIP, GCMP, and CCMP. WEP and TKIP are based on the ARC4¹⁹ algorithm, and CCMP and GCMP are ~~is~~ based on the advanced encryption standard (AES). A means is provided for STAs to select the algorithm(s) to be used for a given association.

IEEE Std 802.11 provides the following one ~~security protocols, CCMP~~, for protection of individually addressed robust management frames: CCMP and GCMP. This standard does not provide data confidentiality for group addressed robust management frames.

Change 4.7 and insert Figure 4.13a as follows:

4.7 Differences ~~between~~ among ESS, PBSS, and IBSS LANs

In 4.3.2 the concept of the IBSS LAN was introduced, and in 4.3.2a the concept of the PBSS LAN was introduced. In an IBSS and a PBSS network, a STA communicates directly with one or more other STAs.

Consider the full IEEE 802.11 architecture as shown in Figure 4-12.