
**Information technology —
Telecommunications and information
exchange between systems — Local
and metropolitan area networks —
Specific requirements —**

**Part 3:
Standard for Ethernet**

**AMENDMENT 9: Physical layer
specifications and management
parameters for 1000 Mb/s operation
over plastic optical fiber**

*Technologies de l'information — Télécommunications et échange
d'information entre systèmes — Réseaux locaux et métropolitains —
Prescriptions spécifiques —*

Partie 3: Norme pour Ethernet

AMENDEMENT 9



Reference number
ISO/IEC/IEEE 8802-3:2017/Amd.9:2018(E)

Documents
© IEEE 2017
Document Sharing Hub



COPYRIGHT PROTECTED DOCUMENT

© IEEE 2017

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO or IEEE at the respective address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Institute of Electrical and Electronics Engineers, Inc
3 Park Avenue, New York
NY 10016-5997, USA

Email: stds.ipr@ieee.org
Website: www.ieee.org

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted (see www.iso.org/directives).

IEEE Standards documents are developed within the IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (IEEE-SA) Standards Board. The IEEE develops its standards through a consensus development process, approved by the American National Standards Institute, which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of the Institute and serve without compensation. While the IEEE administers the process and establishes rules to promote fairness in the consensus development process, the IEEE does not independently evaluate, test, or verify the accuracy of any of the information contained in its standards.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents) or the IEC list of patent declarations received (see <http://patents.iec.ch>).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see: www.iso.org/iso/foreword.html.

ISO/IEC/IEEE 8802-3:2017/Amd.9 was prepared by the LAN/MAN of the IEEE Computer Society (as IEEE Std 802.3bv-2017) and drafted in accordance with its editorial rules. It was adopted, under the “fast-track procedure” defined in the Partner Standards Development Organization cooperation agreement between ISO and IEEE, by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 6, *Telecommunications and information exchange between systems*.

A list of all parts in the ISO/IEC/IEEE 8802 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

IEEE Std 802.3bv™-2017

(Amendment to
IEEE Std 802.3™-2015
as amended by
IEEE Std 802.3bw™-2015,
IEEE Std 802.3by™-2016,
IEEE Std 802.3bq™-2016,
IEEE Std 802.3bp™-2016,
IEEE Std 802.3br™-2016,
IEEE Std 802.3bn™-2016,
IEEE Std 802.3bz™-2016, and
IEEE Std 802.3bu™-2016)

IEEE Standard for Ethernet

Amendment 9: Physical Layer Specifications and Management Parameters for 1000 Mb/s Operation Over Plastic Optical Fiber

LAN/MAN Standards Committee
of the
IEEE Computer Society

Approved 14 February 2017
IEEE-SA Standards Board

Abstract: A family of three point-to-point physical layers (PHYs) for 1000 Mb/s operation over duplex plastic optical fiber (POF) and related management parameters are specified by this amendment to IEEE Std 802.3-2015.

Keywords: 1000BASE-H, 1000BASE-RHA, 1000BASE-RHB, 1000BASE-RXC, amendment, BASE-H, EEE, Energy Efficient Ethernet, IEEE 802.3™, IEEE 802.3bv™, PCS, Physical Coding Sublayer, Physical Medium Attachment sublayer, Physical Medium Dependent sublayer, plastic optical fiber, PMA, PMD, POF

The Institute of Electrical and Electronics Engineers, Inc.
3 Park Avenue, New York, NY 10016-5997, USA

Copyright © 2017 by The Institute of Electrical and Electronics Engineers, Inc.
All rights reserved. Published 14 March 2017. Printed in the United States of America.

IEEE and 802 are registered trademarks in the U.S. Patent & Trademark Office, owned by The Institute of Electrical and Electronics Engineers, Incorporated.

Print: ISBN 978-5044-3721-9 STD22413
PDF: ISBN 978-1-5044-3722-6 STDPD22413

IEEE prohibits discrimination, harassment, and bullying.

For more information, visit <http://www.ieee.org/web/aboutus/whatis/policies/p9-26.html>.

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

Important Notices and Disclaimers Concerning IEEE Standards Documents

IEEE documents are made available for use subject to important notices and legal disclaimers. These notices and disclaimers, or a reference to this page, appear in all standards and may be found under the heading “Important Notice” or “Important Notices and Disclaimers Concerning IEEE Standards Documents.”

Notice and Disclaimer of Liability Concerning the Use of IEEE Standards Documents

IEEE Standards documents (standards, recommended practices, and guides), both full-use and trial-use, are developed within IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (“IEEE-SA”) Standards Board. IEEE (“the Institute”) develops its standards through a consensus development process, approved by the American National Standards Institute (“ANSI”), which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of the Institute and participate without compensation from IEEE. While IEEE administers the process and establishes rules to promote fairness in the consensus development process, IEEE does not independently evaluate, test, or verify the accuracy of any of the information or the soundness of any judgments contained in its standards.

IEEE does not warrant or represent the accuracy or content of the material contained in its standards, and expressly disclaims all warranties (express, implied and statutory) not included in this or any other document relating to the standard, including, but not limited to, the warranties of: merchantability; fitness for a particular purpose; non-infringement; and quality, accuracy, effectiveness, currency, or completeness of material. In addition, IEEE disclaims any and all conditions relating to: results; and workmanlike effort. IEEE standards documents are supplied “AS IS” and “WITH ALL FAULTS.”

Use of an IEEE standard is wholly voluntary. The existence of an IEEE standard does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the IEEE standard. Furthermore, the viewpoint expressed at the time a standard is approved and issued is subject to change brought about through developments in the state of the art and comments received from users of the standard.

In publishing and making its standards available, IEEE is not suggesting or rendering professional or other services for, or on behalf of, any person or entity nor is IEEE undertaking to perform any duty owed by any other person or entity to another. Any person utilizing any IEEE Standards document, should rely upon his or her own independent judgment in the exercise of reasonable care in any given circumstances or, as appropriate, seek the advice of a competent professional in determining the appropriateness of a given IEEE standard.

IN NO EVENT SHALL IEEE BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO: PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE PUBLICATION, USE OF, OR RELIANCE UPON ANY STANDARD, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE AND REGARDLESS OF WHETHER SUCH DAMAGE WAS FORESEEABLE.

Translations

The IEEE consensus development process involves the review of documents in English only. In the event that an IEEE standard is translated, only the English version published by IEEE should be considered the approved IEEE standard.

Official statements

A statement, written or oral, that is not processed in accordance with the IEEE-SA Standards Board Operations Manual shall not be considered or inferred to be the official position of IEEE or any of its committees and shall not be considered to be, or be relied upon as, a formal position of IEEE. At lectures, symposia, seminars, or educational courses, an individual presenting information on IEEE standards shall make it clear that his or her views should be considered the personal views of that individual rather than the formal position of IEEE.

Comments on standards

Comments for revision of IEEE Standards documents are welcome from any interested party, regardless of membership affiliation with IEEE. However, IEEE does not provide consulting information or advice pertaining to IEEE Standards documents. Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments. Since IEEE standards represent a consensus of concerned interests, it is important that any responses to comments and questions also receive the concurrence of a balance of interests. For this reason, IEEE and the members of its societies and Standards Coordinating Committees are not able to provide an instant response to comments or questions except in those cases where the matter has previously been addressed. For the same reason, IEEE does not respond to interpretation requests. Any person who would like to participate in revisions to an IEEE standard is welcome to join the relevant IEEE working group.

Comments on standards should be submitted to the following address:

Secretary, IEEE-SA Standards Board
445 Hoes Lane
Piscataway, NJ 08854 USA

Laws and regulations

Users of IEEE Standards documents should consult all applicable laws and regulations. Compliance with the provisions of any IEEE Standards document does not imply compliance to any applicable regulatory requirements. Implementers of the standard are responsible for observing or referring to the applicable regulatory requirements. IEEE does not, by the publication of its standards, intend to urge action that is not in compliance with applicable laws, and these documents may not be construed as doing so.

Copyrights

IEEE draft and approved standards are copyrighted by IEEE under U.S. and international copyright laws. They are made available by IEEE and are adopted for a wide variety of both public and private uses. These include both use, by reference, in laws and regulations, and use in private self-regulation, standardization, and the promotion of engineering practices and methods. By making these documents available for use and adoption by public authorities and private users, IEEE does not waive any rights in copyright to the documents.

Photocopies

Subject to payment of the appropriate fee, IEEE will grant users a limited, non-exclusive license to photocopy portions of any individual standard for company or organizational internal use or individual, non-commercial use only. To arrange for payment of licensing fees, please contact Copyright Clearance Center, Customer Service, 222 Rosewood Drive, Danvers, MA 01923 USA; +1 978 750 8400. Permission to photocopy portions of any individual standard for educational classroom use can also be obtained through the Copyright Clearance Center.

Updating of IEEE Standards documents

Users of IEEE Standards documents should be aware that these documents may be superseded at any time by the issuance of new editions or may be amended from time to time through the issuance of amendments, corrigenda, or errata. An official IEEE document at any point in time consists of the current edition of the document together with any amendments, corrigenda, or errata then in effect.

Every IEEE standard is subjected to review at least every ten years. When a document is more than ten years old and has not undergone a revision process, it is reasonable to conclude that its contents, although still of some value, do not wholly reflect the present state of the art. Users are cautioned to check to determine that they have the latest edition of any IEEE standard.

In order to determine whether a given document is the current edition and whether it has been amended through the issuance of amendments, corrigenda, or errata, visit the IEEE-SA Website at <http://standards.ieee.org> or contact IEEE at the address listed previously. For more information about the IEEE-SA or IEEE's standards development process, visit the IEEE-SA Website at <http://standards.ieee.org>.

Errata

Errata, if any, for all IEEE standards can be accessed on the IEEE-SA Website at the following URL: <http://standards.ieee.org/findstds/errata/index.html>. Users are encouraged to check this URL for errata periodically.

Patents

Attention is called to the possibility that implementation of this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken by the IEEE with respect to the existence or validity of any patent rights in connection therewith. If a patent holder or patent applicant has filed a statement of assurance via an Accepted Letter of Assurance, then the statement is listed on the IEEE-SA Website at <http://standards.ieee.org/about/sasb/patcom/patents.html>. Letters of Assurance may indicate whether the Submitter is willing or unwilling to grant licenses under patent rights without compensation or under reasonable rates, with reasonable terms and conditions that are demonstrably free of any unfair discrimination to applicants desiring to obtain such licenses.

Essential Patent Claims may exist for which a Letter of Assurance has not been received. The IEEE is not responsible for identifying Essential Patent Claims for which a license may be required, for conducting inquiries into the legal validity or scope of Patents Claims, or determining whether any licensing terms or conditions provided in connection with submission of a Letter of Assurance, if any, or in any licensing agreements are reasonable or non-discriminatory. Users of this standard are expressly advised that determination of the validity of any patent rights, and the risk of infringement of such rights, is entirely their own responsibility. Further information may be obtained from the IEEE Standards Association.

Participants

The following individuals were officers and members of the IEEE 802.3 Working Group at the beginning of the IEEE P802.3bv Working Group ballot. Individuals may have not voted, voted for approval, disapproval, or abstained on this amendment.

David J. Law, *IEEE 802.3 Working Group Chair*
Adam Healey, *IEEE 802.3 Working Group Vice-Chair*
Pete Anslow, *IEEE 802.3 Working Group Secretary*
Steven B. Carlson, *IEEE 802.3 Working Group Executive Secretary*
Valerie Maguire, *IEEE 802.3 Working Group Treasurer*

Robert M. Grow, *IEEE P802.3bv GEPOF Task Force Chair*
Rubén Pérez-Aranda, *IEEE P802.3bv GEPOF Task Force Editor*

David Abramson	Dan Dove	Michael Klempa
Shadi Abughazaleh	Mike Dudek	Shigeru Kobayashi
Dale Amason	Nick Duer	Keisuke Kojima
J. Michael Andrewartha	Frank Effenberger	Paul Kolesar
Eric Baden	Hesham Elbakoury	Tom Kolze
Amrik Bains	David Estes	Glen Kramer
Thananya Baldwin	John Ewen	Hans Lackner
Denis Beaudoin	Dave Dwelley	Jeffrey Lapak
Christian Beia	Ramin Farjad	Mark Laubach
Michael Bennett	Shahar Feldman	David Lewis
Vipul Bhatt	German Feyh	Jon Lewis
William Bliss	Alan Flatman	William Lo
Brad Booth	Matthias Fritsche	Miklos Lukacs
Martin Bouda	Richard Frosch	Kent Lusted
Ralf-Peter Braun	Andy Gardner	Jeffery Maki
Theodore Brillhart	Ali Ghiasi	David Malicoat
Paul Brooks	Joel Goergen	James Malkemus
Matthew Brown	Steven Gorshe	Yonatan Malkiman
Jairo Bustos Heredia	James Graba	Arthur Marris
Adrian Butter	Mark Gustlin	Takeo Masuda
Juan-Carlos Calderon	Marek Hajduczenia	Kirsten Matheus
J. Martin Carroll	Bernie Hammond	Erdem Matoglu
Clark Carty	Takehiro Hayashi	Laurence Matola
Craig Chabot	Yasuo Hidaka	Brett McClellan
Geoffrey Chacon Simon	Brian Holden	Thomas McDermott
Mandeep Chadha	Rita Horner	John McDonough
David Chalupsky	Bernd Horrmeyer	Richard Mei
Jacky Chang	Victor Hou	Richard Mellitz
Xin Chang	Yasuhiro Hyakutake	Bryan Moffitt
Ahmad Chini	Hideki Isono	Ardeshir Mohammadian
Keng Hua Chuang	Tom Issenhuth	Leo Montreuil
Peter Cibula	Kenneth Jackson	Paul Mooney
Christopher R. Cole	Andrew Jimenez	Dale Murray
Shaoan Dai	Chad Jones	Henry Muyschondt
John D'Ambrosia	Peter Jones	Edward Nakamoto
Yair Darshan	Manabu Kagami	Gary Nicholl
Piers Dawe	Upen Kareti	Paul Nikolich
Wael Diab	Keisuke Kawahara	Kevin Noll
Eric DiBiao	Yasuaki Kawatsu	Mark Nowell
Daniel Dillow	Michael Kelsen	David Ofelt
Chris Diminico	Yong Kim	Tom Palkert
Thuyen Dinh	Jonathan King	Hui Pan
Curtis Donahue	Scott Kipp	Sesha Panguluri
		Carlos Pardo

Petar Pepeljugin
Gerald Pepper
Michael Peters
Rick Pimpinella
William Powell
Richard Prodan
Rick Rabinovich
Adee Ran
Alon Regev
Duane Remein
Victor Renteria
Martin Rossbach
Christopher Roth
Salvatore Rotolo
Vineet Salunke
Sam Sambasivan
Edward Sayre
Dieter Schicketanz
Fred Schindler
Peter Scruton
Hossein Sedarat
Naoshi Serizawa
Megha Shanbhag
Stephen Shellhammer

Ramin Shirani
Tom Skaar
Jeff Slavick
Scott Sommers
Tom Souvignier
Edward Sprague
Peter Stassar
Robert Stone
Junqing Sun
Steve Swanson
Andre Szczepanek
William Szeto
Bharat Tailor
Akio Tajima
Takayuki Tajima
Satoshi Takahashi
Kohichi Tamura
Alexander Tan
Mehmet Tazebay
Brian Teipen
Geoffrey Thompson
Pirooz Tooyserkani
Albert Tretter

Stephen Trowbridge
Yoshihiro Tsukamoto
Mike Tu
Sterling A. Vaden
Stefano Valle
Paul Vanderlaan
Robert Wagner
Roy Wang
Xinyuan Wang
Matthias Wendt
Oded Wertheim
Martin White
Natalie Wienckowski
Ludwig Winkel
Peter Wu
Yu Xu
Jun Yi
Lennart Yseboodt
Ting-Fa Yu
Hayato Yuki
Andrew Zambell
Yan Zhuang
George Zimmerman
Helge Zinner

The following members of the individual balloting committee voted on this standard. Balloters may have voted for approval, disapproval, or abstention.

Thomas Alexander	Manabu Kagami	Carlos Pardo
Richard Alfvén	Piotr Karocki	Bansi Patel
Carol Ansley	Keisuke Kawahara	Arumugam Paventhan
Peter Anslow	Stuart Kerry	Ruben Pérez-Aranda
Butch Anton	Tomohiro Kikuta	Michael Peters
Stefan Aust	Yongbum Kim	Rick Pimpinella
Yoshitada Beppu	Shigeru Kobayashi	Adee Ran
Ralf-Peter Braun	Peter Kroepelin	Alon Regev
Nancy Bravin	Mark Laubach	Maximilian Riegel
Theodore Brillhart	David J. Law	Benjamin Rolfe
Jairo Bustos Heredia	David Lewis	Osman Sakr
William Byrd	Jon Lewis	Frank Schewe
Steven B. Carlson	Arthur H. Light	Dieter Schicketanz
Juan Carreon	Michael Lynch	Thomas Starai
Keith Chow	Elvis Maculuba	Peter Stassar
Charles Cook	Valerie Maguire	Jan Streibel
Matthias Fritsche	Jeffery Maki	Walter Struppler
Yukihiro Fujimoto	Arthur Marris	Mitsutoshi Sugawara
Joel Goergen	Naoki Matsuda	Bo Sun
Volker Goetzfried	Mick McCarthy	Junqing Sun
Randall Groves	Brett McClellan	Satoshi Takahashi
Robert M. Grow	Thomas McDermott	Yoshihiro Tsukamoto
Takehiro Hayashi	Richard Mellitz	Mark-Rene Uchida
Adam Healey	Tremont Miao	Sterling Vaden
Marco Hernandez	Jeffrey Moore	Paul Vanderlaan
Werner Hoelzl	Charles Moorwood	Dmitri Varsanofiev
Koji Horiguchi	Matthew Mora	Prabodh Varshney
Rita Horner	Jose Morales	George Vlantis
Yasuhiro Hyakutake	Henry Muyschondt	Khurram Waheed
Tadahisa Ikubo	Michael Newman	Stephen Webb
Noriyuki Ikeuchi	Nick S. A. Nikjoo	Ludwig Winkel
Masanori Ishikawa	Paul Nikolich	Tomonari Yoshimura
Atsushi Ito	Satoshi Obara	Oren Yuen
Raj Jain	Akimitsu Okita	Hayato Yuki
Michael Johas Teener	Thomas Palkert	Zhen Zhou

When the IEEE-SA Standards Board approved this standard on 14 February 2017, it had the following membership:

Jean-Philippe Faure, *Chair*
Vacant Position, *Vice Chair*
John D. Kulick, *Past Chair*
Konstantinos Karachalios, *Secretary*

Chuck Adams
Masayuki Ariyoshi
Ted Burse
Stephen Dukes
Doug Edwards
J. Travis Griffith
Gary Hoffman
Michael Janezic

Thomas Koshy
Joseph L. Koepfinger*
Kevin Lu
Daleep Mohla
Damir Novosel
Ronald C. Petersen
Annette D. Reilly

Robby Robson
Dorothy Stanley
Adrian Stephens
Mehmet Ulema
Phil Wennblom
Howard Wolfman
Yu Yuan

*Member Emeritus

Introduction

This introduction is not part of IEEE Std 802.3bv-2017, IEEE Standard for Ethernet—Amendment 9: Physical Layer Specifications and Management Parameters for 1000 Mb/s Operation Over Plastic Optical Fiber

IEEE Std 802.3™ was first published in 1985. Since the initial publication, many projects have added functionality or provided maintenance updates to the specifications and text included in the standard. Each IEEE 802.3 project/amendment is identified with a suffix (e.g., IEEE Std 802.3ba™-2010).

The half duplex Media Access Control (MAC) protocol specified in IEEE Std 802.3-1985 is Carrier Sense Multiple Access with Collision Detection (CSMA/CD). This MAC protocol was key to the experimental Ethernet developed at Xerox Palo Alto Research Center, which had a 2.94 Mb/s data rate. Ethernet at 10 Mb/s was jointly released as a public specification by Digital Equipment Corporation (DEC), Intel and Xerox in 1980. Ethernet at 10 Mb/s was approved as an IEEE standard by the IEEE Standards Board in 1983 and subsequently published in 1985 as IEEE Std 802.3-1985. Since 1985, new media options, new speeds of operation, and new capabilities have been added to IEEE Std 802.3. A full duplex MAC protocol was added in 1997.

Some of the major additions to IEEE Std 802.3 are identified in the marketplace with their project number. This is most common for projects adding higher speeds of operation or new protocols. For example, IEEE Std 802.3u™ added 100 Mb/s operation (also called Fast Ethernet), IEEE Std 802.3z added 1000 Mb/s operation (also called Gigabit Ethernet), IEEE Std 802.3ae added 10 Gb/s operation (also called 10 Gigabit Ethernet), IEEE Std 802.3ah™ specified access network Ethernet (also called Ethernet in the First Mile) and IEEE Std 802.3ba added 40 Gb/s operation (also called 40 Gigabit Ethernet) and 100 Gb/s operation (also called 100 Gigabit Ethernet). These major additions are all now included in and are superseded by IEEE Std 802.3-2015 and are not maintained as separate documents.

At the date of IEEE Std 802.3bv-2017 publication, IEEE Std 802.3 is composed of the following documents:

IEEE Std 802.3-2015

Section One—Includes Clause 1 through Clause 20 and Annex A through Annex H and Annex 4A. Section One includes the specifications for 10 Mb/s operation and the MAC, frame formats and service interfaces used for all speeds of operation.

Section Two—Includes Clause 21 through Clause 33 and Annex 22A through Annex 33E. Section Two includes management attributes for multiple protocols and speed of operation as well as specifications for providing power over twisted pair cabling for multiple operational speeds. It also includes general information on 100 Mb/s operation as well as most of the 100 Mb/s Physical Layer specifications.

Section Three—Includes Clause 34 through Clause 43 and Annex 36A through Annex 43C. Section Three includes general information on 1000 Mb/s operation as well as most of the 1000 Mb/s Physical Layer specifications.

Section Four—Includes Clause 44 through Clause 55 and Annex 44A through Annex 55B. Section Four includes general information on 10 Gb/s operation as well as most of the 10 Gb/s Physical Layer specifications.

Section Five—Includes Clause 56 through Clause 77 and Annex 57A through Annex 76A. Clause 56 through Clause 67 and Clause 75 through Clause 77, as well as associated annexes, specify subscriber

access and other Physical Layers and sublayers for operation from 512 kb/s to 10 Gb/s, and defines services and protocol elements that enable the exchange of IEEE Std 802.3 format frames between stations in a subscriber access network. Clause 68 specifies a 10 Gb/s Physical Layer specification. Clause 69 through Clause 74 and associated annexes specify Ethernet operation over electrical backplanes at speeds of 1000 Mb/s and 10 Gb/s.

Section Six—Includes Clause 78 through Clause 95 and Annex 83A through Annex 93C. Clause 78 specifies Energy-Efficient Ethernet. Clause 79 specifies IEEE 802.3 Organizationally Specific Link Layer Discovery Protocol (LLDP) type, length, and value (TLV) information elements. Clause 80 through Clause 95 and associated annexes includes general information on 40 Gb/s and 100 Gb/s operation as well the 40 Gb/s and 100 Gb/s Physical Layer specifications. Clause 90 specifies Ethernet support for time synchronization protocols.

IEEE Std 802.3bw™-2015

Amendment 1—This amendment includes changes to IEEE Std 802.3-2015 and adds Clause 96. This amendment adds 100 Mb/s Physical Layer (PHY) specifications and management parameters for operation on a single balanced twisted-pair copper cable.

IEEE Std 802.3by™-2016

Amendment 2—This amendment includes changes to IEEE Std 802.3-2015 and adds Clause 105 through Clause 112, Annex 109A, Annex 109B, Annex 110A, Annex 110B, and Annex 110C. This amendment adds MAC parameters, Physical Layers, and management parameters for the transfer of IEEE 802.3 format frames at 25 Gb/s.

IEEE Std 802.3bq™-2016

Amendment 3—This amendment includes changes to IEEE Std 802.3-2015 and adds Clause 113 and Annex 113A. This amendment adds new Physical Layers for 25 Gb/s and 40 Gb/s operation over balanced twisted-pair structured cabling systems.

IEEE Std 802.3bp™-2016

Amendment 4—This amendment includes changes to IEEE Std 802.3-2015 and adds Clause 97 and Clause 98. This amendment adds point-to-point 1 Gb/s Physical Layer (PHY) specifications and management parameters for operation on a single balanced twisted-pair copper cable in automotive and other applications not utilizing the structured wiring plant.

IEEE Std 802.3br™-2016

Amendment 5—This amendment includes changes to IEEE Std 802.3-2015 and adds Clause 99. This amendment adds a MAC Merge sublayer and a MAC Merge Service Interface to support for Interspersing Express Traffic over a single link.

IEEE Std 802.3bn™-2016

Amendment 6—This amendment adds the Physical Layer specifications and management parameters for symmetric and/or asymmetric operation of up to 10 Gb/s on point-to-multipoint Radio Frequency (RF) distribution plants comprising either amplified or passive coaxial media. It also extends the operation of Ethernet Passive Optical Networks (EPON) protocols, such as Multipoint Control Protocol (MPCP) and Operation Administration and Management (OAM).

IEEE Std 802.3bz™-2016

Amendment 7—This amendment includes changes to IEEE Std 802.3-2015 and adds Clause 125 and Clause 126. This amendment adds new rates of 2.5 Gb/s and 5 Gb/s and new Physical Layers for operation at 2.5 Gb/s and 5 Gb/s over balanced twisted-pair structured cabling systems.

IEEE Std 802.3bu™-2016

Amendment 8—This amendment includes changes to IEEE Std 802.3-2015 to define a methodology for the provision of power via a single twisted pair to connected Data Terminal Equipment (DTE) with IEEE 802.3 single twisted-pair interfaces.

IEEE Std 802.3bv-2017

Amendment 9—This amendment includes changes to IEEE Std 802.3-2015 and adds Clause 115 and Annex 115A. This amendment adds point-to-point 1000 Mb/s Physical Layer (PHY) specifications and management parameters for operation on duplex plastic optical fiber (POF) targeting use in automotive, industrial, home-network, and other applications.

A companion document IEEE Std 802.3.1 describes Ethernet management information base (MIB) modules for use with the Simple Network Management Protocol (SNMP). IEEE Std 802.3.1 is updated to add management capability for enhancements to IEEE Std 802.3 after approval of the enhancements.

IEEE Std 802.3 will continue to evolve. New Ethernet capabilities are anticipated to be added within the next few years as amendments to this standard.

Contents

1. Introduction.....	18
1.3 Normative references.....	18
1.4 Definitions.....	18
1.5 Abbreviations.....	20
30. Management.....	21
30.3.2.1.2 aPhyType.....	21
30.3.2.1.3 aPhyTypeList.....	21
30.5.1.1.2 aMAUType.....	21
30.5.1.1.4 aMediaAvailable.....	21
45. Management Data Input/Output (MDIO) Interface.....	22
45.2 MDIO Interface Registers.....	22
45.2.1 PMA/PMD registers.....	22
45.2.1.6 PMA/PMD control 2 register (Register 1.7).....	23
45.2.1.10 PMA/PMD extended ability register (Register 1.11).....	23
45.2.1.10.aaaa BASE-H extended abilities (1.11.15).....	23
45.2.1.14d BASE-H PMA/PMD extended ability register (Register 1.22).....	24
45.2.1.117a BASE-H PMA/PMD control register (Register 1.900).....	24
45.2.1.117a.1 Type selection (1.900.3:0).....	24
45.2.3 PCS registers.....	25
45.2.3.47a 1000BASE-H OAM transmit registers (Registers 3.500 through 3.508).....	25
45.2.3.47a.1 TXO_REQ (3.500.15).....	25
45.2.3.47a.2 TXO_PHYT (3.500.14).....	26
45.2.3.47a.3 TXO_MERT (3.500.13).....	26
45.2.3.47a.4 TXO_MSGT (3.500.12).....	26
45.2.3.47a.5 TXO_DATAx (Bits 3.500.11:0 and Registers 3.501 through 3.508).....	26
45.2.3.47b 1000BASE-H OAM receive registers (Registers 3.509 through 3.517).....	27
45.2.3.47b.1 RXO_VAL (3.509.15).....	27
45.2.3.47b.2 RXO_MSGT (3.509.12).....	28
45.2.3.47b.3 RXO_DATAx (Bits 3.509.11:0 and Registers 3.510 through 3.517).....	28
45.2.3.47c 1000BASE-H PCS control register (Register 3.518).....	28
45.2.3.47c.1 Operation mode (3.518.15:13).....	28
45.2.3.47c.2 Loopback mode (3.518.12:10).....	28
45.2.3.47c.3 1000BASE-H OAM enable (3.518.1).....	29
45.2.3.47c.4 EEE enable (3.518.0).....	29
45.2.3.47d 1000BASE-H PCS status 1 register (Register 3.519).....	29
45.2.3.47d.1 Local receiver status (3.519.15).....	30
45.2.3.47d.2 Remote receiver status (3.519.14).....	30
45.2.3.47d.3 Link status (3.519.13).....	30
45.2.3.47d.4 Local PHD reception status (3.519.12).....	30
45.2.3.47d.5 Remote PHD reception status (3.519.11).....	30
45.2.3.47d.6 PHD lock status (3.519.10).....	30
45.2.3.47d.7 THP lock status (3.519.9).....	30
45.2.3.47d.8 Tx Assert LPI received (3.519.8).....	31
45.2.3.47d.9 Rx Assert LPI generated (3.519.7).....	31
45.2.3.47d.10 Tx LPI indication (3.519.6).....	31
45.2.3.47d.11 Rx LPI indication (3.519.5).....	31

45.2.3.47d.12	Remote 1000BASE-H OAM ability (3.519.3)	31
45.2.3.47d.13	Remote EEE ability (3.519.2)	31
45.2.3.47d.14	1000BASE-H OAM ability (3.519.1)	31
45.2.3.47d.15	EEE ability (3.519.0)	32
45.2.3.47e	1000BASE-H PCS status 2 register (Register 3.520)	32
45.2.3.47e.1	Local link margin (3.520.7:0)	32
45.2.3.47f	1000BASE-H PCS status 3 register (Register 3.521)	32
45.2.3.47f.1	Remote link margin (3.521.7:0)	32
45.2.3.47g	1000BASE-H PCS status 4 register (Register 3.522)	32
45.5	Protocol implementation conformance statement (PICS) proforma for Clause 45, Management Data Input/Output (MDIO) interface	34
45.5.3	PICS proforma tables for the Management Data Input Output (MDIO) interface	34
45.5.3.2	PMA/PMD MMD options	34
45.5.3.3	PMA/PMD management functions	34
45.5.3.6	PCS options	35
45.5.3.7	PCS management functions	35
78	Energy-Efficient Ethernet (EEE)	37
78.1.4	PHY types optionally supporting EEE	37
78.2	LPI mode timing parameters descriptions	37
78.5	Communication link access latency	37
115	Physical Coding Sublayer (PCS), Physical Medium Attachment (PMA) sublayer, and Physical Medium Dependent (PMD) sublayer, types 1000BASE-RHA, 1000BASE-RHB, and 1000BASE- RHC	38
115.1	Overview	38
115.1.1	Features	38
115.1.2	Conventions	38
115.1.3	Relationship of 1000BASE-RHx to other standards	38
115.1.4	Relationship to other Gigabit Ethernet PHY types	39
115.1.5	Operation of 1000BASE-RHx	39
115.1.6	Functional block diagram	41
115.2	Physical Coding Sublayer (PCS)	42
115.2.1	Transmit Block	42
115.2.2	Pilots data path	44
115.2.2.1	Pilot S1 generator	44
115.2.2.2	Pilot S2 generator	45
115.2.3	Physical header encoding and scrambling	46
115.2.3.1	Physical header CRC16	46
115.2.3.2	Physical header binary scrambler	47
115.2.3.3	Physical header BCH encoder	47
115.2.3.4	Physical header modulation	47
115.2.3.5	Physical header ordering	48
115.2.4	Payload data encoding and scrambling	48
115.2.4.1	GMII data stream encoding	48
115.2.4.1.1	64B/65B encoding	48
115.2.4.1.2	64B/65B encoding formal definition	51
115.2.4.1.3	PDB alignment with Transmit Block	52
115.2.4.2	Payload data binary scrambler	52
115.2.4.3	PAM16 encoder	53
115.2.4.3.1	MLCC demultiplexer	54
115.2.4.3.2	Payload BCH encoder	54

115.2.4.3.3	QAM16 mapper	55
115.2.4.3.4	QAM8 mapper	56
115.2.4.3.5	First lattice transformation	56
115.2.4.3.6	Lattice addition	56
115.2.4.3.7	Second lattice transformation	57
115.2.4.3.8	QAM to PAM multiplexer	57
115.2.4.4	Payload data symbol scrambler	57
115.2.5	PCS receive function	58
115.3	Physical Medium Attachment (PMA) sublayer	60
115.3.1	PMA transmit function	60
115.3.1.1	Payload data Tomlinson-Harashima precoding	60
115.3.1.2	Transmit power scaling	61
115.3.2	PMA receive function	61
115.3.3	Interface to the PMD	62
115.3.3.1	Signals transmitted to the PMD	62
115.3.3.2	Signals received from PMD	62
115.3.4	Physical Header Data (PHD)	63
115.3.5	PHY control	66
115.3.5.1	PHY control state variables	66
115.3.5.2	PHY TX control state diagram	68
115.3.5.3	PHY RX control state diagram	69
115.3.5.4	Link monitor state diagram	71
115.3.5.5	PHD monitor state diagrams	72
115.3.6	Adaptive THP protocol	74
115.3.6.1	Adaptive THP state variables	74
115.3.6.2	Adaptive THP TX state diagram	75
115.3.6.3	Adaptive THP REQ state diagram	77
115.3.7	PHY quality monitor	78
115.3.7.1	PHY quality criterion	78
115.3.7.2	PHY quality assessment	78
115.3.7.3	PHY quality monitor state variables	79
115.3.7.4	PHY quality monitor state diagram	79
115.3.8	Fixed-point format formal definition	81
115.3.8.1	Fixed-point encoding	81
115.3.8.2	Fixed-point decoding	81
115.4	Energy-Efficient Ethernet (EEE)	81
115.4.1	LPI mode transmit operation	83
115.4.2	LPI mode receive operation	83
115.4.3	PMD power control state variables	84
115.4.4	PMD power control state diagrams	84
115.5	Test modes	86
115.5.1	Test mode 1	87
115.5.2	Test mode 2	87
115.5.3	Test mode 3	87
115.5.4	Test mode 4	87
115.5.5	Test mode 5	87
115.5.6	Test mode 6	87
115.6	Physical Medium Dependent (PMD) sublayer	89
115.6.1	PMD service interface	89
115.6.1.1	PMD_COMSIGNAL.request	89
115.6.1.1.1	Semantics of the primitive	89
115.6.1.1.2	When generated	89
115.6.1.1.3	Effect of receipt	89
115.6.1.2	PMD_COMSIGNAL.indication	89

115.6.1.2.1	Semantics of the primitive	89
115.6.1.2.2	When generated	90
115.6.1.2.3	Effect of receipt	90
115.6.1.3	PMD_TXPWR.request	90
115.6.1.3.1	Semantics of the primitive	90
115.6.1.3.2	When generated	90
115.6.1.3.3	Effect of receipt	90
115.6.1.4	PMD_RXPWR.request	90
115.6.1.4.1	Semantics of the primitive	90
115.6.1.4.2	When generated	91
115.6.1.4.3	Effect of receipt	91
115.6.1.5	PMD_RXDETECT.indication	91
115.6.1.5.1	Semantics of the primitive	91
115.6.1.5.2	When generated	91
115.6.1.5.3	Effect of receipt	91
115.6.1.6	PMD_SDINH.request	91
115.6.1.6.1	Semantics of the primitive	92
115.6.1.6.2	When generated	92
115.6.1.6.3	Effect of receipt	92
115.6.2	PMD functional specifications	92
115.6.2.1	PMD block diagram	92
115.6.2.2	PMD transmit function	93
115.6.2.3	PMD receive function	93
115.6.2.4	PMD signal detect function	93
115.6.3	PMD to MDI optical specifications	94
115.6.3.1	Transmitter optical specifications	94
115.6.3.2	Transmit clock frequency	96
115.6.3.3	Receiver optical specifications	96
115.6.3.4	Receiver boundary condition tests	97
115.6.3.4.1	Receiver minimum AOP test	97
115.6.3.4.2	Receiver maximum AOP test	97
115.6.4	Optical measurement requirements	98
115.6.4.1	Center wavelength measurement	98
115.6.4.2	Spectral width measurement	98
115.6.4.3	Average Optical Power (AOP) measurement	99
115.6.4.4	Transmitter rise and fall time measurements	99
115.6.4.5	Transmitter extinction ratio (ER) measurement	99
115.6.4.6	Transmitter overshoot measurements	99
115.6.4.7	Transmitter output droop measurements	100
115.6.4.8	Transmitter distortion measurement	100
115.6.4.9	Transmitter timing jitter measurement	103
115.6.4.10	Transmitter relative intensity noise (RIN) measurement	103
115.6.4.11	Transmitter modal power distribution measurement	104
115.7	Characteristics of the fiber optic cabling (channel)	104
115.7.1	Transfer function of fiber optic channel type I	106
115.7.2	Transfer function of fiber optic channel type II	107
115.7.3	Transfer function of fiber optic channel type III	108
115.7.4	Fiber optic channel insertion loss measurement	109
115.7.5	Fiber optic channel transfer function measurement	109
115.7.6	Worst-case 1000BASE-RHx link power budget	109
115.8	Medium Dependent Interface (MDI)	109
115.8.1	MDI mechanical interface for 1000BASE-RHA	109
115.9	1000BASE-H Operations, Administration, and Maintenance (1000BASE-H OAM) channel	111

115.9.1	1000BASE-H OAM message transmission protocol.....	111
115.9.2	1000BASE-H OAM channel status	112
115.9.3	1000BASE-H OAM message reception protocol.....	113
115.9.4	1000BASE-H OAM channel state diagrams descriptions.....	114
115.9.4.1	1000BASE-H OAM control state variables.....	114
115.9.4.2	1000BASE-H OAM transmit control state diagram.....	116
115.9.4.3	1000BASE-H OAM receive control state diagram	116
115.10	Loopback modes	119
115.11	Management interface.....	119
115.12	Environmental specifications.....	119
115.12.1	Temperature classes	119
115.12.2	General safety	120
115.12.3	Environmental safety	120
115.12.4	Electromagnetic compatibility	121
115.12.5	Optical safety	121
115.13	Delay constraints.....	121
115.14	Protocol implementation conformance statement (PICS) proforma for Clause 115, Physical Coding Sublayer (PCS), Physical Medium Attachment (PMA) sublayer, and Physical Medium Dependent (PMD) sublayer, types 1000BASE-RHA, 1000BASE-RHB, and 1000BASE-RHC	122
115.14.1	Introduction.....	122
115.14.2	Identification	122
115.14.2.1	Implementation identification.....	122
115.14.2.2	Protocol summary	122
115.14.3	Major capabilities/options.....	123
115.14.4	Physical Coding Sublayer (PCS)	124
115.14.5	Physical Medium Attachment (PMA)	126
115.14.6	Energy-Efficient Ethernet (EEE)	128
115.14.7	Test modes	129
115.14.8	Physical Medium Dependent (PMD).....	130
115.14.9	PMD to MDI optical specifications	131
115.14.10	Optical measurement requirements	132
115.14.11	Characteristics of the fiber optic cabling (channel)	133
115.14.12	Medium dependent interface (MDI).....	133
115.14.13	1000BASE-H Operations, Administration, and Maintenance (1000BASE-H OAM) channel	134
115.14.14	Loopback modes	135
115.14.15	Management Interface	135
115.14.16	Environmental specifications	135
115.14.17	Delay constraints.....	136
Annex 115A	(informative) BCH codeword examples	137
115A.1	Output of the BCH(896, 720) encoder.....	137
115A.2	Output of the BCH(1976, 1668) encoder.....	137

IEEE Standard for Ethernet

Amendment 9: Physical Layer Specifications and Management Parameters for 1000 Mb/s Operation Over Plastic Optical Fiber

1. Introduction

1.3 Normative references

Insert the following references in alphanumeric order:

IEC 60793-1-41:2010, Optical fibres—Part 1-41: Measurement methods and test procedures—Bandwidth.

IEC 60793-2-40:2009, Optical fibres—Part 2-40: Product specifications—Sectional specification for category A4 multimode fibres.

IEC 61300-2-4, Fibre optic interconnecting devices and passive components—Basic test and measurement procedures—Part 2-4: Tests—Fibre/cable retention.

IEC 61300-3-53, Fibre optic interconnecting devices and passive components—Basic test and measurement procedures—Part 3-53: Examinations and measurements—Encircled angular flux (EAF) measurement method based on two-dimensional far field data from step index multimode waveguide (including fibre).

ISO/IEC 14763-3:2014, Information technology—Implementation and operation of customer premises cabling—Part 3: Testing of optical fibre cabling.

1.4 Definitions

Insert the following new definition after 1.4.22 “1000BASE-CX”:

1.4.22a 1000BASE-H: IEEE 802.3 PCS and PMA sublayers for 1000 Mb/s Ethernet that support PMDs using duplex plastic optical fiber. (See IEEE Std 802.3, Clause 115.)

Insert the following new definitions after 1.4.26 “1000BASE-PX”:

1.4.26a 1000BASE-RHA: IEEE 802.3 Physical Layer specification for 1000 Mb/s Ethernet using 1000BASE-H encoding and red light (approximately 650 nm) PMD tailored for home-network and other consumer application requirements. (See IEEE Std 802.3, Clause 115.)

1.4.26b 1000BASE-RHB: IEEE 802.3 Physical Layer specification for 1000 Mb/s Ethernet using 1000BASE-H encoding and red light (approximately 650 nm) PMD tailored for industrial application requirements. (See IEEE Std 802.3, Clause 115.)

1.4.26c 1000BASE-RHC: IEEE 802.3 Physical Layer specification for 1000 Mb/s Ethernet using 1000BASE-H encoding and red light (approximately 650 nm) PMD tailored for automotive application requirements. (See IEEE Std 802.3, Clause 115.)

1.4.26d 1000BASE-RHx: IEEE 802.3 specification for 1000 Mb/s Ethernet using duplex plastic optical fiber and red light (approximately 650 nm) with unspecified optical power budget (optical power budget is defined by the specific PMD type). (See IEEE Std 802.3, Clause 115.)

Change the definition 1.4.91 as follows:

1.4.91 64B/65B transmission code: A block oriented encoding where 64-bit blocks are prepended with a single bit to indicate whether the block contains only data or a mix of data and control information. The details of each 64B/65B encoding are specific to the PCS. (See IEEE Std 802.3, [Clause 55](#), and [Clause 115](#).)

Insert the following new definition after 1.4.245 “jumper cable assembly”:

1.4.245a Kojiri-safe: A property of the mechanical design for receptacles and mated plugs to protect sensitive functional elements, especially fiber optic ferrules and receptacles. Also called scoop-proof.

Insert the following new definition after 1.4.277a “MultiGBASE-T” (inserted by IEEE Std 802.3bq-2016):

1.4.277b multi-level coset code (MLCC): A forward error correcting technique consisting of splitting the information bit stream among several levels, for each one a binary component code (possibly none) is employed with an error correction capability according to the reliability of each level in data transmission over noisy channels. (See IEEE Std 802.3, Clause 115.)

Insert the following new definitions after 1.4.326 “Physical Coding Sublayer”:

1.4.326a physical data block (PDB): The minimum data unit of 65 bits used to encode the GMII data stream. (See IEEE Std 802.3, Clause 115.)

1.4.326b physical header data (PHD): Side information block embedded inside a Transmit Block that is used to exchange control and for negotiation of PCS and PMA parameters between two link partners. (See IEEE Std 802.3, Clause 115.)

1.4.326c physical header subframe (PHS): Block of symbols that are the result of adding error detection and error correction parities plus modulation to PHD (See IEEE Std 802.3, Clause 115.)

Change the definition of 1.4.401 as follows:

1.4.401 Tomlinson-Harashima precoder (THP): A precoding technique for intersymbol interference mitigation. (See IEEE Std 802.3, [Clause 55](#), and [Clause 115](#).)

1.5 Abbreviations

Insert the following new abbreviations into the list, in alphanumeric order:

BCH	Bose, Ray-Chaudhuri, Hocquenghem
LED	light emitting diode
MLCC	multi-level coset code
PDB	physical data block
PHD	physical header data
PHS	physical header subframe
POF	plastic optical fiber
SI-POF	step index plastic optical fiber

30. Management

30.3.2.1.2 aPhyType

Insert the following after 1000BASE-X in APPROPRIATE SYNTAX:

APPROPRIATE SYNTAX:

...
1000BASE-H Clause 115 1000 Mb/s PAM16-THP

30.3.2.1.3 aPhyTypeList

Insert the following after 1000BASE-X in APPROPRIATE SYNTAX:

APPROPRIATE SYNTAX:

...
1000BASE-H Clause 115 1000 Mb/s PAM16-THP

30.5.1.1.2 aMAUType

Insert the following enumerations after 1000BASE-KX in APPROPRIATE SYNTAX:

APPROPRIATE SYNTAX:

...
1000BASE-RHA Plastic optical fiber PHY as specified in Clause 115.
1000BASE-RHB Plastic optical fiber PHY as specified in Clause 115.
1000BASE-RHC Plastic optical fiber PHY as specified in Clause 115.

30.5.1.1.4 aMediaAvailable

Insert into the third paragraph in BEHAVIOUR DEFINED AS section of 30.5.1.1.4 after the second sentence (and before the sentences inserted by IEEE Std 802.3bw-2015 and IEEE Std 802.3bp-2016) the following:

BEHAVIOUR DEFINED AS:

...
For 1000BASE-RHx, a link_status (see 115.3.5.4 and 45.2.3.47d.3) of OK maps to the enumeration “available” and a link_status of FAIL maps to the enumeration “not available”

45. Management Data Input/Output (MDIO) Interface

45.2 MDIO Interface Registers

45.2.1 PMA/PMD registers

Change the 1.22 through 1.29 Reserved row (as modified by IEEE Std 802.3bz-2016) and insert a new row above as follows:

Table 45–3—PMA/PMD registers

Register address	Register name	Subclause
<u>1.22</u>	<u>BASE-H PMA/PMD extended ability</u>	<u>45.2.1.14d</u>
~~1.22~~ <u>1.23</u> through 1.29	Reserved	

Change the 1.740 through 1.1099 Reserved row of Table 45-3 and insert new rows as follows (unchanged rows not shown):

Table 45–3—PMA/PMD registers

Register address	Register name	Subclause
1.740 through ~~1.1099~~ <u>1.899</u>	Reserved	
<u>1.900</u>	<u>BASE-H PMA/PMD control</u>	<u>45.2.1.117a</u>
<u>1.901</u> through 1.1099	<u>Reserved</u>	

45.2.1.6 PMA/PMD control 2 register (Register 1.7)

Change the below 1 1 0 1 0 x = reserved line in the Description of bits 1.7.5:0 of Table 45–7 to be two lines, including new footnote c (footnote b inserted by IEEE Std 802.3bp-2016) as follows:

Table 45–7—PMA/PMD control 2 register bit definitions

Bit(s)	Name	Description	R/W ^a
1.7.5:0	PMA/PMD type selection	5 4 3 2 1 0 1 1 0 1 0 x = reserved 1 1 0 1 0 1 = reserved 1 1 0 1 0 0 = BASE-H PMA/PMD ^c	R/W

^aR/W = Read/Write, RO = Read only

^bIf BASE-T1 is selected, bits 1.2100.3:0 are used to differentiate which BASE-T1 PMA/PMD is selected.

^cIf BASE-H PMA/PMD is selected, register 1.900 is used to differentiate which BASE-H PMA/PMD is selected.

45.2.1.10 PMA/PMD extended ability register (Register 1.11)

Change Bit 1.11.15 of Table 45-14 (as modified by IEEE Std 802.3bz-2016), as follows (unchanged rows not shown):

Table 45–14—PMA/PMD extended ability register bit definitions

Bit(s)	Name	Description	R/W ^a
1.11.15	~~Reserved~~ BASE-H extended abilities	~~Value always zero~~ 1 = PMA/PMD has BASE-H extended abilities listed in register 1.22. 0 = PMA/PMD does not have BASE-H extended abilities	RO

^aRO = Read Only

Insert new subclause 45.2.1.10.aaaa before 45.2.10.aaa (inserted by IEEE Std 802.3bz-2016) as follows (unchanged rows not shown):

45.2.1.10.aaaa BASE-H extended abilities (1.11.15)

When read as one, bit 1.11.15 indicates that the PMA/PMD has BASE-H extended abilities listed in register 1.22. When read as zero, bit 1.11.15 indicates that the PMA/PMD does not have BASE-H extended abilities.

Insert new subclause 45.2.1.14d and Table 45-17d after 45.2.1.14c (as inserted by IEEE Std 802.3bz-2016) as follows:

45.2.1.14d BASE-H PMA/PMD extended ability register (Register 1.22)

The assignment of bits in the BASE-H PMA/PMD extended ability register is shown in Table 45-17d. All of the bits in the BASE-H PMA/PMD extended ability register are read only; a write to the BASE-H PMA/PMD extended ability register shall have no effect.

Table 45-17d—BASE-H PMA/PMD extended ability register bit definitions

Bit(s)	Name	Description	R/W ^a
1.22.15:3	Reserved	Value always 0	RO
1.22.2	1000BASE-RHC ability	1 = PMA/PMD is able to perform 1000BASE-RHC 0 = PMA/PMD is not able to perform 1000BASE-RHC	RO
1.22.1	1000BASE-RHB ability	1 = PMA/PMD is able to perform 1000BASE-RHB 0 = PMA/PMD is not able to perform 1000BASE-RHB	RO
1.22.0	1000BASE-RHA ability	1 = PMA/PMD is able to perform 1000BASE-RHA 0 = PMA/PMD is not able to perform 1000BASE-RHA	RO

^aRO = Read Only

Insert new subclause 45.2.1.117a and Table 45-90a after 45.2.1.117 as follows:

45.2.1.117a BASE-H PMA/PMD control register (Register 1.900)

The assignment of bits in the BASE-H PMA/PMD control register is shown in Table 45-90a.

Table 45-90a—BASE-H PMA/PMD control register bit definitions

Bit(s)	Name	Description	R/W ^a
1.900.15:4	Reserved	Value always 0	RO
1.900.3:0	Type selection	3 2 1 0 1 x x x = Reserved 0 1 x x = Reserved 0 0 1 1 = Reserved 0 0 1 0 = 1000BASE-RHC 0 0 0 1 = 1000BASE-RHB 0 0 0 0 = 1000BASE-RHA	R/W

^aRO = Read Only, R/W = Read Write

45.2.1.117a.1 Type selection (1.900.3:0)

Bits 1.900.3:0 are used to set the mode of operation. When these bits are set to 0000, the mode of operation is 1000BASE-RHA. When these bits are set to 0001, the mode of operation is 1000BASE-RHB. When these bits are set to 0010, the mode of operation is 1000BASE-RHC. Any attempt to configure a different value or a mode of operation not supported per register 1.22 shall have no effect.

45.2.3 PCS registers

Change the 3.420 through 3.1799 reserved row of Table 45-119 and insert new 1000BASE-H rows as follows (unchanged rows and footnotes not shown):

Table 45–119—PCS registers

Register address	Register name	Subclause
3.420 through ~~3.1799~~ 3.499	Reserved	
<u>3.500</u>	<u>1000BASE-H OAM transmit control</u>	<u>45.2.3.47a</u>
<u>3.501 through 3.508</u>	<u>1000BASE-H OAM transmit message</u>	<u>45.2.3.47a</u>
<u>3.509</u>	<u>1000BASE-H OAM receive control</u>	<u>45.2.3.47b</u>
<u>3.510 through 3.517</u>	<u>1000BASE-H OAM receive message</u>	<u>45.2.3.47b</u>
<u>3.518</u>	<u>1000BASE-H PCS control</u>	<u>45.2.3.47c</u>
<u>3.519</u>	<u>1000BASE-H PCS status 1</u>	<u>45.2.3.47d</u>
<u>3.520</u>	<u>1000BASE-H PCS status 2</u>	<u>45.2.3.47e</u>
<u>3.521</u>	<u>1000BASE-H PCS status 3</u>	<u>45.2.3.47f</u>
<u>3.522</u>	<u>1000BASE-H PCS status 4</u>	<u>45.2.3.47g</u>
<u>3.523 through 3.1799</u>	<u>Reserved</u>	

Insert 45.2.3.47a after 45.2.3.47 as follows:

45.2.3.47a 1000BASE-H OAM transmit registers (Registers 3.500 through 3.508)

Registers 3.500 through 3.508 are used to transmit messages over the 1000BASE-H OAM channel established between two link partners (see 115.9.1). The 1000BASE-H OAM message is part of the physical header data (PHD) defined for 1000BASE-H (see Table 115–6).

The transmit registers are used to compose a 1000BASE-H OAM message and to control its transmission to the link partner. Register 3.500 contains control, status, identification, and the beginning of a 1000BASE-H OAM message. Eight additional registers (3.501 through 3.508) hold the remainder of the 1000BASE-H OAM message.

The assignment of bits in the 1000BASE-H OAM transmit registers is shown in Table 45–160a.

45.2.3.47a.1 TXO_REQ (3.500.15)

Bit 3.500.15 set to one requests the 1000BASE-H based PHY to transmit the 1000BASE-H OAM message written to registers 3.500 through 3.508. Bit 3.500.15 is set to zero by the 1000BASE-H based PHY to indicate that the 1000BASE-H OAM message has been accepted for transmission, and that the 1000BASE-H OAM transmit message registers are free to accept a new 1000BASE-H OAM message.

Bit 3.500.15, together with bits 3.500.14 (TXO_PHYT), 3.500.13 (TXO_MERT), and 3.500.12 (TXO_MSGT), indicates the status of the 1000BASE-H OAM transmission channel (see 115.9.2).

Table 45–160a—1000BASE-H OAM transmit register bit definitions

Bit(s)	Name	Description	R/W ^a
3.500.15	TXO_REQ	1 = Transmission of a 1000BASE-H OAM message is pending; write as 1 to request transmission 0 = 1000BASE-H transmit registers are available for a new 1000BASE-H OAM message	R/W, SC
3.500.14	TXO_PHYT	The identifier of the last 1000BASE-H OAM message received by the remote PHY	RO
3.500.13	TXO_MERT	The identifier of the last 1000BASE-H OAM message read by the STA attached to the remote PHY	RO
3.500.12	TXO_MSGT	1000BASE-H OAM message identifier; its value change with each new transmitted message	RO
3.500.11:0	TXO_DATA0	Transmit 1000BASE-H OAM message first 12 bits	R/W
3.501.15:0	TXO_DATA1	Transmit 1000BASE-H OAM message 16-bit data word 1	R/W
3.502.15:0	TXO_DATA2	Transmit 1000BASE-H OAM message 16-bit data word 2	R/W
3.503.15:0	TXO_DATA3	Transmit 1000BASE-H OAM message 16-bit data word 3	R/W
3.504.15:0	TXO_DATA4	Transmit 1000BASE-H OAM message 16-bit data word 4	R/W
3.505.15:0	TXO_DATA5	Transmit 1000BASE-H OAM message 16-bit data word 5	R/W
3.506.15:0	TXO_DATA6	Transmit 1000BASE-H OAM message 16-bit data word 6	R/W
3.507.15:0	TXO_DATA7	Transmit 1000BASE-H OAM message 16-bit data word 7	R/W
3.508.15:0	TXO_DATA8	Transmit 1000BASE-H OAM message 16-bit data word 8	R/W

^aR/W = Read/Write, RO = Read only, SC = Self-clearing

45.2.3.47a.2 TXO_PHYT (3.500.14)

Bit 3.500.14 reflects the value of the bit TXO_MSGT in the last 1000BASE-H OAM message received by the remote 1000BASE-H based PHY.

45.2.3.47a.3 TXO_MERT (3.500.13)

Bit 3.500.13 reflects the value of the bit TXO_MSGT in the last 1000BASE-H OAM message read by the STA attached to the remote 1000BASE-H based PHY.

45.2.3.47a.4 TXO_MSGT (3.500.12)

Bit 3.500.12 is used for 1000BASE-H OAM message identification. Bit 3.500.12 is changed by the 1000BASE-H based PHY when it accepts a new 1000BASE-H OAM message for transmission (simultaneously setting bit 3.500.15 to zero), acting as a 1-bit sequence number.

45.2.3.47a.5 TXO_DATAx (Bits 3.500.11:0 and Registers 3.501 through 3.508)

Bits 3.500.11:0 (TXO_DATA0) contains the first 12 bits of a 1000BASE-H OAM message and registers 3.501 through 3.508 (TXO_DATA1 through TXO_DATA8) the remaining 128 bits of that 1000BASE-H OAM message.

TXO_DATA0 and TXO_DATA1 shall be a 28-bit 1000BASE-H OAM protocol identifier composed of a 24-bit Organizationally Unique Identifier (OUI) or Company ID (CID) followed by a 4-bit protocol number; where TXO_DATA0[10:0] = OUI[23:12], TXO_DATA1[15:3] = OUI[11:0], and TXO_DATA1[3:0] = protocol number. The content of TXO_DATA2 to TXO_DATA8 is vendor specific to the assignee of the OUI or CID.

45.2.3.47b 1000BASE-H OAM receive registers (Registers 3.509 through 3.517)

Registers 3.509 through 3.517 store messages received over the 1000BASE-H OAM channel established between two link partners (see 115.9.3). Register 3.509 contains status information, identification, and the first 12 bits of a 1000BASE-H OAM message, and registers 3.510 through 3.517 the following 128 bits of the received 1000BASE-H OAM message.

The assignment of bits in the 1000BASE-H OAM receive registers is shown in Table 45–160b.

Table 45–160b—1000BASE-H OAM receive register bit definitions

Bit(s)	Name	Description	R/W ^a
3.509.15	RXO_VAL	1 = A new 1000BASE-H OAM message has arrived 0 = No new 1000BASE-H OAM message arrived since either last message was read or PMA reset	RO
3.509.14:13	Reserved	Value always 0	RO
3.509.12	RXO_MSGT	Identifier of the received 1000BASE-H OAM message	RO
3.509.11:0	RXO_DATA0	Receive 1000BASE-H OAM message first 12 bits	RO
3.510.15:0	RXO_DATA1	Receive 1000BASE-H OAM message 16-bit data word 1	RO
3.511.15:0	RXO_DATA2	Receive 1000BASE-H OAM message 16-bit data word 2	RO
3.512.15:0	RXO_DATA3	Receive 1000BASE-H OAM message 16-bit data word 3	RO
3.513.15:0	RXO_DATA4	Receive 1000BASE-H OAM message 16-bit data word 4	RO
3.514.15:0	RXO_DATA5	Receive 1000BASE-H OAM message 16-bit data word 5	RO
3.515.15:0	RXO_DATA6	Receive 1000BASE-H OAM message 16-bit data word 6	RO
3.516.15:0	RXO_DATA7	Receive 1000BASE-H OAM message 16-bit data word 7	RO
3.517.15:0	RXO_DATA8	Receive 1000BASE-H OAM message 16-bit data word 8	RO

^aRO = Read only

45.2.3.47b.1 RXO_VAL (3.509.15)

The 1000BASE-H based PHY sets bit 3.509.15 to one to indicate the reception of a new 1000BASE-H OAM message. The 1000BASE-H based PHY sets bit 3.509.15 to zero when the last register (3.517) containing the 1000BASE-H OAM message is read (see Figure 115–43). The 1000BASE-H based PHY does not update the receive message registers until the message is read by STA as indicated by a read of register 3.517.

45.2.3.47b.2 RXO_MSGT (3.509.12)

Bit 3.509.12 is used for message identification. Bit 3.509.12 changes with every new received 1000BASE-H OAM message, acting as a 1-bit sequence number.

45.2.3.47b.3 RXO_DATAx (Bits 3.509.11:0 and Registers 3.510 through 3.517)

Bits 3.509.11:0 (RXO_DATA0) contains the first 12 bits of a received 1000BASE-H OAM message, and registers 3.510 through 3.517 (RXO_DATA1 through RXO_DATA8) the remaining 128 bits of that received 1000BASE-H OAM message.

45.2.3.47c 1000BASE-H PCS control register (Register 3.518)

The assignment of bits in the 1000BASE-H PCS control register is shown in Table 45–160c.

Table 45–160c—1000BASE-H PCS control register bit definitions

Bit(s)	Name	Description	R/W ^a
3.518.15:13	Operation mode	15 14 13 0 0 0 = Normal operation 0 0 1 = Test mode 1 0 1 0 = Test mode 2 0 1 1 = Test mode 3 1 0 0 = Test mode 4 1 0 1 = Test mode 5 1 1 0 = Test mode 6 1 1 1 = Reserved	R/W
3.518.12:10	Loopback mode	12 11 10 0 0 0 = No loopback 0 0 1 = GMII level loopback 0 1 0 = PMD interface level loopback 0 1 1 = Line loopback 1 x x = Reserved	R/W
3.518.9:2	Reserved	Value always 0	RO
3.518.1	1000BASE-H OAM enable	1 = Enable 1000BASE-H OAM functionality 0 = Disable 1000BASE-H OAM functionality	R/W
3.518.0	EEE enable	1 = Enable LPI mode 0 = Disable LPI mode	R/W

^aR/W = Read/Write, RO = Read only

45.2.3.47c.1 Operation mode (3.518.15:13)

Bits 3.518.15:13 shall have a default value of binary 000, selecting normal 1000BASE-H operation. A value of binary 001 through binary 110 in bits 3.518.15:13 shall select the test mode as specified in Table 45–160c with behavior as defined in 115.5.

45.2.3.47c.2 Loopback mode (3.518.12:10)

Bits 3.518.12:10 shall select one of the loopback modes defined in 115.10. Bits 3.518.12:10 shall have a default value of binary 000 (no loopback operation). Loopback modes are only available when a 1000BASE-H based PHY is in the normal operation mode (no test mode is selected in 3.518.15:13).

45.2.3.47c.3 1000BASE-H OAM enable (3.518.1)

Bit 3.518.1 controls establishing the 1000BASE-H OAM channel with the link partner (115.9). If the 1000BASE-H based PHY does not have 1000BASE-H OAM ability (bit 3.519.1 = 0), setting bit 3.518.1 shall have no effect. Setting bit 3.518.1 to zero shall prevent establishment of a 1000BASE-H OAM channel with the link partner. Changes in a 1000BASE-H OAM enable value shall only take effect after a PMA reset. Bit 3.518.1 has no specified default value.

45.2.3.47c.4 EEE enable (3.518.0)

Setting bit 3.518.0 to one enables 1000BASE-H based PHY EEE capability (see 115.4). Setting bit 3.518.0 to zero shall prevent establishment of EEE operation with the link partner. If the 1000BASE-H based PHY does not have EEE ability (bit 3.519.0 = 0), setting bit 3.518.0 shall have no effect. Changes in EEE enable value shall only take effect after a PMA reset. Bit 3.518.0 has no specified default value.

45.2.3.47d 1000BASE-H PCS status 1 register (Register 3.519)

The assignment of bits in the 1000BASE-H PCS status 1 register is shown in Table 45–160d.

Table 45–160d— 1000BASE-H PCS status 1 register bit definitions

Bit(s)	Name	Description	R/W ^a
3.519.15	Local receiver status	1 = The local receive operation is reliable 0 = The local receive operation is unreliable	RO
3.519.14	Remote receiver status	1 = The receive operation of the remote PHY is reliable 0 = The receive operation of the remote PHY is unreliable	RO
3.519.13	Link status	1 = A bidirectional reliable link is established 0 = A bidirectional reliable link is not established	RO, LL
3.519.12	Local PHD reception status	1 = PHD reception is reliable for the local PHY 0 = PHD reception is unreliable for the local PHY	RO
3.519.11	Remote PHD reception status	1 = PHD reception is reliable for the remote PHY 0 = PHD reception is unreliable for the remote PHY	RO
3.519.10	PHD lock status	1 = PHD transmission and reception are reliable 0 = PHD transmission or reception are unreliable	RO, LL
3.519.9	THP lock status	1 = THP is initialized; payload data is received with THP processing 0 = THP is not initialized	RO
3.519.8	Tx Assert LPI received	1 = Tx PCS has received LPI 0 = LPI not received by Tx PCS	RO, LH
3.519.7	Rx Assert LPI generated	1 = Rx PCS has generated LPI 0 = LPI not generated by Rx PCS	RO, LH
3.519.6	Tx LPI indication	1 = Tx PCS is currently transmitting LPI 0 = Tx PCS is not currently transmitting LPI	RO
3.519.5	Rx LPI indication	1 = Rx PCS is currently receiving LPI 0 = Rx PCS is not currently receiving LPI	RO
3.519.4	Reserved	Value always 0	RO

Table 45–160d— 1000BASE-H PCS status 1 register bit definitions (continued)

Bit(s)	Name	Description	R/W ^a
3.519.3	Remote 1000BASE-H OAM ability	1 = The remote PHY has 1000BASE-H OAM ability and it is enabled 0 = The remote PHY does not have 1000BASE-H OAM ability or it is disabled	RO
3.519.2	Remote EEE ability	1 = The remote PHY has EEE ability and it is enabled 0 = The remote PHY does not have EEE ability or it is disabled	RO
3.519.1	1000BASE-H OAM ability	1 = The PHY has 1000BASE-H OAM ability 0 = The PHY does not have 1000BASE-H OAM ability	RO
3.519.0	EEE ability	1 = The PHY has EEE ability 0 = The PHY does not have EEE ability	RO

^aRO = Read only, LH = Latching high, LL = Latching low

45.2.3.47d.1 Local receiver status (3.519.15)

Bit 3.519.15 reflects the value of the state variable `loc_rcvr_status` as determined by the PHY quality monitor state diagram (see 115.3.5.1).

45.2.3.47d.2 Remote receiver status (3.519.14)

Bit 3.519.14 reflects the value of the state variable `rem_rcvr_status` as determined by the link monitor state diagram (see 115.3.5.1).

45.2.3.47d.3 Link status (3.519.13)

Bit 3.519.13 reflects the value of the state variable `link_status` as determined by the link monitor state diagram (see 115.3.5.1). Bit 3.519.13 shall have latching low behavior. Bit 1.1.2, bit 3.1.2, and bit 3.519.13 are identical for 1000BASE-H; a read to any of these three bits shall release the latch for all the bits.

45.2.3.47d.4 Local PHD reception status (3.519.12)

Bit 3.519.12 reflects the value of the state variable `loc_rcvr_hdr_lock` as determined by the local PHD reception monitor state diagram (see 115.3.5.1).

45.2.3.47d.5 Remote PHD reception status (3.519.11)

Bit 3.519.11 reflects the value of the state variable `rem_rcvr_hdr_lock` as determined by the remote PHD reception monitor state diagram (see 115.3.5.1).

45.2.3.47d.6 PHD lock status (3.519.10)

Bit 3.519.10 reflects the value of the state variable `rcvr_hdr_lock` as determined by the PHD monitor state diagram (see 115.3.5.1). Bit 3.519.10 shall have latching low behavior.

45.2.3.47d.7 THP lock status (3.519.9)

Bit 3.519.9 reflects the value of the state variable `rcvr_thp_lock` as determined by the adaptive THP REQ state diagram (see 115.3.6.1).

45.2.3.47d.8 Tx Assert LPI received (3.519.8)

When read as a one, bit 3.519.8 indicates that the transmit 1000BASE-H PCS has received Assert LPI signaling from the TX GMII one or more times since the register was last read. When read as a zero, bit 3.519.8 indicates that the 1000BASE-H PCS transmitter has not received Assert LPI. Bit 3.519.8 shall have latching high behavior. Bit 3.519.8 is a copy of bit 3.1.11; a read of either bit shall release the latch for all the bits.

45.2.3.47d.9 Rx Assert LPI generated (3.519.7)

When read as a one, bit 3.519.7 indicates that the receive 1000BASE-H PCS has generated Assert LPI on the RX GMII one or more times since the register was last read. When read as a zero, bit 3.519.7 indicates that the 1000BASE-H PCS receiver has not generated Assert LPI on the RX GMII. Bit 3.519.7 shall have latching high behavior. Bit 3.519.7 is a copy of bit 3.1.10; a read of either bit shall release the latch for all the bits.

45.2.3.47d.10 Tx LPI indication (3.519.6)

Bit 3.519.6 indicates the current LPI mode status of the local 1000BASE-H based PHY transmit path. When read as one, the PHY transmitter is currently in LPI mode (transmitting refresh and quiet). When read as zero, the PHY transmitter is not in LPI mode (see 115.4.1). Bit 3.519.6 is a copy of bit 3.1.9.

45.2.3.47d.11 Rx LPI indication (3.519.5)

Bit 3.519.5 indicates the current LPI mode status of the local 1000BASE-H based PHY receive path. When read as a one, the PHY is receiving LPI mode signals (refresh and quiet). When read as a zero, the PHY is not receiving LPI mode signals (see 115.4.2). Bit 3.519.5 is a copy of bit 3.1.8.

45.2.3.47d.12 Remote 1000BASE-H OAM ability (3.519.3)

Bit 3.519.3 indicates the 1000BASE-H OAM ability of the remote PHY received in the PHD field PHD.CAPOAM (see Table 115–6). When read as one, bit 3.519.3 indicates the remote PHY has both 1000BASE-H OAM ability and the 1000BASE-H OAM is enabled. When read as zero, bit 3.519.3 indicates that the remote PHY either does not have 1000BASE-H OAM ability or 1000BASE-H OAM is disabled.

45.2.3.47d.13 Remote EEE ability (3.519.2)

Bit 3.519.2 indicates the EEE ability of the remote PHY received in the PHD field PHD.CAPLPI (see Table 115–6). When read as one, bit 3.519.2 indicates the remote PHY has both EEE ability and EEE is enabled. When read as zero, bit 3.519.2 indicates that the remote PHY either does not have EEE ability or EEE is disabled.

45.2.3.47d.14 1000BASE-H OAM ability (3.519.1)

Bit 3.519.1 indicates the 1000BASE-H OAM ability of the 1000BASE-H based PHY (see 115.9). When read as one, bit 3.519.1 indicates that the 1000BASE-H based PHY supports the 1000BASE-H OAM protocol. When read as zero, bit 3.519.1 indicates the 1000BASE-H based PHY does not support the 1000BASE-H OAM protocol.

A PHY indicating in bit 3.519.1 support of 1000BASE-H OAM shall provide the functions of registers 3.500 through 3.517 as specified in 115.9.

45.2.3.47d.15 EEE ability (3.519.0)

Bit 3.519.0 indicates the EEE ability of the 1000BASE-H based PHY. When read as one, bit 3.519.0 indicates that the 1000BASE-H based PHY implements EEE, and is able to enter LPI mode (see 115.4). When read as zero, bit 3.519.0 indicates the 1000BASE-H based PHY does not implement EEE operation.

45.2.3.47e 1000BASE-H PCS status 2 register (Register 3.520)

The assignment of bits in the 1000BASE-H PCS status 2 register is shown in Table 45–160e.

Table 45–160e—1000BASE-H PCS status 2 register bit definitions

Bit(s)	Name	Description	R/W ^a
3.520.15:8	Reserved	Value always 0	RO
3.520.7:0	Local link margin	Reports the local link margin	RO

^aRO = Read only

45.2.3.47e.1 Local link margin (3.520.7:0)

Bits 3.520.7:0 indicate the link margin of the receiver. Link margin is defined in 115.3.7.2 and is fixed-point formatted (8,3). See 115.3.8 for fixed-point format definition.

45.2.3.47f 1000BASE-H PCS status 3 register (Register 3.521)

The assignment of bits in the 1000BASE-H PCS status 3 register is shown in Table 45–160f.

Table 45–160f—1000BASE-H PCS status 3 register bit definitions

Bit(s)	Name	Description	R/W ^a
3.521.15:8	Reserved	Value always 0	RO
3.521.7:0	Remote link margin	Link margin reported by the link partner	RO

^aRO = Read only

45.2.3.47f.1 Remote link margin (3.521.7:0)

Bits 3.521.7:0 report the link margin of the remote PHY receiver as it is received in the PHD field PHD.RX.LINKMARGIN (see Table 115–6). Link margin is defined in 115.3.7.2 and is fixed-point formatted (8,3). See 115.3.8 for fixed-point format definition.

45.2.3.47g 1000BASE-H PCS status 4 register (Register 3.522)

The assignment of bits in the 1000BASE-H PCS status 4 register is shown in Table 45–160g.

Bits 3.522.15:0 are a 16-bit counter that counts the number of bits received with value 1 at the output of the binary descrambler, when the 1000BASE-H based PHY receiver is operating in test mode 1. These bits shall be reset to all zeros when the counter is read. The counter shall be held at all ones in the case of overflow.

IEEE Std 802.3bv-2017
 Amendment 9: Physical Layer Specifications and Management Parameters for 1000 Mb/s Operation
 Over Plastic Optical Fiber

Table 45–160g—1000BASE-H PCS status 4 register bit definitions

Bit(s)	Name	Description	R/W ^a
3.522.15:0	BER test mode counter	A 16-bit counter used when operating in test mode 1	RO, NR

^aRO = Read only, NR = Non Roll-over

45.5 Protocol implementation conformance statement (PICS) proforma for Clause 45, Management Data Input/Output (MDIO) interface¹

45.5.3 PICS proforma tables for the Management Data Input Output (MDIO) interface

45.5.3.2 PMA/PMD MMD options

Insert the following row at the end of table 45.5.3.2 PMA/PMD MMD options (as modified by IEEE Std 802.3bw-2015, IEEE Std 802.3bn-2016, IEEE Std 802.3bz-2016, and IEEE Std 802.3bq-2016):

Item	Feature	Subclause	Value/Comment	Status	Support
*BH	Implementation of a BASE-H PMA/PMD			PMA:O	Yes [] No []

45.5.3.3 PMA/PMD management functions

Insert PICS items MM150 through MM151 at the bottom of the table in 45.5.3.3 (as modified by IEEE Std 802.3bw-2015, IEEE Std 802.3by-2016, and IEEE Std 802.3bp-2016) as follows:

Item	Feature	Subclause	Value/Comment	Status	Support
MM150	Writes to the register 1.22 have no effect			PMA:O	Yes [] N/A []
MM151	Writes of reserved values or modes of operation different of those advertised by register 1.22, to bits 1.900.3:0 have no effect			BH:M	Yes [] N/A []

¹Copyright release for PICS proformas: Users of this standard may freely reproduce the PICS proforma in this subclause so that it can be used for its intended purpose and may further publish the completed PICS.

45.5.3.6 PCS options

Insert the following rows at the end of table 45.5.3.6 PCS options:

Item	Feature	Subclause	Value/Comment	Status	Support
*BHOAM	1000BASE-H OAM channel implementation	45.2.3.47a and 45.2.3.47b		PCS:O	Yes [] No []

45.5.3.7 PCS management functions

Insert PICS items RM137 through RM156 at the bottom of the table in 45.5.3.7 (as modified by IEEE Std 802.3bp-2016) as follows:

Item	Feature	Subclause	Value/Comment	Status	Support
RM137	1000BASE-H OAM message format to be transmitted	45.2.3.47a.5	TXO_DATA0[10:0] = OUI[23:12], TXO_DATA1[15:3] = OUI[11:0], and TXO_DATA1[3:0] = protocol number. Content of TXO_DATA2 to TXO_DATA8 is vendor specific per OUI or Company ID	PCS *BHOAM :M	Yes [] N/A []
RM138	Default operation mode	45.2.3.47c.1	Default value of bits 3.518.15:13 is binary 000 (normal mode)	PCS:M	Yes [] N/A []
RM139	Test operation modes	45.2.3.47c.1	Values binary 001 through binary 110 of bits 3.518.15:13 select test modes of Table 45–160c, with behavior per 115.5	PCS:M	Yes [] N/A []
RM140	Default loopback mode	45.2.3.47c.2	Default value of bits 3.518.12:10 is binary 000 (no loopback operation)	PCS:M	Yes [] N/A []
RM141	Loopback modes	45.2.3.47c.2	Bits 3.518.12:10 select loopback modes with behavior per 115.10	PCS:M	Yes [] N/A []
RM142	1000BASE-H OAM conditional enable	45.2.3.47c.3	Write a 1 to bit 3.518.1 only produces effect if bit 3.519.1 is read as 1	PCS *BHOAM :M	Yes [] N/A []
RM143	1000BASE-H OAM disable	45.2.3.47c.3	Write a 0 to bit 3.518.1 prevents 1000BASE-H OAM channel establishment with link partner	PCS *BHOAM :M	Yes [] N/A []

IEEE Std 802.3bv-2017
Amendment 9: Physical Layer Specifications and Management Parameters for 1000 Mb/s Operation
Over Plastic Optical Fiber

Item	Feature	Subclause	Value/Comment	Status	Support
RM144	1000BASE-H OAM enable change effect	45.2.3.47c.3	Changes in the value of bit 3.518.1 only takes effect after PMA reset	PCS *OAM:M	Yes [] N/A []
RM145	EEE conditional enable	45.2.3.47c.4	Write a 1 to bit 3.518.0 only produces effect if bit 3.519.0 is read as 1	PCS *EEE:M	Yes [] N/A []
RM146	EEE disable	45.2.3.47c.4	Write a 0 to bit 3.518.0 prevents EEE operation with link partner	PCS *EEE:M	Yes [] N/A []
RM147	EEE enable change effect	45.2.3.47c.4	Changes in the value of bit 3.518.0 only takes effect after PMA reset	PCS *EEE:M	Yes [] N/A []
RM148	Link status behavior	45.2.3.47d.3	Bit 3.519.13 has latching low behavior	PCS:M	Yes [] N/A []
RM149	Link status mirroring	45.2.3.47d.3	Bit 1.1.2, bit 3.1.2, and bit 3.519.13 reflect same state variable link_status and a read of any of them releases the latch of all the bits	PCS:M	Yes [] N/A []
RM150	PHD lock status behavior	45.2.3.47d.6	Bit 3.519.10 has latching low behavior	PCS:M	Yes [] N/A []
RM151	Tx Assert LPI received behavior	45.2.3.47d.8	Bit 3.519.8 has latching high behavior	PCS *EEE:M	Yes [] N/A []
RM152	Tx Assert LPI received mirroring	45.2.3.47d.8	Bit 3.519.8 is a copy of bit 3.1.11 and a read of any of them releases the latch of all the bits	PCS *EEE:M	Yes [] N/A []
RM153	Rx Assert LPI generated behavior	45.2.3.47d.9	Bit 3.519.7 has latching high behavior	PCS *EEE:M	Yes [] N/A []
RM154	Rx Assert LPI generated mirroring	45.2.3.47d.9	Bit 3.519.7 is a copy of bit 3.1.10 and a read of any of them releases the latch of all the bits	PCS *EEE:M	Yes [] N/A []
RM155	1000BASE-H OAM ability	45.2.3.47d.14	Registers 3.500 through 3.517 are implemented and 3.519.1 reads as 1	PCS *BHOAM:M	Yes [] N/A []
RM156	BER test mode counter is reset to all zeros when read	45.2.3.47g		PCS:M	Yes [] N/A []
RM157	BER test mode counter holds all ones in case of overflow	45.2.3.47g		PCS:M	Yes [] N/A []

78. Energy-Efficient Ethernet (EEE)

78.1.4 PHY types optionally supporting EEE

Insert new 1000BASE-RHx rows into Table 78-1 after the entry for 1000BASE-T1 (inserted by IEEE Std 802.3bp-2016), and before the entry for 2.5GBASE-T (inserted by IEEE Std 802.3bz-2016) as follows:

Table 78-1—Clauses associated with each PHY or interface type

PHY or interface type	Clause
1000BASE-RHA	115
1000BASE-RHB	115
1000BASE-RHC	115

78.2 LPI mode timing parameters descriptions

Insert new 1000BASE-RHx rows into Table 78-2 after the entry for 1000BASE-T1 (inserted by IEEE Std 802.3bp-2016), and before the entry for 2.5GBASE-T (inserted by IEEE Std 802.3bz-2016) as follows:

Table 78-2—Summary of the key EEE parameters for supported PHYs or interfaces

PHY Type	T_s (μ s)		T_q (μ s)		T_r (μ s)	
	Min	Max	Min	Max	Min	Max
1000BASE-RHA	0	0	23.52	23.52	1.3	1.3
1000BASE-RHB	0	0	23.52	23.52	1.3	1.3
1000BASE-RHC	0	0	23.52	23.52	1.3	1.3

78.5 Communication link access latency

Insert new 1000BASE-RHx rows into Table 78-4 after 1000BASE-T1 (inserted by IEEE Std 802.3bp-2016) as follows:

Table 78-4—Summary of the LPI timing parameters for supported PHYs or interfaces

PHY Type	Case	$T_{w_sys_tx}$ (min) (μ s)	T_{w_phy} (min) (μ s)	$T_{phy_shrink_tx}$ (min) (μ s)	$T_{phy_shrink_rx}$ (min) (μ s)	$T_{w_sys_rx}$ (min) (μ s)
1000BASE-RHA		25	25	25	0	0
1000BASE-RHB		25	25	25	0	0
1000BASE-RHC		25	25	25	0	0

115. Physical Coding Sublayer (PCS), Physical Medium Attachment (PMA) sublayer, and Physical Medium Dependent (PMD) sublayer, types 1000BASE-RHA, 1000BASE-RHB, and 1000BASE-RHC**115.1 Overview**

1000BASE-H comprises a Physical Coding Sublayer (PCS) and a Physical Medium Attachment (PMA) sublayer that supports Physical Medium Dependent (PMD) sublayers for operation at 1000 Mb/s over duplex plastic optical fiber (POF) as the transmission medium. The following three port types with different PMDs are defined: 1000BASE-RHA, 1000BASE-RHB, and 1000BASE-RHC (collectively referred to as 1000BASE-RHx).

1000BASE-RHA specifications are driven by the requirements of home and other consumer networks. Connection of the PMD to the step index plastic optical fiber (SI-POF) medium is typically not a mated connector. Rather, a bare duplex cable is attached with a clamp in the PMD receptacle.

1000BASE-RHB specifications are driven by the requirements for industrial applications. Connection of PMD to the SI-POF medium is typically with a PMD receptacle and mated plug. A harsh environment is expected (e.g., extended temperature range, dust), and the connector is typically terminated in the field to facilitate flexible equipment interconnection layout.

1000BASE-RHC specifications are driven by requirements for automotive applications. Connection of PMD to the SI-POF medium is with a PMD receptacle and mated plug. PMD and in-line connectors and the cable have to support specific requirements for installation in a vehicle: Kojiri-safe, dust protection, vibration robustness, tensile strength, etc.

115.1.1 Features

The following are the features of the 1000BASE-H set of PHYs:

- a) Specified to operate with the GMII ([Clause 35](#)).
- b) Full duplex operation.
- c) Support for BER of 10^{-12} or better.
- d) Communication side-channel for PHY management, operations, administration, and maintenance between link partners.
- e) Operation in automotive, industrial, and home network environments.

115.1.2 Conventions

The notation used in the state diagrams in this clause follows the conventions in [21.5](#). Should there be a discrepancy between a state diagram and descriptive text, the state diagram prevails.

115.1.3 Relationship of 1000BASE-RHx to other standards

The relationship between a 1000BASE-RHx PHY, the ISO Open Systems Interconnection (OSI) Reference Model, and the IEEE 802.3 Ethernet Model is shown in Figure 115–1. The physical layer connects one [Annex 4A](#) Media Access Control (MAC) to the medium. This clause specifies the Physical Coding Sublayer (PCS), Physical Medium Attachment (PMA), and Physical Medium Dependent (PMD) components of the physical layer device (PHY).

IEEE Std 802.3bv-2017
Amendment 9: Physical Layer Specifications and Management Parameters for 1000 Mb/s Operation
Over Plastic Optical Fiber

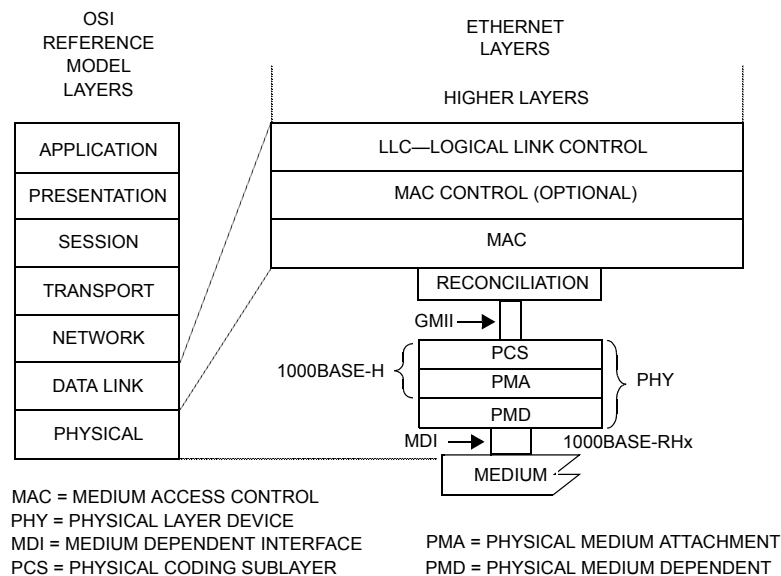


Figure 115-1—1000BASE-RHx PHY relationship to the ISO/IEC Open Systems Interconnection (OSI) Reference Model and the IEEE 802.3 Ethernet Model

115.1.4 Relationship to other Gigabit Ethernet PHY types

1000BASE-RHx PHY types are specified with the PCS interfacing to a GMII. Physical implementation of the GMII is optional. System operation from the perspective of signals at the MDI and management objects are identical whether the GMII is implemented or not. The MII Management Interface used with the initial set of Gigabit Ethernet PHYs is not used for 1000BASE-RHx PHY types.

115.1.5 Operation of 1000BASE-RHx

1000BASE-RHx PHY types support full duplex operation only, using two plastic optical fibers as the medium. Each fiber is used for unidirectional transmission with the 1000BASE-RHx port on one end of the link segment transmitting on one fiber and receiving on the second fiber. A cross-over in the cabling connects the local PMD transmitter to the link partner's PMD receiver, and the link partner's PMD transmitter to the local PMD receiver. The PMD TX and PMD RX compose the PMD sublayer.

The topology of 1000BASE-RHx is illustrated in Figure 115-2.




Figure 115-2—1000BASE-RHx topology

The 1000BASE-H PCS encapsulates and decapsulates the transmit and receive GMII data streams using a series of fixed length Transmit Blocks. A frame on the GMII can be contained in one or more Transmit Blocks. GMII frame boundaries have no correlation to Transmit Block boundaries.

Transmit Blocks also include pilot signals and control information. This information keeps the receiver clock aligned with the transmitter, supports channel equalization, and provides link monitoring. These signals and control information are inserted at fixed locations within the Transmit Block interrupting the transmission of the GMII data stream also included in the Transmit Block. Encapsulation of the GMII data stream within the Transmit Block also includes forward error correction encoding in fixed-length codewords inserted at fixed locations.