

ANSI/AWWA **E102-23**
(Revision of ANSI/AWWA E102-17)

AWWA Standard

Submersible Vertical Turbine Pumps

Effective date: May 1, 2024.

First edition approved by Board of Directors June 11, 2006.

This edition approved Oct. 23, 2023.

Approved by American National Standards Institute Sept. 29, 2023.




AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. The AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or code of any governmental authority. AWWA standards are intended to represent a consensus of the water industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed in the Official Notice section of *Journal AWWA*. The action becomes effective on the first day of the month following the month of *Journal AWWA* publication of the official notice.

American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether that person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

CAUTION NOTICE: The American National Standards Institute (ANSI) approval date on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of ANSI approval. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036; (212) 642-4900; or emailing info@ansi.org.

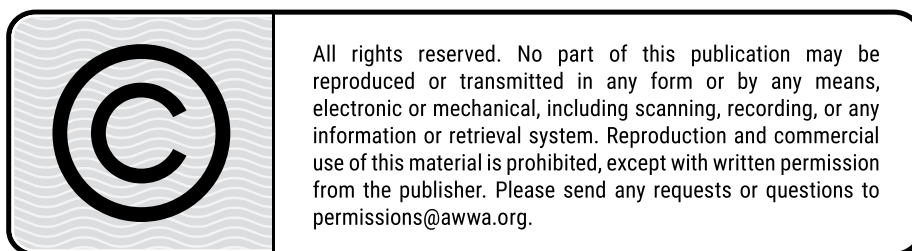

ISBN-13, print: 978-1-64717-167-4

ISBN-13, electronic: 978-1-61300-696-2

DOI: <http://dx.doi.org/10.12999/AWWA.E102.23>

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including scanning, recording, or any information or retrieval system. Reproduction and commercial use of this material is prohibited, except with written permission from the publisher. Please send any requests or questions to permissions@awwa.org.

Copyright © 2023 by American Water Works Association
Printed in USA

 **Documents**
Document Sharing Hub

Committee Personnel

The AWWA Standards Committee on Submersible Vertical Turbine Pumps, which reviewed and approved this standard, had the following personnel at the time of approval:

Anthony Holmes, *Chair*
Granger Smith, *Vice-Chair*

General Interest Members

E.P. Butts, 4B Engineering and Consulting LLC, Salem, Ore.
P.F. Gaydon, Hydraulic Institute, Parsippany, N.J.
J.W. Green (*liaison, nonvoting*), Standards Council Liaison, Lockwood, Andrews & Newnam, Inc., Oakbrook Terrace, Ill.
F.H. Hanson, Consultant, Apple Valley, Calif.
A.R. Holmes, Jones Edmunds & Associates Inc., Winter Haven, Fla.
J.A. Hrdlicka (*liaison, nonvoting*), Standards Engineer Liaison, AWWA, Denver, Colo.
A.M. Naimey, Jacobs, Irvine, Calif.
N. Perez-Jacome, City of Miami Beach, Miami Beach, Fla.

Producer Members

A. McCullough, Headwater Engineered Systems, Abernathy, Tex.
G. Smith, Smith Pump Company Inc., Waco, Tex.

User Members

C.R. Dugan, East Lansing–Meridian Water and Sewer Authority, East Lansing, Mich.
J. Heath, Denver Water, Denver, Colo.
J.T. Otoshi, Los Angeles Department of Water and Power, Los Angeles, Calif.
R. Parks, City of Independence, Independence, Mo.

This page intentionally blank.

Contents

All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.

SEC.	PAGE	SEC.	PAGE
<i>Foreword</i>		2	References 2
I Introduction.....	vii	3	Definitions 3
I.A Background.....	vii	4	Requirements
I.B History.....	vii	4.1	Materials 6
I.C Acceptance	viii	4.2	General Design..... 11
II Special Issues	ix	4.3	Submersible Motor..... 16
II.A General	ix	4.4	Submersible Cable..... 17
II.B Chlorine and Chloramine		4.5	Surface Plate..... 18
Degradation of Elastomers	xi	4.6	Strainer..... 18
II.C Advisory Information on Product		4.7	Discharge Pipe 18
Application	xi	4.8	Pump Motor Coupling..... 19
II.D Pump Tests.....	xii	4.9	Protective Coatings..... 19
II.E Vibration Limits.....	xiii	5	Verification
III Use of This Standard.....	xiii	5.1	Inspection 20
III.A Information for Manufacturers.....	xiv	5.2	Factory Performance Testing..... 20
III.B Purchaser Options and		5.3	Performance Test 21
Alternatives	xvi	5.4	Basis for Rejection 21
III.C Modification to Standard	xvi	5.5	Typical Laboratory Test
IV Major Revisions.....	xvi		Arrangement 21
V Comments	xvii	6	Delivery
<i>Standard</i>		6.1	Marking 22
1 General		6.2	Preparation for Shipment 23
1.1 Scope.....	1	6.3	Affidavit of Compliance 23
1.2 Purpose	1		
1.3 Application.....	1		

SEC.	PAGE	SEC.	PAGE
<i>Appendixes</i>		3	Typical Laboratory Test Arrangement—Submersible Vertical Turbine Pumps 22
A	Submersible Vertical Turbine Pump Data Form 25	B.1	Head Loss for Standard Pipe..... 27
B	Engineering Data 27	B.2	Head Loss for 90-Degree Elbow 28
B.1	Discharge Column Pipe 27		
B.2	Friction Loss..... 27		
B.3	Discharge-Elbow Head Loss 28		
<i>Figures</i>		<i>Tables</i>	
1	Typical Submersible-Pump Assembly (Bowl Assemblies)..... 10	1	Standard Nomenclature— Submersible Vertical Turbine Pumps 7
2	Submersible-Pump Discharge Styles and Surface-Plate Assemblies 11	2	Diameters and Weights of Standard Discharge Column Pipe Sizes 19

Foreword

This foreword is for information only and is not a part of ANSI/AWWA E102.

I. Introduction.

I.A. *Background.* This standard describes the minimum requirements for submersible vertical turbine pumps utilizing a discharge column pipe assembly for installation in wells, water treatment plants, water transmission systems, and water distribution systems. Pumps described in this standard are intended for pumping fresh water. This standard is applicable for a driver power range from 5 hp (3.7 kW) to 250 hp (186.5 kW).

I.B. *History.* The original standard for vertical line-shaft turbine pumps presented the composite findings from studies conducted from 1949 to 1986 by committees consisting of manufacturers, consumers, and engineers. The first standard was published in 1955. In 1961, the standard was revised to include standards for submersible vertical turbine pumps. Additional technical changes were added in the 1971 revision. Solid shaft motors were added in the 1977 revision, together with numerous editorial changes and conversions to the international system of units. The 1977 standard was reaffirmed in 1982 without revision. Additional revisions were made in 1988. ANSI/AWWA E101-88 was withdrawn in 2000. Subsequent editions were approved on June 11, 2006, and Jan. 14, 2017. This edition was approved on Oct. 23, 2023.

In 1994, AWWA's Standards Council approved development of a new standard for Horizontal Centrifugal Pumps. The new standard was assigned to AWWA Standards Committee 276 for Horizontal Centrifugal Pumps. Upon review of pump standards development in 1996, AWWA's Standards Council modified the development process to include two new pump standards to replace ANSI/AWWA E101-88, Standard for Vertical Turbine Pumps—Line Shaft and Submersible Types. As part of this action, two committees were renamed. AWWA Standards Committee 276 for Horizontal Centrifugal Pumps was changed to AWWA Standards Committee 276 for Horizontal and Vertical Line-Shaft Pumps. Committee 276 was charged with development of a standard for horizontal and vertical line-shaft pumps. AWWA Standards Committee 375 for Vertical Turbine Pumps was changed to AWWA Standards Committee 375 for Submersible Vertical Turbine Pumps. Committee 375 was charged with development

* American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10018

of a standard for submersible vertical turbine pumps. During development of these two replacement standards, ANSI/AWWA E101-88 was withdrawn effective June 2000.

I.C. *Acceptance.* In May 1985, the US Environmental Protection Agency (USEPA) entered into a cooperative agreement with a consortium led by NSF International[†] (NSF) to develop voluntary third-party consensus standards and a certification program for direct and indirect drinking water additives. Other members of the original consortium included the Water Research Foundation (formerly AwwaRF) and the Conference of State Health and Environmental Managers (COSHEM). AWWA and the Association of State Drinking Water Administrators (ASDWA) joined later.

In the United States, authority to regulate products for use in, or in contact with, drinking water rests with individual states.[‡] Local agencies may choose to impose requirements more stringent than those required by the state. To evaluate the health effects of products and drinking water additives from such products, state and local agencies may use various references, including

1. Specific policies of the state or local agency.
2. Two standards developed under the direction of NSF: NSF/ANSI/CAN[§] 60, Drinking Water Treatment Chemicals—Health Effects, and NSF/ANSI/CAN 61, Drinking Water System Components—Health Effects.
3. Other references, including AWWA standards, *Food Chemicals Codex*, *Water Chemicals Codex*,[¶] and other standards considered appropriate by the state or local agency.

Various certification organizations may be involved in certifying products in accordance with NSF/ANSI/CAN 61. Individual states or local agencies have authority to accept or accredit certification organizations within their jurisdictions. Accreditation of certification organizations may vary from jurisdiction to jurisdiction.

Annex A, “Toxicology Review and Evaluation Procedures,” to NSF/ANSI/CAN 61 does not stipulate a maximum allowable level (MAL) of a contaminant for substances not regulated by a USEPA final maximum contaminant level (MCL). The MALs of an unspecified list of “unregulated contaminants” are based on toxicity testing guidelines (noncarcinogens) and risk characterization methodology (carcinogens). Use of Annex A procedures may not always be identical, depending on the certifier.

[†] NSF International, 789 North Dixboro Road, Ann Arbor, MI 48105.

[‡] Persons outside the United States should contact the appropriate authority having jurisdiction.

[§] Standards Council of Canada, 55 Metcalfe Street, Suite 600, Ottawa, ON K1P 6L5 Canada.

[¶] Both publications available from National Academies Press, 500 Fifth Street NW, Washington, DC 20001.

ANSI/AWWA E102 does not address additives requirements. Thus, users of this standard should consult the appropriate state or local agency having jurisdiction in order to

1. Determine additives requirements, including applicable standards.
2. Determine the status of certifications by parties offering to certify products for contact with, or treatment of, drinking water.
3. Determine current information on product certification.

NSF/ANSI/CAN 372, Drinking Water System Components—Lead Content, specifies restrictions for a maximum lead content of materials in contact with drinking water. The user shall specify NSF/ANSI/CAN 372 when applicable in the purchase documents. Currently compliance with NSF/ANSI/CAN 372 is mandatory in some states and meets the new low-lead requirements of the US Safe Drinking Water Act, which went into effect January 2014.

II. Special Issues.

II.A. *General.* A pumping system consists of several components: the pump, the driver, the discharge column pipe and discharge elbow, the baseplate, the foundation, the controls, the discharge piping, and in most cases the well casing or suction barrel. This ANSI/AWWA E102 standard discusses only the pump unit that consists of the pump, motor, column piping, and discharge head. Users of this standard should review other publications such as the Hydraulic Institute* (HI) standards. Users should especially review the HI standards and other publications for information on baseplates, foundation design, connection into discharge piping systems, and component alignment recommendations. Conditions under which a pump will operate must be carefully evaluated and described by the purchaser.

II.A.1. Fluid Ambient Temperature Range. Equipment selection criteria are dependent upon the fluid temperature in which the equipment operates. Pump component part dimensions and tolerances can change in extremely cold or hot fluid environments. Different lubricant fluids are used in submersible motors in extreme ambient temperature conditions. The purchase documents should identify the ambient temperature range of the fluid environment in which the pumping unit is to be installed.

II.A.2. Operating Region. Evaluations that define the operating region of the pump should include the determination of the hydraulic characteristics of the pump system at the rated flow and head condition and the extremes (maximum and minimum)

* Hydraulic Institute, 300 Interpace Pkwy, Suite A280, Parsippany, NJ 07054

of heads and flow capacities under which the pump will be required to operate. Users of this standard should determine the operating region for each application and select the pump that best fits within the HI standards' limits for preferred operating region (POR). Operation outside of the POR is common. However, continuous operation within the allowable operating region (AOR) is necessary for success. The AOR limit is defined in the HI standards, but the values are defined by the pump manufacturer.

II.A.3. Inlet Conditions. Pump field performance and service life can be significantly reduced if pump inlet conditions, including net positive suction head available (NPSHA), are not appropriate. Anticipated pump performance curves, including net positive suction head required (NPSHR) curves provided by manufacturers (the accepted industry standard is a 3 percent drop in head, termed "NPSH3"), are based on a flow pattern at the pump inlet being uniform, steady, and free from swirls and vortices. Inadequate pump inlet conditions can result in damaging vibrations, excessive component stresses, and reduced performance. ANSI/HI 9.8 and ANSI/HI 9.6.1 provide recommendations for pump intake conditions.

II.A.4. Preferred Operating Region. This standard does not require pumps to be furnished that will operate within a POR or within an AOR as defined by the HI standard ANSI/HI 9.6.3. Operating outside these regions will have an adverse effect on the life of the pump. Purchasers should be aware of the pump manufacturer's recommended operating limits when specifying pumps and should, as a minimum, define the maximum and minimum anticipated operating head and flow rates. Purchasers may require submittal of data by manufacturers defining the operating regions and advising anticipated bearing life and vibration when operating within these regions.

II.A.5. Nonreturn Valves. This standard does not provide requirements for nonreturn valves, nor does it require pumps to be furnished with nonreturn valves. Nonreturn valves are used in pumping systems to prevent reverse flow or to prevent flow opposite to the intended direction. Flow opposite to the intended direction can cause the pump and motor to spin backward at damaging speeds and cause other harm to the pumping system. Various types of nonreturn valves exist, such as check valves and pump control valves. For systems with high operating pressures and flows, the rapid closure of a nonreturn valve can create transient-surge pressures that may damage the connecting piping system and related components. Systems with deep water wells may require more than one nonreturn valve. The purchaser should give particular attention to the spacing and quantity of the nonreturn valves. Consideration of column weight and the capability to drain the column pipe to facilitate maintenance, as well as the

duration the pump can run against low system head (empty column pipe), should be considered when applying nonreturn valves. Nonreturn valves should be carefully selected by the purchaser depending on the specifics of the pumping system and the recommendations of the pump manufacturer.

II.A.6. *Column Centralizers.* This standard does not require pump discharge column piping or the pump to be furnished with centralizers. Some water wells may significantly deviate in vertical alignment, which can lead to submersible power cable abrasion during installation and removal and can affect flow at the pump intake (including flow around the motor) during operation. At the discretion of the user, column pipe centralizers may be installed on the column piping. It is recommended that the design and installation of column pipe centralizers be performed by the pump manufacturer and thus be included in the purchase documents if required.

II.A.7. *Pump Size.* It is recommended that the maximum motor diameter and the minimum inside diameter (ID) of the well be sized such that under any operating condition the water velocity past the motor should neither exceed 10 ft/s (3.0 m/s) nor be less than 1.0 ft/s (0.3 m/s). For this purpose, a minor irregularity in the motor shape, such as that caused by the cable connection, can be excluded in the motor-diameter measurement. For flow velocity conditions other than those recommended previously, a shroud may be recommended by the manufacturer. The pump manufacturer should verify motor shroud requirements based on operating flow characteristics provided by the purchaser.

II.B. *Chlorine and Chloramine Degradation of Elastomers.* The selection of materials is critical for water service and distribution piping in locations where there is a possibility that elastomers will be in contact with chlorine or chloramines. Documented research has shown that elastomers such as gaskets, seals, valve seats, and encapsulations may be degraded when exposed to chlorine or chloramines. The impact of degradation is a function of the type of elastomeric material, chemical concentration, contact surface area, elastomer cross section, and environmental conditions as well as temperature. Careful selection of and specifications for elastomeric materials and the specifics of their application for each water system component should be considered to provide long term usefulness and minimum degradation (swelling, loss of elasticity or softening) of the elastomer specified.

II.C. *Advisory Information on Product Application.* This standard does not cover all applications or manufacturing technologies. Some waters may have high conductivity levels well in excess of 200 $\mu\Omega/\text{cm}$, for which it may be advisable to consult with a metallurgist or corrosion expert to determine whether special materials or techniques

to deal with galvanic corrosion are required. The purchaser should identify special requirements and deviations from this standard and include appropriate language in the purchase documents.

II.C.1. Materials. Materials required by this standard are selected based on suitability for operation with water as described in the scope. Selection is based on successful experience in the waterworks industry and local code and regulation requirements for suitable materials.

II.C.1.1. Treatment Chemicals. The potential for corrosion because of chemicals added to the water should be considered. Materials, including some bronzes and rubber compounds exposed to water containing chlorine, chloramines, or other chemicals, may not be suitable. If such problems are anticipated, purchase documents should identify the maximum expected concentrations of these chemicals and other factors, such as pH and temperature ranges, that may affect the corrosivity of these chemicals. The purchaser and manufacturer should be aware that at times the pump may be used to disperse chemicals into the system that may result in local concentrations much higher than normal concentrations intended for the system. The purchaser should consult with the manufacturer and, if appropriate, specify special requirements for these materials in the purchase documents.

II.C.1.2. Disinfection Chemicals. Pumps are often disinfected before being placed in service initially or after repair. During the disinfection process, wetted surfaces are exposed to liquids far more corrosive than that allowed by the scope of this standard. Materials required by this standard may not be suitable for prolonged exposure to corrosive chemicals, including chlorine and sodium hypochlorite. Therefore, these chemicals should be removed and surfaces flushed with water meeting scope requirements immediately after disinfection.

II.C.1.3. Dealloying. Some waters promote dealloying corrosion of some copper alloys in the form of dezincification or dealuminization, particularly when the material is exposed to water at high velocity. If this is a concern, the purchaser should consult with the manufacturer and, if appropriate, require alternate materials in the purchase documents.

II.C.1.4. Coatings. This standard requires that ferrous (except for stainless) surfaces of pumps exposed to water be coated. The purchase documents should delete this requirement if coatings are not required.

II.D. *Pump Tests.*

II.D.1. Factory Tests.

II.D.1.1. Procedures. This standard requires factory tests to be performed in accordance with the current version of ANSI/HI 14.6. Acceptance grade should be identified in the purchase documents.

II.D.1.2. Extent. This standard requires nonwitnessed hydrostatic testing only for the bowl assembly and discharge head.

II.D.1.3. Additional Factory Tests. Additional factory tests, including hydrostatic tests of an assembled pump, vertical pump column sections, performance, NPSH₃, mechanical, and witnessed tests, may be included by the purchase documents.

II.D.2. Field Tests. This standard does not include field performance testing requirements. The following can be used to define field-test requirements.

1. ANSI/HI test standards, as described in Sec. II.D.1 for factory tests, may be used for field testing at the discretion of the purchaser. ANSI/HI test standards require minimum pipe lengths, internal straightening vanes, and other criteria that, although practical in a controlled test loop, may not be available in the field. Application of this standard for field testing requires parties to agree on the scope and protocol of the test before the test.

2. Appendix B included with this standard.

II.E. *Vibration Limits.* The vibration characteristics of a pumping system depend on a combination of pump and driver design and construction, column piping design and construction, baseplate or mounting plate design and construction, support foundation design and construction, balancing requirements, the pump installation, component alignment requirements, and operating flow rate relative to the pump's operating best efficiency point. This standard does not require a structural natural frequency response analysis be performed for the pump and motor, complete column piping assembly, the discharge head, or other critical components incorporated into the mounting system. Users of this standard should review ANSI/HI 9.6.8 Rotodynamic Pumps Guideline for Dynamics of Pumping Machinery regarding these subjects and consider if requirements within the purchase documents regarding vibration limits and vibration limit verification are necessary.

III. Use of This Standard. It is the responsibility of the user of an AWWA standard to determine that the products described in that standard are suitable for use in the particular application being considered. Users of submersible vertical turbine pumps should not expect long-lasting or reliable service unless all aspects of the pump application are defined: operating conditions, environmental conditions, and local

ambient conditions. Additionally, the pump and driver unit, discharge column piping, discharge head assembly, mounting plate, foundation system, and connecting discharge piping must be designed, installed, and aligned as an integral system.

III.A. *Information for Manufacturers.* Pump manufacturers require basic data to provide pumps meeting purchasers' needs. This includes, at minimum, a definition of required operating conditions. When placing orders for pumps to be manufactured in accordance with this standard, the purchaser should specify the following items:

1. Standard to be used—that is, ANSI/AWWA E102, Submersible Vertical Turbine Pumps, of latest edition.
2. Water properties:
 - a. Temperature range
 - b. pH range
 - c. Percent solids
 - d. Chlorine injection location and concentration
3. Datum (elevation):
 - a. Setting
 - b. Static water level
 - c. Maximum and minimum pumping water level
 - d. Drawdown
 - e. Well casing inner diameter
 - f. Well screen levels
 - g. Well screen dimensions
4. Design point:
 - a. Capacity
 - b. Head
 - c. Efficiency
 - d. NPSHA
5. Motor:
 - a. Revolutions per minute (rpm) of pump and motor
 - b. Voltage
 - c. Number of electrical phases
 - d. Horsepower
 - e. Frequency

6. Nonreturn valve(s) to be used:
 - a. Style (solid or bleed back)
 - b. Material
 - c. Pressure rating
 - d. Location(s)
7. Materials:
 - a. Documentation of materials of construction used in the manufacture of the pumping unit, including materials testing documentation certifying compliance with the referenced ASTM standard and grade
8. Drinking water requirements: Refer to Sec. 4.1. The purchaser should state whether compliance with NSF/ANSI/CAN 61, Drinking Water System Components—Health Effects, and/or NSF/ANSI/CAN 372, Drinking Water System Components—Lead Content, is required. If compliance is required, the purchase documents should note, “This product shall be certified as suitable for contact with drinking water by an accredited certification organization in accordance with NSF/ANSI/CAN 61, Drinking Water System Components—Health Effects, and/or NSF/ANSI/CAN 372, Drinking Water System Components—Lead Content.”

Purchasers should be aware that the availability of NSF/ANSI/CAN 61–certified pumps may be very limited, and this requirement may limit competition and add to the cost and delivery time of the pumps. Purchasers should also be aware that some states may allow installation of noncertified pumps, based on submittal and acceptance of materials used to construct the pump, especially if suitable certified pumps are not available.

Compliance with NSF/ANSI/CAN 372 meets the new low-lead requirements of the US Safe Drinking Water Act, which went into effect January 2014. Most pump manufacturers are able to certify compliance to NSF/ANSI/CAN 372.

9. Alternative materials: Purchase documents may require alternative materials or limit manufacturer’s choices of materials listed in this standard. For example, this standard lists silicon bronze, aluminum bronze, and stainless steel as impeller materials. Silicon bronze may not be suitable if the water contains a significant concentration of chlorine or chloramine. Aluminum bronze and stainless-steel components may be more costly and difficult to fabricate than silicon bronze components. Purchasers should be aware that alternatives or limitations on manufacturer’s selections may increase costs and delivery time.