

Report of


EASTERN HEMISPHERE PRODUCTION

of
**CASING, TUBING
and
DRILL PIPE
2000**



**American
Petroleum
Institute**

**Helping You
Get The Job
Done Right.SM**

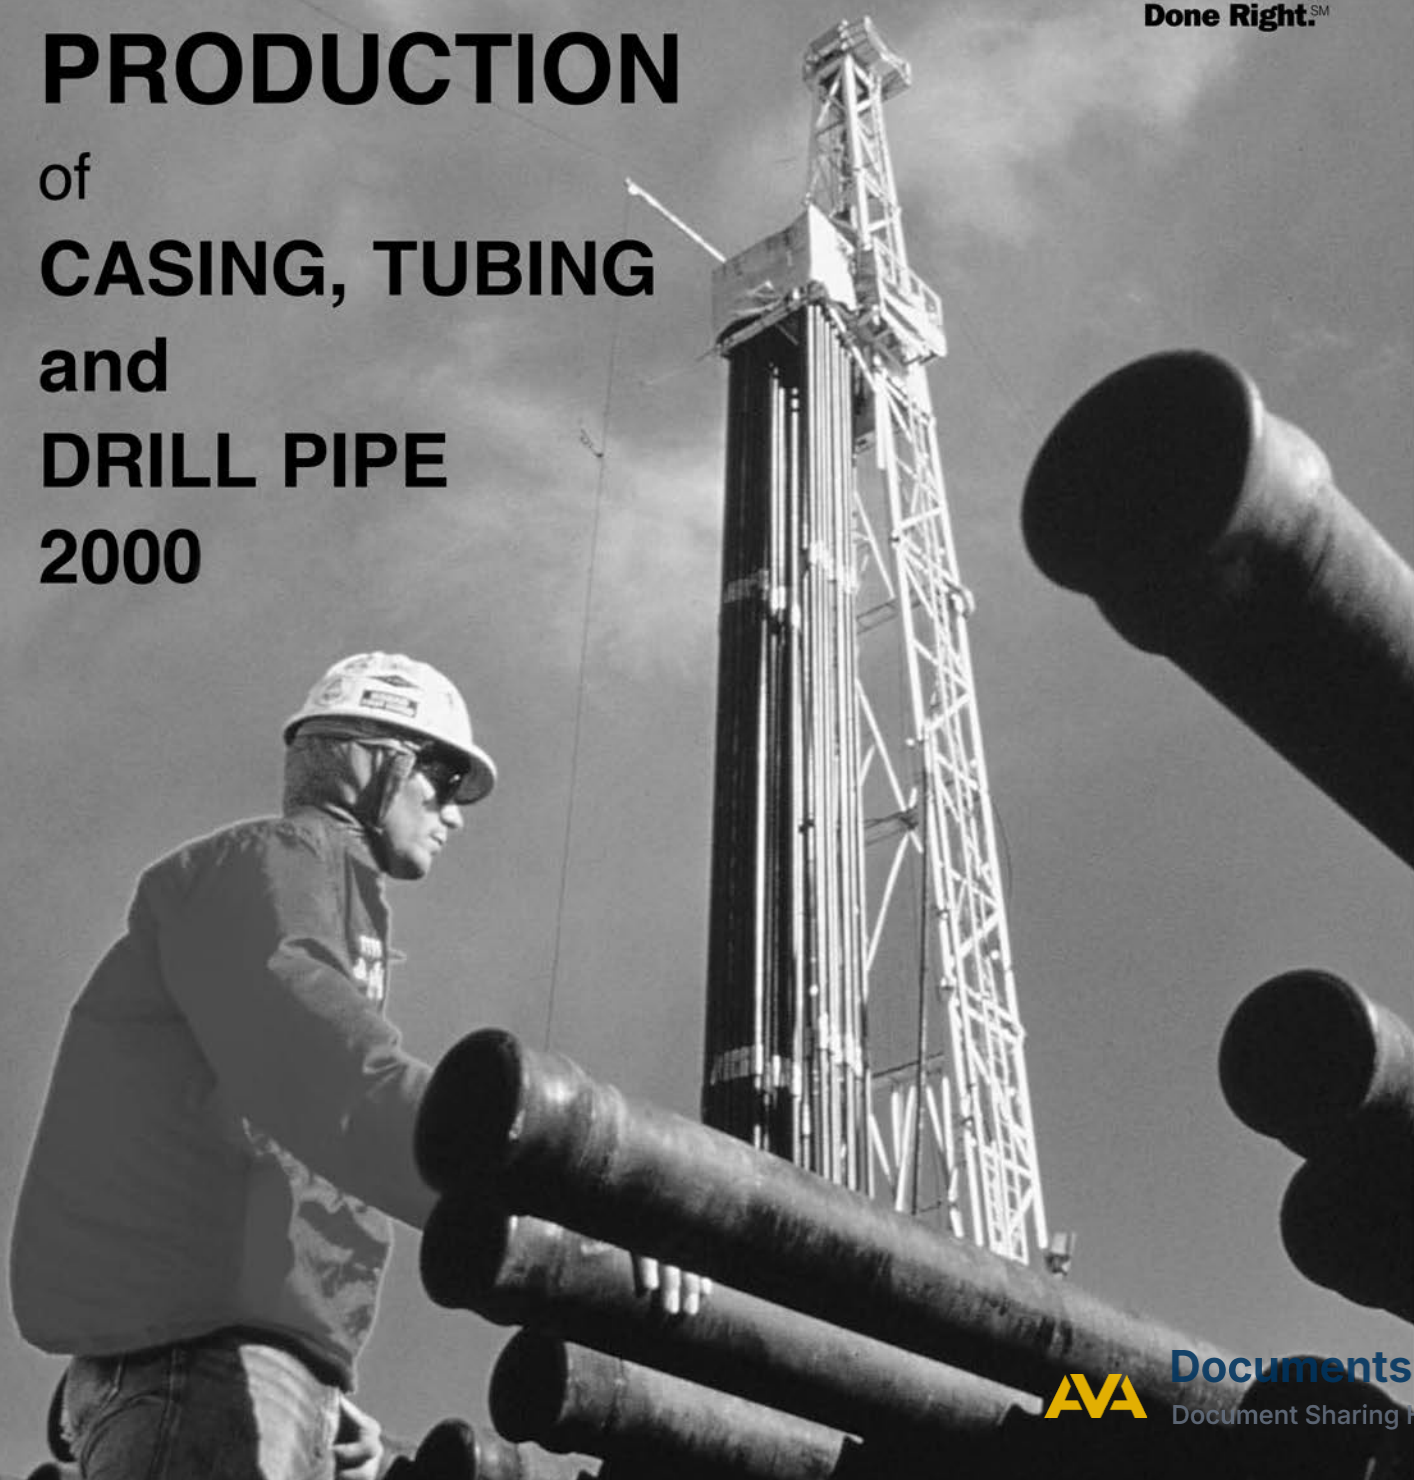

Documents

Document Sharing Hub

Data Supplied By API Monogram Licensed Mills Worldwide
(in Metric Tonnes)

Issued by:

American Petroleum Institute
Exploration and Production Department
1220 L Street, Northwest
Washington, DC 20005-4070

Phone (202) 682-8375
Fax (202) 962-4776

Compiled by:

Preston Publishing Company, Inc.
6613 East 106th Street
Tulsa, Oklahoma 74133-7131

All rights reserved. No part of this work may be reproduced, stored in a retrieval system, or transmitted by any means, electronic, mechanical, photocopying, recording, or otherwise, without prior written permission from the publisher. Contact the Publisher, API Publishing Services, 1220 L Street, N.W., Washington, D.C. 20005.

Copyright © 2001 American Petroleum Institute

2000
TONNAGE OF CASING SHIPPED - WORLDWIDE
(Including Casing Liners)
(in Metric Tonnes)

SIZE OD (mm)	NOMINAL WEIGHT (lb/ft)	PLAIN END WEIGHT (kg/m)	WALL THICKNESS (mm)	H40	J55 K55	N80	M65	L80	L80 13Cr (a)	L85 13Cr (a)	C90	C95	T95	High Collapse 95 (b)	P110	Q125	Other RY (c)	All Other	TOTAL ALL GRADES
88,9	---	14,76	7,34	0	1,589	0	0	0	0	0	0	0	0	0	0	0	0	0	1,589
TOTAL TONS PER SIZE:				0	1,589	0	0	0	0	0	0	0	0	0	0	0	0	0	1,589
101,6	---	16,89	7,26	0	0	0	0	11	0	0	0	0	0	0	120	0	0	45	176
TOTAL TONS PER SIZE:				0	0	0	0	11	0	0	0	0	0	0	120	0	0	45	176
114,30	9.50	14,02	5,21	0	1,456	0	0	0	0	0	0	0	0	0	0	0	0	0	1,456
	10.50	15,24	5,69	0	2,367	0	0	12	0	0	0	0	0	2,337	0	0	0	0	4,716
	11.60	16,91	6,35	0	9,818	17,384	0	2,713	184	0	0	0	0	0	4,301	0	1,361	21	35,781
	12.60	---	6,88	0	109	0	0	2,930	652	0	0	0	0	0	55	0	0	1,862	5,607
	13.50	19,44	7,37	0	123	491	0	1,402	430	61	0	98	0	321	10,386	186	3,958	380	17,834
	15.10	22,32	8,56	0	3	42	0	18	79	0	513	43	0	0	2,368	46	2,110	352	5,573
	---	---	9,65	0	0	0	0	0	0	0	0	137	0	0	10	28	0	0	175
	19.20	---	10,92	0	0	0	0	205	0	0	0	0	0	0	0	0	0	0	205
TOTAL TONS PER SIZE:				0	13,877	17,916	0	7,279	1,345	61	513	277	0	2,658	17,119	260	7,429	2,614	71,349
127,00	11.50	16,74	5,59	0	223	0	0	0	0	0	0	0	0	0	0	0	0	0	223
	13.00	19,12	6,43	0	270	0	0	0	0	0	0	0	0	0	0	0	0	0	270
	15.00	22,16	7,52	0	891	1,209	0	1,301	327	0	0	0	0	0	225	0	374	36	4,363
	18.00	26,70	9,19	0	20	609	0	1,249	43	190	0	53	268	124	3,041	0	850	724	7,172
	---	---	10,72	0	0	0	0	0	238	0	0	0	0	0	0	0	0	0	238
	21.40	31,73	11,10	0	0	0	0	0	0	0	0	34	0	0	0	0	0	0	34
	23.20	34,39	12,14	0	87	0	0	116	6	0	0	0	0	0	217	22	0	194	642
	24.10	35,80	12,70	0	0	51	0	0	0	0	0	8	0	0	0	0	40	142	241
TOTAL TONS PER SIZE:				0	1,492	1,869	0	2,666	614	190	0	94	268	124	3,482	22	1,264	1,096	13,182

NOTE: SIZES IN **ITALICS** ARE THOSE NOT LISTED IN THE CURRENT EDITION OF SPEC 5CT

- (a) Weights are not applicable for L80 and L85 13Cr grades.
(b) 95,000 psi minimum yield strength casing manufactured to meet collapse pressures higher than that for Grade C95 casing of the same size and thickness.
(c) Other Restricted Yield Strength Grades. Includes any grade with a specified yield strength range of 20,000 psi or less which is not included in the table.

*Numbers may not add due to rounding

2000
TONNAGE OF CASING SHIPPED - WORLDWIDE
(Including Casing Liners)
(in Metric Tonnes)

SIZE OD (In.)	NOMINAL WEIGHT (lb/ft)	PLAIN END WEIGHT (lb/ft)	WALL THICKNESS (In.)	H40	J55 K55	N80	M65	L80	L80 13Cr (a)	L85 13Cr (a)	C90	C95	T95	High Collapse 95 (b)	P110	Q125	Other RY (c)	All Other	TOTAL ALL GRADES
3 1/2	---	9.92	0.289	0	1,589	0	0	0	0	0	0	0	0	0	0	0	0	0	1,589
TOTAL TONS PER SIZE:				0	1,589	0	0	0	0	0	0	0	0	0	0	0	0	0	1,589
4	---	11.35	0.286	0	0	0	0	11	0	0	0	0	0	0	120	0	0	45	176
TOTAL TONS PER SIZE:				0	0	0	0	11	0	0	0	0	0	0	120	0	0	45	176
4 1/2	9.50	9.41	0.205	0	1,456	0	0	0	0	0	0	0	0	0	0	0	0	0	1,456
	10.50	10.24	0.224	0	2,367	0	0	12	0	0	0	0	0	2,337	0	0	0	0	4,716
	11.60	11.36	0.250	0	9,818	17,384	0	2,713	184	0	0	0	0	0	4,301	0	1,361	21	35,781
	12.60	---	0.271	0	109	0	0	2,930	652	0	0	0	0	0	55	0	0	1,862	5,607
	13.50	13.05	0.290	0	123	491	0	1,402	430	61	0	98	0	321	10,386	186	3,958	380	17,834
	15.10	15.00	0.337	0	3	42	0	18	79	0	513	43	0	0	2,368	46	2,110	352	5,573
	---	---	0.380	0	0	0	0	0	0	0	0	137	0	0	10	28	0	0	175
	19.20	---	0.430	0	0	0	0	205	0	0	0	0	0	0	0	0	0	0	205
TOTAL TONS PER SIZE:				0	13,877	17,916	0	7,279	1,345	61	513	277	0	2,658	17,119	260	7,429	2,614	71,349
5	11.50	11.24	0.220	0	223	0	0	0	0	0	0	0	0	0	0	0	0	0	223
	13.00	12.84	0.253	0	270	0	0	0	0	0	0	0	0	0	0	0	0	0	270
	15.00	14.88	0.296	0	891	1,209	0	1,301	327	0	0	0	0	0	225	0	374	36	4,363
	18.00	17.95	0.362	0	20	609	0	1,249	43	190	0	53	268	124	3,041	0	850	724	7,172
	---	---	0.422	0	0	0	0	0	238	0	0	0	0	0	0	0	0	0	238
	21.40	21.32	0.437	0	0	0	0	0	0	0	0	34	0	0	0	0	0	0	34
	23.20	23.11	0.478	0	87	0	0	116	6	0	0	0	0	0	217	22	0	194	642
	24.10	24.05	0.500	0	0	51	0	0	0	0	0	8	0	0	0	0	40	142	241
TOTAL TONS PER SIZE:				0	1,492	1,869	0	2,666	614	190	0	94	268	124	3,482	22	1,264	1,096	13,182

NOTE: SIZES IN **ITALICS** ARE THOSE NOT LISTED IN THE CURRENT EDITION OF SPEC 5CT

- (a) Weights are not applicable for L80 and L85 13Cr grades.
- (b) 95,000 psi minimum yield strength casing manufactured to meet collapse pressures higher than that for Grade C95 casing of the same size and thickness.
- (c) Other Restricted Yield Strength Grades. Includes any grade with a specified yield strength range of 20,000 psi or less which is not included in the table.

*Numbers may not add due to rounding

SIZE OD (mm)	NOMINAL WEIGHT (lb/ft)	PLAIN END WEIGHT (kg/m)	WALL THICKNESS (mm)						L80 13Cr (a)	L85 13Cr (a)				High Collapse 95 (b)			Other RY (c)	All Other	TOTAL ALL GRADES
				H40	J55 K55	N80	M65	L80			C90	C95	T95		P110	Q125			
139,70	14.00	20,41	6,20	0	59,579	0	0	0	0	0	0	0	0	0	0	0	0	0	59,579
	15.50	22,88	6,99	0	27,346	0	17	637	218	123	0	0	0	0	0	0	196	179	28,716
	17.00	25,13	7,72	0	144,613	107,821	0	8,419	2,133	2,359	0	317	0	6,782	9,029	0	863	1,524	283,859
	20.00	29,52	9,17	0	526	55,657	0	6,784	2,520	1,124	0	1,283	0	1,923	14,722	0	2,449	340	87,326
	23.00	33,57	10,54	0	664	1,556	0	1,512	439	0	0	0	0	0	6,869	0	873	45	11,958
	26.00	38,02	12,09	0	0	0	0	0	24	0	0	0	0	0	0	0	966	0	990
	26.80	39,78	12,70	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	29.70	44,14	14,27	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	32.60	48,49	15,88	0	0	0	0	0	0	0	0	0	0	0	0	103	0	0	103
	35.30	52,61	17,45	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	38.00	56,68	19,05	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	40.50	60,55	20,62	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	43.10	64,40	22,23	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL TONS PER SIZE:				0	232,729	165,034	17	17,352	5,333	3,606	0	1,599	0	8,704	30,620	103	5,347	2,088	472,532
146,05	---	---	8,00	0	135,998	16,122	0	12	0	0	0	10,655	0	0	0	0	0	29,920	192,707
	---	---	9,53	0	57,864	34,856	0	19,895	0	0	0	15,083	0	0	0	0	0	760	128,458
	---	---	11,00	0	0	16,382	0	66,129	0	0	0	19,284	0	0	0	0	0	0	101,795
TOTAL TONS PER SIZE:				0	193,862	67,360	0	86,036	0	0	0	45,023	0	0	0	0	0	30,680	422,961
168,28	20.00	29,06	7,32	676	24,967	14,432	0	15,107	0	349	0	0	0	0	0	0	0	10,768	66,297
	24.00	35,13	8,94	0	1,631	660	0	274	3,244	0	0	0	0	0	300	0	0	17,359	23,466
	28.00	41,18	10,59	0	192	90	0	1,613	41	0	0	945	0	0	771	0	781	0	4,434
	32.00	46,50	12,07	0	53	140	0	1,864	0	0	0	220	0	0	206	0	63	0	2,546
	---	---	13,28	0	4,758	3,133	0	5,990	0	0	0	0	0	0	0	0	0	0	13,881
TOTAL TONS PER SIZE:				676	31,601	18,454	0	24,849	3,285	349	0	1,165	0	0	1,277	0	844	28,127	110,625

NOTE: SIZES IN **ITALICS** ARE THOSE NOT LISTED IN THE CURRENT EDITION OF SPEC 5CT

- (a) Weights are not applicable for L80 and L85 13Cr grades.
- (b) 95,000 psi minimum yield strength casing manufactured to meet collapse pressures higher than that for Grade C95 casing of the same size and thickness.
- (c) Other Restricted Yield Strength Grades. Includes any grade with a specified yield strength range of 20,000 psi or less which is not included in the table.

*Numbers may not add due to rounding

SIZE	NOMINAL	PLAIN END	WALL															Other		TOTAL
OD	WEIGHT	WEIGHT	THICKNESS		J55	N80	M65	L80	L80	L85				High				RY	All	ALL
(In.)	(lb/ft)	(lb/ft)	(In.)	H40	K55				13Cr	13Cr	C90	C95	T95	Collapse	95	P110	Q125	(c)	Other	GRADES
									(a)	(a)				(b)						
5 1/2	14.00	13.71	0.244	0	59,579	0	0	0	0	0	0	0	0	0	0	0	0	0	0	59,579
	15.50	15.36	0.275	0	27,346	0	17	637	218	123	0	0	0	0	0	0	0	196	179	28,716
	17.00	16.89	0.304	0	144,613	107,821	0	8,419	2,133	2,359	0	317	0	6,782	9,029	0	863	1,524		283,859
	20.00	19.83	0.361	0	526	55,657	0	6,784	2,520	1,124	0	1,283	0	1,923	14,722	0	2,449	340		87,326
	23.00	22.56	0.415	0	664	1,556	0	1,512	439	0	0	0	0	0	6,869	0	873	45		11,958
	26.00	25.54	0.476	0	0	0	0	0	24	0	0	0	0	0	0	0	966	0		990
	26.80	26.72	0.500	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	29.70	29.67	0.562	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	32.60	32.57	0.625	0	0	0	0	0	0	0	0	0	0	0	0	103	0	0		103
	35.30	35.35	0.687	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	38.00	38.08	0.750	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	40.50	40.69	0.812	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	43.10	43.26	0.875	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL TONS PER SIZE:				0	232,729	165,034	17	17,352	5,333	3,606	0	1,599	0	8,704	30,620	103	5,347	2,088		472,532
5 3/4	---	---	0.315	0	135,998	16,122	0	12	0	0	0	10,655	0	0	0	0	0	29,920		192,707
	---	---	0.375	0	57,864	34,856	0	19,895	0	0	0	15,083	0	0	0	0	0	760		128,458
	---	---	0.433	0	0	16,382	0	66,129	0	0	0	19,284	0	0	0	0	0	0		101,795
TOTAL TONS PER SIZE:				0	193,862	67,360	0	86,036	0	0	0	45,023	0	0	0	0	0	30,680		422,961
6 5/8	20.00	19.51	0.288	676	24,967	14,432	0	15,107	0	349	0	0	0	0	0	0	0	10,768		66,297
	24.00	23.60	0.352	0	1,631	660	0	274	3,244	0	0	0	0	0	300	0	0	17,359		23,466
	28.00	27.67	0.417	0	192	90	0	1,613	41	0	0	945	0	0	771	0	781	0		4,434
	32.00	31.23	0.475	0	53	140	0	1,864	0	0	0	220	0	0	206	0	63	0		2,546
	---	---	0.523	0	4,758	3,133	0	5,990	0	0	0	0	0	0	0	0	0	0		13,881
TOTAL TONS PER SIZE:				676	31,601	18,454	0	24,849	3,285	349	0	1,165	0	0	1,277	0	844	28,127		110,625

NOTE: SIZES IN **ITALICS** ARE THOSE NOT LISTED IN THE CURRENT EDITION OF SPEC 5CT

- (a) Weights are not applicable for L80 and L85 13Cr grades.
- (b) 95,000 psi minimum yield strength casing manufactured to meet collapse pressures higher than that for Grade C95 casing of the same size and thickness.
- (c) Other Restricted Yield Strength Grades. Includes any grade with a specified yield strength range of 20,000 psi or less which is not included in the table.

*Numbers may not add due to rounding

SIZE OD (mm)	NOMINAL WEIGHT (lb/ft)	PLAIN END WEIGHT (kg/m)	WALL THICKNESS (mm)						L80 13Cr (a)	L85 13Cr (a)				High Collapse 95 (b)			Other RY (c)	All Other	TOTAL ALL GRADES
				H40	J55 K55	N80	M65	L80			C90	C95	T95		P110	Q125			
177,80	17.00	24,89	5,87	0	46	0	0	0	0	0	0	0	0	0	0	0	0	0	46
	20.00	29,12	6,91	0	2,025	0	0	0	0	0	0	0	0	0	0	0	0	0	2,025
	23.00	33,70	8,05	0	24,465	63,965	0	3,507	0	0	0	0	0	0	26	0	2,421	855	95,238
	26.00	38,21	9,19	0	20,436	26,215	0	8,993	1,804	1,162	0	32	658	4,088	8,863	0	4,532	2,237	79,021
	29.00	42,78	10,36	0	647	12,863	0	25,883	1,676	2,544	0	875	1,125	3,355	8,928	0	6,843	3,410	68,148
	32.00	47,20	11,51	0	13	540	0	6,042	3,910	1,920	0	551	2,126	482	10,154	41	6,773	2,101	34,653
	35.00	51,52	12,65	0	87	48	0	0	0	19	0	262	0	118	2,095	348	4,400	612	7,988
	38.00	55,52	13,72	0	0	0	0	0	0	0	0	0	0	0	0	150	19	0	169
	41.00	60,14	14,99	0	0	0	0	0	0	0	0	0	0	0	0	2	227	0	229
	42.70	63,41	15,88	0	0	0	0	0	0	0	0	0	0	0	0	0	0	56	56
	46.40	69,01	17,45	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	50.10	74,58	19,05	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	53.60	79,93	20,62	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	57.50	85,29	22,23	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL TONS PER SIZE:				0	47,720	103,629	0	44,425	7,391	5,645	0	1,720	3,909	8,042	30,067	541	25,214	9,270	287,574
193,68	24.00	34,97	7,62	0	430	0	0	0	0	0	0	0	0	0	0	0	0	0	430
	26.40	38,08	8,33	0	482	0	0	0	0	0	0	0	0	0	0	0	0	0	482
	29.70	43,28	9,53	0	32	976	0	67	0	0	0	0	0	0	33	0	64	0	1,171
	33.70	49,22	10,92	0	0	2,426	0	0	0	0	0	0	242	0	13	0	858	0	3,539
	39.00	56,69	12,70	0	0	1,172	0	16	557	0	0	406	0	0	1,541	0	0	0	3,691
	42.80	63,14	14,27	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	45.30	66,55	15,11	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	47.10	69,64	15,88	0	441	0	0	0	0	0	0	0	0	0	0	0	370	311	1,122
	51.20	75,85	17,45	0	83	0	0	0	0	0	0	0	0	0	0	0	0	0	83
	55.30	82,05	19,05	0	0	0	0	0	0	0	0	0	0	0	0	0	255	0	255
	59.00	---	20,60	0	0	0	0	216	13	0	219	132	0	0	2,468	0	558	0	3,605
TOTAL TONS PER SIZE:				0	1,469	4,574	0	299	570	0	219	538	242	0	4,054	0	2,104	311	14,378
196,90	46.10	67,74	15,11	0	0	0	0	0	0	0	0	6,054	0	0	0	0	0	0	6,054
TOTAL TONS PER SIZE:				0	0	0	0	0	0	0	0	6,054	0	0	0	0	0	0	6,054

NOTE: SIZES IN **ITALICS** ARE THOSE NOT LISTED IN THE CURRENT EDITION OF SPEC 5CT

- (a) Weights are not applicable for L80 and L85 13Cr grades.
- (b) 95,000 psi minimum yield strength casing manufactured to meet collapse pressures higher than that for Grade C95 casing of the same size and thickness.
- (c) Other Restricted Yield Strength Grades. Includes any grade with a specified yield strength range of 20,000 psi or less which is not included in the table.

*Numbers may not add due to rounding

SIZE	NOMINAL	PLAIN END	WALL															Other		TOTAL
OD	WEIGHT	WEIGHT	THICKNESS		J55	N80	M65	L80	L85					High				RY	All	TOTAL
(In.)	(lb/ft)	(lb/ft)	(In.)	H40	K55				13Cr	13Cr	C90	C95	T95	Collapse	95	P110	Q125	(c)	Other	ALL
									(a)	(a)				(b)						GRADES
7	17.00	16.72	0.231	0	46	0	0	0	0	0	0	0	0	0	0	0	0	0	0	46
	20.00	19.56	0.272	0	2,025	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2,025
	23.00	22.65	0.317	0	24,465	63,965	0	3,507	0	0	0	0	0	0	0	26	0	2,421	855	95,238
	26.00	25.69	0.362	0	20,436	26,215	0	8,993	1,804	1,162	0	32	658	4,088	8,863	0	4,532	2,237	79,021	
	29.00	28.75	0.408	0	647	12,863	0	25,883	1,676	2,544	0	875	1,125	3,355	8,928	0	6,843	3,410	68,148	
	32.00	31.70	0.453	0	13	540	0	6,042	3,910	1,920	0	551	2,126	482	10,154	41	6,773	2,101	34,653	
	35.00	34.61	0.498	0	87	48	0	0	0	19	0	262	0	118	2,095	348	4,400	612	7,988	
	38.00	37.29	0.540	0	0	0	0	0	0	0	0	0	0	0	0	150	19	0	169	
	41.00	40.39	0.590	0	0	0	0	0	0	0	0	0	0	0	0	2	227	0	229	
	42.70	42.65	0.625	0	0	0	0	0	0	0	0	0	0	0	0	0	0	56	56	
	46.40	46.36	0.687	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	50.10	50.11	0.750	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	53.60	53.71	0.812	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	57.50	57.29	0.875	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
TOTAL TONS PER SIZE:				0	47,720	103,629	0	44,425	7,391	5,645	0	1,720	3,909	8,042	30,067	541	25,214	9,270	287,574	
7 5/8	24.00	23.49	0.300	0	430	0	0	0	0	0	0	0	0	0	0	0	0	0	0	430
	26.40	25.59	0.328	0	482	0	0	0	0	0	0	0	0	0	0	0	0	0	0	482
	29.70	29.06	0.375	0	32	976	0	67	0	0	0	0	0	0	33	0	64	0	1,171	
	33.70	33.07	0.430	0	0	2,426	0	0	0	0	0	0	242	0	13	0	858	0	3,539	
	39.00	38.08	0.500	0	0	1,172	0	16	557	0	0	406	0	0	1,541	0	0	0	3,691	
	42.80	42.43	0.562	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	45.30	44.71	0.595	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	47.10	46.77	0.625	0	441	0	0	0	0	0	0	0	0	0	0	0	370	311	1,122	
	51.20	50.95	0.687	0	83	0	0	0	0	0	0	0	0	0	0	0	0	0	83	
	55.30	55.12	0.750	0	0	0	0	0	0	0	0	0	0	0	0	0	255	0	255	
	59.00	---	0.811	0	0	0	0	216	13	0	219	132	0	0	2,468	0	558	0	3,605	
TOTAL TONS PER SIZE:				0	1,469	4,574	0	299	570	0	219	538	242	0	4,054	0	2,104	311	14,378	
7 3/4	46.10	45.54	0.595	0	0	0	0	0	0	0	0	6,054	0	0	0	0	0	0	0	6,054
TOTAL TONS PER SIZE:				0	0	0	0	0	0	0	0	6,054	0	0	0	0	0	0	0	6,054

NOTE: SIZES IN *ITALICS* ARE THOSE NOT LISTED IN THE CURRENT EDITION OF SPEC 5CT

- (a) Weights are not applicable for L80 and L85 13Cr grades.
- (b) 95,000 psi minimum yield strength casing manufactured to meet collapse pressures higher than that for Grade C95 casing of the same size and thickness.
- (c) Other Restricted Yield Strength Grades. Includes any grade with a specified yield strength range of 20,000 psi or less which is not included in the table.

*Numbers may not add due to rounding

SIZE	NOMINAL	PLAIN END	WALL															High			Other		
OD	WEIGHT	WEIGHT	THICKNESS						L80	L85				Collapse					TOTAL				
(mm)	(lb/ft)	(kg/m)	(mm)	H40	J55	N80	M65	L80	13Cr	13Cr	C90	C95	T95	95	P110	Q125	RY	All	ALL				
					K55				(a)	(a)				(b)			(c)	Other	GRADES				
219,08	---	33,31	6,35	0	375	0	0	0	0	0	0	0	0	0	0	0	0	0	375				
219,08	24.00	35,15	6,71	283	8,089	0	0	0	0	0	0	0	0	0	0	0	0	0	8,372				
	28.00	40,24	7,72	0	42	0	0	0	0	0	0	0	0	0	0	0	0	0	42				
	32.00	46,33	8,94	0	1,415	170	0	0	0	0	0	0	0	0	0	0	0	0	1,586				
	36.00	52,35	10,16	0	23	46	0	888	0	0	0	0	0	0	419	0	0	0	1,376				
	40.00	58,54	11,43	0	40	0	0	0	0	0	0	0	0	0	1,064	0	0	0	1,104				
	44.00	---	11,43	0	0	0	0	12,967	0	0	0	4,649	0	0	0	0	0	0	17,616				
	44.00	64,64	12,70	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
	49.00	71,52	14,15	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
TOTAL TONS PER SIZE:				283	9,984	216	0	13,855	0	0	0	4,649	0	0	1,483	0	0	0	0	30,470			
244,48	32.30	46,21	7,92	20	208	0	0	0	0	0	0	0	0	0	0	0	0	32,071	32,298				
	36.00	51,93	8,94	3	41,435	610	0	0	0	0	0	0	0	0	0	0	0	36,493	78,541				
	40.00	58,00	10,03	1	42,208	30,881	0	6,394	0	0	0	83	0	0	9,630	0	0	8,527	97,725				
	43.50	63,62	11,05	0	2,195	41,256	0	29,943	0	0	0	438	1,047	613	11,126	0	0	1,859	88,477				
	47.00	68,75	11,99	0	480	28,928	0	38,603	52	498	0	604	1,540	2,140	15,388	0	5,632	7,585	101,450				
	53.50	78,73	13,84	0	16	2,479	0	24,432	282	403	157	5,867	3,870	5,069	30,622	2,828	11,547	12,368	99,939				
	58.40	85,48	15,11	0	0	0	0	139	173	0	0	0	0	1,348	1,109	106	6,095	452	9,421				
	59.40	87,38	15,47	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
	---	---	15,88	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
	64.90	95,74	17,07	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
	---	---	17,78	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
	70.30	103,83	18,64	0	0	0	0	0	0	0	0	0	0	0	0	5	0	469	474				
	---	---	19,05	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
	75.60	111,94	20,24	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
TOTAL TONS PER SIZE:				24	86,542	104,155	0	99,510	507	901	157	6,992	6,457	9,170	67,875	2,939	23,274	99,823	508,325				
250,83	---	---	15,88	0	0	0	0	0	0	0	0	51	0	0	0	57	0	1,254	1,362				
	---	---	18,29	0	0	0	0	0	0	0	0	0	0	0	0	186	166	0	352				
TOTAL TONS PER SIZE:				0	0	0	0	0	0	0	0	51	0	0	0	243	166	1,254	1,713				

NOTE: SIZES IN **ITALICS** ARE THOSE NOT LISTED IN THE CURRENT EDITION OF SPEC 5CT

- (a) Weights are not applicable for L80 and L85 13Cr grades.
- (b) 95,000 psi minimum yield strength casing manufactured to meet collapse pressures higher than that for Grade C95 casing of the same size and thickness.
- (c) Other Restricted Yield Strength Grades. Includes any grade with a specified yield strength range of 20,000 psi or less which is not included in the table.

*Numbers may not add due to rounding

SIZE	NOMINAL	PLAIN END	WALL															Other		TOTAL
OD	WEIGHT	WEIGHT	THICKNESS		J55	N80	M65	L80	L80	L85				High				RY	All	ALL
(In.)	(lb/ft)	(lb/ft)	(In.)	H40	K55				13Cr	13Cr	C90	C95	T95	Collapse	95	P110	Q125	(c)	Other	GRADES
									(a)	(a)					(b)					
8 5/8	---	22.36	0.250	0	375	0	0	0	0	0	0	0	0	0	0	0	0	0	0	375
8 5/8	24.00	23.60	0.264	283	8,089	0	0	0	0	0	0	0	0	0	0	0	0	0	0	8,372
	28.00	27.04	0.304	0	42	0	0	0	0	0	0	0	0	0	0	0	0	0	0	42
	32.00	31.13	0.352	0	1,415	170	0	0	0	0	0	0	0	0	0	0	0	0	0	1,586
	36.00	35.17	0.400	0	23	46	0	888	0	0	0	0	0	0	0	419	0	0	0	1,376
	40.00	39.33	0.450	0	40	0	0	0	0	0	0	0	0	0	0	1,064	0	0	0	1,104
44.00	---	0.450		0	0	0	0	12,967	0	0	0	4,649	0	0	0	0	0	0	0	17,616
	44.00	43.43	0.500	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	49.00	48.04	0.557	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL TONS PER SIZE:				283	9,984	216	0	13,855	0	0	0	4,649	0	0	0	1,483	0	0	0	30,470
9 5/8	32.30	31.06	0.312	20	208	0	0	0	0	0	0	0	0	0	0	0	0	0	32,071	32,298
	36.00	34.89	0.352	3	41,435	610	0	0	0	0	0	0	0	0	0	0	0	0	36,493	78,541
	40.00	38.97	0.395	1	42,208	30,881	0	6,394	0	0	0	83	0	0	0	9,630	0	0	8,527	97,725
	43.50	42.73	0.435	0	2,195	41,256	0	29,943	0	0	0	438	1,047	613	11,126	0	0	1,859	88,477	
	47.00	46.18	0.472	0	480	28,928	0	38,603	52	498	0	604	1,540	2,140	15,388	0	5,632	7,585	101,450	
	53.50	52.90	0.545	0	16	2,479	0	24,432	282	403	157	5,867	3,870	5,069	30,622	2,828	11,547	12,368	99,939	
	58.40	57.44	0.595	0	0	0	0	139	173	0	0	0	0	1,348	1,109	106	6,095	452	9,421	
	59.40	58.70	0.609	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	---	---	0.625	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	64.90	64.32	0.672	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	---	---	0.700	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	70.30	69.76	0.734	0	0	0	0	0	0	0	0	0	0	0	0	5	0	469	474	
	---	---	0.750	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	75.60	75.21	0.797	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
TOTAL TONS PER SIZE:				24	86,542	104,155	0	99,510	507	901	157	6,992	6,457	9,170	67,875	2,939	23,274	99,823	508,325	
9 7/8	---	---	0.625	0	0	0	0	0	0	0	0	51	0	0	0	57	0	1,254	1,362	
	---	---	0.720	0	0	0	0	0	0	0	0	0	0	0	0	186	166	0	352	
TOTAL TONS PER SIZE:				0	0	0	0	0	0	0	0	51	0	0	0	243	166	1,254	1,713	

NOTE: SIZES IN **ITALICS** ARE THOSE NOT LISTED IN THE CURRENT EDITION OF SPEC 5CT

- (a) Weights are not applicable for L80 and L85 13Cr grades.
- (b) 95,000 psi minimum yield strength casing manufactured to meet collapse pressures higher than that for Grade C95 casing of the same size and thickness.
- (c) Other Restricted Yield Strength Grades. Includes any grade with a specified yield strength range of 20,000 psi or less which is not included in the table.

*Numbers may not add due to rounding

SIZE OD (mm)	NOMINAL WEIGHT (lb/ft)	PLAIN END WEIGHT (kg/m)	WALL THICKNESS (mm)						L80 13Cr (a)	L85 13Cr (a)				High Collapse 95 (b)			Other RY (c)	All Other	TOTAL ALL GRADES
				H40	J55 K55	N80	M65	L80			C90	C95	T95		P110	Q125			
273,05	32.75	46,51	7,09	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	40.50	57,93	8,89	0	16,879	0	0	0	0	0	0	0	0	0	0	0	0	0	16,879
	45.50	65,88	10,16	0	1,284	244	0	34	0	0	0	0	40	0	0	0	123	0	1,725
	51.00	73,76	11,43	0	0	634	0	445	0	0	0	0	0	40	58	0	0	0	1,176
	55.50	80,76	12,57	0	0	0	0	423	0	0	443	169	0	0	245	12	0	173	1,464
	60.70	88,49	13,84	0	0	0	0	3,191	1,610	0	0	0	88	0	0	0	107	1,768	6,764
	65.70	96,14	15,11	0	0	0	0	674	0	0	267	488	43	0	6	0	404	27	1,907
	73.20	107,78	17,07	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	79.20	116,97	18,64	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	85.30	126,21	20,24	0	0	0	0	267	0	0	0	0	0	0	133	0	274	169	843
TOTAL TONS PER SIZE:				0	18,163	878	0	5,033	1,610	0	710	657	171	40	441	12	908	2,136	30,758
298,50	42.00	60,51	8,46	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	47.00	67,91	9,53	0	29	0	0	1,416	0	0	0	0	0	0	0	0	0	0	1,445
	54.00	78,33	11,05	0	35	0	0	54	0	0	0	0	0	0	68	0	0	48	205
	60.00	87,63	12,42	0	0	0	0	109	0	0	0	71	0	0	0	89	0	0	269
	65.00	95,29	13,56	0	89	106	0	0	0	0	0	0	0	0	402	873	1,275	106	2,851
	71.00	103,42	14,78	0	0	0	0	0	0	0	0	0	0	0	31	0	0	0	31
TOTAL TONS PER SIZE:				0	153	106	0	1,579	0	0	0	71	0	0	501	962	1,275	154	4,800
301,63	71.80	---	14,78	0	0	0	0	0	0	0	0	0	0	0	0	0	804	39	843
TOTAL TONS PER SIZE:				0	0	0	0	0	0	0	0	0	0	0	0	0	804	39	843
323,85	---	---	9,50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL TONS PER SIZE:				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
339,70	48.00	68,47	8,38	0	4,451	0	0	0	0	0	0	0	0	0	0	0	0	0	4,451
	54.50	78,55	9,65	0	49,415	0	0	0	0	0	0	0	0	0	0	0	0	7,212	56,627
	61.00	88,54	10,92	0	12,120	1,039	0	718	0	0	0	0	0	0	0	0	0	1,800	15,677
	68.00	98,46	12,19	0	52,831	29,039	0	10,588	0	0	0	0	0	0	2,277	0	3,208	6,580	104,522

NOTE: SIZES IN **ITALICS** ARE THOSE NOT LISTED IN THE CURRENT EDITION OF SPEC 5CT

- (a) Weights are not applicable for L80 and L85 13Cr grades.
- (b) 95,000 psi minimum yield strength casing manufactured to meet collapse pressures higher than that for Grade C95 casing of the same size and thickness.
- (c) Other Restricted Yield Strength Grades. Includes any grade with a specified yield strength range of 20,000 psi or less which is not included in the table.

*Numbers may not add due to rounding

SIZE OD (In.)	NOMINAL WEIGHT (lb/ft)	PLAIN END WEIGHT (lb/ft)	WALL THICKNESS (In.)	H40	J55 K55	N80	M65	L80	L80 13Cr (a)	L85 13Cr (a)	C90	C95	T95	High Collapse 95 (b)	P110	Q125	Other RY (c)	All Other	TOTAL ALL GRADES
10 3/4	32.75	31.23	0.279	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	40.50	38.91	0.350	0	16,879	0	0	0	0	0	0	0	0	0	0	0	0	0	16,879
	45.50	44.26	0.400	0	1,284	244	0	34	0	0	0	0	40	0	0	0	123	0	1,725
	51.00	49.55	0.450	0	0	634	0	445	0	0	0	0	0	40	58	0	0	0	1,176
	55.50	54.26	0.495	0	0	0	0	423	0	0	443	169	0	0	245	12	0	173	1,464
	60.70	59.45	0.545	0	0	0	0	3,191	1,610	0	0	0	88	0	0	0	107	1,768	6,764
	65.70	64.59	0.595	0	0	0	0	674	0	0	267	488	43	0	6	0	404	27	1,907
	73.20	72.40	0.672	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	79.20	78.59	0.734	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	85.30	84.80	0.797	0	0	0	0	267	0	0	0	0	0	0	133	0	274	169	843
TOTAL TONS PER SIZE:				0	18,163	878	0	5,033	1,610	0	710	657	171	40	441	12	908	2,136	30,758
11 3/4	42.00	40.64	0.333	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	47.00	45.60	0.375	0	29	0	0	1,416	0	0	0	0	0	0	0	0	0	0	1,445
	54.00	52.62	0.435	0	35	0	0	54	0	0	0	0	0	0	68	0	0	48	205
	60.00	58.87	0.489	0	0	0	0	109	0	0	0	71	0	0	0	89	0	0	269
	65.00	64.03	0.534	0	89	106	0	0	0	0	0	0	0	0	402	873	1,275	106	2,851
	71.00	69.48	0.582	0	0	0	0	0	0	0	0	0	0	0	31	0	0	0	31
TOTAL TONS PER SIZE:				0	153	106	0	1,579	0	0	0	71	0	0	501	962	1,275	154	4,800
11 7/8	71.80	---	0.582	0	0	0	0	0	0	0	0	0	0	0	0	0	804	39	843
TOTAL TONS PER SIZE:				0	0	0	0	0	0	0	0	0	0	0	0	0	804	39	843
12 3/4	---	---	0.374	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL TONS PER SIZE:				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
13 3/8	48.00	46.02	0.330	0	4,451	0	0	0	0	0	0	0	0	0	0	0	0	0	4,451
	54.50	52.79	0.380	0	49,415	0	0	0	0	0	0	0	0	0	0	0	0	7,212	56,627
	61.00	59.50	0.430	0	12,120	1,039	0	718	0	0	0	0	0	0	0	0	0	1,800	15,677
	68.00	66.17	0.480	0	52,831	29,039	0	10,588	0	0	0	0	0	0	2,277	0	3,208	6,580	104,522

NOTE: SIZES IN **ITALICS** ARE THOSE NOT LISTED IN THE CURRENT EDITION OF SPEC 5CT

- (a) Weights are not applicable for L80 and L85 13Cr grades.
- (b) 95,000 psi minimum yield strength casing manufactured to meet collapse pressures higher than that for Grade C95 casing of the same size and thickness.
- (c) Other Restricted Yield Strength Grades. Includes any grade with a specified yield strength range of 20,000 psi or less which is not included in the table.

*Numbers may not add due to rounding

SIZE OD (mm)	NOMINAL WEIGHT (lb/ft)	PLAIN END WEIGHT (kg/m)	WALL THICKNESS (mm)	H40	J55 K55	N80	M65	L80	L80 13Cr (a)	L85 13Cr (a)	C90	C95	T95	High Collapse 95 (b)	P110	Q125	Other RY (c)	All Other	TOTAL ALL GRADES
339,70 (cont.) ---	72.00 85.00 ---	105,20 123,54 ---	13,06 15,44 15,88	213 0 0	217 0 0	7,105 0 374	0 0 0	13,385 0 132 0	0 0 0	0 0 0	0 0 0	1,042 0 0	1,704 0 0	19,103 1,002 0	10,030 0 0	3,654 0 0	5,376 2,072 0	8,666 0 0	70,494 3,074 506
TOTAL TONS PER SIZE:				213	119,034	37,557	0	24,823	0	0	0	1,042	1,704	20,105	12,306	3,654	10,656	24,258	255,350
346,08	88.20	---	14,73	0	0	0	0	0	0	0	0	0	0	300	297	0	1,863	485	2,944
TOTAL TONS PER SIZE:				0	0	0	0	0	0	0	0	0	0	300	297	0	1,863	485	2,944
406,40	65.00	93,27	9,53	1,814	36	0	0	0	0	0	0	0	0	0	0	0	0	0	1,850
	75.00	108,49	11,13	0	1,345	0	0	0	0	0	0	0	0	0	681	0	0	0	2,026
	84.00	122,09	12,57	0	3,463	39	0	0	0	0	0	74	0	0	113	0	0	747	4,436
	---	---	14,61	0	0	0	0	420	0	0	0	291	0	0	141	0	534	0	1,386
	109.00	160,13	16,66	0	1,222	23	0	77	0	0	0	0	0	0	1,428	0	0	0	2,750
TOTAL TONS PER SIZE:				1,814	6,066	62	0	497	0	0	0	365	0	0	2,363	0	534	747	12,446
431,80	---	---	25,40	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL TONS PER SIZE:				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
473,10	87.50	125,91	11,05	0	12,027	1,193	140	0	0	0	0	0	0	0	0	0	0	1,063	14,423
473,10	---	---	12,95	0	769	0	0	0	0	0	0	0	0	0	0	0	163	99	1,030
	---	---	15,09	0	18,211	0	0	0	0	0	0	0	0	0	0	0	0	259	18,470
TOTAL TONS PER SIZE:				0	31,007	1,193	140	0	0	0	0	0	0	0	0	0	163	1,421	33,922
508,00	94.00	136,38	11,13	0	5,535	0	0	0	0	0	0	0	0	0	0	0	0	3	5,538
	106.50	155,13	12,70	0	4,373	0	0	0	0	0	0	0	0	0	0	0	0	0	4,373
	133.00	195,66	16,13	0	27,232	3,947	0	214	0	0	0	0	0	0	0	0	0	2,808	34,200
	169.00	---	20,63	0	241	753	0	0	0	0	0	0	0	0	0	0	0	0	994
TOTAL TONS PER SIZE:				0	37,381	4,700	0	214	0	0	0	0	0	0	0	0	0	2,811	45,105
TOTAL TONS PER GRADE:				3,010	832,667	527,701	157	328,426	20,655	10,752	1,599	70,296	12,752	49,143	172,004	8,735	81,842	207,356	2,327,095

NOTE: SIZES IN **ITALICS** ARE THOSE NOT LISTED IN THE CURRENT EDITION OF SPEC 5CT

- (a) Weights are not applicable for L80 and L85 13Cr grades.
- (b) 95,000 psi minimum yield strength casing manufactured to meet collapse pressures higher than that for Grade C95 casing of the same size and thickness.
- (c) Other Restricted Yield Strength Grades. Includes any grade with a specified yield strength range of 20,000 psi or less which is not included in the table.

*Numbers may not add due to rounding

SIZE OD (In.)	NOMINAL WEIGHT (lb/ft)	PLAIN END WEIGHT (lb/ft)	WALL THICKNESS (In.)	H40	J55 K55	N80	M65	L80	L80 13Cr (a)	L85 13Cr (a)	C90	C95	T95	High Collapse 95 (b)	P110	Q125	Other RY (c)	All Other	TOTAL ALL GRADES
13 3/8 (cont.)	72.00 85.00 ---	70.67 82.90 ---	0.514 0.608 0.625	213 0 0	217 0 0	7,105 0 374	0 0 0	13,385 0 132 0	0 0 0	0 0 0	0 0 0	1,042 0 0	1,704 0 0	19,103 1,002 0	10,030 0 0	3,654 0 0	5,376 2,072 0	8,666 0 0	70,494 3,074 506
TOTAL TONS PER SIZE:				213	119,034	37,557	0	24,823	0	0	0	1,042	1,704	20,105	12,306	3,654	10,656	24,258	255,350
13 5/8	88.20	---	0.580	0	0	0	0	0	0	0	0	0	0	300	297	0	1,863	485	2,944
TOTAL TONS PER SIZE:				0	0	0	0	0	0	0	0	0	0	300	297	0	1,863	485	2,944
16	65.00 75.00 84.00 --- 109.00	62.64 72.86 82.05 --- 107.60	0.375 0.438 0.495 0.575 0.656	1,814 0 0 0 0	36 1,345 3,463 0 1,222	0 0 39 0 23	0 0 0 0 0	0 0 0 420 77	0 0 0 0 0	0 0 0 0 0	0 0 0 0 0	0 0 74 291 0	0 0 0 0 0	0 0 0 0 0	0 681 113 141 1,428	0 0 0 0 0	0 0 0 534 0	0 0 747 0 0	1,850 2,026 4,436 1,386 2,750
TOTAL TONS PER SIZE:				1,814	6,066	62	0	497	0	0	0	365	0	0	2,363	0	534	747	12,446
17	---	---	1.000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL TONS PER SIZE:				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
18 5/8 18 5/8	87.50 --- ---	84.59 --- ---	0.435 0.510 0.594	0 0 0	12,027 769 18,211	1,193 0 0	140 0 0	0 0 0	0 0 0	0 0 0	0 0 0	0 0 0	0 0 0	0 0 0	0 0 0	0 0 0	0 163 0	1,063 99 259	14,423 1,030 18,470
TOTAL TONS PER SIZE:				0	31,007	1,193	140	0	0	0	0	0	0	0	0	0	163	1,421	33,922
20	94.00 106.50 133.00 169.00	91.59 104.23 131.45 ---	0.438 0.500 0.635 0.812	0 0 0 0	5,535 4,373 27,232 241	0 0 3,947 753	0 0 0 0	0 0 214 0	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 0	0 0 2,808 0	3 0 2,808 0	5,538 4,373 34,200 994
TOTAL TONS PER SIZE:				0	37,381	4,700	0	214	0	0	0	0	0	0	0	0	0	2,811	45,105
TOTAL TONS PER GRADE:				3,010	832,667	527,701	157	328,426	20,655	10,752	1,599	70,296	12,752	49,143	172,004	8,735	81,842	207,356	2,327,095

NOTE: SIZES IN **ITALICS** ARE THOSE NOT LISTED IN THE CURRENT EDITION OF SPEC 5CT

- (a) Weights are not applicable for L80 and L85 13Cr grades.
- (b) 95,000 psi minimum yield strength casing manufactured to meet collapse pressures higher than that for Grade C95 casing of the same size and thickness.
- (c) Other Restricted Yield Strength Grades. Includes any grade with a specified yield strength range of 20,000 psi or less which is not included in the table.

*Numbers may not add due to rounding

2000
TONNAGE OF TUBING SHIPPED - WORLDWIDE
(in Metric Tonnes)

SIZE OD (mm)	NOMINAL WEIGHT (lb/ft)	PLAIN END WEIGHT (kg/m)	WALL THICKNESS (mm)	END FINISH (a)	H40	J55	N80	M65	L80	L80 13Cr (b)	L85 13Cr (b)	C90	T95	P110	Other RY (c)	All Other	TOTAL ALL GRADES
26,67	1.14	1,68	2,87	NU10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	1.20	1,68	2,87	EU10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	1,68	2,87	PE	0	0	0	0	0	0	0	0	0	0	0	0	0
	1.54	2,19	3,91	EU10R	0	0	0	0	0	0	0	0	0	0	0	2	2
	---	2,19	3,91	PE	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL TONS PER SIZE:					0	0	0	0	0	0	0	0	0	0	0	2	2
33,40	1.70	2,50	3,38	NU10R	0	1	0	0	0	0	0	0	0	0	0	0	1
	1.72	2,50	3,38	IJ10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	1.80	2,50	3,38	EU10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	2,50	3,38	PE	0	568	0	0	0	0	0	0	0	0	0	225	793
	2.24	3,24	4,55	EU10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	3,24	4,55	PE	0	0	0	0	0	0	0	0	0	42	0	0	42
TOTAL TONS PER SIZE:					0	569	0	0	0	0	0	0	0	42	0	225	836
42,16	2.10	3,06	3,18	IJ10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	3,06	3,18	PE	0	0	0	0	0	0	0	0	0	0	0	0	0
	2.30	3,39	3,56	NU10R	0	34	0	0	0	0	0	0	0	0	0	0	34
	2.33	3,39	3,56	IJ10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	2.40	3,39	3,56	EU10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	3,39	3,56	PE	0	2,257	23	0	0	0	0	0	0	0	0	1,325	3,605
	3.07	4,46	4,85	EU10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	4,46	4,85	PE	0	0	0	0	0	0	0	0	0	63	0	0	63
TOTAL TONS PER SIZE:					0	2,292	23	0	0	0	0	0	0	63	0	1,325	3,703
48,26	2.40	3,54	3,18	IJ10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	3,54	3,18	PE	0	0	0	0	0	0	0	0	0	0	0	0	0
	2.75	4,05	3,68	NU10R	0	199	355	0	0	0	0	0	0	0	0	0	554
	2.76	4,05	3,68	IJ10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	2.90	4,05	3,68	EU10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	4,05	3,68	PE	0	601	81	0	0	0	0	0	0	0	0	163	845

NOTE: SIZES IN ***ITALICS*** ARE THOSE NOT LISTED IN THE CURRENT EDITION OF SPEC 5CT

- (a) NU = Non Upset PE = Plain End 8R = 8 Round Thread EU = External Upset IJ = Integral Joint 10R = 10 Round Thread
(b) Weights are not applicable for L80 and L85 13Cr grades.
(c) Includes any other grade which has a specified yield strength range of 20,000 psi or less & not included in the table.

*Numbers may not add due to rounding

2000
TONNAGE OF TUBING SHIPPED - WORLDWIDE
(in Metric Tonnes)

SIZE OD (In.)	NOMINAL WEIGHT (lb/ft)	PLAIN END WEIGHT (lb/ft)	WALL THICKNESS (In.)	END FINISH (a)	H40	J55	N80	M65	L80	L80 13Cr (b)	L85 13Cr (b)	C90	T95	P110	Other RY (c)	All Other	TOTAL ALL GRADES
1.050	1.14	1.13	0.113	NU10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	1.20	1.13	0.113	EU10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	1.13	0.113	PE	0	0	0	0	0	0	0	0	0	0	0	0	0
	1.54	1.48	0.154	EU10R	0	0	0	0	0	0	0	0	0	0	0	2	2
	---	1.48	0.154	PE	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL TONS PER SIZE:					0	0	0	0	0	0	0	0	0	0	0	2	2
1.315	1.70	1.68	0.133	NU10R	0	1	0	0	0	0	0	0	0	0	0	0	1
	1.72	1.68	0.133	IJ10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	1.80	1.68	0.133	EU10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	1.68	0.133	PE	0	568	0	0	0	0	0	0	0	0	0	225	793
	2.24	2.17	0.179	EU10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	2.17	0.179	PE	0	0	0	0	0	0	0	0	0	42	0	0	42
TOTAL TONS PER SIZE:					0	569	0	0	0	0	0	0	0	42	0	225	836
1.660	2.10	2.05	0.125	IJ10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	2.05	0.125	PE	0	0	0	0	0	0	0	0	0	0	0	0	0
	2.30	2.27	0.140	NU10R	0	34	0	0	0	0	0	0	0	0	0	0	34
	2.33	2.27	0.140	IJ10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	2.40	2.27	0.140	EU10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	2.27	0.140	PE	0	2,257	23	0	0	0	0	0	0	0	0	1,325	3,605
	3.07	3.00	0.191	EU10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	3.00	0.191	PE	0	0	0	0	0	0	0	0	0	63	0	0	63
TOTAL TONS PER SIZE:					0	2,292	23	0	0	0	0	0	0	63	0	1,325	3,703
1.900	2.40	2.37	0.125	IJ10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	2.37	0.125	PE	0	0	0	0	0	0	0	0	0	0	0	0	0
	2.75	2.72	0.145	NU10R	0	199	355	0	0	0	0	0	0	0	0	0	554
	2.76	2.72	0.145	IJ10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	2.90	2.72	0.145	EU10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	2.72	0.145	PE	0	601	81	0	0	0	0	0	0	0	0	163	845

NOTE: SIZES IN **ITALICS** ARE THOSE NOT LISTED IN THE CURRENT EDITION OF SPEC 5CT

- (a) NU = Non Upset PE = Plain End 8R = 8 Round Thread EU = External Upset IJ = Integral Joint 10R = 10 Round Thread
(b) Weights are not applicable for L80 and L85 13Cr grades.
(c) Includes any other grade which has a specified yield strength range of 20,000 psi or less & not included in the table.

*Numbers may not add due to rounding

SIZE OD (mm)	NOMINAL WEIGHT (lb/ft)	PLAIN END WEIGHT (kg/m)	WALL THICKNESS (mm)	END FINISH (a)	H40	J55	N80	M65	L80	L80 13Cr (b)	L85 13Cr (b)	C90	T95	P110	Other RY (c)	All Other	TOTAL ALL GRADES
48,26 (cont.)	3.73	5,41	5,08	EU10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	5,41	5,08	PE	0	0	0	0	0	0	0	0	0	113	0	60	173
	---	6,56	6,35	PE	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	7,64	7,62	PE	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL TONS PER SIZE:					0	800	436	0	0	0	0	0	0	113	0	223	1,571
52,40	3.25	4,73	3,96	IJ10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	4,73	3,96	PE	0	883	170	0	0	0	0	0	0	0	0	249	1,301
	---	6,58	5,72	PE	0	0	0	0	0	0	0	0	0	30	0	17	47
TOTAL TONS PER SIZE:					0	883	170	0	0	0	0	0	0	30	0	265	1,348
60,33	4.00	5,87	5,24	NU10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	5,87	5,24	PE	0	0	0	0	0	0	0	0	0	0	0	26	26
	4.60	6,61	4,83	NU10R	0	662	272	0	8	0	0	0	0	0	0	209	1,150
	4.70	6,61	4,83	EU8R	0	26,772	1,254	0	1,560	52	0	0	0	0	0	410	30,048
	---	6,61	4,83	PE	0	16,886	1,821	0	25	0	0	0	0	16	284	3,017	22,049
	5.80	8,57	6,45	NU8R	0	7	0	0	0	0	0	0	0	0	0	0	7
	5.95	8,57	6,45	EU8R	0	305	500	0	0	0	0	0	0	0	0	0	805
	---	8,57	6,45	PE	0	3	0	0	0	0	0	0	0	0	0	62	65
	---	9,76	7,49	PE	0	0	0	0	0	0	0	0	0	0	0	106	106
	7.45	10,90	8,53	EU8R	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	10,90	8,53	PE	0	52	0	0	0	0	0	0	0	0	0	3	55
TOTAL TONS PER SIZE:					0	44,686	3,847	0	1,593	52	0	0	0	16	284	3,833	54,311
73,03	6.40	9,17	4,83	NU	0	0	0	0	0	0	0	0	0	90	0	0	90
	6.40	9,17	5,51	NU10R	0	137,704	37,291	0	342	1,755	0	0	0	1,394	0	12,774	191,259
	6.50	9,17	5,51	EU8R	0	66,466	40,712	0	8,467	0	0	3,578	0	7,843	0	5,230	132,296
	---	9,17	5,51	PE	0	79,716	6,525	0	6,321	785	0	2	0	464	1,730	6,490	102,033
	7.80	11,41	7,01	NU10R	0	5,058	0	0	0	13	0	0	0	105	0	0	5,176
	7.90	11,41	7,01	EU8R	0	20	689	0	0	0	0	0	0	0	0	0	709
	---	11,41	7,01	PE	0	0	0	0	7	0	0	0	0	0	818	2,103	2,928
	8.60	12,58	7,82	NU10R	0	29	6	0	615	0	0	0	0	0	0	0	650
	8.70	12,58	7,82	EU8R	0	0	42	0	1,292	0	0	0	0	126	0	0	1,460
	---	12,58	7,82	PE	0	0	0	0	51	0	0	0	0	0	0	93	144
	---	---	7,90	PE	0	176	0	0	0	0	0	0	0	0	0	0	176

NOTE: SIZES IN **ITALICS** ARE THOSE NOT LISTED IN THE CURRENT EDITION OF SPEC 5CT

- (a) NU = Non Upset PE = Plain End 8R = 8 Round Thread EU = External Upset IJ = Integral Joint 10R = 10 Round Thread
(b) Weights are not applicable for L80 and L85 13Cr grades.
(c) Includes any other grade which has a specified yield strength range of 20,000 psi or less & not included in the table.

*Numbers may not add due to rounding

SIZE OD (In.)	NOMINAL WEIGHT (lb/ft)	PLAIN END WEIGHT (lb/ft)	WALL THICKNESS (In.)	END FINISH (a)						L80 13Cr (b)	L85 13Cr (b)				Other RY (c)	All Other	TOTAL ALL GRADES
					H40	J55	N80	M65	L80			C90	T95	P110			
1.900 (cont.)	3.73	3.63	0.200	EU10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	3.63	0.200	PE	0	0	0	0	0	0	0	0	0	113	0	60	173
	---	4.41	0.250	PE	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	5.13	0.300	PE	0	0	0	0	0	0	0	0	0	0	0	0	0
TOTAL TONS PER SIZE:					0	800	436	0	0	0	0	0	0	113	0	223	1,571
2.063	3.25	3.18	0.156	IJ10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	3.18	0.156	PE	0	883	170	0	0	0	0	0	0	0	0	249	1,301
	---	4.42	0.225	PE	0	0	0	0	0	0	0	0	0	30	0	17	47
TOTAL TONS PER SIZE:					0	883	170	0	0	0	0	0	0	30	0	265	1,348
2 3/8	4.00	3.94	0.167	NU10R	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	3.94	0.167	PE	0	0	0	0	0	0	0	0	0	0	0	26	26
	4.60	4.44	0.190	NU10R	0	662	272	0	8	0	0	0	0	0	0	209	1,150
	4.70	4.44	0.190	EU8R	0	26,772	1,254	0	1,560	52	0	0	0	0	0	410	30,048
	---	4.44	0.190	PE	0	16,886	1,821	0	25	0	0	0	0	16	284	3,017	22,049
	5.80	5.76	0.254	NU8R	0	7	0	0	0	0	0	0	0	0	0	0	7
	5.95	5.76	0.254	EU8R	0	305	500	0	0	0	0	0	0	0	0	0	805
	---	5.76	0.254	PE	0	3	0	0	0	0	0	0	0	0	0	62	65
	---	6.56	0.295	PE	0	0	0	0	0	0	0	0	0	0	0	106	106
	7.45	7.32	0.336	EU8R	0	0	0	0	0	0	0	0	0	0	0	0	0
	---	7.32	0.336	PE	0	52	0	0	0	0	0	0	0	0	0	3	55
	TOTAL TONS PER SIZE:					0	44,686	3,847	0	1,593	52	0	0	0	16	284	3,833
2 7/8	6.40	6.17	0.190	NU	0	0	0	0	0	0	0	0	0	90	0	0	90
	6.40	6.17	0.217	NU10R	0	137,704	37,291	0	342	1,755	0	0	0	1,394	0	12,774	191,259
	6.50	6.17	0.217	EU8R	0	66,466	40,712	0	8,467	0	0	3,578	0	7,843	0	5,230	132,296
	---	6.17	0.217	PE	0	79,716	6,525	0	6,321	785	0	2	0	464	1,730	6,490	102,033
	7.80	7.67	0.276	NU10R	0	5,058	0	0	0	13	0	0	0	105	0	0	5,176
	7.90	7.67	0.276	EU8R	0	20	689	0	0	0	0	0	0	0	0	0	709
	---	7.67	0.276	PE	0	0	0	0	7	0	0	0	0	0	818	2,103	2,928
	8.60	8.45	0.308	NU10R	0	29	6	0	615	0	0	0	0	0	0	0	650
	8.70	8.45	0.308	EU8R	0	0	42	0	1,292	0	0	0	0	126	0	0	1,460
	---	8.45	0.308	PE	0	0	0	0	51	0	0	0	0	0	0	93	144
	---	---	0.311	PE	0	176	0	0	0	0	0	0	0	0	0	0	176

NOTE: SIZES IN **ITALICS** ARE THOSE NOT LISTED IN THE CURRENT EDITION OF SPEC 5CT

- (a) NU = Non Upset PE = Plain End 8R = 8 Round Thread EU = External Upset IJ = Integral Joint 10R = 10 Round Thread
(b) Weights are not applicable for L80 and L85 13Cr grades.
(c) Includes any other grade which has a specified yield strength range of 20,000 psi or less & not included in the table.

*Numbers may not add due to rounding