

Technical Guidance Note 287

Third-party guidance for working near National Grid Electricity Transmission equipment





Purpose and scope..... 3

Contact National Grid.....	3
How to identify specific National Grid sites.....	3
Plant protection.....	3
Emergencies.....	3

Part 1 – Electricity Transmission

infrastructure..... 4

Overhead lines.....	4
Underground cables.....	4
Substations.....	4

Part 2 – Statutory requirements for working near high-voltage electricity.... 4

Electrical safety clearances.....	4
-----------------------------------	---

Part 3 – What National Grid will do for you and your development..... 5

Provision of information..... 5

Drawings.....	5
---------------	---

Risk of impact identification.....	5
------------------------------------	---

Risks or hazards to be aware of.....6

Land and access.....	6
Electrical clearance from overhead lines.....	6
Underground cables.....	7
Impressed voltage.....	7
Earth potential rise.....	8
Noise.....	8
Maintenance access.....	8
Fires and firefighting.....	9
Excavations, piling or tunnelling.....	9
Microshocks.....	9


Specific development guidance..... 10

Wind farms.....	10
Commercial and housing developments.....	10
Solar farms.....	11

Asset protection agreements..... 12

Contact details..... 12

Emergency situations.....	12
Routine enquiries.....	12

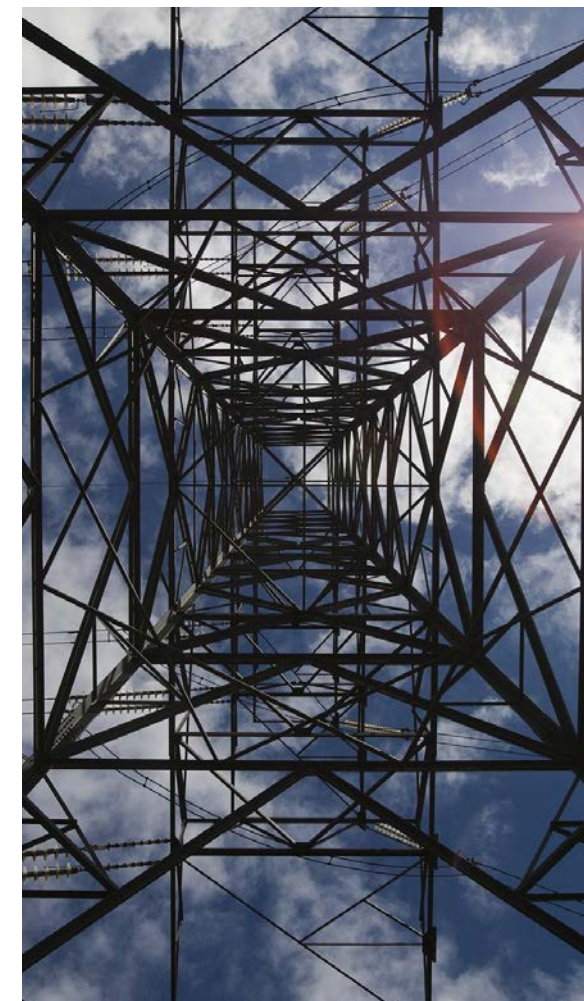

Disclaimer

National Grid Gas Transmission and National Grid Electricity Transmission or their agents, servants or contractors do not accept any liability for any losses arising under or in connection with this information. This limit on liability applies to all and any claims in contract, tort (including negligence), misrepresentation (excluding fraudulent misrepresentation), breach of statutory duty or otherwise. This limit on liability does not exclude or restrict liability where prohibited by the law, nor does it supersede the express terms of any related agreements.



Documents
Document Sharing Hub



Purpose and scope

The purpose of this document is to give guidance and information to third parties who are proposing, scheduling or designing developments close to National Grid Electricity Transmission assets.


The scope of the report covers information on basic safety and the location of our assets – and also highlights key issues around particular types of development and risk areas.

In the case of electrical assets, National Grid does not authorise or agree safe systems of work with developers and contractors. However, we will advise on issues such as electrical safety clearances and the location of towers and cables. We also work with developers to minimise the impact of any National Grid assets that are nearby.

How to identify specific National Grid sites

Substations

The name of the substation and the emergency contact number will be on the site sign.



Overhead lines

The reference number of the tower and the emergency contact number will be on this type of sign.



Contact National Grid

Plant protection

For routine enquiries regarding planned, scheduled or emergency works, contact the Plant Protection team online, by email, post or phone.

www.beforeyoudig.nationalgrid.com

Email: plantprotection@nationalgrid.com

Phone: 0800 688 588

Write to:

National Grid Plant Protection
Brick Kiln Street
Hinckley
Leicestershire
LE10 0NA

Emergencies

In the event of occurrences such as a cable strike, coming into contact with an overhead line conductor or identifying any hazards or problems with National Grid's equipment, phone our emergency number 0800 404 090 (option 1).

If you have apparatus within 30m of a National Grid asset, please ensure that the emergency number is included in your site's emergency procedures.

Consider safety

Consider the hazards identified in this document when working near electrical equipment



Part 1

Electricity transmission infrastructure

National Grid owns and maintains the high-voltage electricity transmission network in England and Wales (Scotland has its own networks). It's responsible for balancing supply with demand on a minute-by-minute basis across the network.

Overhead lines

Overhead lines consist of two main parts – pylons (also called towers) and conductors (or wires). Pylons are typically steel lattice structures mounted on concrete foundations. A pylon's design can vary due to factors such as voltage, conductor type and the strength of structure required.

Conductors, which are the 'live' part of the overhead line, hang from pylons on insulators. Conductors come in several different designs depending on the amount of power that is transmitted on the circuit.

In most cases, National Grid's overhead lines operate at 275kV or 400kV.

Underground cables

Underground cables are a growing feature of National Grid's network. They consist of a conducting core surrounded by layers of insulation and armour. Cables can be laid in the road, across open land or in tunnels. They operate at a range of voltages, up to 400kV.

Substations

Substations are found at points on the network where circuits come together or where a rise or fall in voltage is required. Transmission substations tend to be large facilities containing equipment such as power transformers, circuit breakers, reactors and capacitors. Diesel generators and compressed air systems are also found there.

Part 2

Statutory requirements for working near high-voltage electricity

The legal framework that regulates electrical safety in the UK is *The Electricity Safety, Quality and Continuity Regulations (ESQCR) 2002*. This also details the minimum electrical safety clearances, which are used as a basis for the Energy Networks Association (ENA) TS 43-8. These standards have been agreed by CENELEC (European Committee for Electrotechnical Standardisation) and also form part of the *British Standard BS EN 50341-1:2012 Overhead Electrical Lines exceeding AC 1kV*. All electricity companies are bound by these rules, standards and technical specifications. They are required to uphold them by their operator's licence.

Electrical safety clearances

It is essential that a safe distance is kept between the exposed conductors and people and objects when working near National Grid's electrical assets. A person does not have to touch an exposed conductor to get a life-threatening

electric shock. At the voltages National Grid operates at, it is possible for electricity to jump up to several metres from an exposed conductor and kill or cause serious injury to anyone who is nearby. For this reason, there are several legal requirements and safety standards that must be met.

Any breach of legal safety clearances will be enforced in the courts. This can – and has – resulted in the removal of an infringement, which is normally at the cost of the developer or whoever caused it to be there. Breaching safety clearances, even temporarily, risks a serious incident that could cause serious injury or death.

National Grid will, on request, advise planning authorities, developers or third parties on any safety clearances and associated issues. We can supply detailed drawings of all our overhead line assets marked up with relevant safe areas.



Documents

Document Sharing Hub