

Field device tool (FDT) interface specification —

Part 501: Communication implementation for common object model — IEC 61784 CPF 1

National foreword

This Published Document is the UK implementation of CLC/TR 62453-501:2009.

The UK participation in its preparation was entrusted to Technical Committee AMT/7, Industrial communications: process measurement and control, including fieldbus.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© BSI 2010

ISBN 978 0 580 62568 8

ICS 25.040.40; 35.100.05; 35.110

Compliance with a British Standard cannot confer immunity from legal obligations.

This Published Document was published under the authority of the Standards Policy and Strategy Committee on 31 January 2010

Amendments issued since publication

Amd. No.	Date	Text affected
----------	------	---------------

TECHNICAL REPORT
RAPPORT TECHNIQUE
TECHNISCHER BERICHT

CLC/TR 62453-501

November 2009

ICS 25.040.40; 35.100.05; 35.110

English version

**Field device tool (FDT) interface specification -
Part 501: Communication implementation for common object model -
IEC 61784 CPF 1
(IEC/TR 62453-501:2009)**

Spécification des interfaces des outils
des dispositifs de terrain (FDT) -
Partie 501: Implémentation des
communications
pour le modèle objet commun -
CEI 61784 CPF 1
(CEI/TR 62453-501:2009)

Field Device Tool (FDT)-
Schnittstellenspezifikation -
Teil 501: Kommunikationsimplementierung
mit dem allgemeinen Objektmodell (COM) -
Kommunikationsprofilfamilie (CPF) 1
nach IEC 61784
(IEC/TR 62453-501:2009)

This Technical Report was approved by CENELEC on 2009-10-01.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Central Secretariat: Avenue Marnix 17, B - 1000 Brussels

© 2009 CENELEC - All rights of exploitation in any form and by any means reserved worldwide for CENELEC members.

Ref. No. CLC/TR 62453-501:2009 E

 **Documents**
Document Sharing Hub

Foreword

The text of document 65E/65/CDV, future edition 1 of IEC/TR 62453-501, prepared by SC 65E, Devices and integration in enterprise systems, of IEC TC 65, Industrial-process measurement, control and automation, was submitted to the IEC-CENELEC parallel vote and was approved by CENELEC as CLC/TR 62453-501 on 2009-10-01.

This standard is to be used in conjunction with EN 62453-3xy series.

Annex ZA has been added by CENELEC.

Endorsement notice

The text of the Technical Report IEC/TR 62453-501:2009 was approved by CENELEC as a Technical Report without any modification.

Annex ZA (normative)

Normative references to international publications with their corresponding European publications

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE When an international publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 62453-1	2009	Field device tool (FDT) interface specification - Part 1: Overview and guidance	EN 62453-1	2009
IEC 62453-2	2009	Field device tool (FDT) interface specification - Part 2: Concepts and detailed description	EN 62453-2	2009
IEC/TR 62453-41	2009	Field device tool (FDT) interface specification - Part 41: Object model integration profile - Common object model	CLC/TR 62453-41	2009
IEC 62453-301	2009	Field device tool (FDT) interface specification - Part 301: Communication profile integration - IEC 61784 CPF 1	EN 62453-301	2009

CONTENTS

INTRODUCTION.....	5
1 Scope.....	6
2 Normative references	6
3 Terms, definitions, symbols, abbreviated terms and conventions	6
3.1 Terms and definitions	6
3.2 Symbols and abbreviated terms.....	6
3.3 Conventions	7
3.3.1 Data type names and references to data types	7
3.3.2 Vocabulary for requirements	7
3.3.3 Use of UML	7
4 Bus category	7
5 Access to instance and device data	7
6 Protocol specific usage of general data types	7
7 Protocol specific common data types - FdtFFDataTypesSchema	8
8 Network management data types	10
8.1 General	10
8.2 H1 Management – FdtFFH1ManagementSchema	10
8.3 HSE Management – FdtFFHseManagementSchema	31
8.4 Address management.....	50
8.5 FF specific Parameter Set	50
9 Communication data types	50
9.1 General	50
9.2 FMS communication – FdtFFFmsSchema	50
9.3 H1 communication – FdtFFH1CommunicationSchema	56
9.4 HSE communication – FdtFFHseCommunicationSchema	60
9.5 Standard block communication – BtmFFCommunicationSchema	65
10 Channel parameter data types – FdtFFChannelParameterSchema	66
11 Device identification	67
11.1 Device type identification data types – FDTFieldbusIdentSchema	67
11.2 Topology scan data types	69
11.2.1 General	69
11.2.2 Scan for devices – DtmFFSchema	69
11.2.3 Scan for blocks – FdtFFBlockSchema.....	70
11.3 Scan identification data types – FDTFieldbusScanIdentSchema	70
11.4 Device type identification data types – FDTFieldbusDeviceIdentSchema	72
11.5 XSLT Transformation	75
Bibliography.....	87
Figure 1 – Part 501 of the IEC 62453 series	5
Table 1 – Protocol specific usage of general data types.....	7

INTRODUCTION

This part of IEC 62453 is an interface specification for developers of FDT (Field Device Tool) components for function control and data access within a client/server architecture. The specification is a result of an analysis and design process to develop standard interfaces to facilitate the development of servers and clients by multiple vendors that need to interoperate seamlessly.

With the integration of fieldbuses into control systems, there are a few other tasks which need to be performed. In addition to fieldbus- and device-specific tools, there is a need to integrate these tools into higher-level system-wide planning- or engineering tools. In particular, for use in extensive and heterogeneous control systems, typically in the area of the process industry, the unambiguous definition of engineering interfaces that are easy to use for all those involved is of great importance.

A device-specific software component, called DTM (Device Type Manager), is supplied by the field device manufacturer with its device. The DTM is integrated into engineering tools via the FDT interfaces defined in this specification. The approach to integration is in general open for all kind of fieldbuses and thus meets the requirements for integrating different kinds of devices into heterogeneous control systems.

Figure 1 shows how IEC/TR 62453-501 is aligned in the structure of IEC 62453 series.

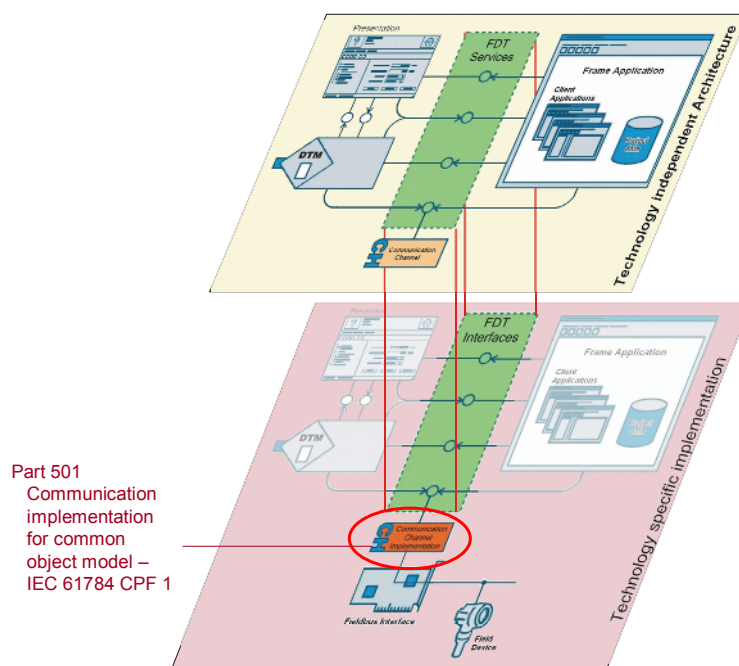


Figure 1 – Part 501 of the IEC 62453 series

FIELD DEVICE TOOL (FDT) INTERFACE SPECIFICATION –

Part 501: Communication implementation for common object model – IEC 61784 CPF 1

1 Scope

IEC/TR 62453-501, which is a technical report, provides additional information for integrating the Foundation Fieldbus (FF) protocol into the COM implementation of the FDT Specification (IEC/TR 62453-41).

The document describes communication definitions, protocol specific extensions and the means for block (e.g. transducer, resource or function blocks) representation.

The new protocol specific definitions are based on FF-Specifications for H1 and HSE protocols. Furthermore, the definitions contain information that is needed by systems to configure FF Devices.

The scope is limited to Foundation Fieldbus device and system specific definitions.

This specification neither contains the FDT specification nor modifies it.

2 Normative references

The following referenced documents are indispensable for the application of this specification. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies

IEC 62453-1:2009, *Field Device Tool (FDT) interface specification – Part 1: Overview and guidance*

IEC 62453-2:2009, *Field Device Tool (FDT) interface specification – Part 2: Concepts and detailed description*

IEC/TR 62453-41:2009, *Field Device Tool (FDT) interface specification – Part 41: Object model integration profile – Common object model*

IEC 62453-301:2009, *Field Device Tool (FDT) interface specification – Part 301: Communication profile integration – IEC 61784 CPF 1*

3 Terms, definitions, symbols, abbreviated terms and conventions

3.1 Terms and definitions

For the purpose of this document, the terms and definitions given in IEC 62453-1, IEC 62453-2, IEC/TR 62453-41 and the following apply.

3.2 Symbols and abbreviated terms

CP	Communication Profile	[IEC 61784-1]
CPF	Communication Profile Family	[IEC 61784-1]
UML	Unified Modelling Language	[ISO/IEC 19501]

3.3 Conventions

3.3.1 Data type names and references to data types

The conventions for naming and referencing of data types are explained in IEC 62453-2 Clause A.1

3.3.2 Vocabulary for requirements

The following expressions are used when specifying requirements.

Usage of “shall” or “Mandatory”	No exceptions allowed.
Usage of “should” or “Recommended”	Strong recommendation. It may make sense in special exceptional cases to differ from the described behaviour.
Usage of “can” or “Optional”	Function or behaviour may be provided, depending on defined conditions.

3.3.3 Use of UML

Figures in this document are using UML notation as defined in Annex A of IEC 62453-1.

4 Bus category

IEC 61784 CPF 1 protocol is identified by the identifiers, as specified in IEC 62453-301.

5 Access to instance and device data

Used at methods:

- IDtmParameter::GetParameters()
- IDtmParameter::SetParameters()

These methods shall provide access to at least to all parameters as defined in IEC 62453-301.

6 Protocol specific usage of general data types

Table 1 shows how general data types are used with IEC 61784 CPF 1 devices.

Table 1 – Protocol specific usage of general data types

Attribute	Description for use
fdt:address	All these attributes of the FDTDatatype schema are used as defined in IEC 62453-301.
fdt:protocolId	
fdt:deviceTypeId	
fdt:deviceTypeInfo	
fdt:deviceTypeInfoPath	
fdt:manufacturerId	

Attribute	Description for use
fdt:semanticId	
fdt:applicationDomain	
fdt:tag	

7 Protocol specific common data types - FdtFFDataTypesSchema

This clause specifies the protocol specific common data types, which are used in the definition of other data types.

```
<Schema name="FdtFFDataTypesSchema" xmlns="urn:schemas-microsoft-com:xml-data"
  xmlns:dt="urn:schemas-microsoft-com:datatypes"
  xmlns:fdt="x-schema:FDTDataTypesSchema.xml">

  <AttributeType name="schemaVersion" dt:type="string" default="1.21"/>

  <!--
    Common definitions of datatypes for Fieldbus Foundation
    use name space prefix fftypes when referencing
  -->
  <!--Definition of Attributes-->
  <!-- VFD Reference according to FF-880 section 8 -->
  <AttributeType name="vfdRef" dt:type="ui4"/>
  <AttributeType name="vfdTag" dt:type="string"/>
  <AttributeType name="communicationReference" dt:type="uuid"/>
  <AttributeType name="subIndex" dt:type="ui4"/>
  <AttributeType name="versionOd" dt:type="i2"/>
  <AttributeType name="versionNumber" dt:type="bin.hex"/>
  <AttributeType name="devID" dt:type="string"/>
  <AttributeType name="ip" dt:type="string"/>
  <AttributeType name="port" dt:type="ui2"/>
  <AttributeType name="deviceIndex" dt:type="ui4"/>
  <AttributeType name="listCount" dt:type="ui4"/>
  <AttributeType name="smServiceID" dt:type="enumeration" dt:values="SmSetPDTag SmSetAddress
SmClearAddress SmIdentify SmFindTagQuery SmClearAssignmentInfo SmSetAssignmentInfo"/>
  <AttributeType name="deviceType" dt:type="enumeration" dt:values="linkingDevice ioGateway hseFieldDevice
h1Device"/>
  <!--Attributes of element DataLinkAddress - Denotes the Data link (DL) Addresses. see FF-822 Annex A -->
  <!-- Link designator according to FF-822 -->
  <AttributeType name="linkId" dt:type="ui2"/>
  <!-- Node designator according to FF-822 -->
  <AttributeType name="nodeId" dt:type="ui2"/>
  <!-- Selector according to FF-822 -->
  <AttributeType name="selector" dt:type="ui2"/>
  <!-- See FF-870 section 3.3.4 - FMS services and the options supported by the server-->
  <AttributeType name="fmsFeaturesSupported" dt:type="bin.hex"/>
  <!-- Management attributes -->
  <AttributeType name="smSupport" dt:type="bin.hex"/>
  <AttributeType name="macroCycleDuration" dt:type="ui4"/>
  <AttributeType name="operationalPowerup" dt:type="ui4"/>
  <AttributeType name="scheduleActivation" dt:type="ui4"/>
  <AttributeType name="timeValue" dt:type="bin.hex"/>
  <AttributeType name="domain" dt:type="bin.hex"/>
  <!-- represent parameters DEV_REV and DD_REV from the resource block-->
  <AttributeType name="deviceRevision" dt:type="ui1" />
  <AttributeType name="ddRevision" dt:type="ui1" />
  <AttributeType name="devType" dt:type="ui2" />
  <!--Definition of Elements-->
  <!--Element DataLinkAddress - Denotes the Data link (DL) Addresses. see FF-822 Annex A -->
  <ElementType name="DataLinkAddress" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="linkId" required="yes"/>
    <attribute type="nodeId" required="yes"/>
    <attribute type="selector" required="yes"/>
  </ElementType>
  <!--Element index -->
```

```
<ElementType name="Index" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="fdt:index" required="yes"/>
</ElementType>
<!--Element SubIndex -->
<ElementType name="SubIndex" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="subIndex" required="yes"/>
</ElementType>
<ElementType name="IndexList" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="listCount" required="yes"/>
  <element type="Index" minOccurs="1" maxOccurs="*" />
</ElementType>
<ElementType name="IP" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="ip" required="yes"/>
  <attribute type="port" required="no"/>
</ElementType>
<!-- Management elements -->
<ElementType name="VfdTag" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="vfdTag" required="yes"/>
</ElementType>
<ElementType name="VfdRef" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="vfdRef" required="yes"/>
</ElementType>
<ElementType name="OperationalPowerup" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="operationalPowerup" required="yes"/>
</ElementType>
<ElementType name="PdTag" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="fdt:tag" required="yes"/>
</ElementType>
<ElementType name="DeviceId" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" default="1" required="no"/>
  <attribute type="devID" required="yes"/>
</ElementType>
<ElementType name="MacrocycleDuration" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="macroCycleDuration" required="yes"/>
</ElementType>
<ElementType name="CurrentTime" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="timeValue" required="yes"/>
</ElementType>
<ElementType name="SmSupport" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="smSupport" required="yes"/>
</ElementType>
```

```

<ElementType name="VfdIdentification" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="ddRevision" required="yes" />
  <attribute type="deviceRevision" required="yes" />
  <attribute type="devType" required="yes" />
  <attribute type="fdt:manufacturerId" required="no"/>
  <attribute type="vfdTag" required="yes"/>
</ElementType>
</Schema>

```

8 Network management data types

8.1 General

The data types specified in this clause are used at following methods:

- IDtmParameter:GetParameters
- IDtmParameter:SetParameters

All parameters defined in EDS in ther [Params]-section shall be exposed by these methods.

8.2 H1 Management – FdtFFH1ManagementSchema

```

<Schema name="FdtFFH1ManagementSchema"
  xmlns="urn:schemas-microsoft-com:xml-data"
  xmlns:dt="urn:schemas-microsoft-com:datatypes"
  xmlns:fftypes="x-schema:FdtFFDataTypesSchema.xml"
  xmlns:fdt="x-schema:FDTDataTypesSchema.xml">

<!-- ***** -->
<!--           Definition of Attributes           -->
<!-- ***** -->

  <AttributeType name="schemaVersion" dt:type="string" default="1.21"/>

  <!-- ***** -->
  <!-- System management information base (SMIB) attributes as in FF-880 section 8 -->

  <!-- "SmAgent" attributes -->
  <AttributeType name="t1" dt:type="ui4"/>
  <AttributeType name="t2" dt:type="ui4"/>
  <AttributeType name="t3" dt:type="ui4"/>

  <!-- "SyncAndScheduling" attributes -->
  <AttributeType name="localTimeDiff" dt:type="ui4"/>
  <AttributeType name="applicationClockSyncInterval" dt:type="ui1"/>
  <AttributeType name="timeLastReceived" dt:type="bin.hex"/>
  <AttributeType name="primaryApplicationTimePublisher" dt:type="ui1"/>
  <AttributeType name="timePublisherAddress" dt:type="ui1"/>
  <!-- "FbSchedule" attributes -->
  <AttributeType name="startTimeOffset" dt:type="ui4"/>

  <!-- ***** -->
  <!-- Network management information base (NMIB) attributes as in FF-801 section 8 -->

  <!-- "DlmeLinkSettings" attributes -->
  <AttributeType name="slotTime" dt:type="ui2"/>
  <AttributeType name="perDlpduPhlOverhead" dt:type="ui1"/>
  <AttributeType name="maxResponseDelay" dt:type="ui1"/>
  <AttributeType name="firstUnpolledNodeId" dt:type="ui1"/>
  <AttributeType name="thisLink" dt:type="ui2"/>
  <AttributeType name="minInterPduDelay" dt:type="ui1"/>
  <AttributeType name="numConsecUnpolledNodeId" dt:type="ui1"/>
  <AttributeType name="preambleExtension" dt:type="ui1"/>
  <AttributeType name="postTransGapExtension" dt:type="ui1"/>

```

```

<AttributeType name="maxInterChanSignalSkew" dt:type="ui1"/>
<AttributeType name="timeSyncClass" dt:type="ui1"/>

<!-- "ScheduleDescriptor" attributes -->
<AttributeType name="timeResolution" dt:type="ui2"/>

<!-- "StackCapabilities" attributes -->
<AttributeType name="fasArTypesAndRolesSupported" dt:type="ui4"/>
<AttributeType name="maxDlsapAddressesSupported" dt:type="ui2"/>
<AttributeType name="maxDlcepAddressesSupported" dt:type="ui2"/>
<AttributeType name="dlcepDeliveryFeaturesSupported" dt:type="ui1"/>
<AttributeType name="agentFunctionsSupported" dt:type="ui2"/>

<!-- "ListCharacteristics" attributes -->
<AttributeType name="maxEntries" dt:type="ui2"/>
<AttributeType name="numPermanentEntries" dt:type="ui2"/>
<AttributeType name="numCurrentlyConfigured" dt:type="ui2"/>
<AttributeType name="firstUnconfiguredEntry" dt:type="ui2"/>
<AttributeType name="dynamicsSupportedFlag" dt:type="boolean"/>
<AttributeType name="statisticsSupported" dt:type="ui1"/>
<AttributeType name="numOfStatisticsEntries" dt:type="ui2"/>

<!-- "VcrStaticEntry" attributes -->
<AttributeType name="fasArTypeAndRole" dt:type="ui1"/>
<AttributeType name="fasDIIAddr" dt:type="ui4"/>
<AttributeType name="fasDIIConfiguredRemoteAddr" dt:type="ui4"/>
<AttributeType name="fasDIIISDAP" dt:type="ui1"/>
<AttributeType name="fasDIIConfirmDelayOnConnect" dt:type="ui2"/>
<AttributeType name="fasDIIConfirmDelayOnData" dt:type="ui2"/>
<AttributeType name="fasDIIISduSize" dt:type="ui2"/>
<AttributeType name="fasDIIResidualActivitySupported" dt:type="boolean"/>
<AttributeType name="fasDIITimelinessClass" dt:type="ui1"/>
<AttributeType name="fasDIIPublisherTimeWindowSize" dt:type="ui2"/>
<AttributeType name="fasDIIPublisherSynchronizingDlcep" dt:type="ui4"/>
<AttributeType name="fasDIISubscriberTimeWindowSize" dt:type="ui2"/>
<AttributeType name="fasDIISubscriberSynchronizingDlcep" dt:type="ui4"/>
<AttributeType name="fmsVfdId" dt:type="ui4"/>
<AttributeType name="fmsMaxOutstandingServicesCalling" dt:type="ui1"/>
<AttributeType name="fmsMaxOutstandingServicesCalled" dt:type="ui1"/>

<!-- "VcrDynamicEntry" attributes -->
<AttributeType name="fmsState" dt:type="ui1"/>
<AttributeType name="fmsActualMaxOutstandingServicesCalling" dt:type="ui1"/>
<AttributeType name="fmsActualMaxOutstandingServicesCalled" dt:type="ui1"/>
<AttributeType name="fmsOutstandingServicesCounterCalling" dt:type="ui1"/>
<AttributeType name="fmsOutstandingServicesCounterCalled" dt:type="ui1"/>
<AttributeType name="fasState" dt:type="ui1"/>
<AttributeType name="fasDIIActualRemoteAddress" dt:type="ui4"/>
<AttributeType name="fasDIIISduQueueDepth" dt:type="ui1"/>
<AttributeType name="fasDIIISduReceivingQueueDepth" dt:type="ui1"/>

<!-- "VcrStatisticsEntry" attributes -->
<AttributeType name="clearVcrStatistics" dt:type="boolean"/>
<AttributeType name="fasNumOfAbortsCtr" dt:type="ui2"/>
<AttributeType name="fasLocallyGeneratedLastAborted" dt:type="boolean"/>
<AttributeType name="fasReasonLastAborted" dt:type="ui2"/>
<AttributeType name="dIIISduNumOfDTPDusSent" dt:type="ui2"/>
<AttributeType name="dIIISduNumOfDTPDusReceived" dt:type="ui2"/>
<AttributeType name="dIIISduNumOfDIDataTransferTimeoutFailures" dt:type="ui2"/>
<AttributeType name="dIIISduNumOfRcvrQuFullDIDataFailures" dt:type="ui2"/>

<!-- "DlmeBasicCharacteristics" attributes -->
<AttributeType name="basicStatisticsSupportedFlag" dt:type="boolean"/>
<AttributeType name="dlOperatFunctionalClass" dt:type="ui1"/>
<AttributeType name="dlDeviceConformance" dt:type="ui4"/>

<!-- "DlmeBasicInfo" attributes -->
<!-- AttributeType name="slotTime" already defined in DlmeLinkSettings -->
<!-- AttributeType name="perDlPduPhlOverhead" already defined in DlmeLinkSettings -->
<!-- AttributeType name="maxResponseDelay" already defined in DlmeLinkSettings -->

```

```

<AttributeType name="thisNode" dt:type="ui1"/>
<!-- AttributeType name="thisLink" already defined in DlmeLinkSettings /-->
<!-- AttributeType name="minInterPduDelay" already defined in DlmeLinkSettings /-->
<!-- AttributeType name="timeSyncClass" already defined in DlmeLinkSettings /-->
<!-- AttributeType name="preambleExtension" already defined in DlmeLinkSettings /-->
<!-- AttributeType name="postTransGapExtension" already defined in DlmeLinkSettings /-->
<!-- AttributeType name="maxInterChanSignalSkew" already defined in DlmeLinkSettings /-->

<!-- "DlmeBasicStatistics" attributes -->
<AttributeType name="numOfDlpduTransmitted" dt:type="ui4"/>
<AttributeType name="numOfGoodDlpduReceived" dt:type="ui4"/>
<AttributeType name="numOfPartialReceivedDlpdu" dt:type="ui4"/>
<AttributeType name="numOfFcsFailures" dt:type="ui4"/>
<AttributeType name="numOfNodeTimeOffsetDiscontinuousChanges" dt:type="ui4"/>

<!-- "DlmeLinkMasterInfo" attributes -->
<AttributeType name="maxSchedulingOverhead" dt:type="ui1"/>
<AttributeType name="defMinTokenDelegTime" dt:type="ui2"/>
<AttributeType name="defTokenHoldTime" dt:type="ui2"/>
<AttributeType name="targetTokenRotTime" dt:type="ui2"/>
<AttributeType name="linkMaintTokHoldTime" dt:type="ui2"/>
<AttributeType name="timeDistributionPeriod" dt:type="ui4"/>
<AttributeType name="maximumInactivityToClaimLasDelay" dt:type="ui2"/>
<AttributeType name="lasDatabaseStatusSpduDistributionPeriod" dt:type="ui2"/>

<!-- "DlmeLinkMasterStatistics" attributes -->
<AttributeType name="numLasRoleDelegOrClaimOrDelegTokenHoldTimeout" dt:type="ui2"/>

<!-- "LastValues" attributes -->
<AttributeType name="frameControlOctetN" dt:type="ui1"/>
<AttributeType name="addressSubfieldsN" dt:type="bin.hex"/>
<AttributeType name="frameControlOctetNminus1" dt:type="ui1"/>
<AttributeType name="addressSubfieldsNminus1" dt:type="bin.hex"/>
<AttributeType name="frameControlOctetNminus2" dt:type="ui1"/>
<AttributeType name="addressSubfieldsNminus2" dt:type="bin.hex"/>
<AttributeType name="frameControlOctetNminus3" dt:type="ui1"/>
<AttributeType name="addressSubfieldsNminus3" dt:type="bin.hex"/>

<!-- "LinkScheduleListCharacteristics" attributes -->
<AttributeType name="numOfSchedules" dt:type="ui1"/>
<AttributeType name="numOfSubSchedulesPerSchedule" dt:type="ui1"/>
<AttributeType name="activeScheduleStartingTime" dt:type="bin.hex"/>

<!-- "PlmeBasicCharacteristics" attributes -->
<AttributeType name="channelStatisticsSupported" dt:type="ui1"/>
<AttributeType name="mediumAndDataRatesSupported" dt:type="bin.hex"/>
<AttributeType name="numOfChannels" dt:type="ui1"/>
<AttributeType name="powerMode" dt:type="ui1"/>

<!-- "PlmeBasicInfo" attributes -->
<AttributeType name="interfaceMode" dt:type="ui1"/>
<AttributeType name="loopBackMode" dt:type="ui1"/>
<AttributeType name="xmitEnabled" dt:type="ui1"/>
<AttributeType name="rcvEnabled" dt:type="ui1"/>
<AttributeType name="preferredReceiveChannel" dt:type="ui1"/>
<AttributeType name="mediaTypeSelected" dt:type="ui1"/>
<AttributeType name="receiveSelect" dt:type="ui1"/>

<!-- "MmeWireStatistics" attributes -->
<AttributeType name="channelNumber" dt:type="ui1"/>
<AttributeType name="totalGoodMsgsSent" dt:type="ui4"/>
<AttributeType name="totalGoodMsgsRcvd" dt:type="ui4"/>
<AttributeType name="numOfJabberFaults" dt:type="ui2"/>
<AttributeType name="numOfInternAndJabberFaults" dt:type="ui2"/>
<AttributeType name="numEndActivityBeforeEndData" dt:type="ui2"/>

<!-- "VcrList" attributes -->
<AttributeType name="listControl" dt:type="ui1"/>

<!-- "DlmeLinkMaster" attributes -->

```

```

<AttributeType name="dlmeLinkMasterCapabilities" dt:type="ui1"/>
<AttributeType name="primaryLinkMasterFlag" dt:type="boolean"/>
<AttributeType name="liveListStatusArray" dt:type="bin.hex"/>
<AttributeType name="maxTokenHoldTime" dt:type="bin.hex"/>
<AttributeType name="bootOperatFunctionalClass" dt:type="ui1"/>

<!-- "PlmeBasic" attributes -->
<AttributeType name="channelStates" dt:type="bin.hex"/>

<!-- ***** -->
<!--          Definition of Elements          -->
<!-- ***** -->

<!-- ***** -->
<!-- SMIB elements for basic variables as in FF-880 section 8 -->
<!-- ***** -->

<!-- "SmAgent" elements -->
<ElementType name="T1" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="t1" required="yes"/>
</ElementType>
<ElementType name="T2" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="t2" required="yes"/>
</ElementType>
<ElementType name="T3" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="t3" required="yes"/>
</ElementType>

<!-- "SyncAndScheduling" elements -->
<ElementType name="LocalTimeDiff" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="localTimeDiff" required="yes"/>
</ElementType>
<ElementType name="ApplicationClockSyncInterval" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="applicationClockSyncInterval" required="yes"/>
</ElementType>
<ElementType name="TimeLastReceived" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="timeLastReceived" required="yes"/>
</ElementType>
<ElementType name="PrimaryApplicationTimePublisher" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="primaryApplicationTimePublisher" required="yes"/>
</ElementType>
<ElementType name="TimePublisherAddress" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="timePublisherAddress" required="yes"/>
</ElementType>

<!-- "FbSchedule" elements -->

```

```

<ElementType name="StartTimeOffset" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="startTimeOffset" required="yes"/>
</ElementType>
<ElementType name="FbObjectIndex" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="fdt:index" required="yes"/>
</ElementType>

<!-- ***** -->
<!-- NMIB elements for basic variables as in FF-801 section 8 -->
<!-- ***** -->

<!-- "DlmeLinkSettings" elements -->
<ElementType name="SlotTime" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="slotTime" required="yes"/>
</ElementType>
<ElementType name="PerDlPduPhlOverhead" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="perDlPduPhlOverhead" required="yes"/>
</ElementType>
<ElementType name="MaxResponseDelay" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="maxResponseDelay" required="yes"/>
</ElementType>
<ElementType name="FirstUnpolledNodeId" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="firstUnpolledNodeId" required="yes"/>
</ElementType>
<ElementType name="ThisLink" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="thisLink" required="yes"/>
</ElementType>
<ElementType name="MinInterPduDelay" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="minInterPduDelay" required="yes"/>
</ElementType>
<ElementType name="NumConsecUnpolledNodeId" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="numConsecUnpolledNodeId" required="yes"/>
</ElementType>
<ElementType name="PreambleExtension" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="preambleExtension" required="yes"/>
</ElementType>
<ElementType name="PostTransGapExtension" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>

```

```

        <attribute type="fdt:writeAccess" required="no"/>
        <attribute type="postTransGapExtension" required="yes"/>
    </ElementType>
    <ElementType name="MaxInterChanSignalSkew" content="empty" model="closed">
        <attribute type="fdt:nodeId" required="no"/>
        <attribute type="fdt:readAccess" required="no"/>
        <attribute type="fdt:writeAccess" required="no"/>
        <attribute type="maxInterChanSignalSkew" required="yes"/>
    </ElementType>
    <ElementType name="TimeSyncClass" content="empty" model="closed">
        <attribute type="fdt:nodeId" required="no"/>
        <attribute type="fdt:readAccess" required="no"/>
        <attribute type="fdt:writeAccess" required="no"/>
        <attribute type="timeSyncClass" required="yes"/>
    </ElementType>

    <!-- "ScheduleDescriptor" elements -->
    <ElementType name="TimeResolution" content="empty" model="closed">
        <attribute type="fdt:nodeId" required="no"/>
        <attribute type="fdt:readAccess" required="no"/>
        <attribute type="fdt:writeAccess" required="no"/>
        <attribute type="timeResolution" required="yes"/>
    </ElementType>

    <!-- "StackCapabilities" elements -->
    <ElementType name="FasArTypesAndRolesSupported" content="empty" model="closed">
        <attribute type="fdt:nodeId" required="no"/>
        <attribute type="fdt:readAccess" required="no"/>
        <attribute type="fdt:writeAccess" required="no"/>
        <attribute type="fasArTypesAndRolesSupported" required="yes"/>
    </ElementType>
    <ElementType name="MaxDisapAddressesSupported" content="empty" model="closed">
        <attribute type="fdt:nodeId" required="no"/>
        <attribute type="fdt:readAccess" required="no"/>
        <attribute type="fdt:writeAccess" required="no"/>
        <attribute type="maxDisapAddressesSupported" required="yes"/>
    </ElementType>
    <ElementType name="MaxDlcepAddressesSupported" content="empty" model="closed">
        <attribute type="fdt:nodeId" required="no"/>
        <attribute type="fdt:readAccess" required="no"/>
        <attribute type="fdt:writeAccess" required="no"/>
        <attribute type="maxDlcepAddressesSupported" required="yes"/>
    </ElementType>
    <ElementType name="DlcepDeliveryFeaturesSupported" content="empty" model="closed">
        <attribute type="fdt:nodeId" required="no"/>
        <attribute type="fdt:readAccess" required="no"/>
        <attribute type="fdt:writeAccess" required="no"/>
        <attribute type="dlcepDeliveryFeaturesSupported" required="yes"/>
    </ElementType>
    <ElementType name="VersionOfNmSpecSupported" content="empty" model="closed">
        <attribute type="fdt:nodeId" required="no"/>
        <attribute type="fdt:readAccess" required="no"/>
        <attribute type="fdt:writeAccess" required="no"/>
        <attribute type="fftypes:versionNumber" required="yes"/>
    </ElementType>
    <ElementType name="AgentFunctionsSupported" content="empty" model="closed">
        <attribute type="fdt:nodeId" required="no"/>
        <attribute type="fdt:readAccess" required="no"/>
        <attribute type="fdt:writeAccess" required="no"/>
        <attribute type="agentFunctionsSupported" required="yes"/>
    </ElementType>
    <ElementType name="FmsFeaturesSupported" content="empty" model="closed">
        <attribute type="fdt:nodeId" required="no"/>
        <attribute type="fdt:readAccess" required="no"/>
        <attribute type="fdt:writeAccess" required="no"/>
        <attribute type="fftypes:fmsFeaturesSupported" required="yes"/>
    </ElementType>

    <!-- "ListCharacteristics" elements -->
    <ElementType name="MaxEntries" content="empty" model="closed">

```

```

    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="maxEntries" required="yes"/>
</ElementType>
<ElementType name="NumPermanentEntries" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="numPermanentEntries" required="yes"/>
</ElementType>
<ElementType name="NumCurrentlyConfigured" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="numCurrentlyConfigured" required="yes"/>
</ElementType>
<ElementType name="FirstUnconfiguredEntry" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="firstUnconfiguredEntry" required="yes"/>
</ElementType>
<ElementType name="DynamicsSupportedFlag" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="dynamicsSupportedFlag" required="yes"/>
</ElementType>
<ElementType name="StatisticsSupported" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="statisticsSupported" required="yes"/>
</ElementType>
<ElementType name="NumOfStatisticsEntries" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="numOfStatisticsEntries" required="yes"/>
</ElementType>

<!-- "VcrStaticEntry" elements -->
<ElementType name="FasArTypeAndRole" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="fasArTypeAndRole" required="yes"/>
</ElementType>
<ElementType name="FasDIILocalAddr" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="fasDIILocalAddr" required="yes"/>
</ElementType>
<ElementType name="FasDIConfiguredRemoteAddr" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="fasDIConfiguredRemoteAddr" required="yes"/>
</ElementType>
<ElementType name="FasDIISDAP" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="fasDIISDAP" required="yes"/>
</ElementType>
<ElementType name="FasDIIMaxConfirmDelayOnConnect" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>

```

```
<attribute type="fdt:writeAccess" required="no"/>
<attribute type="fasDIIMaxConfirmDelayOnConnect" required="yes"/>
</ElementType>
<ElementType name="FasDIIMaxConfirmDelayOnData" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="fasDIIMaxConfirmDelayOnData" required="yes"/>
</ElementType>
<ElementType name="FasDIIMaxDlsduSize" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="fasDIIMaxDlsduSize" required="yes"/>
</ElementType>
<ElementType name="FasDIIResidualActivitySupported" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="fasDIIResidualActivitySupported" required="yes"/>
</ElementType>
<ElementType name="FasDIITimelinessClass" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="fasDIITimelinessClass" required="yes"/>
</ElementType>
<ElementType name="FasDIIPublisherTimeWindowSize" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="fasDIIPublisherTimeWindowSize" required="yes"/>
</ElementType>
<ElementType name="FasDIIPublisherSynchronizingDlcep" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="fasDIIPublisherSynchronizingDlcep" required="yes"/>
</ElementType>
<ElementType name="FasDIISubscriberTimeWindowSize" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="fasDIISubscriberTimeWindowSize" required="yes"/>
</ElementType>
<ElementType name="FasDIISubscriberSynchronizingDlcep" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="fasDIISubscriberSynchronizingDlcep" required="yes"/>
</ElementType>
<ElementType name="FmsVfdId" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="fmsVfdId" required="yes"/>
</ElementType>
<ElementType name="FmsMaxOutstandingServicesCalling" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="fmsMaxOutstandingServicesCalling" required="yes"/>
</ElementType>
<ElementType name="FmsMaxOutstandingServicesCalled" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="fmsMaxOutstandingServicesCalled" required="yes"/>
</ElementType>
```

```

<!-- "VcrDynamicEntry" elements -->
<ElementType name="FmsState" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="fmsState" required="yes"/>
</ElementType>
<ElementType name="FmsActualMaxOutstandingServicesCalling" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="fmsActualMaxOutstandingServicesCalling" required="yes"/>
</ElementType>
<ElementType name="FmsActualMaxOutstandingServicesCalled" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="fmsActualMaxOutstandingServicesCalled" required="yes"/>
</ElementType>
<ElementType name="FmsOutstandingServicesCounterCalling" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="fmsOutstandingServicesCounterCalling" required="yes"/>
</ElementType>
<ElementType name="FmsOutstandingServicesCounterCalled" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="fmsOutstandingServicesCounterCalled" required="yes"/>
</ElementType>
<ElementType name="FasState" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="fasState" required="yes"/>
</ElementType>
<ElementType name="FasDIIActualRemoteAddress" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="fasDIIActualRemoteAddress" required="yes"/>
</ElementType>
<ElementType name="FasDIIMaxSendingQueueDepth" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="fasDIIMaxSendingQueueDepth" required="yes"/>
</ElementType>
<ElementType name="FasDIIMaxReceivingQueueDepth" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="fasDIIMaxReceivingQueueDepth" required="yes"/>
</ElementType>

<!-- "VcrStatisticsEntry" elements -->
<ElementType name="VcrStaticEntryOdIndex" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="fdt:index" required="yes"/>
</ElementType>
<ElementType name="ClearVcrStatistics" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="clearVcrStatistics" required="yes"/>
</ElementType>
<ElementType name="FasNumOfAbortsCtr" content="empty" model="closed">

```

```

    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="fasNumOfAbortsCtr" required="yes"/>
</ElementType>
<ElementType name="FasLocallyGeneratedLastAborted" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="fasLocallyGeneratedLastAborted" required="yes"/>
</ElementType>
<ElementType name="FasReasonLastAborted" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="fasReasonLastAborted" required="yes"/>
</ElementType>
<ElementType name="DIINumOfDtPduSent" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="dIIINumOfDtPduSent" required="yes"/>
</ElementType>
<ElementType name="DIINumOfDtPduReceived" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="dIIINumOfDtPduReceived" required="yes"/>
</ElementType>
<ElementType name="DIINumOfDIDataTransferTimeoutFailures" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="dIIINumOfDIDataTransferTimeoutFailures" required="yes"/>
</ElementType>
<ElementType name="DIINumOfRcvrQuFullDIDataFailures" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="dIIINumOfRcvrQuFullDIDataFailures" required="yes"/>
</ElementType>

<!-- "DImeBasicCharacteristics" elements -->
<ElementType name="Version" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="fftypes:versionNumber" required="yes"/>
</ElementType>
<ElementType name="BasicStatisticsSupportedFlag" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="basicStatisticsSupportedFlag" required="yes"/>
</ElementType>
<ElementType name="DIOperatFunctionalClass" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="dIOperatFunctionalClass" required="yes"/>
</ElementType>
<ElementType name="DIDeviceConformance" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="dIDeviceConformance" required="yes"/>
</ElementType>

<!-- "DImeBasicInfo" elements -->
<!-- AttributeType name="SlotTime" already defined in DImeLinkSettings -->

```

```

<!-- AttributeType name="maxResponseDelay" already defined in DImeLinkSettings /-->
<ElementType name="ThisNode" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="thisNode" required="yes"/>
</ElementType>
<!-- AttributeType name="ThisLink" already defined in DImeLinkSettings /-->
<!-- AttributeType name="timeSyncClass" already defined in DImeLinkSettings /-->
<!-- AttributeType name="preambleExtension" already defined in DImeLinkSettings /-->
<!-- AttributeType name="postTransGapExtension" already defined in DImeLinkSettings /-->
<!-- AttributeType name="maxInterChanSignalSkewthisLinkalready defined in DImeLinkSettings /-->

<!-- "DImeBasicStatistics" elements -->
<ElementType name="NumOfDlpduTransmitted" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="numOfDlpduTransmitted" required="yes"/>
</ElementType>
<ElementType name="NumOfGoodDlpduReceived" dt:type="ui4">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="numOfGoodDlpduReceived" required="yes"/>
</ElementType>
<ElementType name="NumOfPartialReceivedDlpdu" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="numOfPartialReceivedDlpdu" required="yes"/>
</ElementType>
<ElementType name="NumOfFcsFailures" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="numOfFcsFailures" required="yes"/>
</ElementType>
<ElementType name="NumOfNodeTimeOffsetDiscontinuousChanges" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="numOfNodeTimeOffsetDiscontinuousChanges" required="yes"/>
</ElementType>

<!-- "DImeLinkMasterInfo" elements -->
<ElementType name="MaxSchedulingOverhead" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="maxSchedulingOverhead" required="yes"/>
</ElementType>
<ElementType name="DefMinTokenDelegTime" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="defMinTokenDelegTime" required="yes"/>
</ElementType>
<ElementType name="DefTokenHoldTime" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="defTokenHoldTime" required="yes"/>
</ElementType>
<ElementType name="TargetTokenRotTime" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="targetTokenRotTime" required="yes"/>

```

```

</ElementType>
<ElementType name="LinkMaintTokHoldTime" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="linkMaintTokHoldTime" required="yes"/>
</ElementType>
<ElementType name="TimeDistributionPeriod" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="timeDistributionPeriod" required="yes"/>
</ElementType>
<ElementType name="MaximumInactivityToClaimLasDelay" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="maximumInactivityToClaimLasDelay" required="yes"/>
</ElementType>
<ElementType name="LasDatabaseStatusSpduDistributionPeriod" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="lasDatabaseStatusSpduDistributionPeriod" required="yes"/>
</ElementType>

<!-- "DlmeLinkMasterStatistics" elements -->
<ElementType name="NumLasRoleDelegOrClaimOrDelegTokenHoldTimeout" content="empty"
model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="numLasRoleDelegOrClaimOrDelegTokenHoldTimeout" required="yes"/>
</ElementType>

<!-- "LastValues" elements -->
<ElementType name="FrameControlOctetN" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="frameControlOctetN" required="yes"/>
</ElementType>
<ElementType name="AddressSubfieldsN" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="addressSubfieldsN" required="yes"/>
</ElementType>
<ElementType name="FrameControlOctetNminus1" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="frameControlOctetNminus1" required="yes"/>
</ElementType>
<ElementType name="AddressSubfieldsNminus1" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="addressSubfieldsNminus1" required="yes"/>
</ElementType>
<ElementType name="FrameControlOctetNminus2" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="frameControlOctetNminus2" required="yes"/>
</ElementType>
<ElementType name="AddressSubfieldsNminus2" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>

```

```

    <attribute type="addressSubfieldsNminus2" required="yes"/>
  </ElementType>
  <ElementType name="FrameControlOctetNminus3" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="frameControlOctetNminus3" required="yes"/>
  </ElementType>
  <ElementType name="AddressSubfieldsNminus3" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="addressSubfieldsNminus3" required="yes"/>
  </ElementType>

  <!-- "LinkScheduleListCharacteristics" elements -->
  <ElementType name="NumOfSchedules" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="numOfSchedules" required="yes"/>
  </ElementType>
  <ElementType name="NumOfSubSchedulesPerSchedule" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="numOfSubSchedulesPerSchedule" required="yes"/>
  </ElementType>
  <ElementType name="ActiveScheduleVersion" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="fftypes:versionNumber" required="yes"/>
  </ElementType>
  <ElementType name="ActiveScheduleOdIndex" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="fdt:index" required="yes"/>
  </ElementType>
  <ElementType name="ActiveScheduleStartingTime" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="activeScheduleStartingTime" required="yes"/>
  </ElementType>
  <ElementType name="ScheduleDomain" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="fftypes:domain" required="yes"/>
  </ElementType>

  <!-- "PlmeBasicCharacteristics" elements -->
  <ElementType name="ChannelStatisticsSupported" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="channelStatisticsSupported" required="yes"/>
  </ElementType>
  <ElementType name="MediumAndDataRatesSupported" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="mediumAndDataRatesSupported" required="yes"/>
  </ElementType>
  <ElementType name="IecVersion" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>

```

```

    <attribute type="fftypes:versionNumber" required="yes"/>
  </ElementType>
  <ElementType name="NumOfChannels" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="numOfChannels" required="yes"/>
  </ElementType>
  <ElementType name="PowerMode" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="powerMode" required="yes"/>
  </ElementType>

  <!-- "PlmeBasicInfo" elements -->
  <ElementType name="InterfaceMode" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="interfaceMode" required="yes"/>
  </ElementType>
  <ElementType name="LoopBackMode" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="loopBackMode" required="yes"/>
  </ElementType>
  <ElementType name="XmitEnabled" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="xmitEnabled" required="yes"/>
  </ElementType>
  <ElementType name="RcvEnabled" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="rcvEnabled" required="yes"/>
  </ElementType>
  <ElementType name="PreferredReceiveChannel" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="preferredReceiveChannel" required="yes"/>
  </ElementType>
  <ElementType name="MediaTypeSelected" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="mediaTypeSelected" required="yes"/>
  </ElementType>
  <ElementType name="ReceiveSelect" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="receiveSelect" required="yes"/>
  </ElementType>

  <!-- "MmeWireStatistics" elements -->
  <ElementType name="ChannelNumber" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="channelNumber" required="yes"/>
  </ElementType>
  <ElementType name="TotalGoodMsgsSent" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>

```

```

    <attribute type="totalGoodMsgsSent" required="yes"/>
  </ElementType>
  <ElementType name="TotalGoodMsgsRcvd" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="totalGoodMsgsRcvd" required="yes"/>
  </ElementType>
  <ElementType name="NumOfJabberFaults" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="numOfJabberFaults" required="yes"/>
  </ElementType>
  <ElementType name="NumOfInternAndJabberFaults" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="numOfInternAndJabberFaults" required="yes"/>
  </ElementType>
  <ElementType name="NumEndActivityBeforeEndData" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="numEndActivityBeforeEndData" required="yes"/>
  </ElementType>

  <!-- "VcrList" elements -->
  <ElementType name="ListControl" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="listControl" required="yes"/>
  </ElementType>

  <!-- "DlmeLinkMaster" elements -->
  <ElementType name="DlmeLinkMasterCapabilities" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="dlmeLinkMasterCapabilities" required="yes"/>
  </ElementType>
  <ElementType name="PrimaryLinkMasterFlag" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="primaryLinkMasterFlag" required="yes"/>
  </ElementType>
  <ElementType name="LiveListStatusArray" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="liveListStatusArray" required="yes"/>
  </ElementType>
  <ElementType name="MaxTokenHoldTime" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="maxTokenHoldTime" required="yes"/>
  </ElementType>
  <ElementType name="BootOperatFunctionalClass" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>
    <attribute type="fdt:writeAccess" required="no"/>
    <attribute type="bootOperatFunctionalClass" required="yes"/>
  </ElementType>

  <ElementType name="LinkScheduleActivation" content="empty" model="closed">
    <attribute type="fdt:nodeId" required="no"/>
    <attribute type="fdt:readAccess" required="no"/>

```

```
<attribute type="fdt:writeAccess" required="no"/>
<attribute type="fftypes:scheduleActivation" required="yes"/>
</ElementType>

<!-- "PlmeBasic" elements -->
<ElementType name="ChannelStates" content="empty" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fdt:readAccess" required="no"/>
  <attribute type="fdt:writeAccess" required="no"/>
  <attribute type="channelStates" required="yes"/>
</ElementType>

<!-- SMIB level 3 -->

<ElementType name="VfdRefEntry" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <element type="fftypes:VfdRef" minOccurs="1" maxOccurs="1"/>
  <element type="fftypes:VfdTag" minOccurs="1" maxOccurs="1"/>
</ElementType>
<ElementType name="FbStartEntry" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <element type="StartTimeOffset" minOccurs="1" maxOccurs="1"/>
  <element type="FbObjectIndex" minOccurs="1" maxOccurs="1"/>
  <element type="fftypes:VfdRef" minOccurs="1" maxOccurs="1"/>
</ElementType>

<!-- SMIB level 2 -->

<ElementType name="SmAgent" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <element type="fftypes:SmSupport" minOccurs="1" maxOccurs="1"/>
  <element type="T1" minOccurs="1" maxOccurs="1"/>
  <element type="T2" minOccurs="1" maxOccurs="1"/>
  <element type="T3" minOccurs="1" maxOccurs="1"/>
</ElementType>

<ElementType name="SyncAndScheduling" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <element type="fftypes:CurrentTime" minOccurs="1" maxOccurs="1"/>
  <element type="LocalTimeDiff" minOccurs="1" maxOccurs="1"/>
  <element type="ApplicationClockSyncInterval" minOccurs="1" maxOccurs="1"/>
  <element type="TimeLastReceived" minOccurs="1" maxOccurs="1"/>
  <element type="PrimaryApplicationTimePublisher" minOccurs="1" maxOccurs="1"/>
  <element type="TimePublisherAddress" minOccurs="1" maxOccurs="1"/>
  <element type="fftypes:MacrocycleDuration" minOccurs="1" maxOccurs="1"/>
</ElementType>

<ElementType name="AddressAssignment" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <element type="fftypes:DeviceId" minOccurs="1" maxOccurs="1"/>
  <element type="fftypes:PdTag" minOccurs="1" maxOccurs="1"/>
  <element type="fftypes:OperationalPowerup" minOccurs="1" maxOccurs="1"/>
</ElementType>

<ElementType name="VfdList" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fftypes:listCount" required="yes"/>
  <element type="VfdRefEntry" minOccurs="1" maxOccurs="*/>
</ElementType>

<ElementType name="ListOfFbStartEntries" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <attribute type="fftypes:listCount" required="yes"/>
  <element type="FbStartEntry" minOccurs="1" maxOccurs="*/>
</ElementType>

<ElementType name="FbSchedule" content="eltOnly" model="closed">
```

```

    <attribute type="fdt:nodeId" required="no"/>
    <element type="Version" minOccurs="1" maxOccurs="1"/>
    <element type="ListOfFbStartEntries" minOccurs="1" maxOccurs="1"/>
  </ElementType>

```

```

<!-- SMIB level 1 -->

```

```

<ElementType name="SMIB" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <element type="SmAgent" minOccurs="1" maxOccurs="1"/>
  <element type="SyncAndScheduling" minOccurs="1" maxOccurs="1"/>
  <element type="AddressAssignment" minOccurs="1" maxOccurs="1"/>
  <element type="VfdList" minOccurs="1" maxOccurs="1"/>
  <element type="FbSchedule" minOccurs="1" maxOccurs="1"/>
</ElementType>

```

```

<!-- ***** -->

```

```

<!-- NMIB elements as in FF-801 section 8 -->

```

```

<!-- NMIB level 4 -->

```

```

<ElementType name="DlmeLinkSettings" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <element type="SlotTime" minOccurs="1" maxOccurs="1"/>
  <element type="PerDlPduPhlOverhead" minOccurs="1" maxOccurs="1"/>
  <element type="MaxResponseDelay" minOccurs="1" maxOccurs="1"/>
  <element type="FirstUnpolledNodeId" minOccurs="1" maxOccurs="1"/>
  <element type="ThisLink" minOccurs="1" maxOccurs="1"/>
  <element type="MinInterPduDelay" minOccurs="1" maxOccurs="1"/>
  <element type="NumConsecUnpolledNodeId" minOccurs="1" maxOccurs="1"/>
  <element type="PreambleExtension" minOccurs="1" maxOccurs="1"/>
  <element type="PostTransGapExtension" minOccurs="1" maxOccurs="1"/>
  <element type="MaxInterChanSignalSkew" minOccurs="1" maxOccurs="1"/>
  <element type="TimeSyncClass" minOccurs="1" maxOccurs="1"/>
</ElementType>

```

```

<ElementType name="ScheduleDescriptor" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <element type="Version" minOccurs="1" maxOccurs="1"/>
  <element type="fftypes:MacrocycleDuration" minOccurs="1" maxOccurs="1"/>
  <element type="TimeResolution" minOccurs="1" maxOccurs="1"/>
</ElementType>

```

```

<!-- NMIB level 3 -->

```

```

<ElementType name="StackCapabilities" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <element type="FasArTypesAndRolesSupported" minOccurs="1" maxOccurs="1"/>
  <element type="MaxDlsapAddressesSupported" minOccurs="1" maxOccurs="1"/>
  <element type="MaxDlcepAddressesSupported" minOccurs="1" maxOccurs="1"/>
  <element type="DlcepDeliveryFeaturesSupported" minOccurs="1" maxOccurs="1"/>
  <element type="VersionOfNmSpecSupported" minOccurs="1" maxOccurs="1"/>
  <element type="AgentFunctionsSupported" minOccurs="1" maxOccurs="1"/>
  <element type="FmsFeaturesSupported" minOccurs="1" maxOccurs="1"/>
</ElementType>

```

```

<ElementType name="ListCharacteristics" content="eltOnly" model="closed">
  <attribute type="fdt:nodeId" required="no"/>
  <element type="Version" minOccurs="1" maxOccurs="1"/>
  <element type="MaxEntries" minOccurs="1" maxOccurs="1"/>
  <element type="NumPermanentEntries" minOccurs="1" maxOccurs="1"/>
  <element type="NumCurrentlyConfigured" minOccurs="1" maxOccurs="1"/>
  <element type="FirstUnconfiguredEntry" minOccurs="1" maxOccurs="1"/>
  <element type="DynamicsSupportedFlag" minOccurs="1" maxOccurs="1"/>
  <element type="StatisticsSupported" minOccurs="1" maxOccurs="1"/>
  <element type="NumOfStatisticsEntries" minOccurs="1" maxOccurs="1"/>
</ElementType>

```