PD IEC TR 61282-5:2019

BSI Standards Publication

Fibre optic communication system design guidelines

Part 5: Accommodation and compensation of chromatic dispersion

Documents
Document Sharing Hub

Full document details: PD IEC TR 61282-5:2019

National foreword

This Published Document is the UK implementation of IEC TR 61282-5:2019. It supersedes PD IEC TR 61282-5:2002, which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee GEL/86/3, Fibre optic systems and active devices.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2019
Published by BSI Standards Limited 2019

ISBN 978 0 539 01119 7

ICS 33.180.01

Compliance with a British Standard cannot confer immunity from legal obligations.

This Published Document was published under the authority of the Standards Policy and Strategy Committee on 31 July 2019.

Amendments/corrigenda issued since publication

Date	Text affected

Documents
Document Sharing Hub

Full document details: PD IEC TR 61282-5:2019

IEC TR 61282-5

Edition 2.0 2019-07

TECHNICAL REPORT

Fibre optic communication system design guidelines – Part 5: Accommodation and compensation of chromatic dispersion

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 33.180.01

ISBN 978-2-8322-7131-5

Warning! Make sure that you obtained this publication from an authorized distributor.

® Registered trademark of the International Electrotechnical Commission

Documents
Document Sharing Hub

Full document details: PD IEC TR 61282-5:2019

CONTENTS

FOREWORD 4
1 Scope 6
2 Normative references 6
3 Terms, definitions and abbreviated terms 6
3.1 Terms and definitions 6
3.2 Abbreviated terms 6
4 Background 7
5 Impact of chromatic dispersion 8
5.1 Dependence on fibre type 8
5.2 Dispersion-unshifted fibres 8
5.3 Dispersion-shifted fibres 10
5.4 Pulse broadening 11
5.5 Pulse narrowing and signal peaking 13
5.6 Dispersion-limited transmission distance 14
6 Compensation and accommodation of dispersion 16
6.1 Passive dispersion compensation along the optical path 16
6.1.1 General 16
6.1.2 Dispersion compensating fibre 16
6.1.3 Chirped fibre Bragg grating 17
6.1.4 Etalon filter 18
6.2 Dispersion management 18
6.3 Accommodation of dispersion 20
6.4 Pre-distortion of the transmitted signal 20
6.5 Electrical accommodation in the receiver 21
6.6 Dispersion-assisted transmission 22
6.7 Mid-span spectral inversion 23
7 Passive dispersion compensator parameters 24
7.1 Compensated fibre length 24
7.2 Operating wavelength range 24
7.3 Chromatic dispersion 24
7.4 Dispersion slope 25
7.5 Insertion loss 25
7.6 Wavelength-dependent loss 25
7.7 Phase ripple 26
7.8 Reflectance 26
7.9 Polarization-mode dispersion 26
7.10 Polarization-dependent loss 27
7.11 Optical nonlinearity 27
7.12 Latency 27
8 Passive dispersion compensator applications 28
8.1 Unamplified fibre spans 28
8.2 Fibre links with in-line optical amplifiers 28
8.3 Multi-channel WDM transmission systems 29
8.4 Hybrid transmission systems 30
8.5 Multi-band WDM transmission systems 30

AVA Documents
Document Sharing Hub

Full document details: PD IEC TR 61282-5:2019

9 System parameters for passive dispersion compensators 30
Bibliography 32

Figure 1 – Range of the dispersion coefficient for B-652.D fibres 9
Figure 2 – Distortions in a 10 Gbit/s NRZ signal at various amounts of CD 14
Figure 3 – Summing the dispersions of a B-652 fibre and a DCF over the C-band 17
Figure 4 – Reflectivity and time delay of an FBG-based PDC 18
Figure 5 – Periodic dispersion map with span-by-span compensation 19
Figure 6 – Transmitter for generating pre-compensated optical signals 21
Figure 7 – Coherent optical receiver with electrical CD post-compensation 22
Figure 8 – Spectral inversion of a modulated signal via four-wave mixing 23
Figure 9 – Passive dispersion compensators placed at the receiver 28
Figure 10– PDCs placed before optical booster amplifiers at the transmitter 28
Figure 11 – PDCs placed after pre-amplifiers at the receiver 28
Figure 12 – Optically amplified link with in-line PDCs 29
Figure 13 – Optically amplified WDM communication link with in-line PDCs 29
Figure 14 – WDM link with individual compensation of residual dispersion 30
Figure 15 – Two-band WDM link with OA and PDC in the C-band 30

Table 1 – Single-mode fibre types and range of dispersion coefficients at 1 550 nm 11
Table 2 – Dispersion-limited transmission distances over B-652 fibre at 1 550 nm 15
Table 3 – Primary system parameters for DCF-based PDCs 31
Table 4 – Primary system parameters for FBG-based PDCs 31

Documents
Document Sharing Hub

Full document details: PD IEC TR 61282-5:2019

INTERNATIONAL ELECTROTECHNICAL COMMISSION

FIBRE OPTIC COMMUNICATION SYSTEM DESIGN GUIDELINES –

Part 5: Accommodation and compensation of chromatic dispersion

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC technical committees is to prepare International Standards. However, a technical committee may propose the publication of a Technical Report when it has collected data of a different kind from that which is normally published as an International Standard, for example "state of the art".

IEC TR 61282-5, which is a Technical Report, has been prepared by subcommittee 86C: Fibre optic systems and active devices, of IEC technical committee 86: Fibre optics.

This second edition cancels and replaces the first edition, published in 2002, and constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

a) extends the application space for dispersion compensation and accommodation to communication systems that employ non-zero dispersion-shifted fibres;
b) adds a discussion on the suitability of fibre types for long-haul transmission of wavelength-multiplexed signals;
c) updates the dispersion coefficient limits for dispersion-unshifted fibres;

Documents
Document Sharing Hub

d) adds information on the dispersion coefficients of dispersion-shifted fibres;

e) updates the naming of the fibre types to the revised naming conventions defined in IEC 60793-2-50:2018;

f) updates Table 2 to include the dispersion tolerance of phase-shift-keyed modulation formats used for the transmission of 40 Gbit/s and 100 Gbit/s signals;

g) adds information on dispersion management in terrestrial and submarine communication systems;

h) extends the description of passive dispersion compensators based on fibre Bragg gratings and etalons;

i) adds information on electronic dispersion accommodation in coherent communication systems (including transmitters and receivers);

j) updates the description of optical accommodation techniques to include soliton transmission and mid-span spectral inversion;

k) extends the list of system parameters for passive dispersion compensators to include wavelength-dependent loss, phase ripple, and latency;

l) updates the description of dispersion compensator applications in long-haul communication systems.

The text of this Technical Report is based on the following documents:

Draft TR	Report on voting
86C/1573/DTR	86C/1581/RVDTR

Full information on the voting for the approval of this Technical Report can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 61282 series, published under the general title *Fibre optic communication system design guidelines*, can be found on the IEC website.

Future standards in this series will carry the new general title as cited above. Titles of existing standards in this series will be updated at the time of the next edition.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

Documents
Document Sharing Hub

Full document details: PD IEC TR 61282-5:2019

FIBRE OPTIC COMMUNICATION SYSTEM DESIGN GUIDELINES –

Part 5: Accommodation and compensation of chromatic dispersion

1 Scope

This part of IEC 61282, which is a Technical Report, describes various techniques for accommodation and compensation of chromatic dispersion in fibre optic communication systems. These techniques include dispersion compensation with passive optical components, advanced dispersion management, and electronic accommodation of dispersion in the transmitters and receivers.

2 Normative references

There are no normative references in this document.

3 Terms, definitions and abbreviated terms

3.1 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at http://www.electropedia.org/
- ISO Online browsing platform: available at http://www.iso.org/obp

3.2 Abbreviated terms

ADC	analogue-to-digital converter
BER	bit-error ratio
CD	chromatic dispersion
CW	continuous wave
DAC	digital-to-analogue converter
DCF	dispersion-compensating fibre
DCM	dispersion compensation module
DGD	differential group delay
DPSK	differential phase-shift keying
DQPSK	differential quaternary phase-shift keying
DSF	dispersion-shifted fibre
DWDM	dense wavelength-division multiplexing
FBG	fibre Bragg grating
FWM	four-wave mixing
I	in-phase component
IL	insertion loss
ITU	International Telecommunication Union

Documents
Document Sharing Hub

Full document details: PD IEC TR 61282-5:2019

LO	local oscillator
MLSE	maximum-likelihood sequence estimation
NRZ	non-return-to-zero
NZDSF	non-zero dispersion-shifted fibre
OA	optical amplifier
OOK	on-off keying
OSNR	optical signal-to-noise ratio
PAM	pulse-amplitude modulation
PBS	polarization splitter
PCD	pre-compensated dispersion
PD	photo-detector
PDC	passive dispersion compensator
PDL	polarization-dependent loss
PMD	polarization-mode dispersion
PSK	phase-shift keying
Q	quadrature-phase component
QAM	quadrature amplitude modulation
QPSK	quaternary phase-shift keying
RD	residual dispersion
RDPS	residual dispersion per span
RMS	root-mean-square
Rx	optical receiver
RZ	return-to-zero
SPM	self-phase modulation
TIA	transimpedance amplifier
Tx	optical transmitter
WDL	wavelength-dependent loss
WDM	wavelength-division multiplexing
XPM	cross-phase modulation
XPolM	cross-polarization modulation
XI	in-phase component of X-polarized signal
XQ	quadrature-phase component of X-polarized signal
YI	in-phase component of Y-polarized signal
YQ	quadrature-phase component of Y-polarized signal

4 Background

Optical communication fibres often exhibit a considerable amount of chromatic dispersion (CD). This means that optical signals at different wavelengths propagate at different speeds through the fibre and, hence, arrive at different times at the receiver. In some communication links, the fibre dispersion can be large enough to also introduce significant differential time delays between the various frequency components forming a single modulated optical signal. These time delays may cause severe waveform distortions in the transmitted optical signal. Chromatic dispersion accumulates linearly with fibre length and, hence, can severely limit the maximal distance over which an optical signal may be transmitted without intermediate electrical regeneration.

AVA Documents
Document Sharing Hub

Full document details: PD IEC TR 61282-5:2019

To overcome these distance limitations, special fibres have been developed that exhibit relatively small or even negligible dispersion in the wavelength range of interest. It was found, however, that fibres with vanishing dispersion are not well suited for long-haul communication systems employing dense wavelength-division multiplexing (DWDM) because of signal distortions due to nonlinear optical interactions between the various multiplexed signals, such as cross-phase modulation (XPM) and four-wave mixing (FWM). In fibres with relatively large CD, the nonlinear signal distortions accumulate much more slowly than in fibres with only small or even vanishing CD. The reason is that dispersion introduces differential time delays between the various multiplexed signals as they travel through the fibre, which have the effect that they de-phase the nonlinear interactions between the signals. For this reason, DWDM communication systems usually employ fibres that have non-vanishing dispersion in the wavelength range of interest.

If not properly compensated or otherwise accommodated, the accumulated dispersion at the end of the fibre link may cause severe signal distortions in the transmitted signals, especially in long-haul communication systems and for signals that are modulated at symbol rates of 10 GBd or higher. Without dispersion compensation, the maximal transmission distances decrease rapidly with increasing modulation rate of the transmitted signals.

Techniques for reducing the waveform distortions caused by accumulated CD include the insertion of passive optical elements with opposite dispersion along the fibre link (optical dispersion compensation), dispersion-assisted transmission of optical signals (soliton pulses), and electrical accommodation of CD-induced waveform distortions in the optical transmitters and receivers (pre- and post-compensation). Optical compensation techniques are primarily applied in medium- to long-haul DWDM transmission systems using direct-detection (i.e. non-coherent) receivers, whereas electrical accommodation techniques are widely employed in transmission systems using coherent receivers and complex vector modulation.

Depending on the fibre type, short-reach communication systems, in particular those operating in the 1 300-nm wavelength range, may not require dispersion mitigation, because of their short length (typically less than 10 km) and small dispersion coefficient.

5 Impact of chromatic dispersion

5.1 Dependence on fibre type

Chromatic dispersion in optical communication fibres is usually characterized by a length-independent dispersion coefficient $D(\lambda)$, expressed in units of ps/(nm·km) or ps/nm-km. The total amount of dispersion in a fibre of length L is given by $D(\lambda)\times L$ and, hence, increases linearly with fibre length. The magnitude and sign of the dispersion coefficient generally vary with optical wavelength λ and can differ substantially from fibre type to fibre type.

The various fibre types used in single-mode optical communication links are categorized in IEC 60793-2-50 according to their design and dispersion characteristics. They include dispersion-unshifted fibres as well as various types of dispersion-shifted fibres. IEC 60793-2-50 also specifies acceptable ranges for the dispersion coefficients $D(\lambda)$ of these fibres, which mirror those specified in ITU-T Recommendations G.652 through G.657 for single-mode fibres and cables [1] to [6].

The amount of distortion caused by chromatic dispersion in a transmitted optical signal thus depends on the fibre type, the length of the fibre, and the wavelength of the signal. The magnitude and wavelength dependence of $D(\lambda)$ for the various fibre types and their impact on signal transmission is discussed in 5.2 and 5.3.

5.2 Dispersion-unshifted fibres

The first generation of single-mode fibres used in optical communication systems were dispersion-unshifted fibres, which are defined in IEC 60793-2-50 as category B652 fibres (formerly known as category B1 fibres). Although originally intended for signal transmission

AVA Documents
Document Sharing Hub

around 1 310 nm wavelength, B-652 fibres are also frequently used in the 1 550-nm range, where the optical attenuation coefficient is significantly smaller than at 1 310 nm. The dispersion coefficient of these fibres vanishes at some wavelength around 1 310 nm, called the zero-dispersion wavelength λ_0, but becomes fairly large at wavelengths around 1 550 nm. As for most fibre types, the zero-dispersion wavelength and the wavelength dependence of the dispersion coefficient $D(\lambda)$ may differ from fibre to fibre because of variations in the fibre design and the manufacturing process.

IEC 60793-2-50 specifies the acceptable variations in the zero-dispersion wavelength λ_0 and the slope of the dispersion coefficient, thus setting boundaries for the dispersion coefficient $D(\lambda)$ as a function of wavelength [7] [8]. This is shown in Figure 1 for the example of sub-category B-652.D fibres. The solid curve displays the maximal values allowed for $D(\lambda)$, while the dashed curve shows the corresponding minimal values. At 1 310 nm wavelength, the dispersion coefficient is bound between –1,3 ps/nm-km and +0,9 ps/nm-km, whereas it increases to at least 13,3 ps/nm-km but no more than 18,6 ps/nm-km at 1 550 nm. Other types of dispersion-unshifted fibres may have slightly different limits for $D(\lambda)$.

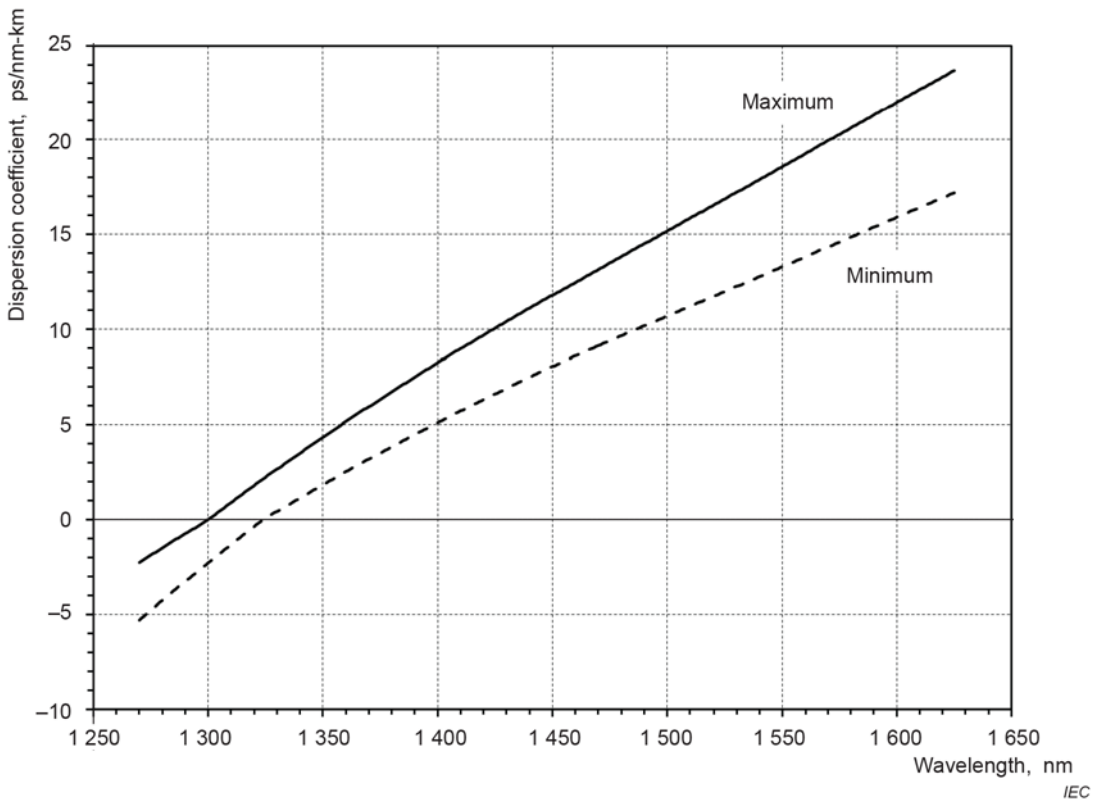

Figure 1 – Range of the dispersion coefficient for B-652.D fibres

Short-reach communication systems (with less than 40 km transmission distance) using category B-652 fibres and signal sources around 1 300 nm wavelength may not be impacted by CD, whereas medium- and long-haul communication systems operating in the C-band (1 530 nm to 1 565 nm) or in the L-band (1 565 nm to 1 625 nm) can be severely affected by CD because of the higher dispersion coefficient and longer length.

At 1 550 nm wavelength, a dispersion coefficient of around 17 ps/nm-km may be considered typical for dispersion-unshifted fibres. Thus, in a 100-km long fibre link, the accumulated dispersion is about 1 700 ps/nm. Insertion of a properly selected optical dispersion compensator can decrease this value to about 100 ps/nm or less. However, in DWDM applications, the slope of the dispersion coefficient also becomes important. Around 1 550 nm, the dispersion-slope coefficient is about 0,057 ps/nm^2-km, which means that the accumulated

AVA Documents
Document Sharing Hub
Full document details: PD IEC TR 61282-5:2019

dispersion in a 100-km long link typically increases by about 200 ps/nm between 1 530 nm and 1 565 nm wavelength.

5.3 Dispersion-shifted fibres

Fibre dispersion is the sum of material and waveguide dispersion. It is therefore possible to move the zero-dispersion wavelength λ_0 of a fibre to a different value by changing the waveguide dispersion in the light-guiding fibre core. Shifting λ_0 to longer wavelengths typically reduces the dispersion coefficient in the 1 550-nm range. These types of fibres are known as dispersion-shifted fibres (DSFs). In category B-653 fibres (formerly category B2 fibres), the zero-dispersion wavelength is shifted to around 1 550 nm, as specified in IEC 60793-2-50. Consequently, the magnitude of the dispersion coefficient in B-653 fibres is very small across the C-band.

Transmission of DWDM signals over zero- or low-dispersion fibres can be severely impaired by nonlinear optical interactions between the various optical channels which occur along the fibre link, as described in IEC TR 61282-4 [9]. These non-linear interactions manifest themselves in cross-phase modulation (XPM), cross-polarization modulation (XPolM), and four-wave mixing (FWM). It was found that signal distortions caused by XPM, XPolM and FWM accumulate much more slowly in fibres with large dispersion coefficients than in those with small or nearly vanishing dispersion coefficients [10]. Therefore, B-653 fibres are not suitable for long-haul transmission of DWDM signals in the C-band, although they may be used for DWDM transmission in the L-band, where the dispersion coefficient is significantly larger. For this reason, B-653 fibres are no longer deployed in long-haul optical communication systems.

Newer generations of dispersion-shifted fibres are designed to have relatively small but non-vanishing dispersion coefficients within the C-band, so as to allow DWDM transmission over long fibre links. In these non-zero dispersion-shifted fibres (NZDSF), defined as category B-655 fibres in IEC 60793-2-50 (formerly category B4), λ_0 is shifted either to a wavelength below 1 530 nm, so that $D(\lambda)$ is greater than zero in the entire C-band, or to one above 1 565 nm, so that $D(\lambda)$ is lower than zero in the C-band. Since fibres with λ_0 > 1 565 nm do not support DWDM transmission in the L-band (1 565 nm to 1 625 nm), newer generations of NZDSFs, like sub-category B-655.D fibres, specify λ_0 to be below 1 530 nm, so that $D(\lambda)$ is greater than zero in the C- and L-bands. In category B-656 fibres (formerly category B5), which were designed for wideband optical transport networks, λ_0 is shifted to below 1 460 nm, so that $D(\lambda)$ is greater than zero over the extended wavelength range from 1 460 nm to 1 625 nm, covering the S-, C- and L-bands. Consequently, category B-656 fibres exhibit significantly larger dispersion at 1 550 nm than some of the earlier generations of NZDSF.

Documents
Document Sharing Hub

Full document details: PD IEC TR 61282-5:2019