PD IEC/TR 62689-100:2016

BSI Standards Publication

Current and voltage sensors or detectors, to be used for fault passage indication purposes

Part 100: Requirements and proposals for the IEC 61850 series data model extensions to support fault passage indicators applications

Documents
Document Sharing Hub

Full document details: PD IEC/TR 62689-100:2016

National foreword

This Published Document is the UK implementation of IEC/TR 62689-100:2016.

The UK participation in its preparation was entrusted to Technical Committee PEL/38, Instrument transformers.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2016.
Published by BSI Standards Limited 2016

ISBN 978 0 580 93493 3
ICS 17.220.20

Compliance with a British Standard cannot confer immunity from legal obligations.

This Published Document was published under the authority of the Standards Policy and Strategy Committee on 31 December 2016.

Amendments/corrigenda issued since publication

Date	Text affected

Documents
Document Sharing Hub

Full document details: PD IEC/TR 62689-100:2016

IEC TR 62689-100

Edition 1.0 2016-10

TECHNICAL REPORT

colour inside

Current and voltage sensors or detectors, to be used for fault passage indication purposes – Part 100: Requirements and proposals for the IEC 61850 series data model extensions to support fault passage indicators applications

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 17.220.20

ISBN 978-2-8322-3724-3

Warning! Make sure that you obtained this publication from an authorized distributor.

® Registered trademark of the International Electrotechnical Commission

Documents
Document Sharing Hub

Full document details: PD IEC/TR 62689-100:2016

CONTENTS

FOREWORD....6
INTRODUCTION....8
1 Scope....9
2 Normative references....9
3 Terms, definitions and abbreviated terms....9
3.1 Terms and definitions....9
3.2 Abbreviated terms....10
3.2.1 Generic abbreviated terms....10
3.2.2 Proposed specifically for the data model part of this document....11
3.2.3 Existing abbreviated terms used in IEC 61850 (all parts) data object names model....12
3.3 Fault classification definitions....22
4 Requirements and use cases....23
4.1 General....23
4.2 Common actors....24
4.3 Use cases: fault indication and report....33
4.3.1 Generic use case – Not fault type specific....33
4.3.2 Overcurrent non directional Fault Localization and Indication (F1C/NC)....51
4.3.3 Phase to earth faults, non directional fault detection (F2)....52
4.3.4 Overcurrent and phase to earth non directional faults detection (F3)....52
4.3.5 Overcurrent, directional and non directional, fault detection (F4)....53
4.3.6 Overcurrent, non directional, phase to earth faults, directional and non directional fault detection (F5)....53
4.3.7 Overcurrents and phase to earth faults, directional and non directional fault detection (F6)....53
4.4 Use cases related to “other functions”....53
4.4.1 Report on device health....53
4.4.2 Monitor substation environment....53
4.4.3 Monitor external communication....53
4.4.4 Monitor energy flow (energy flow related use cases)....53
4.4.5 Contribute to distributed automatic FLISR....59
4.4.6 Contribute to distributed automatic VVC....75
4.4.7 Contribute to distributed DER management....75
4.5 Use cases related to “Product life cycle”....75
4.5.1 IED configuration via CID file....75
5 Information Models....100
5.1 Mapping of requirements on LNs....100
5.1.1 General....100
5.1.2 Mapping of the requirements of Fault Identification and report....100
5.1.3 Mapping of the requirements of “other functions”....101
5.1.4 Mapping of the requirements of “product life cycle” (FieldComp remote configuration)....103
6 Logical node classes....103
6.1 General....103
6.2 Package LNGroupL....104
6.2.1 General....104
6.2.2 LICH LN....106

AVA Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

6.2.3 LN: Common LD Settings Name: LCLD ... 107
6.3 Package LNGroupM ... 108
6.3.1 General ... 108
6.3.2 LN: Energy Name: MMTNExt ... 109
6.3.3 LN: Energy Name: MMTRExt ... 111
6.3.4 LN: Measurement Name: MMXNExt ... 113
6.3.5 LN: Measurement Name: MMXUExt ... 114
6.4 Package LNGroupS ... 116
6.4.1 General ... 116
6.4.2 LN: Current presence monitoring Name: SCPI ... 117
6.4.3 LN: Fault Passage Indicator Name: SFPI ... 118
6.4.4 LN: Fault indicator statistic calculation Name: SFST ... 120
6.4.5 LN: Voltage presence indicator Name: SVPI ... 121
7 Data object name semantics and enumerations ... 123
7.1 Data semantics ... 123
7.2 Enumerated data attribute types ... 126
7.2.1 General ... 126
7.2.2 CIDHandlingResultKind enumeration ... 127
7.2.3 CIDHandlingStatusKind enumeration ... 128
7.2.4 CurrentTransformersArrangementKind enumeration ... 128
7.2.5 FaultConfirmationModeKind enumeration ... 128
7.2.6 FaultPermanenceKind enumeration ... 129
7.2.7 PwrFlwSignKind enumeration ... 129
8 SCL enumerations (from DOEnumsJAHWG51) ... 129
9 References ... 130
Annex A (informative) Interpretation of logical node tables ... 131
A.1 General interpretation of logical node tables ... 131
A.2 Conditions for element presence ... 131
Bibliography ... 134

Figure 1 – Actors global hierarchy ... 25
Figure 2 – System Actors SGAM positioning (function) ... 26
Figure 3 – System Actors SGAM positioning (not function related) ... 27
Figure 4 – Fault indication – Main use case ... 35
Figure 5 – Fault detection and indication – T1 ... 36
Figure 6 – Fault detection and indication– T2 ... 37
Figure 7 – Fault detection and indication for FPI – T3,T4 (with communication to HV/MV SS) in the context of FLISR as described in 4.4.5 ... 38
Figure 8 – Fault detection and indication for FPI – T3,T4 (without communication to HV/MV SS) in the context of FLISR as described in 4.4.5 ... 39
Figure 9 – Voltage presence/absence ... 52
Figure 10 – Energy flow related use cases ... 54
Figure 11 – Sequence diagram for monitoring energy flows use cases ... 55
Figure 12 – Logical selectivity – FLI along the MV feeder ... 61
Figure 13 – Logical selectivity – FLI inside the EU plant ... 62
Figure 14 – Logical selectivity – FLI along the MV feeder and anti-islanding ... 63
Figure 15 – Use case – fault location indication ... 64

Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

Figure 16 – For further analysis 65
Figure 17 – IED configuration process via CID 77
Figure 18 – FieldComp configuration – Main UC 78
Figure 19 – FieldComp asset management 79
Figure 20 – Grid and topology planning 79
Figure 21 – Communication network planning 80
Figure 22 – First FieldComp connection to communication network 81
Figure 23 – New FieldComp configuration via CID – Remote + local (successful case) 82
Figure 24 – New FieldComp configuration via CID – Remote + local (unsuccessful case – corrupted CID) 83
Figure 25 – Existing FieldComp on-line reconfiguration – (topology – successful case) 84
Figure 26 – Possible arrangement of LNs to support fault passage indication 101
Figure 27 – Possible arrangement of LNs to support "Energy flow related use cases" 102
Figure 28 – Possible arrangement of LNs to support CID Handling 103
Figure 29 – Class diagram LogicalNodesJAHWG51::LogicalNodesJAHWG51 104
Figure 30 – Statechart diagram LNGroupL::LNGroupL 105
Figure 31 – Class diagram LNGroupL::LNGroupL 106
Figure 32 – Class diagram LNGroupM::LNGroupM 109
Figure 33 – Class diagram LNGroupS::LNGroupS 117
Figure 34 – Class diagram DOEnumsJAHWG51::DOEnumsJAHWG51 127

Table 1 – Generic acronyms and abbreviated terms 10
Table 2 – Abbreviated terms for data object names 11
Table 3 – Abbreviated terms of IEC 61850 (all parts) for data object names 12
Table 4 – Fault types 23
Table 5 – List of common actors 28
Table 6 – Data objects of LICH 107
Table 7 – Data objects of LCLD 108
Table 8 – Data objects of MMTNExt 110
Table 9 – Data objects of MMTRExt 112
Table 10 – Data objects of MMXNExt 114
Table 11 – Data objects of MMXUExt 115
Table 12 – Data objects of SCPI 117
Table 13 – Data objects of SFPI 119
Table 14 – Data objects of SFST 120
Table 15 – Data objects of SVPI 122
Table 16 – Attributes defined on classes of LogicalNodesJAHWG51 package 123
Table 17 – Literals of CIDHandlingResultKind 127
Table 18 – Literals of CIDHandlingStatusKind 128
Table 19 – Literals of CurrentTransformersArrangementKind 128
Table 20 – Literals of FaultConfirmationModeKind 128
Table 21 – Literals of FaultPermanenceKind 129
Table 22 – Literals of PwrFlwSignKind 129

AVA Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

Table A.1 – Interpretation of logical node tables 131
Table A.2 – Conditions for presence of elements within a context 132

Documents
Document Sharing Hub

Full document details: PD IEC/TR 62689-100:2016

INTERNATIONAL ELECTROTECHNICAL COMMISSION

CURRENT AND VOLTAGE SENSORS OR DETECTORS, TO BE USED FOR FAULT PASSAGE INDICATION PURPOSES –

Part 100: Requirements and proposals for the IEC 61850 series data model extensions to support fault passage indicators applications

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC technical committees is to prepare International Standards. However, a technical committee may propose the publication of a Technical Report when it has collected data of a different kind from that which is normally published as an International Standard, for example "state of the art".

IEC TR 62689-100, which is a Technical Report, has been prepared by IEC technical committee 38: Instrument transformers, in cooperation with TC 57: Power systems management and associated information exchange.

Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

The text of this Technical Report is based on the following documents:

Enquiry draft	Report on voting
38/499/DTR	38/519/RVC

Full information on the voting for the approval of this technical report can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 62689 series, published under the general title *Current and voltage sensors or detectors, to be used for fault passage indication purposes*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC website under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

Documents
Document Sharing Hub

Full document details: PD IEC/TR 62689-100:2016

INTRODUCTION

This part of IEC 62689 has two main framework constraints with editorial and technical impacts as

- this document will be merged with IEC TR 61850-90-6[1]: IEC TR 62689-100 will exactly stick with the targeted document structure and principles, and
- this document intends to prepare the content of the future IEC 62689-3[2] which will directly rely on the functional requirements expressed in IEC 62689-1 and IEC 62689-2.

[1] Under preparation. Stage at the time of publication: IEC PWI 61850-90-6:2016.

[2] Under preparation. Stage at the time of publication: IEC PWI 62689-3:2016.

Documents
Document Sharing Hub

Full document details: PD IEC/TR 62689-100:2016

CURRENT AND VOLTAGE SENSORS OR DETECTORS, TO BE USED FOR FAULT PASSAGE INDICATION PURPOSES –

Part 100: Requirements and proposals for the IEC 61850 series data model extensions to support fault passage indicators applications

1 Scope

This part of IEC 62689, which is a Technical Report, was prepared jointly with TC 57 with the scope to prepare requirements and proposals for the IEC 61850 series data model extensions to support fault passage indicators (all classes and extended functions) applications to be introduced in the future IEC 61850-90-6 and that, in turn, will be needed for the preparation of the future IEC 62689-3.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC TS 61850-2, *Communication networks and systems in substations – Part 2: Glossary*

IEC 61850-7-2, *Communication networks and systems for power utility automation – Part 7-2: Basic information and communication structure – Abstract communication service interface (ACSI)*

IEC 61850-7-4, *Communication networks and systems for power utility automation – Part 7-4: Basic communication structure – Compatible logical node classes and data object classes*

IEC 62689 (all parts), *Current and voltage sensors or detectors, to be used for fault passage indication purposes*

IEC 62689-1, *Current and voltage sensors or detectors, to be used for fault passage indication purposes – Part 1: General principles and requirements*

IEC 62689-2, *Current and voltage sensors or detectors, to be used for fault passage indication purposes – Part 2: System aspects*

3 Terms, definitions and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 61850-2, IEC 61850-7-2, IEC 62689 (all parts) and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at http://www.electropedia.org/
- ISO Online browsing platform: available at http://www.iso.org/obp

Documents
Document Sharing Hub

Full document details: PD IEC/TR 62689-100:2016

3.1.1
fault passage indicator
FPI
device able to detect faults providing indications about their localization (upstream or downstream from the FPI's location) and/or about the direction of fault current (usually referred as the direction of load current, i.e. from the HV/MV transformer towards end of MV feeders in a radial operated network)

[SOURCE: IEC 62689-1:2016, 3.1.1, modified — The notes to entry have been deleted.]

3.1.2
substation
substation of a power system
part of a power system, concentrated in a given place, including mainly the terminations of transmission or distribution lines switchgear and housing and which may also include transformers

Note 1 to entry: It generally includes facilities necessary for system security and control (e.g. the protective devices).

Note 2 to entry: Apply as well to overhead and underground equipment.

[SOURCE: IEC 62689-1:2016, 3.1.3, modifed — The term "substation of a power system" has been added as a second preferred term, the last sentence in the definition has been moved to a new note and the notes to entry have been replaced by new a new note.]

3.1.3
distribution substation unit
DSU
distribution automation unit
device (or a combination of devices and/or functions) able to perform, in addition to specific FPI functionalities, additional features, not strictly related to fault detection (for instance remote communication/commands, switch control or breaker control, network automation, distributed energy resources monitoring and control, etc.)

[SOURCE: IEC 62689-1:2016, 3.1.4, modified — The term "distribution automation unit" has been added as an admitted term and the note to entry has been deleted.]

3.2 Abbreviated terms

3.2.1 Generic abbreviated terms

Table 1 presents generic acronyms and abbreviated terms used throughout the document.

Table 1 – Generic acronyms and abbreviated terms

Term	Description
AR	Autorecloser
CB	Circuit Breaker
DER	Distributed Energy Resource
ds	derived statistics
DER MS	DER Management System
DERCtl	DER Unit Controller
DMSapp	DMS application module
DSO	SysOp
ECP	Electrical connection point

Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

Term	Description
EPS	Electrical Power System
FeProt	Feeder protection function
FeCTL	Feeder equipment controller
FieldComp	Field level physical component
FieldSyst	Field level sub system
FLISRapp	FLISR application module
FMS	Electric Network Fault management system
FOP	Field Operation Personnel
FPI	Fault Passage Indicator
FtDet	Fault signature detection
FtInd	Fault Indicator
FtLOCapp	Fault location application module
FtPInd	Fault Passage indicator at feeder level
Ms(I,U)	Electrical measurement
Ms(Wh)	Energy counting for operation
nds	not derived statistics
PCC	Point of common coupling
Planning	Electric Network Planning
PresCond	Presence Condition
QIS	(Electric Network) Quality Index System
RTUapp	Remote terminal gateway function
SysOp	Electric System operator
VPI	Voltage presence indicator
VVCapp	Volt var control Application module

NOTE Refer to Annex A for the terms ds,nds, PresCond.

3.2.2 Proposed specifically for the data model part of this document

Table 2 shows abbreviated terms that are combined to create data object names.

Table 2 – Abbreviated terms for data object names

Term	Description
Abc	Absence
All	All
Cid	Configuration file (CID)
Cus	customer
Def	Default
Evo	Evolution, Evolutive
Hdl	Handle, Handling
Itm	Intermittent
Ms	measurement
New	New

AVA Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

Term	Description
Abc	Absence
Ot	Outage
Oth	Other
Pm	Permanent
Q	Quadrant
Run	Run
Sfx	Self-extinguishing
Spm	Semi-permanent
To	To (preposition)

3.2.3 Existing abbreviated terms used in IEC 61850 (all parts) data object names model

Table 3 shows abbreviated terms of IEC 61850 (all parts) that are combined to create data object names.

Table 3 – Abbreviated terms of IEC 61850 (all parts) for data object names

Term	Description
A	Current; phase A (L1)
AC	AC, alternating current
AGC	Automatic generation control
ASG	Analogue setting CDC
AWatt	Wattmetric component of current
Abr	Abrasion
Abs	Absolute
Absb	Absorbing
Acc	Accuracy; acceleration (deprecated: use Accl instead)
Accl	Acceleration
Accm	Accumulated
Ack	Acknowledgement, acknowledge
Acs	Access
Act	Action, activity, active, activate
Actr	Actuator
Acu	Acoustic
Adj	Adjustment
Adp	Adapter, adaptation
Aff	Affected
Age	Ageing
Ahr	Ampere hours
Air	Air
Alg	Algorithm
Alm	Alarm

Term	Description
Alt	Altitude
Amnt	Amount
Amp	Ampere, current DC or non-phase-related AC
An	Analogue
Anc	Ancillary
Ane	Anemometer
Ang	Angle
Ap	Access point
Apc	Analogue point control
App	Apparent
Ar	Amperes reactive (reactive current)
Arc	Arc
Area	Area
Arr	Array
At	At
Auth	Authorisation
Auto	Automatic
Aux	Auxiliary
Av	Average
Avl	Availability
Ax	Axial
Azi	Azimuth
B	Bushing; phase B (L2)
BG	Before Gain

Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

Term	Description
Bac	Binary-controlled analogue value
Base	Base
Bat	Battery
Bck	Backup
Bec	Beacon
Beh	Behaviour
Ber	Bit error rate
Bias	Bias
Bl	Blade
Blb	Bulb
Blk	Block, blocked
Blow	Blowby
Bnd	Band, bandwidth
Boil	Boiler
Bot	Bottom
Brcb	Buffered report control block
Brg	Bearing
Brk	Brake
Bsc	Binary status control
Bst	Boost
Bt	Heartbeat
Bus	Bus
C	Carbon; phase C (L3)
C2H2	Acetylene
C2H4	Ethylene
C2H6	Ethane
CB	Circuit breaker
CE	Cooling equipment (see also Cl)
CG	Core ground
CH4	Methane
CHP	Combined heat and power
CO	Carbon monoxide
CO2	Carbon dioxide
Cab	Cable
Cal	Calorie, caloric
Cam	Cam, e.g. rotating non-circular disk
Cap	Capability, capacity
Capac	Capacitance
Car	Carrier
Cbr	Calibration
Ccw	Counter clockwise
Ccy	Currency
Ceil	Ceiling
Cel	Cell

Term	Description
Cf	Crest factor
Cff	Coefficient
Cfg	Configuration
Ch	Channel
Cha	Charger
Chg	Change
Chk	Check
Chr	Characteristic
Circ	Circulating, circuit
Cl	Cooling, coolant, cooling system (see also CE)
Clc	Calculate, calculated
Clip	Clip
Clk	Clock
Cloud	Cloud
Clr	Clear
Cls	Close, closed
Cm	Centimetres
Cmbu	Combustible, combustion
Cmd	Command
Cmpl	Completed, completion, complete
Cmut	Commute, commutator
Cndct	Conductivity
Cnt	Counter
Cntt	Contractual
Cnv	Converter
Col	Coil
Comm	Communication
Comp	Compensation
ConfRev	Configuration revision (confRev from IEC 61850-7-2)
Conn	Connected, connections
Cons	Constant (general)
Cor	Correction
Core	Core
Cost	Cost
Crank	Crank
Crd	Coordination
Crit	Critical
Crl	Correlation
Crp	Creeping, slow movement
Crv	Curve
Csmp	Consumption, consumed
Ctl	Control
Ctr	Center

AVA Documents
Document Sharing Hub

Term	Description
Cur	Current
Cut	Cut, cut-out, cut-in
Cvr	Cover, cover level
Cw	Clockwise
Cwb	Crowbar
Cyc	Cycle
D	Derivate
DC	DC, direct current
DER	Distributed energy resource
DExt	De-excitation
DPCSO	Double point controllable status output
DQ0	Direct, quadrature, and zero axis quantities
DS	Device state
DT	Daylight saving time
Dam	Dam
Damp	Damping
Date	Date, date and time of action
Day	Day
Db	Deadband
Dcl	DC-link
Dct	Direct
De	De (prefix)
Dea	Dead
Dec	Decrease
Deg	Degrees
Dehum	De-humidifier
Del	Delta
Den	Density
Dep	Dependent
Det	Detected
Detun	Detuning
Dev	Device
Dew	Dew
Dff	Diffuse
Dfl	Deflector (used in Pelton turbines)
Dia	Diaphragm
Diag	Diagnostics
Dif	Differential, difference
Dig	Digital
Dip	Dip
Dir	Direction
Dis	Distance
Dith	Dither

Term	Description
Dl	Delay
Dlt	Delete
Dlv	Delivery
Dmd	Demand
Dn	Down, downstream
Dpc	Double point control
Dpt	Departure
Drag	Drag hand
Dropout	Dropout
Drp	Droop
Drt	Derate
Drtb	Draft tube
Drv	Drive
Dsa	Disable, disabled
Dsc	Discrepancy
Dsch	Discharge
Dscon	Disconnected
Dsp	Displacement
Dtc	Detection
Dur	Duration
Dust	Dust
Dv	Deviation
Dw	Delta Omega
ECP	Electrical connection point
EE	External equipment
EF	Earth fault
EFN	Earth-fault neutriliser (Petersen coil)
ENG	Enumerated status setting CDC
ENS	Enumerated status CDC
EV	Electrical Vehicle
EVSE	EV Supply Equipment
Echo	Echo
Edt	Edit, edited
Efc	Efficiency
El	Elevation
Em	Emission
Emg	Emergency
En	Energy
Ena	Enabled, enable, allow operation
Enc	Enumerated control
Encl	Enclosure
End	End
Eng	Engine
Ent	Entity, entities

AVA Documents
Document Sharing Hub

Term	Description
Entr	Entry, entries
Env	Environment
Eq	Equalization, equal, equivalent
Err	Error
Est	Estimated
Ev	Evaluation
Evn	Even
Evt	Event
Ex	External
ExIm	Export/import
Exc	Exceeded
Excl	Exclusion
Exp	Expired
Expt	Export
Ext	Excitation
F	Float
FA	Fault arc
FPM	Fuel processing module
Fa	"Fire all" sequence (to thyristors)
Fact	Factor
Fail	Failure
Fan	Fan
Fbc	Field breaker configuration
Fer	Frame error rate
Fil	Filter, filtration system
Fish	Fish
Fix	Fixed
Fld	Field
Fll	Fall
Flm	Flame
Flood	Flood
Flsh	Flash, flashing
Flt	Fault
Flush	Flush
Flw	Flow, flowing
Fol	Follower, following
Forc	Forced
Fu	Fuse
Fuel	Fuel
Full	Full
Fwd	Forward
Gain	Gain
Gas	Gas
Gbx	Gearbox

Term	Description
Gdv	Guide vane
Gen	General
Gn	Generator
Gnd	Ground
GoCBRef	GOOSE control block reference
Gocb	GOOSE control block
Gr	Group
Gra	Gradient
Grd	Guard
Gri	Grid
Gross	Gross
Gs	Grease
Gte	Gate
Gust	Gust
H	Harmonics (phase-related)
H2	Hydrogen
H2O	Water (chemical aspect: liquid, steam, etc.)
HP	Hot point
HPh	Harmonics phase
Ha	Harmonics (non-phase-related AC)
Hd	Head
Health	Health
Heat	Heater, heating, heat (see also Ht)
Hi	High, highest
Hold	Hold
Hor	Horizontal
Horn	Horn
Ht	Heating, heating system (see also Heat)
Htex	Heat-exchanger
Hub	Hub
Hum	Humidity
Hy	Hydraulic, hydraulic system
Hyd	Hydrological, hydro, water
Hys	Hysteresis
Hz	Frequency
Hz1	Frequency at side 1
Hz2	Frequency at side 2
I	Integral, integration
ING	Integer status setting CDC
INS	Integer status CDC
ISCSO	Integer status controllable status output
Ia	Information available

AVA Documents
Document Sharing Hub

Term	Description
Iafm	Information available force majeure
Iano	Information available non-operative
Ianofo	Information available non-operative forced outage
Ianopca	Information available non-operative planned corrective action
Ianos	Information available non-operative suspended
Ianosm	Information available non-operative scheduled maintenance
Iao	Information available operative
Iaog	Information available operative generating
Iaogfp	Information available operative generating with full performance
Iaogpp	Information available operative generating with partial performance
Iaong	Information available operative non-generating
Iaongel	Information available operative non-generating out of electrical specification
Iaongen	Information available operative non-generating out of environment specification
Iaongrs	Information available operative non-generating requested shutdown
Iaongts	Information available operative non-generating technical standby
Ice	Ice
Id	Identity, identifier
Ieee	IEEE definition
IeeeKH	Proportional gain HF (High Frequency). Defined in IEEE 421.5
IeeeKH1	Proportional gain HF positive. Defined in IEEE 421.5
IeeeKH11	Lead gain HF positive. Defined in IEEE 421.5
IeeeKH17	Lead gain HF negative. Defined in IEEE 421.5
IeeeKH2	Proportional gain HF negative. Defined in IEEE 421.5
IeeeKI	Proportional gain IF (Intermediate Frequency). Defined in IEEE 421.5
IeeeKI1	Proportional gain IF positive. Defined in IEEE 421.5
IeeeKI11	Lead gain IF positive. Defined in IEEE 421.5
IeeeKI17	Lead gain IF negative. Defined in IEEE 421.5
IeeeKI2	Proportional gain IF negative. Defined in IEEE 421.5
IeeeKL	Proportional gain LF (Low Frequency). Defined in IEEE 421.5

Term	Description
IeeeKL1	Proportional gain LF positive. Defined in IEEE 421.5
IeeeKL11	Lead gain LF positive. Defined in IEEE 421.5
IeeeKL17	Lead gain LF negative. Defined in IEEE 421.5
IeeeKL2	Proportional gain LF negative. Defined in IEEE 421.5
IeeeKs1	Gain Ks1. Defined in IEEE 421.5
IeeeKs2	Gain Ks2. Defined in IEEE 421.5
IeeeKs3	Gain Ks3. Defined in IEEE 421.5
IeeeM	Ramptrack lowpass degree M. Defined in IEEE 421.R
IeeeN	Ramptrack overall degree N. Defined in IEEE 421.5
IeeeT1	Time constant T1. Defined in IEEE 421.5
IeeeT10	Time constant T10. Defined in IEEE 421.5
IeeeT11	Time constant T11. Defined in IEEE 421.5
IeeeT2	Time constant T2. Defined in IEEE 421.5
IeeeT3	Time constant T3. Defined in IEEE 421.5
IeeeT4	Time constant T4. Defined in IEEE 421.5
IeeeT7	Time constant T7. Defined in IEEE 421.5
IeeeT8	Time constant T8. Defined in IEEE 421.5
IeeeT9	Time constant T9. Defined in IEEE 421.5
IeeeTH1	Time constant TH1 (High frequency positive). Defined in IEEE 421.5
IeeeTH10	Time constant TH10 (High frequency negative). Defined in IEEE 421.5
IeeeTH11	Time constant TH11 (High frequency negative). Defined in IEEE 421.5
IeeeTH12	Time constant TH12 (High frequency negative). Defined in IEEE 421.5
IeeeTH2	Time constant TH2 (High frequency positive). Defined in IEEE 421.5
IeeeTH3	Time constant TH3 (High frequency positive). Defined in IEEE 421.5
IeeeTH4	Time constant TH4 (High frequency positive). Defined in IEEE 421.5
IeeeTH5	Time constant TH5 (High frequency positive). Defined in IEEE 421.5
IeeeTH6	Time constant TH6 (High frequency positive). Defined in IEEE 421.5
IeeeTH7	Time constant TH7 (High frequency negative). Defined in IEEE 421.5
IeeeTH8	Time constant TH8 (High frequency negative). Defined in IEEE 421.5

AVA Documents
Document Sharing Hub

Term	Description
IeeeTH9	Time constant TH9 (High frequency negative). Defined in IEEE 421.5
IeeeTI1	Time constant TI1 (Intermediate frequency positive). Defined in IEEE 421.5
IeeeTI10	Time constant TI10 (Intermediate frequency negative). Defined in IEEE 421.5
IeeeTI11	Time constant TI11 (Intermediate frequency negative). Defined in IEEE 421.5
IeeeTI12	Time constant TI12 (Intermediate frequency negative). Defined in IEEE 421.5
IeeeTI2	Time constant TI2 (Intermediate frequency positive). Defined in IEEE 421.5
IeeeTI3	Time constant TI3 (Intermediate frequency positive). Defined in IEEE 421.5
IeeeTI4	Time constant TI4 (Intermediate frequency positive). Defined in IEEE 421.5
IeeeTI5	Time constant TI5 (Intermediate frequency positive). Defined in IEEE 421.5
IeeeTI6	Time constant TI6 (Intermediate frequency positive). Defined in IEEE 421.5
IeeeTI7	Time constant TI7 (Intermediate frequency negative). Defined in IEEE 421.5
IeeeTI8	Time constant TI8 (Intermediate frequency negative). Defined in IEEE 421.5
IeeeTI9	Time constant TI9 (Intermediate frequency negative). Defined in IEEE 421.5
IeeeTL1	Time constant TL1 (Low frequency positive). Defined in IEEE 421.5
IeeeTL10	Time constant TL10 (Low frequency negative). Defined in IEEE 421.5
IeeeTL11	Time constant TL11 (Low frequency negative). Defined in IEEE 421.5
IeeeTL12	Time constant TL12 (Low frequency negative). Defined in IEEE 421.5
IeeeTL2	Time constant TL2 (Low frequency positive). Defined in IEEE 421.5
IeeeTL3	Time constant TL3 (Low frequency positive). Defined in IEEE 421.5
IeeeTL4	Time constant TL4 (Low frequency positive). Defined in IEEE 421.5
IeeeTL5	Time constant TL5 (Low frequency positive). Defined in IEEE 421.5
IeeeTL6	Time constant TL6 (Low frequency positive). Defined in IEEE 421.5
IeeeTL7	Time constant TL7 (Low frequency negative). Defined in IEEE 421.5

Term	Description
IeeeTL8	Time constant TL8 (Low frequency negative). Defined in IEEE 421.5
IeeeTL9	Time constant TL9 (Low frequency negative). Defined in IEEE 421.5
IeeeTw1	Time constant wash out Tw1. Defined in IEEE 421.5
IeeeTw2	Time constant wash out Tw2. Defined in IEEE 421.5
IeeeTw3	Time constant wash out Tw3. Defined in IEEE 421.5
IeeeTw4	Time constant wash out Tw4. Defined in IEEE 421.5
IeeeVHMax	Maximum limit set-point HF. Defined in IEEE 421.5
IeeeVHMin	Minimum limit set-point HF. Defined in IEEE 421.5
IeeeVIMax	Maximum limit set-point IF. Defined in IEEE 421.5
IeeeVIMin	Minimum limit set-point IF. Defined in IEEE 421.5
IeeeVLMax	Maximum limit set-point LF. Defined in IEEE 421.5
IeeeVLMin	Minimum limit set-point LF. Defined in IEEE 421.5
IeeeVsi1Max	Input High Limit 1. Defined in IEEE 421.5
IeeeVsi1Min	Input Low Limit 1. Defined in IEEE 421.5
IeeeVsi2Max	Input High Limit 2. Defined in IEEE 421.5
IeeeVsi2Min	Input Low Limit 2. Defined in IEEE 421.5
IeeeVstMax	Output High Limit. Defined in IEEE 421.5
IeeeVstMin	Output Low Limit. Defined in IEEE 421.5
Imb	Imbalance
Imp	Impedance non-phase-related AC
Impact	Impact
Impt	Import
In	Input
Ina	Inactivity
Inc	Integer control
Incr	Increment, increase
Ind	Indication
Indp	Independent
Iner	Inertia
Inh	Inhibit
Inl	Inline
Inlet	Inlet
Ins	Insulation

Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

Term	Description
Insol	Insolation
Inst	Instantaneous
Int	Integer
Intm	Intermediate
Intn	Internal
Intr	Interrupt, interruption
Intv	Interval
Inv	Inverter, inverted, inverse
Isc	Integer status control
Isld	Islanded
Iso	Isolation
Iu	Information unavailable
Ix	Index
Jmp	Jump
Jnt	Joint
K	Constant (regulation)
K0Fact	Zero-sequence (residual) compensation factor
KFact	K factor (harmonics)
Kck	Kicker
Key	Key, physical control device
L	Lower (action)
LDC	Line drop compensation
LDCR	Line drop compensation resistance
LDCX	Line drop compensation reactance
LDCZ	Line drop compensation impedance
LED	Light-emitting diode
LTC	Load tap changer
Last	Last
Ld	Lead
Leap	Leap (second)
Len	Length
Lev	Level
Lft	Lifting, lift
Lg	Lag
Life	Lifetime
Lim	Limit
Lin	Line
Liv	Live
Lkd	Locked
Lkg	Leakage
Ll	Last long (interval)
Lo	Low (state or value)
Loc	Local

Term	Description
Locb	Log control block
Lod	Load, loading
Log	Log
Lok	(use Lkd instead) Locked
Loop	Loop
Los	Loss
Ls	Last short (interval)
Lst	List
Lub	Lubrication
Lum	Luminosity
M	Minutes
MV	Measured value CDC
Made	Made
Mag	Magnetic, magnitude
Maint	Maintenance
Man	Manual
Mat	Material
Max	Maximum
Mbr	Membrane
Mdul	Module
Mech	Mechanical
Media	Media
Mem	Memory
Min	Minimum
Mlt	Multiple
Mod	Mode
Mot	Motor
Mrk	Market
Mst	Moisture
Msvcb	Multicast sampled values control block
Mth	Method
Mult	Multiplier
Mvm	Movement, moving
N2	Nitrogen
NOx	Nitrogen oxide
NQS	Average partial discharge current
Nam	Name
Name	Name (reserved for use in data objects EEName and LNName only)
Ndl	Needle (used in Pelton turbines)
NdsCom	Needs commissioning
Neut	Neutral
Ng	Negative
Nhd	Net head

AVA Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

Term	Description
Night	Night
No	No, not
Nom	Nominal, normalising
Num	Number
Nxt	Next
O2	Oxygen
O3	Ozon, trioxygen
Obl	Obligation
Oc	Open circuit
Odd	Odd
Of	Offline
Off	Off, device disengaged, not running
Ofs	Offset
Oil	Oil
On	On, device applied, running
Oo	Out of
Op	Operate, operating, operation
Operate	Operate order to any device
Opn	Open, opened
Out	Output
Ov	Over, override, overflow
Ovl	Overload
Ox	Oxidant
P	Proportional
PF	Power factor
PH	Acidity, value of pH
PNV	Phase-to-neutral voltage
POW	Point on wave switching
PP	Phase to phase
PPV	Phase to phase voltage
PT1	Low-pass exponential time rate filter
Pa	Partial
Pair	Pair, paired
Pap	Paper
Par	Parallel
Pas	Passive
Pcb	Power quality qualifier bin
Pct	Percent, percentage
Pdm	Power quality demodulation
Pe	Electric Power
Per	Periodic, period
Ph	Phase to reference
Phs	Phase
Phy	Physical

Term	Description
Pi	Instantaneous real power
Pin	Pin
Pipe	Pipe
Pk	Peak
Pl	Plant
Plg	Plug
Pls	Pulse
Plt	Plate; long-term flicker severity
Pmp	Pump
Po	Polar
Pol	Polarizing
Polytr	Polytropic
Pos	Position
Pot	Potentiometer
Prc	Price, pricing
Pre	Pre-
Prec	Precondition, initial status
Pres	Pressure
Prg	Progress, in progress
Prm	Permissive
Pro	Protection
Proc	Process
Proxy	Proxy
Prt	Parts, part
Ps	Positive
Psk	Penstock
Pss	PSS, power system stabiliser function
Pst	Post, short-term flicker severity
Pt	Point
Pth	Pitch
Pwr	Power
Qty	Quantity
Qu	Queue
Qud	Quad
R	Raise, increase
Rad	Radiation
Ral	Rail
Ramp	Ramp
Rat	Ratio
Rb	Runner blade
Rcd	Record, recording
Rch	Reach
Rcl	Reclaim
Rct	Reaction

Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

Term	Description
Rdy	Ready
Re	Retry
React	Reactance, reactive
Rec	Reclose
Rec1	Reclose after single phase fault
Rec13	Reclose after evolving fault
Rec3	Reclose after three phase fault
Recha	Recharge, recharging
Rect	Rectifier
Red	Redundant; (deprecated meaning) reduction
Ref	Reference
Reg	Regulation
Rel	Release
Req	Requested
Res	Residual
Reso	Resonance
Reuse	Reuse
Rf	Refreshment
Ris	Resistance
Rl	Relation, relative
Rm	Mutual resistance
Rmp	Ramping, ramp
Rms	Root mean square
Rn	Rain
Rnbk	Runback
Rng	Range
Rod	Rod
Root	Root
Rot	Rotation, rotor
Rpt	Repeat, repetition
Rs	Reset, resettable
Rsl	Result
Rst	Restraint, restriction
Rsv	Reserve
Rt	Ride-through
Rte	Rate
Rtg	Rating
Rv	Reverse
Rvrt	Revert
Rwy	Runaway, e.g. in runaway speed
Rx	Receive, received
S10	Coefficient S1.0
S12	Coefficient S1.2

Term	Description
SM	Servo, servo-motor
SNL	Speed-no-load, connected but not generating
SOx	Sulphur oxide
SPCSO	Single point controllable status output
SPG	Single point setting CDC
SPS	Single point status CDC
SPl	Single pole/phase
ST	Standard time
Saf	Safety
Sag	Sag
Sar	Surge arrestor
Sat	Saturation
Sc	Short circuit
Scale	Scale
Schd	Schedule
Sco	Supply change over
Sec	Security
Sel	Select
Self	Self
Seq	Sequence
Ser	Series, serial
Set	Setting
Sgcb	Setting group control block
Sh	Shunt
Shar	Shared
Shft	Shaft
Sig	Signal
Sign	Sign
Sim	Simulation, simulated
Sld	Solidity
Slnt	Salinity, saline content
Slp	Sleep; slip
Smok	Smoke
Smp	Sampling
Snd	Sound pressure
Snpt	Snapshot
Snr	Signal to noise ratio
Snw	Snow
Soc	State of charge
Sof	Switch on to fault
Spc	Single point control
Spcf	Specific
Spd	Speed

Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

Term	Description
Spec	Spectra
Spir	Spiral
Spt	Setpoint
Src	Source
Srfc	Surface
St	Status, state
Sta	Station, function at plant level
Stab	Stabilizer
Stat	Statistics
Stc	Stack
Stdby	Standby
Step	Step
Stk	Stroke
Stl	Still, not moving
Stnd	Stand, standing
Sto	Storage, e.g. activity of storing data
Stop	Stop
Storm	Storm
Stow	Stow
Str	Start
Strg	String
Stt	Stator
Stuck	Stuck, cannot move
Sub	Sub
Sum	Sum
Sup	Supply
Sv	Sampled value
SvCBRef	SV control block reference
Svc	Service
Sw	Switch, switched
Swg	Swing
Swl	Power quality event swell
Syn	Synchronisation, synchronous, synchronism, synchrocheck
Sys	System
TP	Three pole/phase
Ta	Armature time constant
Tag	Tag (maintenance work in progress)
Tap	Tap
Task	Task
Td	Transformer derating
Td0p	Td0'
Td0s	Td0''
Tdd	Total demand distortion

Term	Description
Tdf	Transformer derating factor
Tdp	Td'
Tds	Td''
Tech	Technology
Term	Termination
Test	Test
Tgt	Target
Thd	Total harmonic distortion
Thm	Thermal
Ti	Telephone influence
Tilt	Tilt
Tm	Time
Tm1	Time constant 1
Tm2	Time constant 2
Tm3	Time constant 3
Tmh	Time in h
Tmm	Time in min
Tmms	Time in ms
Tmp	Temperature (°C)
Tms	Time in s
Tnk	Tank
Tns	Tension (stress)
Top	Top (position)
Torq	Torque
Tot	Total
Tp	Test Point
Tpc	Teleprotection
Tq0p	Tq0'
Tq0s	Tq0''
Tqp	Tq'
Tqs	Tq''
Tr	Trip (electrical protection function)
Trf	Transformer
Trg	Trigger
Trip	Trip (non-electrical function)
Trk	Track, tracking
Trs	Transient
Ts	Total signed
Tu	Total unsigned
Tun	Tuning
Tur	Turbine
Tx	Transmit, transmitted
Typ	Type
UPS	Uninterruptible power supply

Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

Term	Description
Uhf	Ultra-high-frequency
Un	Un-; under
Unav	Unavailable
Unb	Unbalanced
Unld	Unload
Unt	Unit, production unit
Up	Up, upstream
Urcb	Unbuffered report control block
Use	Use
Used	Used
Usvcb	Unicast sampled values control block
Util	Utility
V	Voltage
V1	Voltage at side 1
V2	Voltage at side 2
VA	Apparent power (volt amperes)
VAh	Apparent energy
VAr	Reactive power (volt amperes reactive)
VArh	Reactive energy
Va	Variation
Vac	Vacuum
Val	Value
Vbr	Vibration
Ver	Vertical
Viol	Violation
Vis	Visibility
Visc	Viscosity
Vld	Valid, validate, validated
Vlm	Volume
Vlv	Valve
Vol	Voltage DC or non-phase-related AC
VolAmpr	Non-phase-related AC reactive power
W	Active power
W200	Watts peak at 200 W/m2
Wac	Watchdog
Wash	Washout
Watt	Active power non-phase-related AC
Wav	Wave, waveform
Wd	Wind

Term	Description
Week	Week
Wei	Weak end infeed
Wet	Wet
Wh	Watt hours
Wid	Width
Win	Window
Wkup	Wake up
Wld	Welding
Wrm	Warm
Wrn	Warning
Wtr	Water (physical aspect: river, cooling, etc.)
Wup	Windup
X	Reactance (imaginary part of impedance)
X0	Zero sequence reactance
X1	Positive sequence reactance
X2	Negative sequence reactance X2
Xd	Synchronous reactance Xd
Xdir	X-direction
Xdp	Transient synchronous reactance Xd'
Xds	Subtransient reactance Xd''
Xm	Mutual reactance
Xq	Synchronous reactance Xq
Xqp	Transient synchronous reactance Xq'
Xqs	Subtransient reactance Xq''
Xsec	Cross-section
Ydir	Y-direction
Yw	Yaw
Z	Impedance
Zer	Zero
Zero	(use 'Zer' instead) Zero
Zm	Mutual impedance
Zn	Zone
Zro	Zero sequence
km	Kilometre
ppm	Parts per million

3.3 Fault classification definitions

Fault classification: contains the categorization of faults, according to their clearance, referred to in this document, as shown in Table 4.

Documents
Document Sharing Hub

Table 4 – Fault types

Fault type	Definitions	Notes
Intermittent	Short fault (< 20 ms) appearing every 100 ms to 200 ms	Given durations are only here as examples
Self extinguishing	Duration < protection response time (no tripping)	
Transient	Eliminated by the fast cycle (cycle 1)	
Semi-permanent	Eliminated by the low cycles of recloser (cycle 2 or cycle 3)	
Permanent	Not eliminated by the recloser cycles	
Evolving	Same as permanent fault but the phases in Str Data Object at the end of the fault are not the same as the phases recorded at the beginning of the fault	
Unknown	Unknown type	Different from the above classification

NOTE These definitions align with the conventional usage of "transient" in text books relating to network protection and automation and with the following terms:

- [IEC 60050-614, 614-02-09]

  transient insulation fault

  an insulation fault which only temporarily affects a device's dielectric properties which are restored after a short time
- [IEC 60050-614, 614-02-12]

  intermittent insulation fault

  a transient insulation fault which recurs repeatedly in the same place and due to the same cause
- [IEC 60050-614, 614-02-08]

  permanent insulation fault

  a fault which affects a device and prevents its restoration into service until action has been taken at the point of the insulation fault
- [IEC 60050-614, 614-02-10]

  self-extinguishing insulation fault

  an insulation fault where the arc extinguishes without it being necessary to disconnect the device from the electric power system for its essential dielectric properties to be restored

4 Requirements and use cases

4.1 General

The objective of Clause 4 is to go down to the general high level requirements of information exchanges between a Fault Passage Indicator, as defined in IEC 62689-1 and IEC 62689-2 and the rest of the Distribution Automation Systems (DASs).

These requirements are expressed under the form of use cases as recommended by IEC 62559-2.

The main considered use cases will strictly follow the functional breakdown expressed in IEC 62689-1, and summarised below:

<u>Fault identification and report:</u>

- F1, Fn (refer to FPI function classes – as defined in 62689-1)

<u>Other functions:</u>

Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

- Report on device health
- Monitor substation environment (not developped yet)
- Monitor external communication (not developped yet)
- Monitor energy flow
- Contribute to distributed automatic FLISR
- Contribute to distributed automatic VVC (not developped yet)
- Contribute to distributed DER management

Product life cycle

- IED configuration via CID file

These high level requirements will serve as a starting point for function and data modelling leading to propose new LNs, and/or extension of new LNs with new data objects for the FPI (as expressed in Clause 6), which may feed the IEC 61850-90-6 namespace, when integrated into the corresponding Technical Report.

4.2 Common actors

4.2 and specifically Table 5 contains the list of the actors commonly used in this document. If additional (and specific) actors are needed in the description of the use case, they will be described in the corresponding sublcause dedicated to the given use case.

Figure 1 helps better understanding the global hierarchy of the proposed list of actors, and discreminating between high level actors such as system, persons, devices, application type of actors.

Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

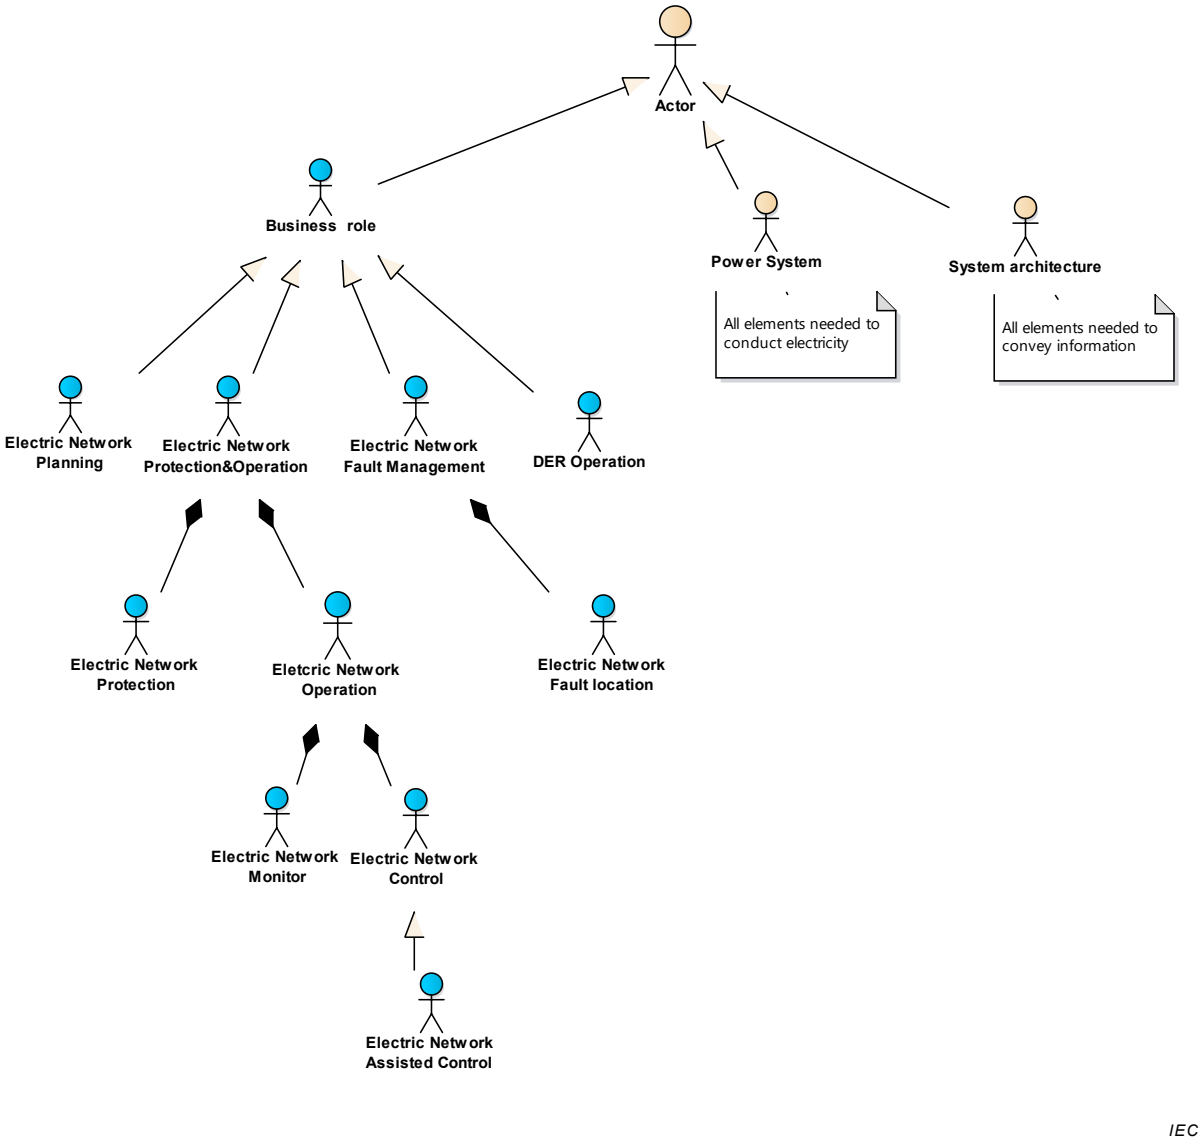

Figure 1 – Actors global hierarchy

Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

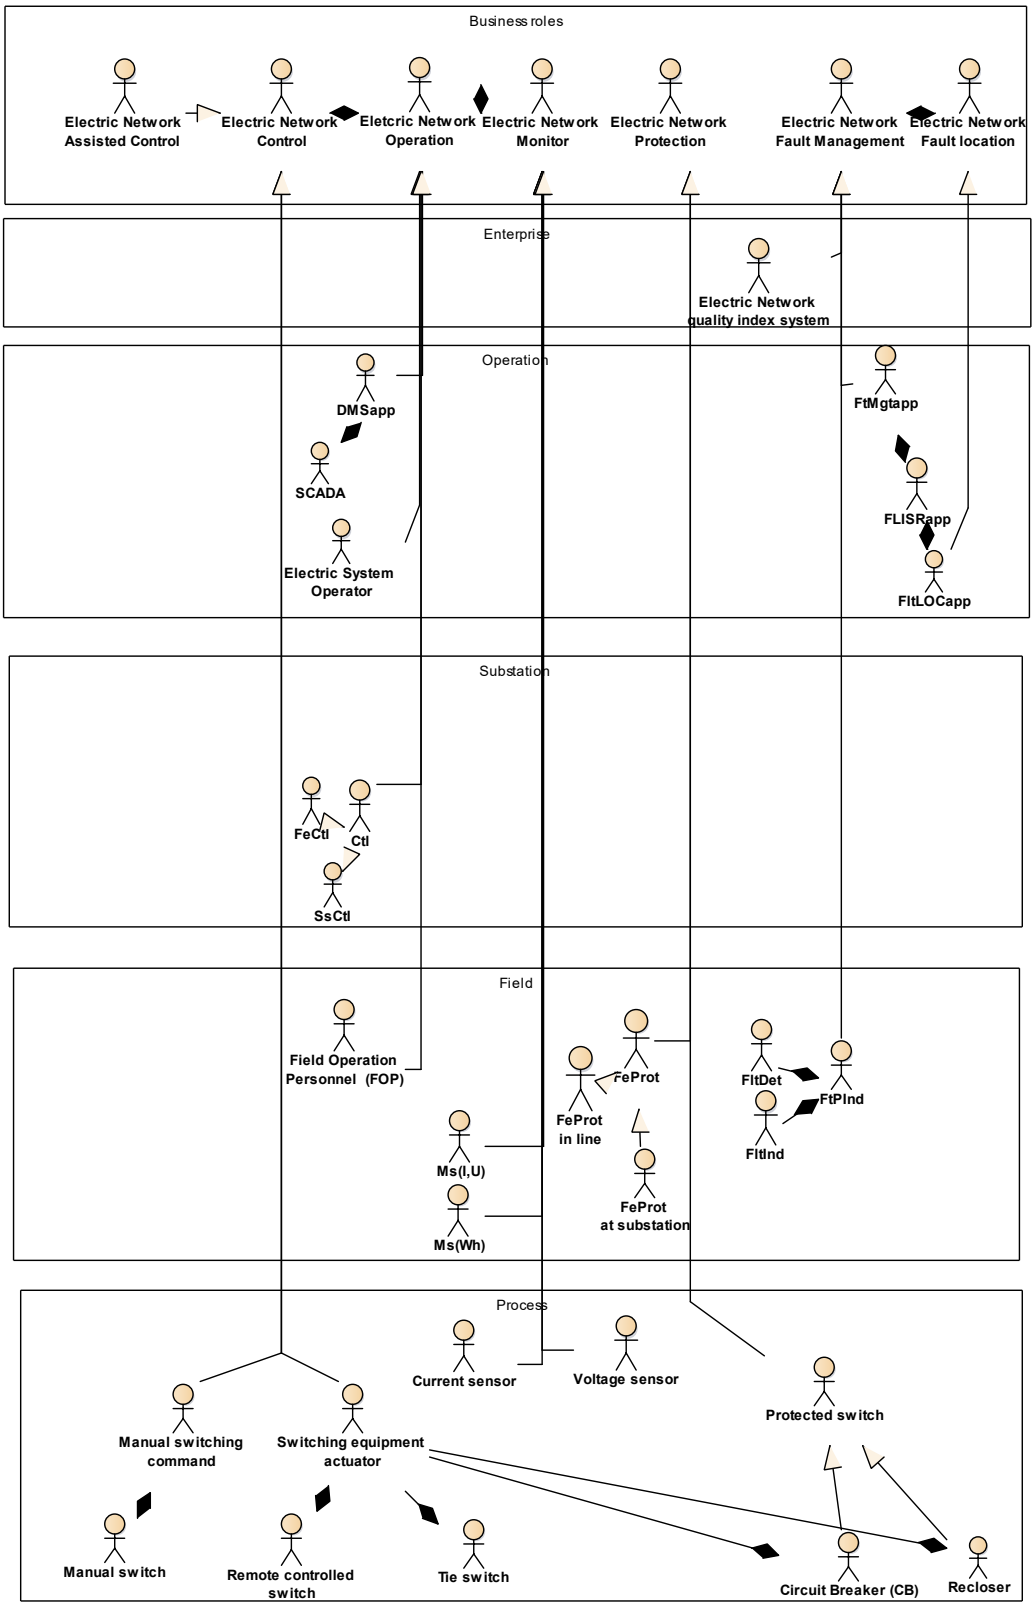

Figure 2 – System Actors SGAM positioning (function)

Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

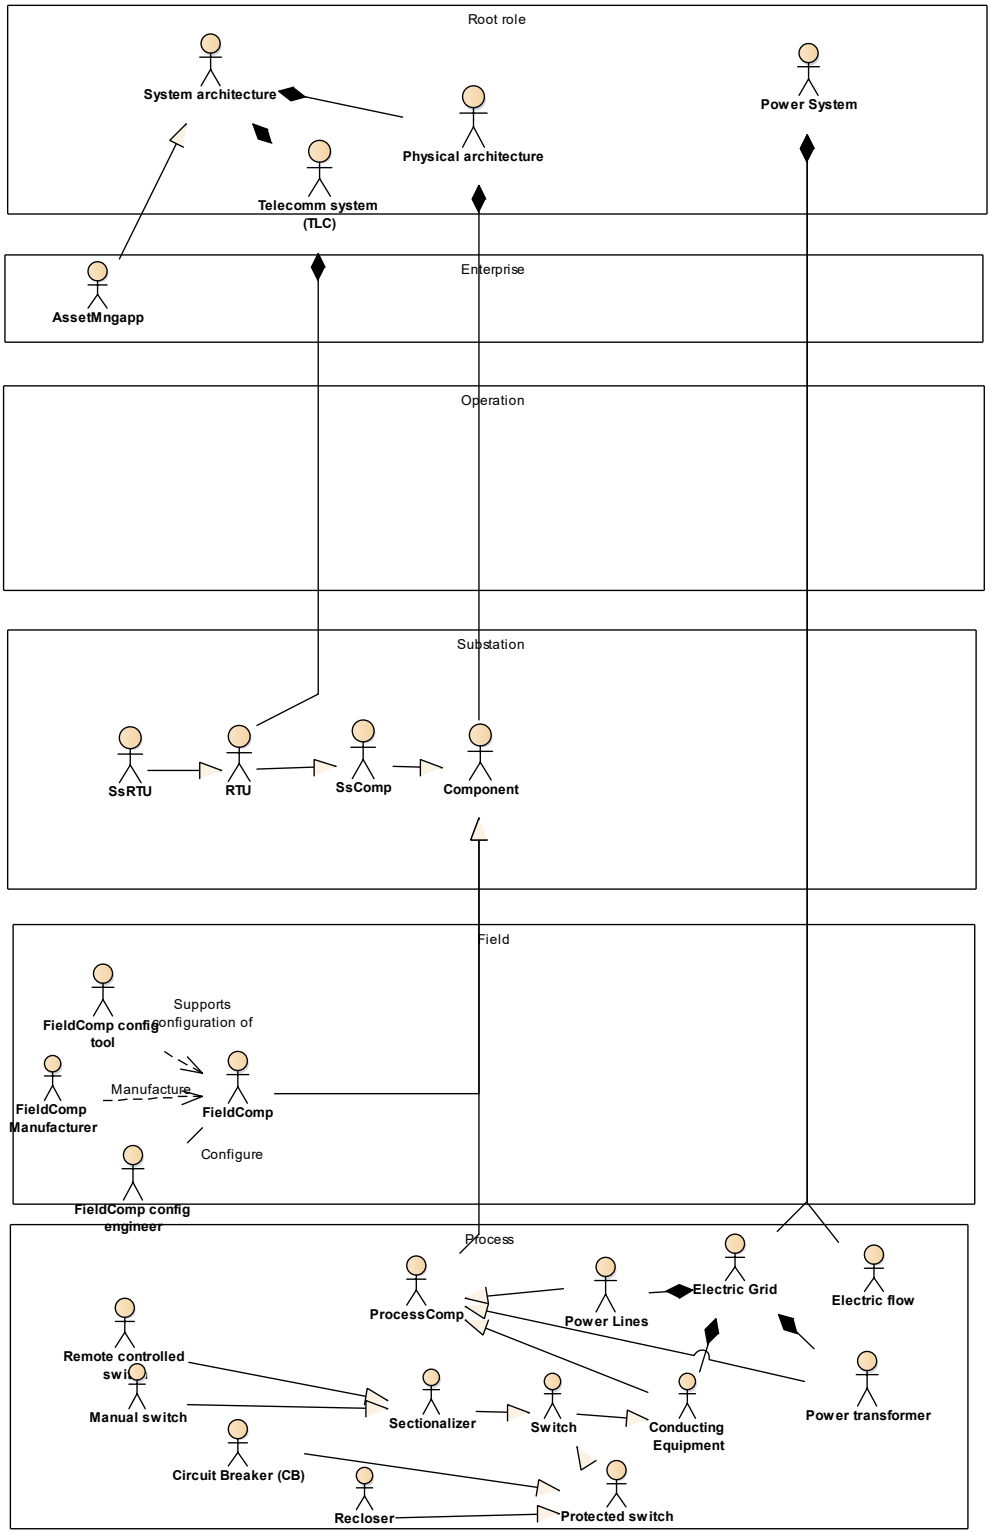

Figure 3 – System Actors SGAM positioning (not function related)

The "system architecture" tree, depicted in Figure 3, designates the "boxes" and "wires" which are used to make the system running. These boxes host a set of functions described in Figure 2, and "wires" support “exchanges” between boxes.

In our case, we focus mostly on components located on the field. For a selected geographical area, a first class at substation level "Component" designates the upper parent class of any of

Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

such component (hosting for example the longitude/latitude/altitude). Then they are sorted in 3 sub-families:

- SsComp -> the one located at "substation zone" such as RTU, Substation controller;
- FieldComp -> the one located at "field zone" such as protection relay, power meters;
- ProcessComp -> the one located at "process zone" such as switchgear, breakers, transformers, lines.

Table 5 – List of common actors

Actors			
Actor Name	**Actor Type**	**Actor Description**	**Further information**
Autorecloser (AR)	System field	Function which is located in the field along the feeder to protect the downstream assets by eliminating fault current and having communicating capability to indicate trip conditions to upper levels. This device includes the protection detection function and the recloser function. It also has the ability to be remotely controlled to re-energise the protected feeder.	Electric Network Protection&Operation [field-process]…autorecloser
Controller at distribution substation	System substation	Controller function installed at the substation level which communicates with both the field devices and the control centre. FLISRapp may be implemented at the substation computer as an option.	Electric Network Assisted Control [substation]…controller … substation …distribution
DER Management System (DERMS)	System	The DER MS provides the DER-type-independent communication interface for the communication to the DMS. It forwards the information coming from the DER unit and executes the commands from the DMS.	DER Operation [operation-field]
DER Unit	System process	Distributed energy resources. A DER Unit consists of the physical equipment to generate, store and consume electrical power.	Power system [process]/DER [process]
DER Unit Controller (DERCTL)	System Field	Distributed energy resources. A DER Unit consists of the physical equipment to generate, store and consume electrical power.	DER Operation [field]
SysOp	People	Person who monitors network and identifies the need for and performs or contributes to perform remote operation such as required switching using the FLISRapp Application, or trigerring VVC	Electric Network Operation [Operation]…distribution grid
DMS application module (DMSapp)	System Operation	Refer to IRM. It represents the aggregation of Network Operation, Fault Management, and many others DMS System feature hosted at control centre level that monitors continuously the Grid network and based on a given network topology reflects the energy path and flows.	Electric Network Operation [operation]
Electric Grid	System process	Represent the set of equipment of a distribution feeder including lines, DER, loads, interconnections, switching equipment and voltage transformers.	Power system [process]… distribution … feeder
Electric Network Fault management	System operation	Refer to IRM	Electric Network Fault Management [operation]

AVA Documents
Document Sharing Hub

Actors			
Actor Name	**Actor Type**	**Actor Description**	**Further information**
Electric Network Planning (Planning)	System enterprise	Refer to IRM	Electric Network Planning [entreprise]
Electric Network quality index system (QIS)	System enterprise	System which collects outage data for reporting to Utility Commissions	Electric Network Fault Management [enterprise]…Network quality logger
Electric System operator (SysOp)	People	Person who monitors network and identifies the need for and performs or contributes to perform required switching using the FLISRApp Application	Electric Network Operation [operation]
Electrical measurement(Ms(I,U))	System field	Function that elaborates electrical measurement such as I, U, P, Q, PF, etc.	Electric Network Protection/Electric Network Operation [field-process]…Electrical measurement
Energy counting for operation (Ms(Wh))	System field	Function that elaborates energy counting (for operational purpose)	Electric Network Protection/Electric Network Operation [field-process]…Energy counting
Power Flow direction computation(Ms(power flow direction))	System field	Function that elaborates the direction of power flow: foreward – from supply or backward – to supply (for operational purpose)	Electric Network Protection/Electric Network Operation [field-process]… Power Flow direction computation
Fault Indicator(FtInd)	System field	Function that identifies the presence of a fault on the Grid.	Electric Network Protection/Electric Network Operation [field-process]…Fault indication
Fault location application module (FtLOCapp)	System operation	Fault location module of a FLISRapp	Electric Network Fault location [operation]…FLISR application module … fault location
Fault Passage indicator at feeder level (FtPInd)	System field	Function located along the feeder and capable of detecting and indicating a fault. It includes the needed sensors to perform the function.	Electric Network Fault location [field-process]…fault detector … feeder
Fault signature detection (FtDet)	System field	Function that detects and reports on fault presence (including the update of concerned statistics)	Electric Network Protection/Electric Network Operation [field-process]…Fault signature detection
Electric Network Fault management application module (FtMgtapp)	System operation	Application module which manages or help managing network faults impact and resolution (usually part of an Outage Management application module)	Electric Network Fault Management [operation]…Fault Management application module
Feeder equipment controller (FeCtl)	System substation	Feeder equipment controller located along a feeder, and helping controlling either feeder switching equipement, and possibly a set of equipement connected to the feeder at this connection point (such as a MV/LV transformer, and a LV switchgear)	Electric Network Operation [substation-field]…feeder substation, feeder equipement
Substation controller (SsCtl)	System substation	Susbtation controller helping controlling any equipement, located in a selected substation (such as a HV/MV transformer, HV incomers, MV feeders)	Electric Network Operation [substation-field]… substation, substation equipement

AVA Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

Actors			
Actor Name	**Actor Type**	**Actor Description**	**Further information**
External environment	System	Groups many external element like weather conditions, flooding conditions, live presence status, geographical perimiter status (doors, etc.)	??
adjacent Feeder equipment controller (Adjacent FeCtl)	System substation	Feeder equipment controller located adjacent to a specific other feeder equipment controller, i.e whose attached switching equipement are sharing a same line segment.	Electric Network Operation [substation-field]…feeder substation, feeder equipement…adjacent to()
Feeder equipment controller downstream to fault (Downstream FeCtl)	System substation	Feeder equipment controller located along a feeder, and speciifcally located downstream to a fault.	Electric Network Operation [substation-field]…feeder substation, feeder equipement…downstream to fault
Feeder equipment controller upstream to fault (Upstream FeCtl)	System substation	Feeder equipment controller located along a feeder,and speciifcally located upstream to a fault.	Electric Network Operation [substation-field]…feeder substation, feeder equipement…upstream to fault
Feeder Protection equipment at feeder end substation (FeProt at end substation)	System field	A Feeder Protection equipment located at the other end of the feeder.	Power system [process]/Electric Network Protection [field-process]…Protection equipment .. Feeder protection equipement… at feeder end substation
Feeder In Line Protection equipment (FeProt in line)	System field	A Feeder Protection equipment located within the feeder	Power system [process]/Electric Network Protection [field-process]…Protection equipment .. Feeder protection equipement… in line
Feeder Protection equipment at main substation (FeProt at main substation)	System field	A breaker-type equipement associated with a protection function, located at the main substation to protect an outgoing feeder. It may have communication capability to indicate trip conditions to upper levels. It may also have the ability to be remotely controlled (closed) to re-energise the feeder. It may as well have an autoreclosing function.	Power system [process]/Electric Network Protection /Electric Network Operation[field-process]…Protection equipment .. Feeder protection equipement… at main substation
Feeder Protection function at substation (FeProt at substation)	System field	A function located in the substation that trips a breaker to eliminate fault current in a feeder. It may also reclose the breaker when a preconfigured delay time is expired after the breaker is tripped.	Electric Network Protection /Electric Monitor & control[field]…Protection function … Feeder Protection function
General Protection function at end-user side (GeneralProt-eu)	System field	A function located at the connecting point of the End User in charge of clearing faults inside its premise.	Electric Network Protection /Electric Monitor & control[field]…Protection function … Feeder Protection function
Generator Interface protection function (GeneratorInterfaceProt-eu)	System field	A function(s) which are located inside the End User power plant in charge of tripping to disconnect the generators in case of faults in the distribution network.	Electric Network Protection /Electric Monitor & control[field]…Protection function … Feeder Protection function

AVA Documents
Document Sharing Hub

Actors			
Actor Name	**Actor Type**	**Actor Description**	**Further information**
Generator Interface disconnection function (GeneratorInterfaceDisconnect-eu)	System field	A function(s) which are located inside the End User power plant in charge of discoonecting the generators when the GeneratorInterfaceProt -eu trips.	Electric Network Protection /Electric Monitor & control[field]…Protection function … Feeder Protection function
Field level physical component (FieldComp)	System susbstation	IEC 61850 physical component of a selected system	System Architecture.. Components [substation-process].. Physical component .. Field
Field level physical component configuration engineer (FieldComp config engineer)	People	Person who is in charge of using a Field level physical component configurator	System Architecture.. Components [substation-process].. Physical component configurator .. Configuration engineer
Field level physical component configurator (FieldComp config tool)	System susbstation	Configurator of an IEC 61850 physical component of a selected system	System Architecture.. Components [substation-process].. Physical component configurator .. Field
Field level physical component setting tool (FieldComp setting tool)	System susbstation	Tool used to enter field parameter settings for an IEC 61850 physical component of a selected system	System Architecture.. Components [substation-process].. Physical component setting tool .. Field
Field level physical feeder sub-system configurator (FieldSyst config tool)	System operation	Configurator of a subsystem made of IEC 61850 physical components including potentially many substation/equipment of a selected feeder or a set of feeders	System Architecture.. Feeder sub-system [operation-process]
Field Operation Personnel (FOP)	People	Person who is activated by people/systems in charge of monitoring network. He performs the required switching operation in filed using the outcome of an overall FLISRapp.	Electric Network Operation [substation-process]
FLISR application module (FLISRapp)	System operation	Application module that performs Fault Location, Isolation and Service Restoration at network operation level	Electric Network Fault location [operation]…FLISR application module
New Field level physical component	System susbstation	New IEC 61850 physical component of a selected system	System Architecture.. Components [substation-process].. Physical component .. Field ..new
ProcessComp	System process	Any physical component (asset, such as switch, breaker, transformer, lines, etc) located at “process zone level”. It enables hosting the common properties such physical asset has, such as a physical nameplate, a volume, a location, an age, etc.	System Architecture.. Components [substation-process].. Physical component .. Process
Power Transformer Tap	System process	Taps actuator on transformer windings that change the turns ratio of the transformer	Power system [process] Electric Network Operation rocess]… Power transformer .. Tap
Remote terminal at Substation (Substation RTU)	System substation	Gateway function with the capability of receiving or sending data/control from or to an external source (for example, electronic multifunction meters, digital relays, controllers), ensuring the interface of a substation of field equipment to the remote world. This device may be either a function included in other devices and/or a specific device including	Electric Network Operation [substation].. .gateway … remote terminal

Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

Actors			
Actor Name	**Actor Type**	**Actor Description**	**Further information**
		also the so-called Remote Terminal Units.	
Sectionalizer	System process	Function located along the feeder – sectionalizers/sectionalizing autoreclosers, and switches.	Power system [process]/Electric Network Protection&Operation [process]…sectionalizer
Service Restoration Controller （SRC）	System operation	The function that controls the service restoration of downstream healthy functions of a fault. This function internally gets the support of the role "Operation Planning – switching action scheduling" to estaliblish the switching sequence – this may have been predefined at configuration	Electric Network Assisted Control [operation] …
Shunt Capacitor Switching equipment	System process	Switches associated with shunt capacitors. They can operate automatically through remote communications from the control center, or manually by the field crew.	Power system [process]/Electric Network Operation [field-process]…switching equipement … capacitor shunt
Switching equipment actuator	System process	Primary equipment switches which are located along the grid lines to enable the operator or the system to isolate faulty section. They can be manually operated or remotely/locally operated through the FSCs. In this use case we will restrict our analysis to remotely controllable switches.	Power system /Electric Network Operation [process]…switching equipement …actuator
Switching equipment as Tie switch	System process	A special normally open tie point device function, which is able to sense voltage presence on both sides of its current interrupting mechanism. It also includes the logic to close the interrupting mechanism either automatically upon loss of voltage on one side, or through communication control command. This function can be implemented with recloser, sectionalizer or switch.	Power system [process]…switching equipement (Tie)
Tie switch equipment actuator	System process	Actuator od a Switching equipment operated as a Tie switch	Power system /Electric Network Operation [process]…switching equipement (Tie) …actuator
Voltage presence indicator (VPIind)	System field	A device that indicates the presence of voltage over a certain limit on the measured point. It includes the needed sensors to perform the funciton	Electric Network Fault location [field-process]…voltage detector
VVC application module (VVCapp)	System operation	Application that performs voltage and var control. It determines optimal settings for capacitors and voltage regulators, and either applies them directly to the devices or recommends them to the DSO for approval.	Electric Network Assisted control [operation]…VVC application module

Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

4.3 Use cases: fault indication and report

4.3.1 Generic use case – Not fault type specific

4.3.1.1 Description of the use case

4.3.1.1.1 General

Fault passage indication (FtPInd) is the main purpose of proper devices indicated as Fault passage indicator (FPI) or distribution substation unit (DSU), depending on their performances, which are, respectively, a device or a device/combination of devices and/or functions able to detect faults and provide indications about their localization.

Therefore, fault passage indication (FtPInd) is made of two sub-functions:

- **Fault detection**: detecting abnormal behavior of the grid (usually through predefined fault signatures);
- **Fault indication**: based on different conditions, identifies the type of the fault and exposes it to different types of consumer of information. Optionaly elaborates statistics on faults.

When a fault occurs on the network, the FtPInd needs to detect and identify such fault. Once the fault is identified and possibly confirmed, the FtPInd needs to report to external local or remote components information related to this fault, to allow fault clearing and possible supply restoration, as well as counting fault occurrence based on different criteria.

4.3.1.1.2 Name of the use case

Use case identification		
ID	**Domain(s)**	**Name of the use case**
	Distribution automation	Fault identification and report

4.3.1.1.3 Version management

Version management						
Version management changes / version	**Date**	**Name author(s) or committee**	**Domain expert**	**Area of expertise / domain / role**	**Title**	**Approval status ()**
First version in IEC template	24/08/15	JAHWG51				Draft

4.3.1.1.4 Scope and objectives of the use case

Scope and objectives of use case	
Related business case	Distribution System Operation
Scope	The Distribution Automation (DA) system with the help (or not) of the Operator identifies and locates a fault in a feeder of a radially operated network.
Objective	Contribute to minimise the duration of the supply interruptions. Improve the continuity of service for users connected in MV or LV, by reducing the overall process of fault isolation thanks to automation, therefore reducing the number of customer minutes lost due to outages.

Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

4.3.1.1.5 Narrative of the use case

Narrative of the use case
Short description
The fault detection process (and possible FLISR) is described considering both only local fault indication and different kinds of extra-substation communication, according to FPIs communication classes described in IEC 62689-1. Different types of faults (short circuits, earth faults, etc.) are not considered explicitly, the fault is a generic one. Possible automatic reclosing cycles are not considered in this generic use case.
Complete description
The Fault detection and indication functionalities are (optionally) preliminary set (e.g. by the Field operation personnel). The monitoring of the power system is constantly performed also by the FtPInds located on the radially operated power system under focus. A fault on the power grid can be Permanent or Fugitive. The involved FtPInds (located upstream to the fault) detect the fault signature and indicates to the Field operation personnel or/and to the FtMgtapp, according to its communication class, the information that such fault signature was observed. The Field Operator and the FtMgtapp have the information to perform the further (out of the scope) Fault Isolation and System Restoration actions. The fault event may be reported to the Quality index system to contribute to the quality index calculation.

4.3.1.1.6 General remarks

General Remarks
This use case describes the function of Fault Identification, Location and Report in a network which feeders are radially operated without any MV/MV autotransformer. Currently the use case does not consider the presence of DER. This use case assumes that the feeder has at least one FtPInd located upstream to the fault. The use case applies to feeders with sections of overhead line or underground cable or a mixture of both types.

4.3.1.2 Diagrams of the use case

For the sake of simplifying the diagram, the Quality index system (refer to 4.2) is not represented in Figure 4 to Figure 8. Basically any fault event received by the FtMgtapp should also be received by the Quality index system (refer to 4.2).

Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

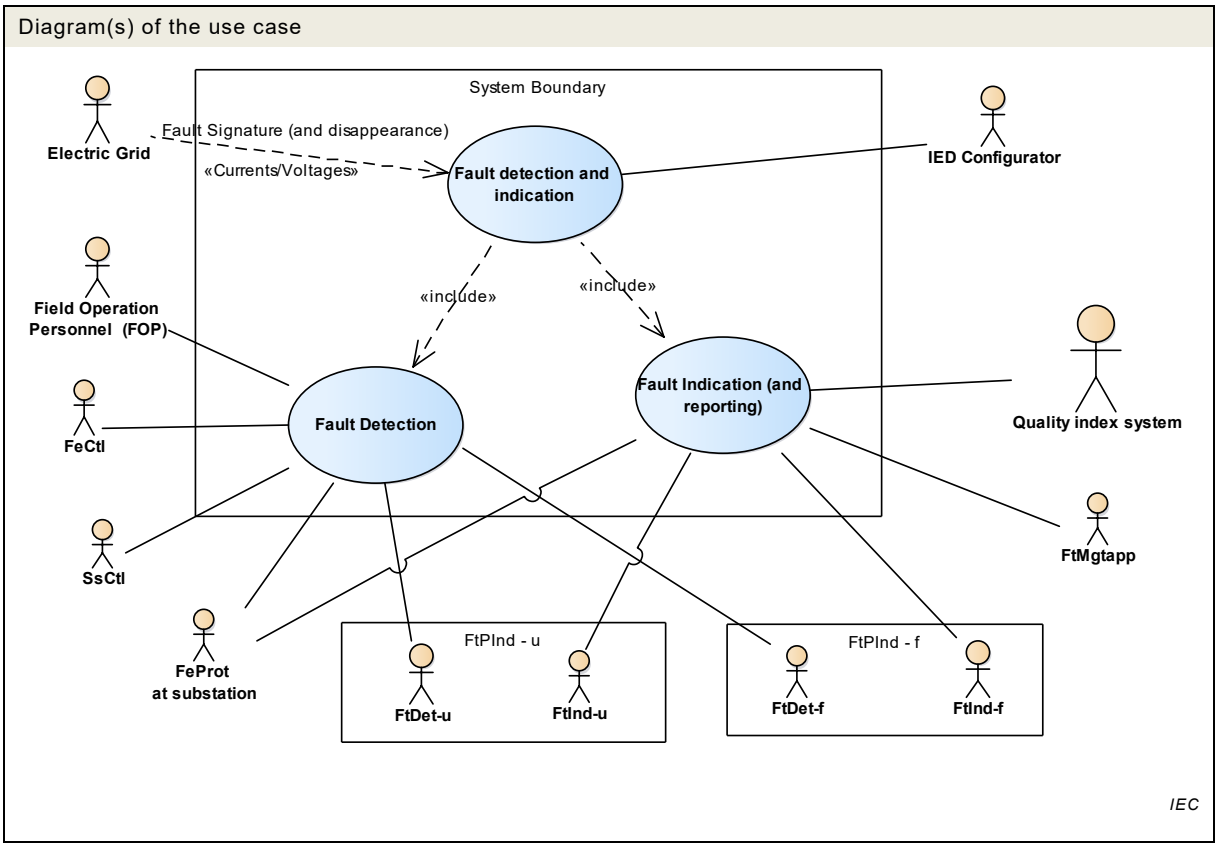

Figure 4 – Fault indication – Main use case

Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

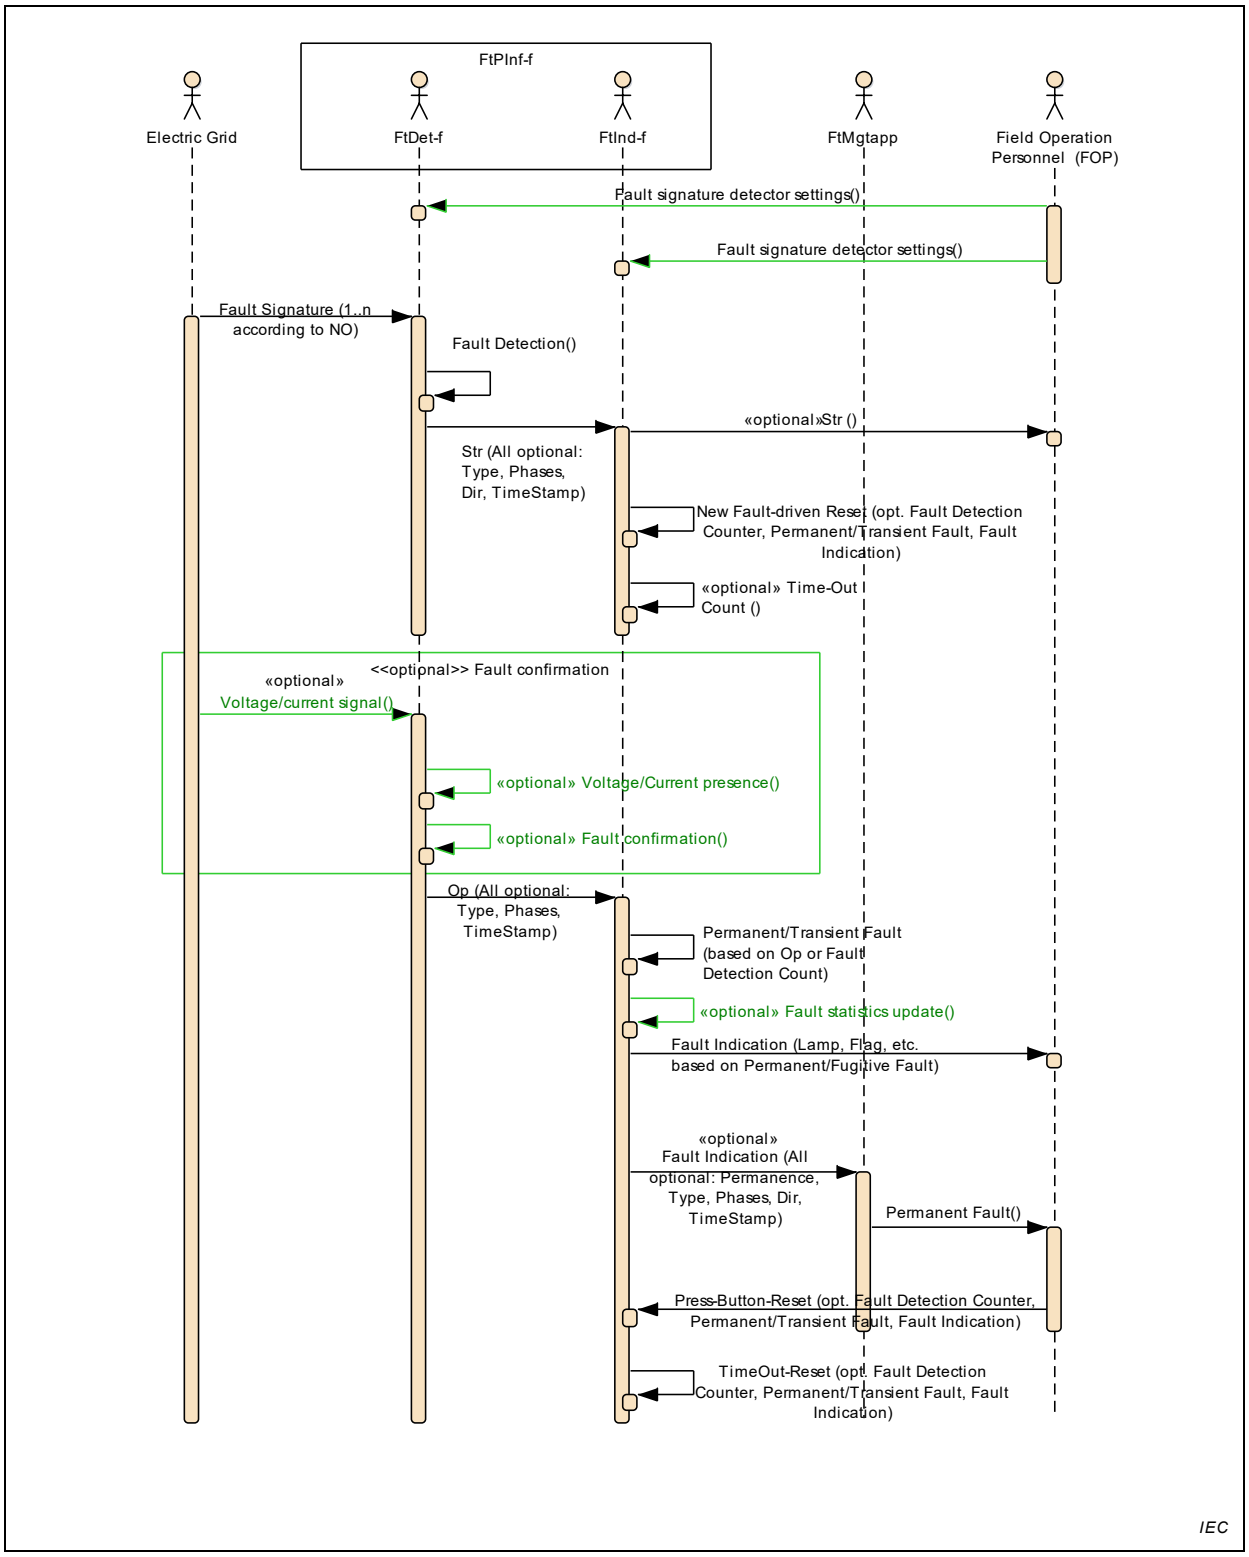

Figure 5 – Fault detection and indication – T1

Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

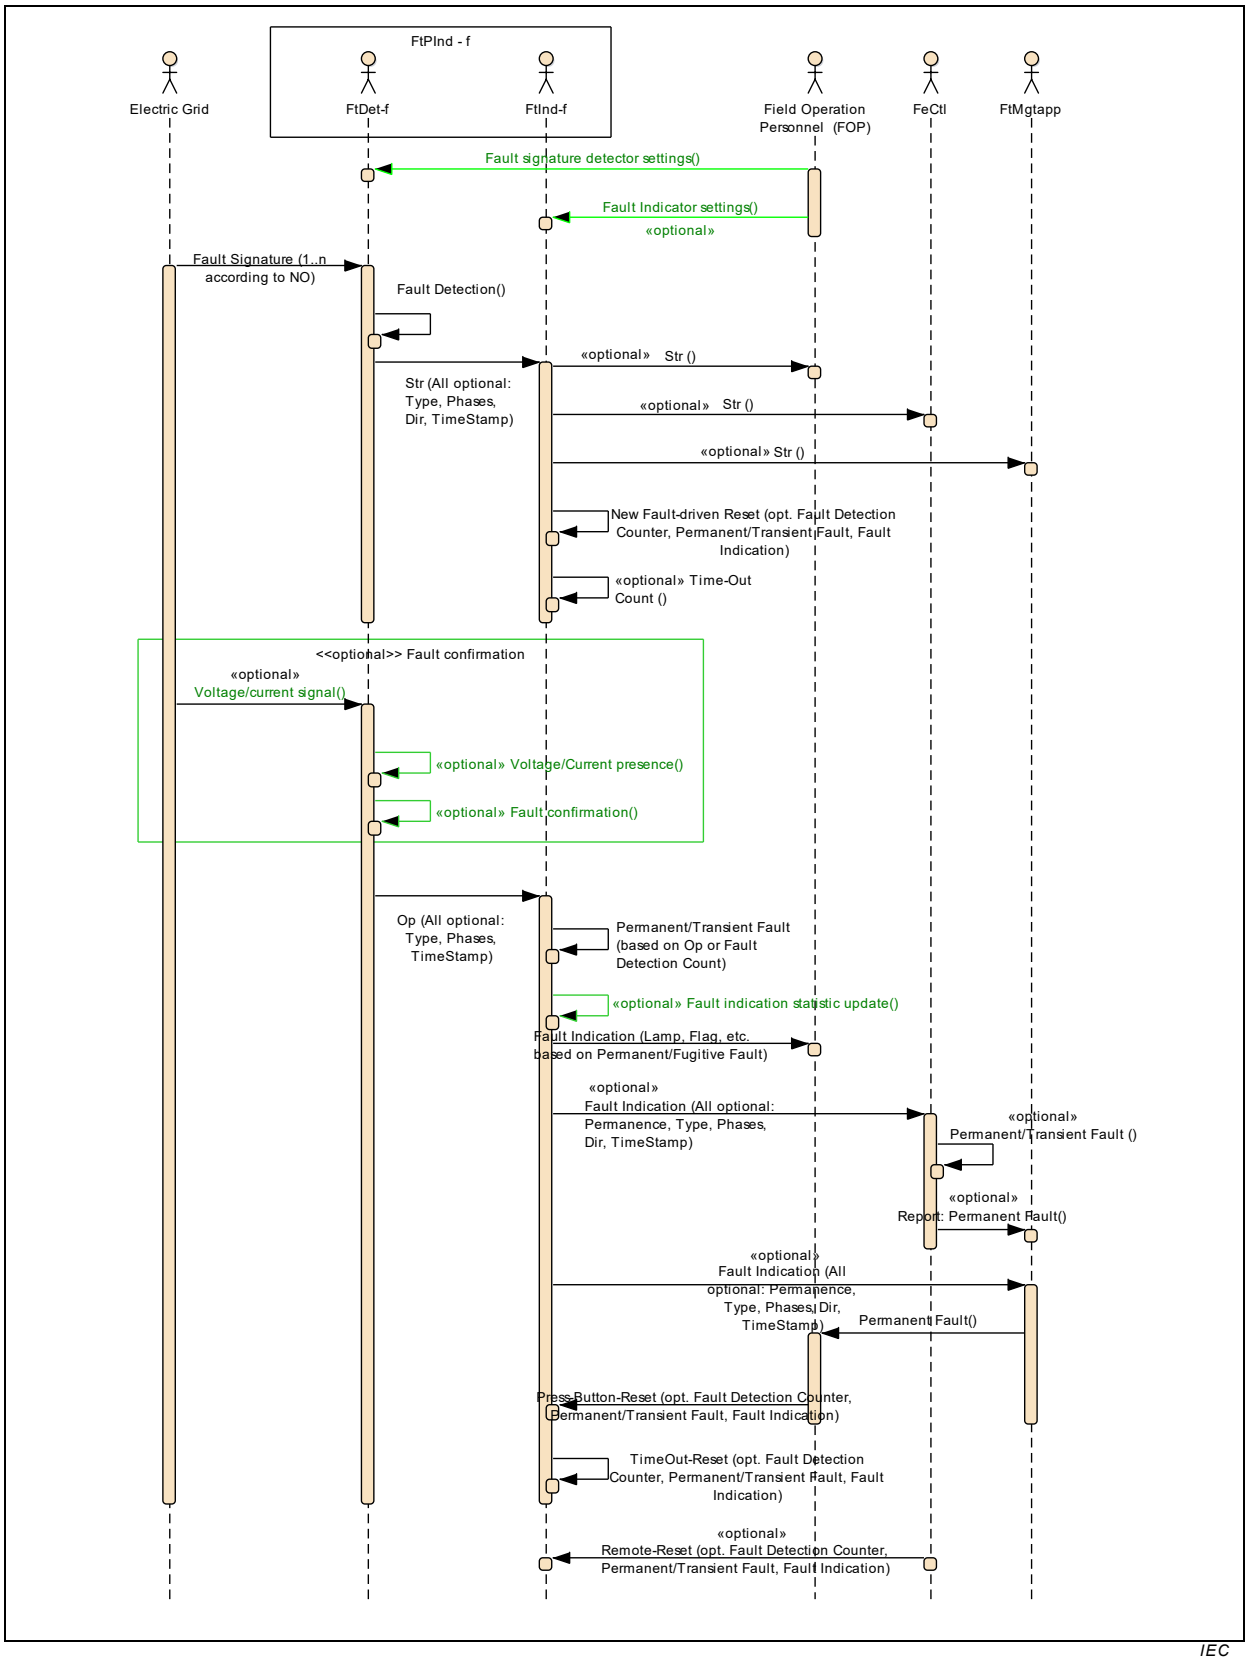

Figure 6 – Fault detection and indication– T2

Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

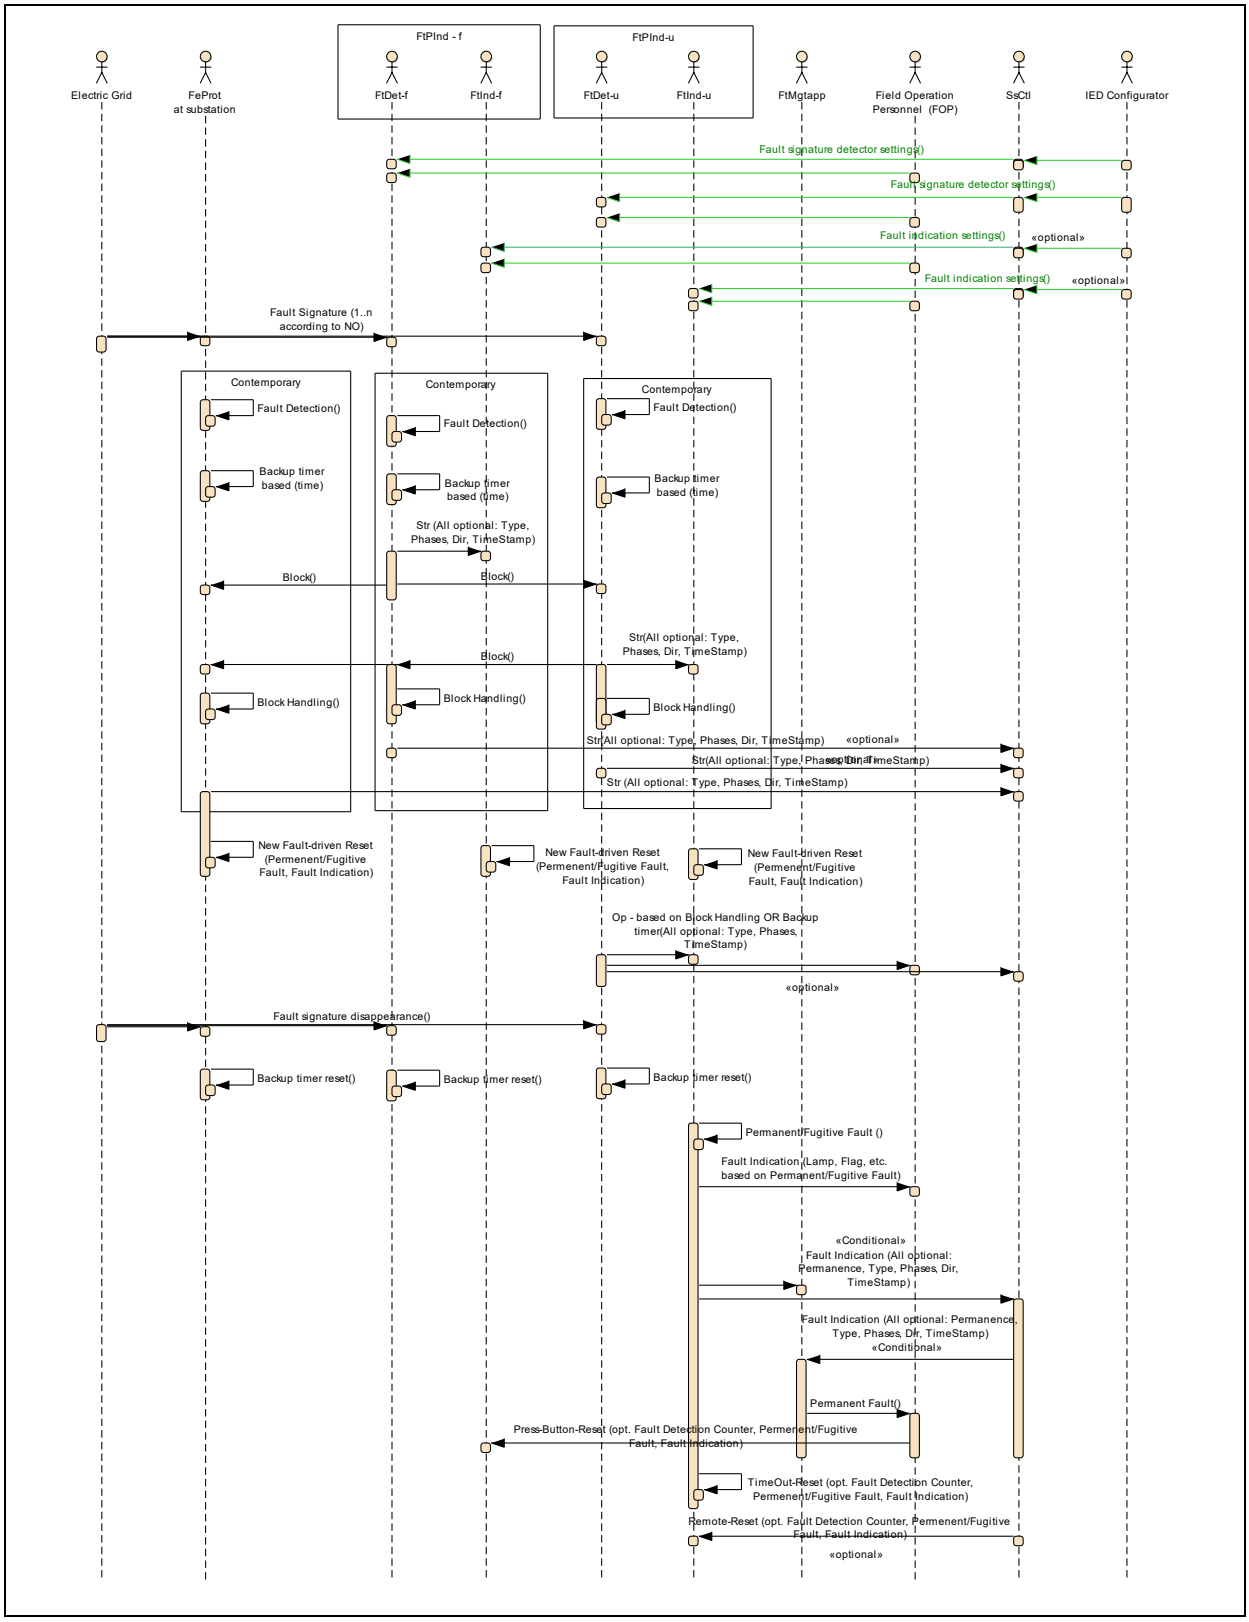

IEC

Figure 7 – Fault detection and indication for FPI – T3,T4 (with communication to HV/MV SS) in the context of FLISR as described in 4.4.5

Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

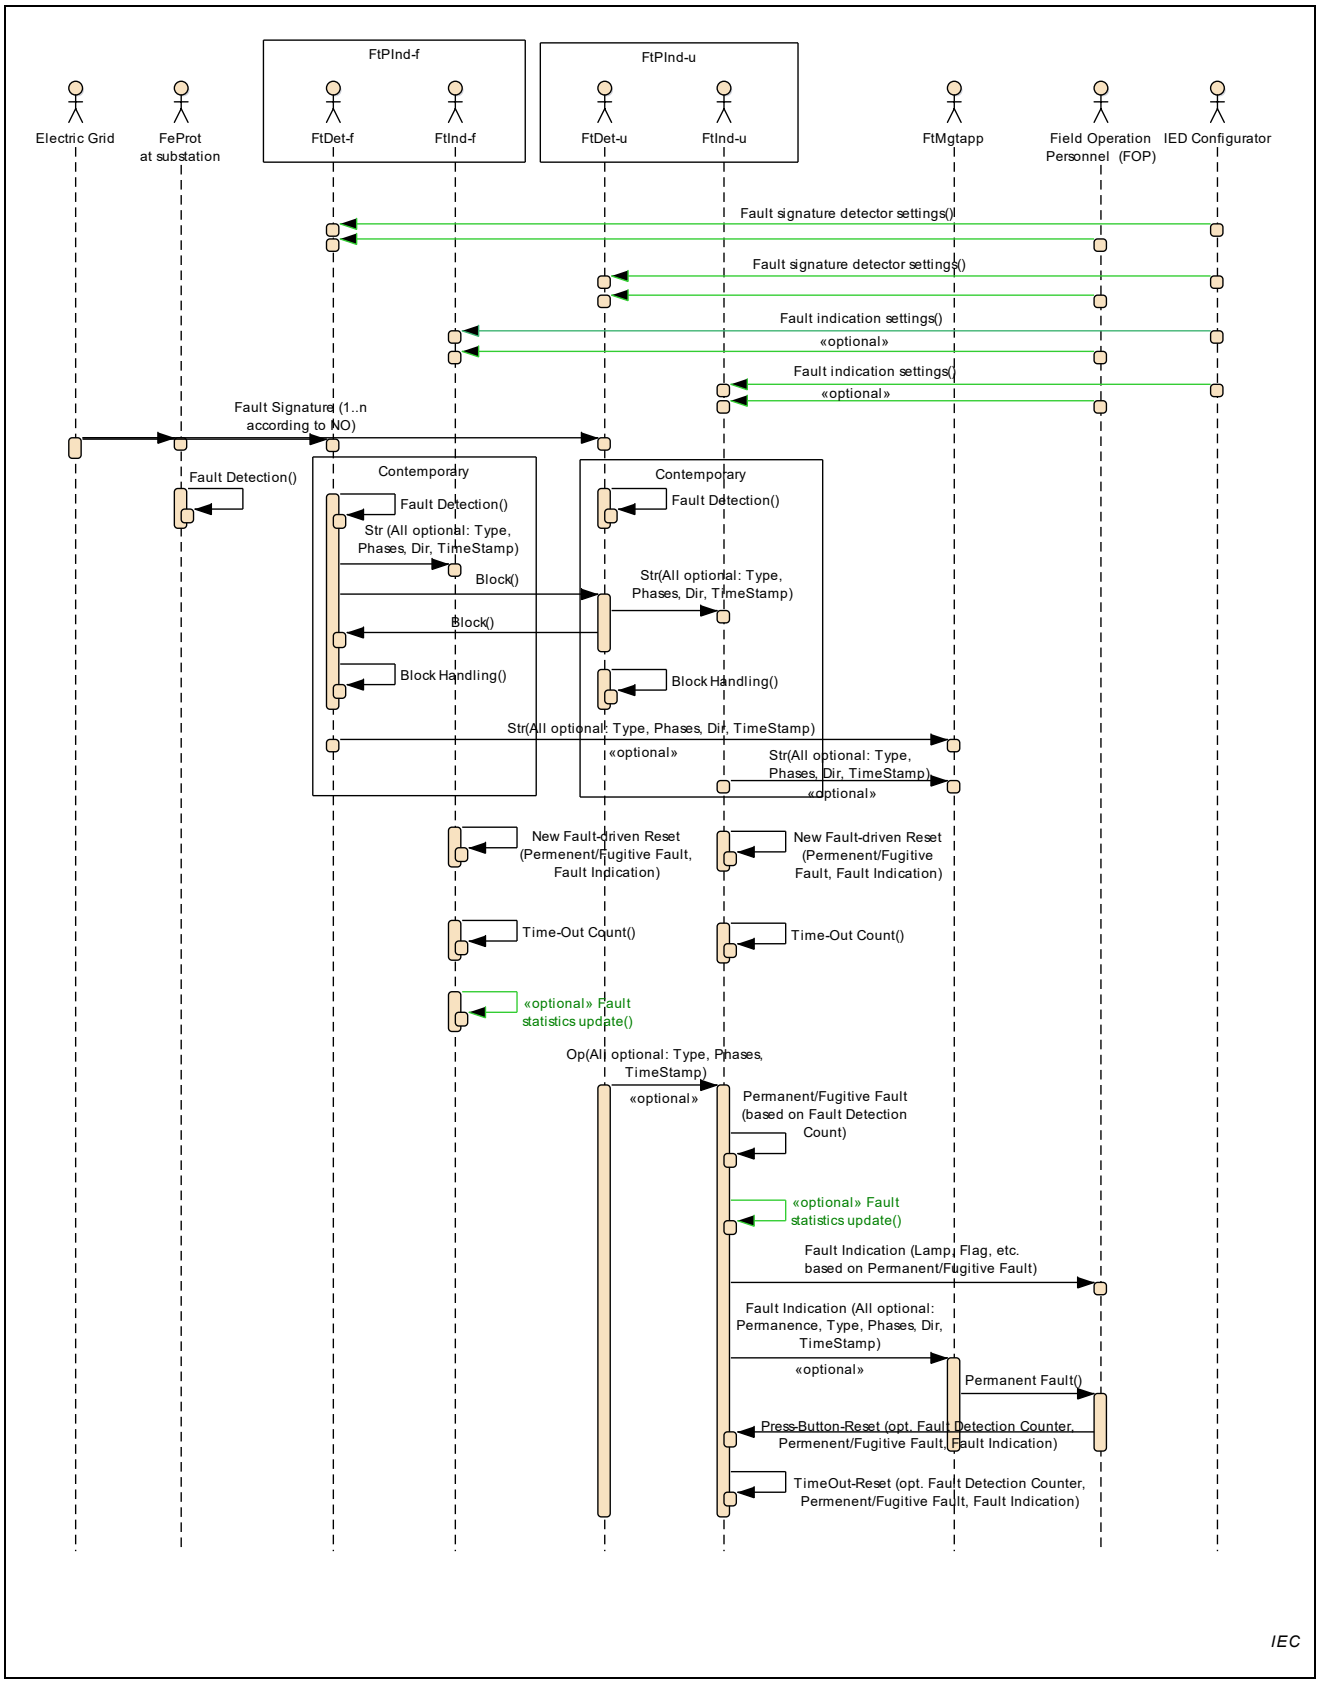

Figure 8 – Fault detection and indication for FPI – T3,T4 (without communication to HV/MV SS) in the context of FLISR as described in 4.4.5

Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016

4.3.1.3 Technical details

4.3.1.3.1 Actors: people, systems, applications, databases, the power system, and other stakeholders

Actors			
Grouping (community)		Group description	
Actor name See actor list	Actor type See actor list	Actor description See actor list	Further information
Electric Grid	System	Refer to 4.2	
FeProt at main substation	Device	Refer to 4.2	
FtPInd	Device	Refer to 4.2	
FtInd	Device	Refer to 4.2	
FtDet	Device	Refer to 4.2	
Field operation personnel (FOP)	Person	Refer to 4.2	
RTU	Device	Refer to 4.2	
DMSapp	(System) Application	Refer to 4.2	
Quality index system	(System) Application	Refer to 4.2	
FtMgtapp	(System) Application	Refer to 4.2	
Fault Location	(System) Application	Refer to 4.2	

4.3.1.3.2 Preconditions, assumptions, post condition, events

Use case conditions			
Actor/system/ information/contract	Triggering event	Pre-conditions	Assumption
DMSapp	Continuous		The Grid is continuously monitored The Grid topology is known and reflects the real topology The Grid energy path is known and reflects the real path (effective status of remote monitored and controllable switches).
Grid	Fault		The Grid is reacting in presence of the fault
FtLOCapp	Fault detection autorecloser operation		The application that performs fault indication and reporting (location) is activated by the fault detection. The application may operate autonomously using local signals or/and with the support of communication network (client-server or peer to peer). If communication is used, enough energy storage shall be available.
FeProt at main substation	Fault detection		The application that performs fault location for the indication and reporting is activated by the fault detection. The application may operate autonomously using local signals or/and with the support of communication network (client-server or peer to peer). It is assumed that enough energy storage is available.
FtPInd	Overcurrent/earth faults/over-undervoltage, etc		Backup power/battery shall be available for operation and communications.
Setting for directional detection	N.A.		These parameters are included in the protection settings

Documents
Document Sharing Hub
Full document details: PD IEC/TR 62689-100:2016