PD IEC TR 63377:2022

BSI Standards Publication

Procedures for the assessment of human exposure to electromagnetic fields from radiative wireless power transfer systems — Measurement and computational methods (frequency range of 30 MHz to 300 GHz)

Documents
Document Sharing Hub

Full document details: PD IEC TR 63377:2022

National foreword

This Published Document is the UK implementation of IEC TR 63377:2022.

The UK participation in its preparation was entrusted to Technical Committee GEL/106, Human exposure to low frequency and high frequency electromagnetic radiation.

A list of organizations represented on this committee can be obtained on request to its committee manager.

Contractual and legal considerations

This publication has been prepared in good faith, however no representation, warranty, assurance or undertaking (express or implied) is or will be made, and no responsibility or liability is or will be accepted by BSI in relation to the adequacy, accuracy, completeness or reasonableness of this publication. All and any such responsibility and liability is expressly disclaimed to the full extent permitted by the law.

This publication is provided as is, and is to be used at the recipient's own risk.

The recipient is advised to consider seeking professional guidance with respect to its use of this publication.

This publication is not intended to constitute a contract. Users are responsible for its correct application.

This publication is not to be regarded as a British Standard.

© The British Standards Institution 2022
Published by BSI Standards Limited 2022

ISBN 978 0 539 17033 7

ICS 17.220.20; 33.050.10

Compliance with a Published Document cannot confer immunity from legal obligations.

This Published Document was published under the authority of the Standards Policy and Strategy Committee on 30 November 2022.

Amendments/corrigenda issued since publication

Date	Text affected

Documents
Document Sharing Hub

Full document details: PD IEC TR 63377:2022

IEC TR 63377

Edition 1.0 2022-11

TECHNICAL REPORT

colour inside

Procedures for the assessment of human exposure to electromagnetic fields from radiative wireless power transfer systems – Measurement and computational methods (frequency range of 30 MHz to 300 GHz)

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 17.220.20, 33.050.10

ISBN 978-2-8322-5945-0

Warning! Make sure that you obtained this publication from an authorized distributor.

® Registered trademark of the International Electrotechnical Commission

Documents
Document Sharing Hub

Full document details: PD IEC TR 63377:2022

CONTENTS

FOREWORD 5
INTRODUCTION 7
1 Scope 8
2 Normative references 8
3 Terms and definitions 8
4 Symbols and abbreviated terms 10
4.1 Physical quantities 10
4.2 Constants 11
4.3 Abbreviated terms 11
5 Description of radiative wireless power transfer systems 12
5.1 General 12
5.2 Radiative WPT systems technology and applications 12
5.2.1 General 12
5.2.2 Operating principle of space diversity WPT 15
5.2.3 Operating principle of narrow-beam WPT 16
5.3 Use cases and environment 16
5.3.1 General 16
5.3.2 Indoor, occupational environment 16
5.3.3 Indoor, general-public environment 18
5.3.4 Outdoor, occupational environment 18
5.3.5 Outdoor, general-public environment 19
6 General exposure assessment considerations 19
6.1 General 19
6.2 Preparation of assessment 19
6.2.1 General 19
6.2.2 Determination of key parameters 19
6.2.3 Determination of applicable limits 20
6.2.4 Determination of assessment method 21
6.3 Assessment conditions 23
6.4 Uncertainty 23
Annex A (informative) Coupling factors and correction factors 26
A.1 General 26
A.2 Coupling factors for near-field exposure 27
A.2.1 Characteristics of the near-field 27
A.2.2 Coupling of electromagnetic energy in the near-field 27
A.2.3 Considerations for whole-body exposure in the near-field 27
A.2.4 Derivation of the coupling factors for E-field or H-field exposure 27
A.3 Correction factors for far-field exposures 28
A.3.1 Characteristics of the far-field 28
A.3.2 Tissue layering 28
A.3.3 Whole-body absorption and resonance 29
A.3.4 Conservative correction factors 29
A.4 Assessment of correction factors for layered tissues 30
A.4.1 General 30
A.4.2 Correction factors for peak-spatial average SAR 30
A.4.3 Correction factors for whole-body SAR 30

AVA Documents
Document Sharing Hub

A.4.4 Correction factors for partial body exposures 30
A.4.5 Correction of SAR results in homogeneous flat phantoms 31
Annex B (informative) Assessment procedure 32
B.1 RF field strength and power density assessment for radiative WPT systems 32
B.2 Local SAR assessment for radiative WPT systems operating between 30 MHz to 6 GHz 32
B.2.1 General 32
B.2.2 Preparation of the device under test 33
B.2.3 Transmitter SAR assessment procedure 33
B.2.4 Validation of the SAR assessment 34
B.3 Incident power density (PD) assessment for local exposure over 6 GHz 34
B.3.1 General 34
B.3.2 Preparation of the device under test 35
B.3.3 PD assessment procedure – Experimental only 35
B.3.4 PD assessment procedure – Combined numerical and experimental methods 35
B.3.5 Validation of the assessment 36
Annex C (informative) Description and validation of exposure mitigation techniques 37
C.1 General 37
C.2 Description of the technology and its implementation 37
C.3 Validation of proximity sensors 37
C.4 Validation of time-period power control 38
C.5 System level validation of the exposure mitigation techniques 38
Annex D (informative) Computational methods 39
D.1 Methods and procedures 39
D.2 Verification of the computational method 39
D.3 Application of hybrid computational and experimental methods 40
D.4 Considerations for the assessment of the numerical uncertainty 40
D.4.1 General 40
D.4.2 Parameters for the numerical uncertainty assessment 40
Annex E (informative) Examples of exposure assessment 41
E.1 Example of the dosimetric assessment of a WPT transmitter operating at 900 MHz 41
E.1.1 Overview 41
E.1.2 Method 41
E.1.3 Model development and validation 42
E.1.4 Dosimetric assessment of the anatomical models 42
E.1.5 Results and conclusions 43
E.2 Example E-field assessment of RF WPT system operating at 2,45 GHz 43
E.2.1 General 43
E.2.2 Assessment procedure 44
E.2.3 E-field assessment results 45
Bibliography 50

Figure 1 – WPT system classification via radio-frequency beam technologies 14
Figure 2 – Beam pattern diagram of omnidirectional radiative WPT 15
Figure 3 – Beam pattern diagram of space diversity WPT 15
Figure 4 – Beam pattern diagram of narrow-beam radiative WPT 16

AVA Documents
Document Sharing Hub
Full document details: PD IEC TR 63377:2022

Figure 5 – Example of indoor and occupational environments: WPT to production equipment sensors in factory 17

Figure 6 – Example of indoor and occupational environments: WPT to machine and line management sensors 17

Figure 7 – WPT to children watching sensors 18

Figure 8 – WPT to watching sensors in nursing homes 18

Figure 9 – Assessment process for radiative WPT 19

Figure B.1 – Flowchart for the SAR assessment procedure between 30 MHz to 6 GHz 33

Figure B.2 – Description of PD assessment procedure between 6 GHz to 300 GHz 35

Figure E.1 – Anatomical model of the five-year-old girl exposed to the WPT transmitter E-field at a distance of 400 mm. The beam of the WPT system is focused at this distance. 43

Figure E.2 – E-field measurement setup of RF WPT system 44

Figure E.3 – E-field measurement scenario and positioning of WPT source (transmitter), client, and scan areas 45

Figure E.4 – E-field distribution measured at the distance 20 cm from RF WPT transmitter 46

Figure E.5 – E-field distribution measured in the far-field zone of WPT source: a) at the distance 2 m from RF WPT transmitter – in front of the client b) at the distance 2,75 m from RF WPT transmitter – behind the client 46

Figure E.6 – E-field measurement scenario with the cylindrical phantom 47

Figure E.7 – E-field measurement setup of RF WPT system with cylindrical phantom 47

Figure E.8 – E-field distribution for the case of partial obstruction by the phantom: a) 14 cm and b) 8 cm distance from phantom outer surface to transmitter-client line 48

Figure E.9 – E-field distribution measured in the horizontal plane within the distances 45 cm to 145 cm from transmitter antenna for the case of strong obstruction by the phantom. The position of cylindrical phantom with respect to scan area is shown. 49

Figure E.10 – E-field distribution measured at the distance 2,75 m from RF WPT transmitter when cylindrical phantom is placed behind the client (case 3 in Figure E.6). Field scan is performed between the client and phantom. 49

Table 1 – Representative characteristics of potential radiative WPT applications 13

Table 2 – Whole-body SAR exclusions based on RF power levels 22

Table 3 – Template of measurement uncertainty budget for assessment of the psSAR for frequencies from 30 MHz to 6 GHz 24

Table 4 – Template of measurement uncertainty budget for assessment of the incident power density for frequencies above 6 GHz 25

Table A.1 – Summary of correction factors accounting for tissue layering effects specified in IEC 62232:2017 [12] for psSAR and wbSAR 29

Documents
Document Sharing Hub

Full document details: PD IEC TR 63377:2022

INTERNATIONAL ELECTROTECHNICAL COMMISSION

PROCEDURES FOR THE ASSESSMENT OF HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS FROM RADIATIVE WIRELESS POWER TRANSFER SYSTEMS – MEASUREMENT AND COMPUTATIONAL METHODS (FREQUENCY RANGE OF 30 MHz TO 300 GHz)

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC TR 63377 has been prepared by IEC technical committee 106: Methods for the assessment of electric, magnetic and electromagnetic fields associated with human exposure. It is a Technical Report.

The text of this Technical Report is based on the following documents:

Draft	Report on voting
106/568/DTR	106/578/RVDTR

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this Technical Report is English.

Documents
Document Sharing Hub

Full document details: PD IEC TR 63377:2022

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

Documents
Document Sharing Hub

Full document details: PD IEC TR 63377:2022

INTRODUCTION

IEC TC 106 is tasked with preparing International Standards on measurement and simulation methods used to assess human exposure to electric fields, magnetic fields, and electromagnetic fields. Wireless power transfer (WPT) systems operating at 30 MHz to 300 GHz utilize electric fields, magnetic fields, or electromagnetic fields to provide power to equipment nearby or at distances up to several metres or more. Users or bystanders in close proximity to both the transmitting equipment and receiving equipment or in between them could be exposed to these fields. Assessment methods are needed to demonstrate compliance with applicable human exposure limits. A working group (WG9) was established by IEC TC 106 to address assessment methods of human exposure to WPT equipment.

This document consists of an overview of radiative WPT, exposure assessment methods, procedures, and case studies, to help in the development of international standards for WPT exposure assessment. This document addresses the frequency range of 30 MHz to 300 GHz. For lower frequencies, WPT equipment operating below 10 MHz is covered by IEC TR 62905:2018, and below 30 MHz is covered by IEC PAS 63184:2021, with an associated subsequent International Standard currently under consideration by IEC TC 106. The methods and procedures described in this document are based on the techniques of other exposure standards covering the same frequency range. Other methods are referenced when deviations from these assessment methods are needed.

Documents
Document Sharing Hub

Full document details: PD IEC TR 63377:2022

PROCEDURES FOR THE ASSESSMENT OF HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS FROM RADIATIVE WIRELESS POWER TRANSFER SYSTEMS – MEASUREMENT AND COMPUTATIONAL METHODS (FREQUENCY RANGE OF 30 MHz TO 300 GHz)

1 Scope

This Technical Report describes assessment methods to evaluate the compliance of radiative wireless power transfer (WPT) systems operating in the frequency range from 30 MHz to 300 GHz with electromagnetic guidelines on human exposure (electromagnetic field strength, specific absorption rate (SAR), and power density). This document includes but is not limited to systems that focus the electromagnetic energy emitted by the transmitter to regions surrounding the receiver, for example, by narrow beam-forming systems, wide-beam systems and spatially closed systems. Implementations without transmitter, for example, applications that harvest energy from the environment, are not included in the scope of this document.

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at http://www.electropedia.org/
- ISO Online browsing platform: available at http://www.iso.org/obp

3.1
basic restriction
BR
human exposure limits for compliance with time-varying electric, magnetic, and electromagnetic fields evaluated inside the body that are based on established adverse health effects

Note 1 to entry: Within the scope of this document, the physical quantity used as a basic restriction is the specific absorption rate (SAR) or absorbed (epithelial) power density.

3.2
equipment under test
EUT
equipment that is tested according to the procedures described in this document

3.3
plane-wave equivalent power density
electromagnetic wave, magnitude of the power density of a plane wave having the same ratio of electric (E) field strength to magnetic (H) field strength

Note 1 to entry: The SI unit of plane-wave equivalent power density is watt per square metre (W/m^2).

Documents
Document Sharing Hub

Full document details: PD IEC TR 63377:2022

3.4
exposure
<for a person> situation that occurs wherever a person is subjected to electric, magnetic, or electromagnetic fields

3.5
far-field region
<of an antenna> region of the electromagnetic field of an antenna wherein the predominant components of the field are those which represent a propagation of energy and wherein the angular field distribution is essentially independent of the distance from the antenna

[SOURCE: IEC 60050-712:1992 [1], 712-02-02, modified – Hyphen added to the term, notes to entry omitted.]

3.6
incident field
field that would exist in the absence of a person over a volume where a person could be located

Note 1 to entry: In some documents, the incident field is called an unperturbed field or environmental field.

3.7
reactive near-field region
region of space immediately surrounding an antenna, where the predominant components of the electric field and magnetic field are those that represent an exchange of reactive energy between the antenna and the surrounding medium, and where the electric field and magnetic field components are 90° out of phase

[SOURCE: IEC/IEEE 63195-1:2022 [2], 3.2.10, modified – The word "region" has been added to the term.]

3.8
peak spatial-average SAR
psSAR
maximum SAR averaged within a local region based on a specific averaging mass, e.g. any 1 g or 10 g of tissue in the shape of a cube

[SOURCE: IEC/IEEE 62209-1528:2020 [3], 3.37, modified – The note to entry has been omitted.]

3.9
phantom
physical model with an equivalent human anatomy and comprised of a tissue-equivalent medium with dielectric properties specified in IEC/IEEE 62209-1528:2020

[SOURCE IEC/IEEE 62209-1528 [3], 3.39, modified – The wording "in this document" is replaced with "IEC/IEEE 62209-1528:2020".]

3.10
radiative wireless power transfer system
radiative WPT system
system that transfers power by radiation of electromagnetic energy from a transmitter to a receiver in the frequency range from 30 MHz to 300 GHz

3.11
reference level
RL
level of field strength or power density derived from the basic restrictions using conservative assumptions about exposure

Documents
Document Sharing Hub

Full document details: PD IEC TR 63377:2022

Note 1 to entry: If the reference levels are met, then the basic restrictions will be complied with, but if the reference levels are exceeded, that does not necessarily mean that the basic restrictions will not be met.

[SOURCE IEC 62311:2019 [4], 3.1.22, modified – Abbreviated term "RL" added.]

3.12
specific absorption rate
SAR
measure of the rate at which energy is absorbed by the human body when exposed to a radio frequency electromagnetic field

Note 1 to entry: The SAR in the tissue-equivalent medium can be determined by the rate of temperature increase or by E-field measurements, according to the following formula:

$$SAR = \frac{\sigma E^2}{\rho} = c_{\mathrm{h}} \left.\frac{\partial T}{\partial t}\right|_{t=0}$$

where

SAR is the specific absorption rate in W/kg;

E is the RMS value of the electric field strength in the tissue-equivalent medium in V/m;

σ is the electrical conductivity of the tissue-equivalent medium in S/m;

ρ is the mass density of the tissue-equivalent medium in kg/m^3;

c_{h} is the specific heat capacity of the tissue-equivalent medium in J/(kg K);

$\left.\frac{\partial T}{\partial t}\right|_{t=0}$ is the initial time derivative of temperature in the tissue-equivalent medium in K/s.

[SOURCE IEC/IEEE 62209-1528:2020 [3], 3.5.1, modified – The two formulae now appear on one line and units have been formatted as symbols rather than as written words.]

3.13
beamwidth
<of an antenna> in a specified plane containing the direction of maximum radiation or the axis of symmetry of a beam or a radiation lobe, angle between two directions (corresponding, for example, to a given fraction of the maximum radiation or to the first minimums) on both sides of this direction or axis

Note 1 to entry: The most generally used fraction is half-power beamwidth.

[SOURCE IEC 60050-712:2021 [1], 712-01-33, modified – Note 2 to entry omitted.]

3.14
whole-body SAR
wbSAR
SAR averaged over the whole body

3.15
epithelial power density
power flow through the epithelium per unit area directly under the body surface

[SOURCE IEEE Std C95.1™-2019 [5], 3.1, modified – Note 1 and Note 2 omitted.]

4 Symbols and abbreviated terms

4.1 Physical quantities

The internationally accepted SI units are used throughout this document.

Documents
Document Sharing Hub

Symbol	Quantity	Unit	Dimensions
c_h	Specific heat capacity	joule per kilogram per kelvin	J/(kg K)
E	Electric field strength	volt per metre, RMS	V/m
f	Frequency	hertz	Hz
H	Magnetic field strength	ampere per metre, RMS	A/m
J	Current density	ampere per square metre	A/m^2
P	Average (temporal) absorbed power	watt	W
S	Power density	watt per square metre	W/m^2
T	Temperature	kelvin	K
ε	Permittivity	farad per metre	F/m
λ	Wavelength	metre	m
σ	Electric conductivity	siemens per metre	S/m
μ	Permeability	Henrys per metre	H/m

NOTE In this document temperature is quantified in degrees Celsius, as determined by: T (°C) = T (K) − 273,15.

4.2 Constants

Symbol	Physical constant	Magnitude
η_0	Intrinsic impedance of free space	120π Ω or 377 Ω
ε_0	Permittivity of free space	8,854 × 10^{-12} F/m
μ_0	Permeability of free space	4π × 10^{-7} H/m

4.3 Abbreviated terms

RF radio frequency
RMS root mean square
RSS root sum square
CW continuous wave
WPT wireless power transfer
DRL dosimetric reference limit
E-field electric field strength
ERL exposure reference level
EUT equipment under test
H-field magnetic field strength
ICNIRP International Commission on Non-Ionizing Radiation Protection
IC integrated circuit
PD power density
TE transverse electric
TM transverse magnetic
TEM transverse electromagnetic

Documents
Document Sharing Hub
Full document details: PD IEC TR 63377:2022

5 Description of radiative wireless power transfer systems

5.1 General

Radiative WPT represents a solution to remotely charge low-power devices (e.g. sensors, RF identification tags, mobile and wearable devices [6][1], [7]) and high power applications [8] over large distances.

Radiative WPT allows for greater distances to be covered than non-radiative WPT and does not require mutual coupling between the transmitter and receiver. However, the longer distances generally result in lower beam efficiency at the receiving end.

In a radiative WPT system, highly directional antennas are mostly used to transmit electromagnetic power and the system efficiency benefits from a highly directive receiver antenna when operated outside the near-field zone. The main theory of WPT via RF beam is based on the Friis transmission formula:

$$\frac{P_r}{P_t} = G_r G_t \left(\frac{\lambda}{4\pi R} \right)^2 \quad (1)$$

where

P_r and P_t are the receive power and transmit power, respectively,

G_t and G_r are the gains of the transmit antenna and receive antenna,

λ is the wavelength representing the effective aperture area of the receive antenna, and

R is the distance between the two antennas.

A rectenna [9] is normally used to convert the received electromagnetic power into usable direct current (DC) power.

5.2 Radiative WPT systems technology and applications

5.2.1 General

Radiative WPT systems can be classified according to the following list of technologies, and as shown in Figure 1:

a) wide beamwidth transmission to multiple receivers at short range;

b) space diversity WPT to a single receiver (using multi-path propagation);

c) narrow beamwidth transmission to a single receiver at either short or long range [10].

NOTE Narrow beamwidth and space diversity systems apply directed beams in order to maximize efficiency of the transmitted power towards a single receiver. Directive antennas can be used on the transmitter and/or the receiver side. Wide beamwidth systems transmit power to multiple receivers and might not necessarily direct the transmitted power towards them. Because of the large number of possible configurations of transmitter and receiver antennas, a more detailed specification of wide and narrow beamwidth systems might be too restrictive for present and upcoming technologies.

Each of the technologies in the preceding list can be used in different WPT applications (Table 1). A detailed description of these WPT applications can be found in [10].

Energy harvesting is another wireless power technology that converts environmental electromagnetic energy into electric power. Due to its typically low conversion efficiency and low collection of power, it can be adequate to run or recharge small wireless micropower devices

[1] Numbers in square brackets refer to the Bibliography.

Documents
Document Sharing Hub

such as remote sensors. It does not include a transmitter for the RF power and therefore does not fall under the scope of this document.

Table 1 – Representative characteristics of potential radiative WPT applications

WPT application	Frequency band	Condition	Distance	Tx antenna gain	Transmit power
Wirelessly powered sensor network	915 MHz band, 2,45 GHz band, 5,8 GHz band	Indoor, Outdoor	Several metres to dozens of metres	6 dBi (Typically 915 MHz band), 25 dBi (Typically 2,45 GHz and 5,8 GHz bands)	< 50 W
Wireless charging of mobile devices	2,45 GHz band, 915 MHz band	Indoor	Several metres to dozens of metres	25 dBi (Typically 2,45 GHz band)	< 50 W
WPT to moving/flying target	2,45 GHz band, 5,8 GHz band	Indoor, Outdoor	several metres to 20 km	10 dBi to 30 dBi (Typically 5,8 GHz band)	50 W to 1 MW
Point-to-point WPT	2,45 GHz band, 5,8 GHz band	Outdoor	1 m to 20 km		100 W to 1 MW
Wireless charging for electric vehicle	2,45 GHz band, 5,8 GHz band	Outdoor	0,1 m to 1 m		100 kW to 500 kW
Solar power satellite	5,8 GHz band	Space to ground	36 000 km		1,3 GW
IoT devices, automation, point-to-point, etc.	24 GHz band, 61 GHz band, 122 GHz band, 244 GHz band	Indoor, Outdoor	1 m to 1 000 m		100 W

Documents
Document Sharing Hub

Full document details: PD IEC TR 63377:2022

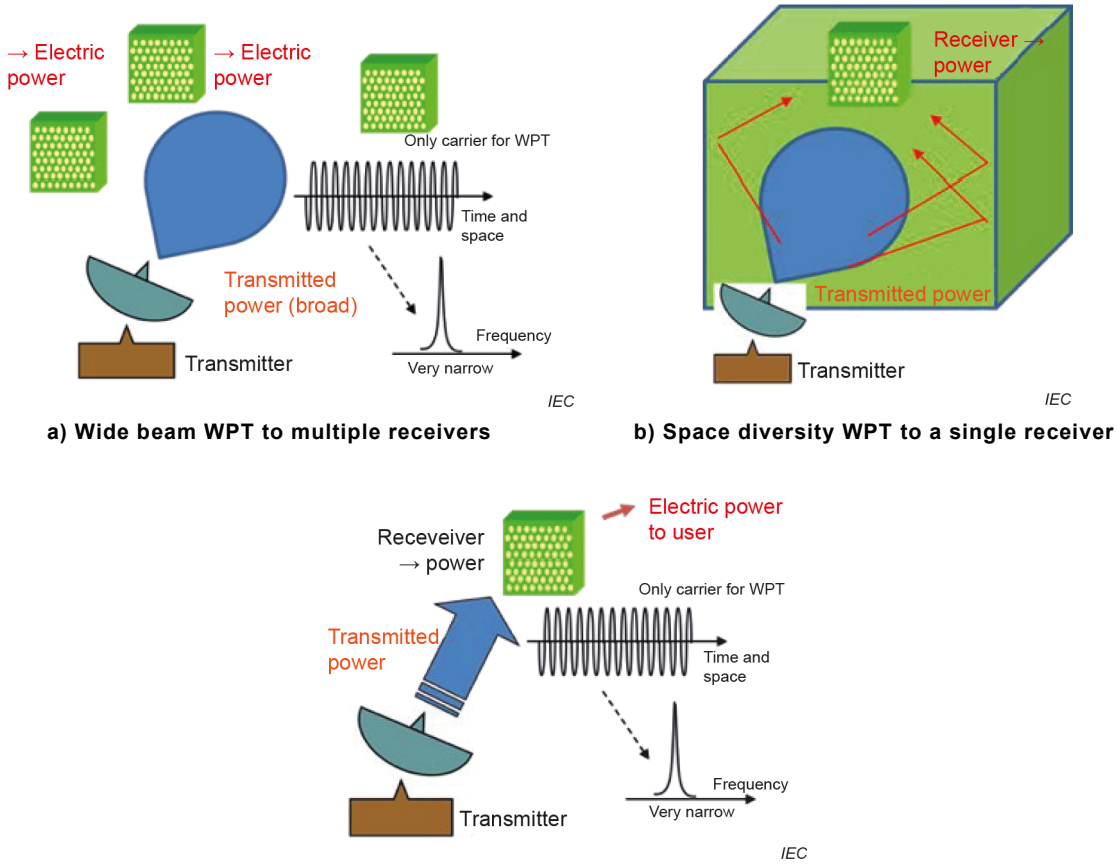

a) Wide beam WPT to multiple receivers

b) Space diversity WPT to a single receiver

c) Narrow beam WPT to a single receiver

[SOURCE: Figure 3.1 of ITU-R SM.2392-0 [10]][2]

Figure 1 – WPT system classification via radio-frequency beam technologies

Omnidirectional radiative WPT uses a wide beam transmission to transfer power to single or multiple users (receivers) over a distance. Figure 2 illustrates the beam pattern. The transmitter transmits electromagnetic waves with high energy and the receiver(s), using a rectenna, convert these waves into power. Due to low efficiency of these systems, only a small fraction of the radiated power is received by the receiver(s).

2 Reproduced from ITU-R SM.2392-0, with the permission of ITU-R.

Documents
Document Sharing Hub
Full document details: PD IEC TR 63377:2022

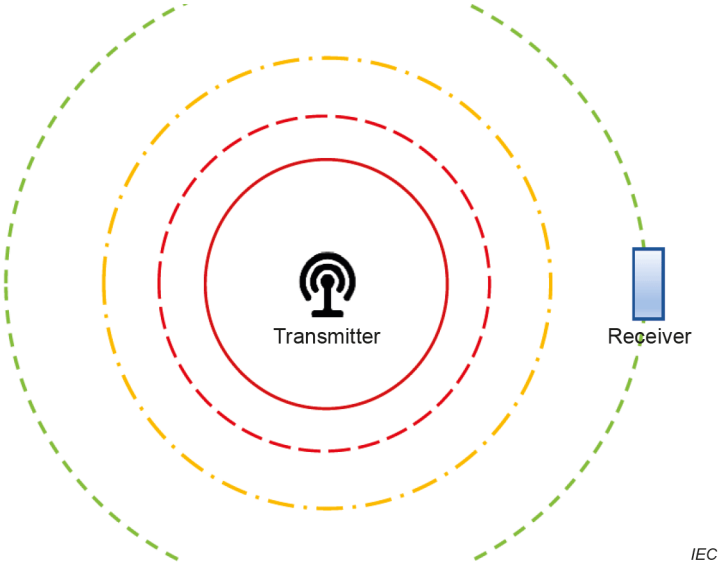

Figure 2 – Beam pattern diagram of omnidirectional radiative WPT

5.2.2 Operating principle of space diversity WPT

The basic principle of the space diversity WPT system is shown in b) of Figure 1 and the beam pattern is illustrated in Figure 3. The main application of such systems is related to the indoor environment where strong multi-path reflection from the walls is utilized to deliver the RF power to the receiver. In a typical space diversity WPT system, a receiver IC chip, built into a receiver device, sends out a low-level beacon signal that seeks the transmitter. Once received, the transmitter sends the RF power back through all the multi-paths from where the beacon signal was received. Such a multi-path functionality allows it to continuously send power from the transmitter so that the power is then delivered mostly to the receiving antenna and less elsewhere. This beacon process repeats, for example up to 100 times per second, which makes it possible to send the power over a distance and while the receiving device is in motion, even if people or objects are in the way. The bandwidth of the transmitted signals is supposed to be sufficiently small not to affect the pathway of the transmitted energy. Hence, the signals can be regarded as CW.

Nevertheless, in this application scenario, RF power could be delivered to other objects within the reflected beam, including human tissue. Considering this, the assertion of human safety operation is confirmed and demonstrated by the assessment results.

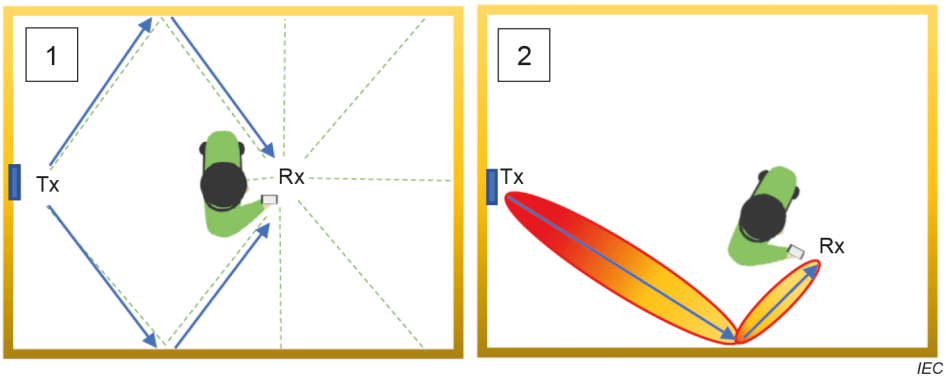

Figure 3 – Beam pattern diagram of space diversity WPT

Documents
Document Sharing Hub
Full document details: PD IEC TR 63377:2022