

STANDARDS AUSTRALIA

RECONFIRMATION

OF

AS 2341.7—1993

Methods of testing bitumen and related roadmaking products

Method 7: Determination of density using a density bottle

RECONFIRMATION NOTICE

Technical Committee CH-025 has reviewed the content of this publication and in accordance with Standards Australia procedures for reconfirmation, it has been determined that the publication is still valid and does not require change.

Certain documents referenced in the publication may have been amended since the original date of publication. Users are advised to ensure that they are using the latest versions of such documents as appropriate, unless advised otherwise in this Reconfirmation Notice.

Approved for reconfirmation in accordance with Standards Australia procedures for reconfirmation on 8 April 2013.

The following are represented on Technical Committee CH-025:

Australian Road Research Board
Australian Asphalt Pavement Association
Australian Chamber of Commerce and Industry
Australian Institute of Petroleum
AUSTROADS
Engineers Australia
National Association of Testing Authorities Australia
Roding New Zealand
Transit New Zealand

NOTES

Australian Standard®

Methods of testing bitumen and
related roadmaking productsMethod 7: Determination of density
using a density bottle

1 SCOPE This Standard sets out two procedures for the determination of density of bituminous materials using a density bottle. These procedures are known as the total filling method and the partial filling method.

The total filling method is applicable to materials which are sufficiently fluid at 25°C to allow the bottle stopper to be pressed into position when the bottle is filled.

The partial filling method is applicable to materials which are too viscous for the total filling method.

The two methods cover all bitumen and related products for roadmaking.

2 REFERENCED DOCUMENTS The following documents are referred to in this Standard:

AS

2341 Methods of testing bitumen and related roadmaking products

2341.1 Precision data—Definitions

ASTM


D 4311 Standard practice for determining asphalt volume correction to a base temperature

E 1 Specification for ASTM thermometers

IP Methods for analysis and testing, Part 1, Vol. 2, Appendix A

3 APPARATUS The following apparatus is required:

(a) *Density bottle*—made of borosilicate glass. Suitable density bottles are illustrated in Figure 1.

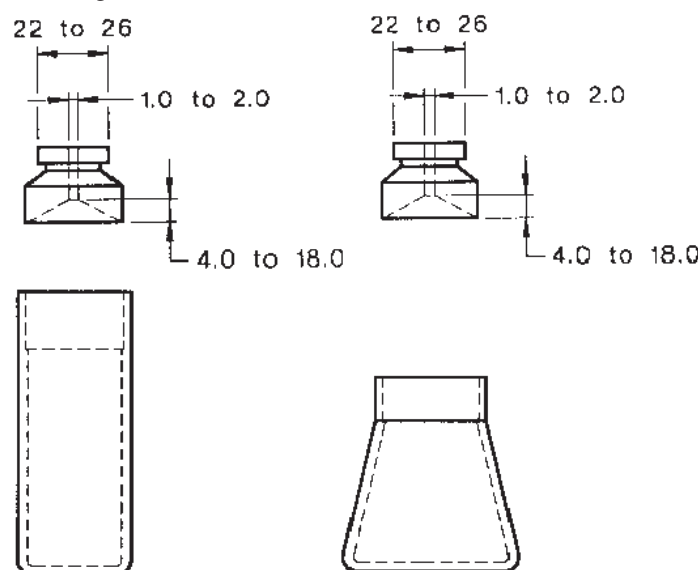

DIMENSIONS IN MILLIMETRES

FIGURE 1 SUITABLE DENSITY BOTTLES

COPYRIGHT