



UL 1310

STANDARD FOR SAFETY

Class 2 Power Units

UL Standard for Safety for Class 2 Power Units, UL 1310

Seventh Edition, Dated March 9, 2018

Summary of Topics

This revision of ANSI/UL 1310 dated June 9, 2022 includes the following:

– Addition of requirements to allow electronic medium for Installation Instructions and other required instructions; [54.6](#), [66.7](#), [72.4](#), [78.3](#), [89.2](#) and [97.6](#).

– Revised marking for products with USB type outlets; [80.1](#).

Text that has been changed in any manner or impacted by UL's electronic publishing system is marked with a vertical line in the margin.

The new and revised requirements are substantially in accordance with Proposal(s) on this subject dated January 21, 2022.

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form by any means, electronic, mechanical photocopying, recording, or otherwise without prior permission of UL.

UL provides this Standard "as is" without warranty of any kind, either expressed or implied, including but not limited to, the implied warranties of merchantability or fitness for any purpose.

In no event will UL be liable for any special, incidental, consequential, indirect or similar damages, including loss of profits, lost savings, loss of data, or any other damages arising out of the use of or the inability to use this Standard, even if UL or an authorized UL representative has been advised of the possibility of such damage. In no event shall UL's liability for any damage ever exceed the price paid for this Standard, regardless of the form of the claim.

Users of the electronic versions of UL's Standards for Safety agree to defend, indemnify, and hold UL harmless from and against any loss, expense, liability, damage, claim, or judgment (including reasonable attorney's fees) resulting from any error or deviation introduced while purchaser is storing an electronic Standard on the purchaser's computer system.

No Text on This Page

MARCH 9, 2018
(Title Page Reprinted: June 9, 2022)



ANSI/UL 1310-2022

1

UL 1310

Standard for Class 2 Power Units

The first and second editions were titled Standard for Direct Plug-In Transformer Units.

First Edition – May 1981
Second Edition – September 1986
Third Edition – August 1992
Fourth Edition – July 1994
Fifth Edition – May 2005
Sixth Edition – August 2011

Seventh Edition

March 9, 2018

This ANSI/UL Standard for Safety consists of the Seventh Edition including revisions through June 9, 2022.

The most recent designation of ANSI/UL 1310 as an American National Standard (ANSI) occurred on June 9, 2022. ANSI approval for a standard does not include the Cover Page, Transmittal Pages, and Title Page.

Comments or proposals for revisions on any part of the Standard may be submitted to UL at any time. Proposals should be submitted via a Proposal Request in UL's On-Line Collaborative Standards Development System (CSDS) at <https://csds.ul.com>.

UL's Standards for Safety are copyrighted by UL. Neither a printed nor electronic copy of a Standard should be altered in any way. All of UL's Standards and all copyrights, ownerships, and rights regarding those Standards shall remain the sole and exclusive property of UL.

COPYRIGHT © 2022 UNDERWRITERS LABORATORIES INC.

No Text on This Page

CONTENTS

INTRODUCTION

1	Scope	7
2	Components	8
3	Units of Measurement	8
4	Undated References	8
5	Glossary	8
6	Terminology	10

CONSTRUCTION

7	Mechanical Assembly	10
8	Enclosure	16
9	Protection Against Corrosion	17
10	Switches	18
11	Protective Devices	18
12	Components	19
13	Coil Insulation	20
	13.1 General	20
	13.2 Insulation for transformers	20
14	Input Connections	23
	14.1 Direct plug-in units	23
	14.2 Cord-connected units	23
	14.3 DC input units	24
15	Output Connections	25
	15.1 General	25
	15.2 Output wiring	25
	15.3 Output terminals	26
	15.4 Output connectors	26
	15.5 Bushings	27
16	Accessibility of Live Parts	27
	16.1 General	27
	16.2 Live parts other than exposed wiring terminals	30
	16.3 Exposed wiring terminals	32
17	Live Parts	32
18	Strain Relief	32
19	Internal Wiring	33
20	Separation of Circuits	33
21	Insulating Materials	34
22	Printed-Wiring Boards	34
23	Grounding	34
	23.1 General	34
	23.2 Bonding conductor	36
24	Spacings	36

PERFORMANCE

25	General	39
26	Leakage Current Test	42
27	Leakage Current Test and Dielectric Voltage Withstand Test After Humidity Exposure	44
28	Maximum Output Voltage Test	44
29	Maximum Input Test	45
30	Output Current and Power Test	45

30.1	General.....	45
30.2	Inherently limited	45
30.3	Not inherently limited	46
31	Calibration of Overcurrent Protection Devices Test.....	47
32	Full-Load Output Current Test	48
33	Normal Temperature Test.....	48
34	Dielectric Voltage Withstand Test.....	51
34.1	General.....	51
34.2	Induced potential	52
35	Endurance Test on Overcurrent- and Overtemperature-Protective Devices.....	52
36	Overload and Endurance Tests on Switches and Controls	53
37	Overload Test on Secondary Switches	53
38	Operation Test	54
39	Abnormal Tests	54
39.1	General.....	54
39.2	Output loading	55
39.3	Output loading – alternate method	55
39.4	Transformer burnout	56
39.5	Reverse polarity	57
39.6	Switch position	57
39.7	Component breakdown	57
39.8	Printed-wiring board abnormal operation test	57
39.9	Backfeed protection	58
40	Tests on Insulating Materials	58
41	Strain Relief Test	59
42	Push-Back Relief Test.....	60
43	Direct Plug-In Blade Secureness Test	60
44	Direct Plug-In Security of Input Contacts Test	60
44.1	General.....	60
44.2	Removable, folding, and retractable blade units	61
45	Security of Output Connectors Test.....	61
46	Abuse Tests	62
46.1	General.....	62
46.2	Impact on direct plug-in units	62
46.3	Impact on cord connected units	63
46.4	Rod pressure on direct plug-in units	64
46.5	Resistance to crushing on direct plug-in units.....	64
47	Bonding Conductor Test.....	64

MANUFACTURING AND PRODUCTION TESTS

48	Dielectric Voltage Withstand Test.....	64
49	Grounding Continuity Test.....	66

RATINGS

50	General	66
----	---------------	----

MARKINGS

51	General	66
52	Cautionary and Warning Markings	68
53	Application of Labeling.....	69

INSTRUCTIONS

54	Instruction Manual	69
----	--------------------------	----

OUTDOOR USE

55	General	70
56	Enclosures.....	71
57	Protection Against Corrosion	71
58	Gaskets	74
59	Supply Connections	74
60	Output Connections and Wiring	74
61	Spacings	74
62	Accessibility of Live Parts.....	75
63	Ground-Fault Circuit-Interrupters	76
64	Performance	76
	64.1 General.....	76
	64.2 Abuse tests	76
	64.3 Rain test	76
	64.4 Standing water immersion test.....	80
65	Markings.....	80
66	Instructions	81

PERMANENTLY-CONNECTED UNITS FOR CONNECTION TO A WIRING SYSTEM

67	General	82
68	Construction	82
69	Wiring Terminals and Leads	83
70	Strain Relief Test	84
71	Markings.....	84
72	Installation Instructions	85

PERMANENTLY-CONNECTED UNITS FOR INSTALLATION IN AN OUTLET BOX

73	General	86
74	Construction	86
75	Polymeric Enclosures	86
76	Spacings	86
77	Performance	87
	77.1 General.....	87
	77.2 Assembly test.....	87
78	Installation Instructions	88
79	User Instructions	89
80	Markings.....	89

POWER UNITS FOR INSTALLATION IN AIR-HANDLING SPACES

81	General	89
82	Marking	89

POWER UNITS SUPPLIED FROM INFORMATION TECHNOLOGY EQUIPMENT DATA PORTS

83	General	90
84	Glossary	90
85	Supply Connections	90

86	Enclosure	90
87	Performance	90
	87.1 General.....	90
	87.2 Abnormal temperature test	91
	87.3 Strain relief test	91
88	Markings.....	91
89	Instructions	91

FLUSH DEVICE COVER PLATES WITH INTEGRAL POWER SUPPLY

90	General	92
91	Construction	92
92	Polymeric Enclosures	93
93	Spacings	93
94	Configurations.....	93
95	Class 2 Output Power Supply Testing	93
96	Assembly Test.....	94
97	Installation Instructions	95
98	Markings.....	95

APPENDIX A

Standards for Components	96
--------------------------------	----

INTRODUCTION

1 Scope

1.1 These requirements cover indoor and outdoor use Class 2 power supplies and battery chargers. These units utilize an isolating transformer and may incorporate components to provide an alternating- or direct-current output. Each output provides Class 2 power levels in accordance with the National Electrical Code, NFPA 70. Maximum output voltage does not exceed 42.4 V peak for alternating current, 60 V for continuous direct current. These products are intended primarily to provide power to low voltage, electrically operated devices. These requirements apply to:

- a) Portable and semipermanent mounted direct plug-in units provided with 15 A blade configurations for use on nominal 120 or 240 V alternating current branch circuits with a maximum potential of 150 V to ground;
- b) Cord- and plug-connected units provided with a 15 or 20 A attachment plug configuration for use on nominal 120 or 240 V alternating current branch circuits with a maximum potential of 150 V to ground; and
- c) Units permanently connected to the input supply for use on nominal 600 V or less alternating or direct current branch circuit.

Direct plug-in and cord-connected units may also be provided with an integral cigarette lighter connector assembly, or a direct current input jack for being powered from a vehicle battery adapter or from a data port associated with information technology equipment. These units utilize an isolating transformer and may incorporate components to provide an alternating- or direct-current output. Each output provides Class 2 power levels in accordance with the National Electrical Code, NFPA 70. Maximum output voltage does not exceed 42.4 V peak for alternating current, 60 V for continuous direct current. These products are intended primarily to provide power to low voltage, electrically operated devices.

1.2 These requirements cover direct plug-in and cord-connected products whose input power does not exceed 660 W under any possible condition of output loading.

1.3 These requirements do not cover the effect that a power unit may have on the equipment or system to which it is connected.

1.4 A product marked for a specific end-use involving additional considerations may be subject to additional requirements found in the applicable end-product standard. See [51.4](#). Examples include considerations related to:

- a) Mechanical risks such as those presented by tools;
- b) Build up of static charges such as those of radio equipment with external antennae connections;
- c) Special shock limits such as those for medical equipment; and
- d) Fire risks such as those posed by decorative lighting products.

1.5 These requirements do not cover products intended to charge batteries for starter motors used to start engines. Products of this type are covered by the Standard for Battery Chargers for Charging Engine-Starter Batteries, UL 1236.

1.6 These requirements cover Class 2 products, as defined in this Standard, intended for use with toys. Products of this type shall also comply with the Standard for Toy Transformers, UL 697.

1.7 These requirements do not cover products with outputs other than Class 2, nor battery chargers intended to charge batteries employed in wheel chairs or similar types of mobility aids. Products of this type are covered by the Standard for Power Units Other Than Class 2, UL 1012.

1.8 Products without a rectifier may be covered by the Standard for Low Voltage Transformers – Part 1: General Requirements, UL 5085-1, and the Standard for Low Voltage Transformers – Part 3: Class 2 and Class 3 Transformers, UL 5085-3.

1.9 These requirements do not cover products powered solely by a dc source. Products of this type are covered by the Standard for Power Converters/Inverters and Power Converter/Inverter Systems for Land Vehicles and Marine Craft, UL 458, or by other requirements appropriate for the intended application.

1.10 These requirements do not cover products intended for supplying low voltage landscape lighting. Products of this type are covered by the Standard for Low Voltage Landscape Lighting Systems, UL 1838.

2 Components

2.1 Except as indicated in [2.2](#), a component of a product covered by this standard shall comply with the requirements for that component. See Appendix [A](#) for a list of standards covering components used in the products covered by this standard.

2.2 A component is not required to comply with a specific requirement that:

- a) Involves a feature or characteristic not required in the application of the component in the product covered by this standard, or
- b) Is superseded by a requirement in this standard.

2.3 A component shall be used in accordance with its rating established for the intended conditions of use.

2.4 Specific components are incomplete in construction features or restricted in performance capabilities. Such components are intended for use only under limited conditions, such as certain temperatures not exceeding specified limits, and shall be used only under those specific conditions.

3 Units of Measurement

3.1 Values stated without parentheses are the requirement. Values in parentheses are explanatory or approximate information.

3.2 Unless otherwise stated, values of current and voltage are rms.

4 Undated References

4.1 Any undated reference to a code or standard appearing in the requirements of this standard shall be interpreted as referring to the latest edition of that code or standard.

5 Glossary

5.1 For the purpose of this standard, the following definitions shall apply:

5.2 BONDING CONDUCTOR – A conductor by which dead metal parts are bonded (connected) to the grounding means.

5.3 CLASS 2 – A source having limited voltage and energy capacity. Requirements for voltage and energy capacity limitations are as indicated in this standard. See the Maximum Output Voltage Test, Section [28](#), and the Output Current and Power Test, Section [30](#).

5.4 CONDUCTIVELY CONNECTED – A part is conductively connected to another part if the current between the parts exceeds the limit for leakage current specified in Leakage Current Test, Section [26](#).

5.5 CONSECUTIVE BATTERY CHARGER – A battery charger whose charging cycle is completed in four hours or less.

5.6 DIRECT CURRENT (DC) – A voltage or current waveform where the instantaneous value does not vary.

5.7 ENCLOSURE – Any surface or surrounding structure that prevents access to a real or potential risk of electric shock or injury to persons.

5.8 ENERGY LIMITING CIRCUIT/ENERGY LIMITING IMPEDANCE – A circuit or component depended on to limit an output to Class 2 levels or to limit energy to an accessible part. Reliability of circuit components shall be determined unless the unit is tested as specified in [39.7.1](#).

5.9 INDOOR USE – Use in an indoor location or where wet contact is not likely to occur.

5.10 INJURY TO PERSONS – The words "injury to persons" are in reference to physical harm to persons other than the physiological effects of electric shock.

5.11 MULTIPLE VOLTAGE RATED POWER UNIT – A power unit with a rated voltage range (such as 100 – 240 volts) or a power unit with more than one discrete voltage rating (such as 120/240 volts).

5.12 POWER UNIT INTENDED FOR USE BY TRAVELERS – A multiple voltage rated direct plug-in power unit with a 125 V 15 A (parallel) input blade configuration, or a multiple voltage rated cord-connected power unit with a non-detachable power supply cord terminating in a 125 V 15 A (parallel) blade plug.

5.13 RISK OF ELECTRIC SHOCK – A risk of electric shock is considered to exist if:

- a) The voltage between parts exceeds the value specified in [16.2.2](#); and
- b) The current between the parts measured in the Leakage Current Test, Section [26](#), exceeds 0.5 mA.

5.14 TAB, INTEGRAL (including a mounting tab) – A molded on or otherwise mechanically secured tab provided as part of the enclosure. An integral tab is usually not provided as part of the required enclosure, but may be provided for compliance with certain requirements of this standard.

5.15 UNIT – For the purposes of this Standard, a unit is either a direct plug-in unit, a cord connected unit, or a unit permanently connected to the input supply.

5.16 UNIT, CORD-CONNECTED – A power unit which employs a cord and plug assembly for connection to the branch circuit.

5.17 UNIT, DIRECT PLUG-IN – A power unit which employs a blade assembly on the enclosure for connection to the branch circuit.

5.18 UNIT, LINEAR DESIGN – A unit employing a branch circuit frequency transformer design where operation is not dependent on circuitry.

5.19 UNIT, PORTABLE – A unit other than a stationary unit or semipermanent mounted unit.

5.20 UNIT, SEMIPERMANENT MOUNTED – A direct plug-in unit provided with a mounting tab. For the purpose of this standard, semipermanent mounted units shall also comply with the requirements for portable units unless otherwise specified.

5.21 UNIT, STATIONARY – A cord- and plug-connected unit that is:

- a) Intended to be fastened in place;
- b) Intended to be located in a dedicated space; or
- c) Not easily moved.

5.22 UNIT, SWITCH MODE DESIGN – A unit employing a high frequency transformer design where transformer operation is dependent on an inverter circuit.

5.23 WORKING VOLTAGE – The highest voltage to which the insulation under consideration is, or is able to be, subjected when the equipment is operating at its rated voltage under conditions of normal use.

6 Terminology

6.1 The term "power unit" as used in these requirements refers to all power supplies, battery chargers, and transformers covered by these requirements.

CONSTRUCTION

7 Mechanical Assembly

7.1 A unit shall be formed and assembled so that it has the strength and rigidity necessary to resist the abuses to which it is likely to be subjected, without producing or increasing a risk of fire, electric shock, or injury to persons due to total or partial collapse with resulting reduction of spacings, loosening or displacement of parts, or other serious defects. See also [46.1.1](#).

7.2 A unit shall have all parts reliably secured in place.

7.3 An enclosure, an opening, a frame, a guard, a knob, a handle, or the like shall not be sufficiently sharp to cause a risk of injury in normal maintenance or use.

7.4 A unit shall be constructed so that it is not necessary to open or remove the enclosure when the unit is used as intended.

7.5 Each lampholder, switch, and similar component shall be mounted securely and shall be prevented from turning by more than friction between surfaces. For example, the use of a lock washer is acceptable to prevent the turning of a device having a single hole mounting means.

Exception No. 1: A lampholder of a type in which the lamp cannot be replaced (such as a neon pilot or indicator light in which the lamp is sealed in by a nonremovable jewel) need not be prevented from turning if rotation cannot reduce spacings below the minimum acceptable values or produce stress on an electrical connection.

Exception No. 2: A switch or other similar component need not comply with this requirement if the turning of such a component and servicing of the part introduces no additional risk of fire or electric shock, such as reduced spacings below minimum acceptable values or stress on an electrical connection.

7.6 A replaceable lamp in a unit shall be wired in the secondary circuit, and shall be replaceable without opening the enclosure. There shall be no primary live part accessible to contact during lamp replacement.

7.7 A nonreplaceable pilot lamp, such as an indicating-type overload- or short-circuit protector, a neon light, or an indicator light, is one in which the lamp is sealed-in, such as by a nonremovable jewel.

7.8 A switch in the primary circuit or an overcurrent-protective device shall be located within the unit enclosure in such a manner as not to be accessible or exposed to tampering nor subject to damage during normal use. This requirement does not apply to the actuating means of a switch, except as noted in [7.10](#).

7.9 If the exterior part of the switch or control forms part of a unit enclosure, the part shall be subjected to the Abuse Tests, Section [46](#).

7.10 The requirements in [7.8](#) also apply to the actuating means – toggle, handle, or the like – if the dislodging of such part exposes live parts or film-coated magnet wire that can be contacted as specified in Accessibility of Live Parts, Section [16](#).

7.11 The maximum acceptable moment, center of gravity, dimensions, and weight of a direct plug-in unit shall comply with the following requirements (See [7.12](#)):

- a) The quotient of WY/Z shall not exceed 48 ounces (1361 g);
- b) The quotient of WY/S shall not exceed 48 ounces (1361 g);
- c) The product of WX shall not exceed 80 ounce-inches (0.56 N·m) for a unit not intended for use by travelers, and 36 ounce-inches (0.25 N·m) for a unit intended for use by travelers (see [14.1.4](#)); and
- d) The weight of a unit shall not exceed 28 ounces (794 g).

Where the definitions for the symbols are as follows:

W is the weight of the unit in ounces (g).


Y is the distance illustrated in [Figure 7.1](#) in inches (mm).

Z is the lesser of the two distances, Z_1 or Z_2 , as illustrated in [Figure 7.1](#) in inches (mm).


S is the lesser of the two distances, S_1 or S_2 , as illustrated in [Figure 7.1](#) in inches (mm).

X is the greater of the two distances, X_1 or X_2 , as illustrated in [Figure 7.1](#) in inches (mm).

Figure 7.1
Dimensions of a direct plug-in unit

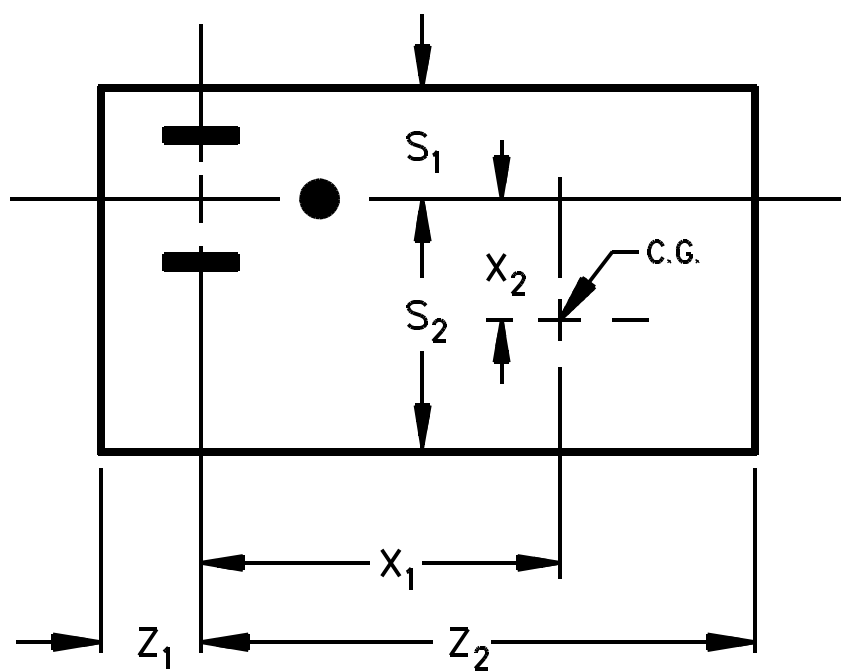

FRONT VIEW

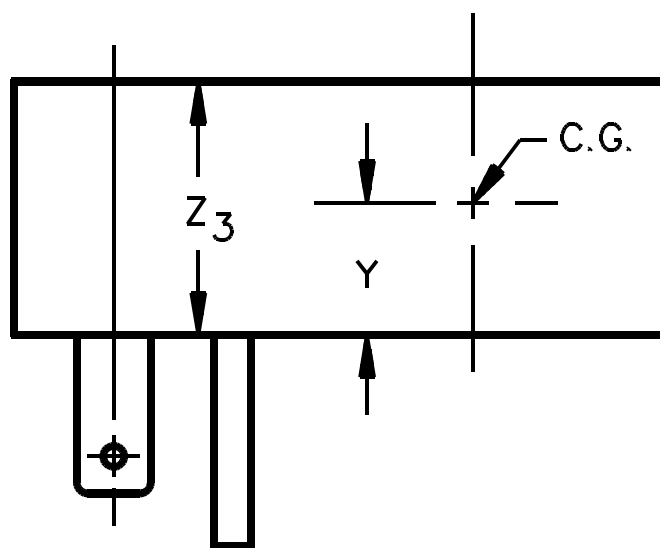

SIDE VIEW

C.G. = Center of Gravity


7.12 The moment and weight specified in [7.11](#) are to be determined as follows:

- a) For units with an output cord, the cord is to be cut off at the enclosure, or at the strain-relief means if the strain-relief means is outside the enclosure.
- b) For units with directly mounted accessories, the values are to be measured with the accessories in place.
- c) An integral tab is not to be included in measurements of the linear dimensions for the purpose of determining moments unless:
 - 1) The tab and enclosure withstand the impact described in [46.2.1](#) with one impact on the tab itself, without deformation; and
 - 2) For a polymeric enclosed unit having an integral tab, the tab and enclosure do not distort at temperatures to which the material may be subjected under conditions of normal and abnormal use as determined by the mold stress relief distortion test in the Standard for Polymeric Materials – Use in Electrical Equipment Evaluations, UL 746C.

7.13 When inserted in a duplex receptacle, no part of a direct plug-in unit, including an integral tab or output wiring, shall interfere with full insertion of an attachment plug into the adjacent receptacle. See [Figure 7.2](#) and [Figure 7.3](#).

Exception: This requirement does not apply to a unit that renders the adjacent receptacle completely unusable in any one mounting position.

Figure 7.2
125V, 15A Duplex receptacle

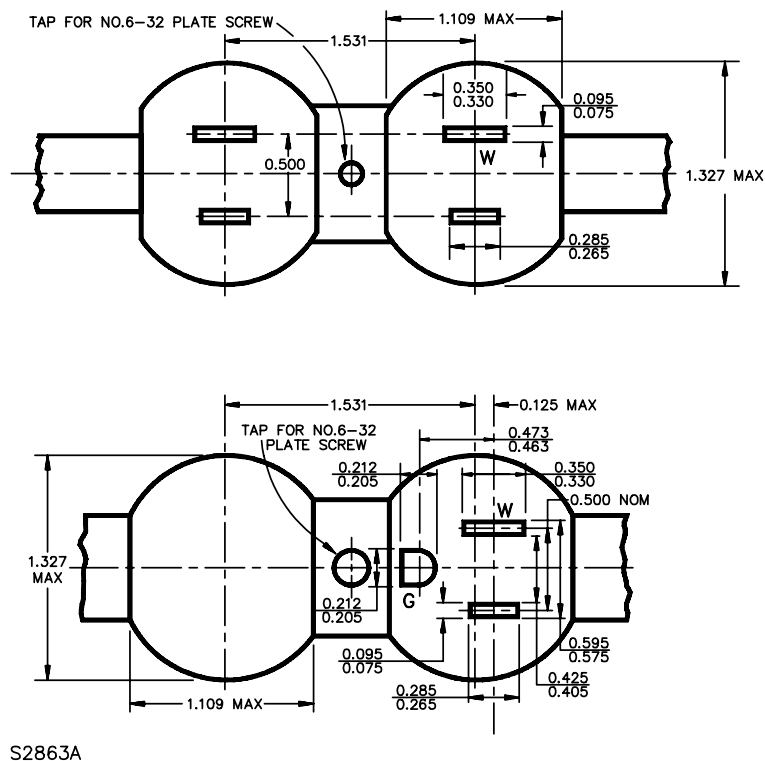

7.17 With reference to [7.16](#), for an extension from the face for mechanical support of the blades provided as shown in [Figure 7.4](#), the point of measurement shall be determined by application of the articulate probe, [Figure 16.2](#), as shown in [Figure 7.5](#).


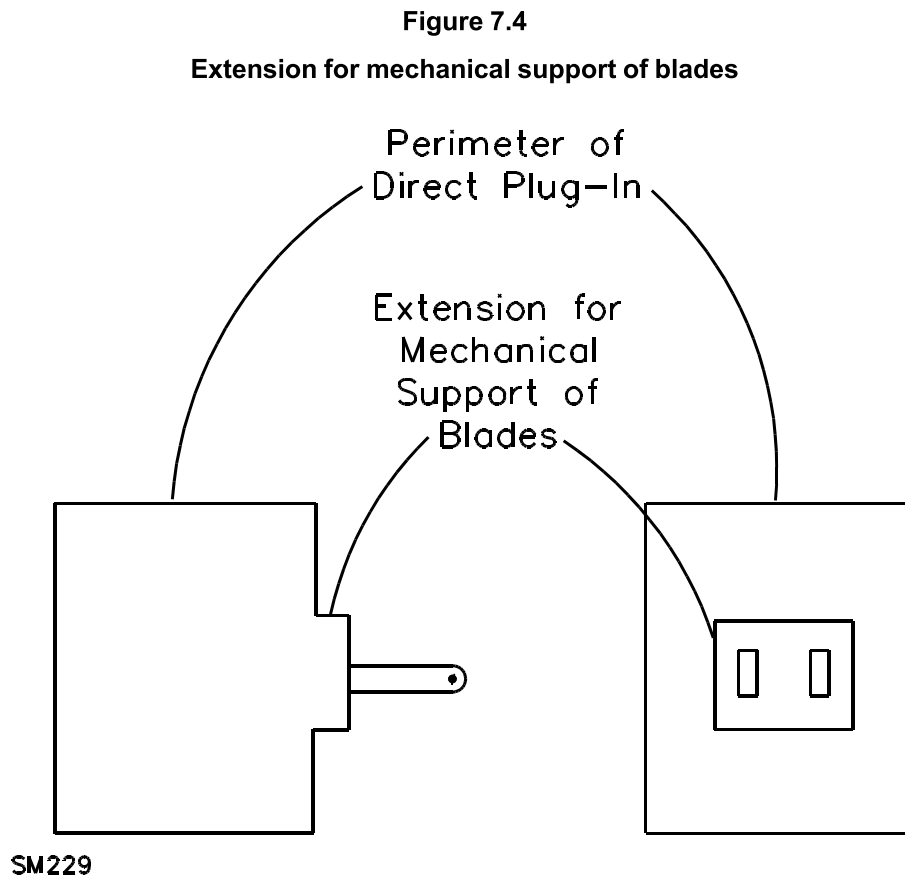


Figure 7.5
Determination of perimeter of units with rounded edges

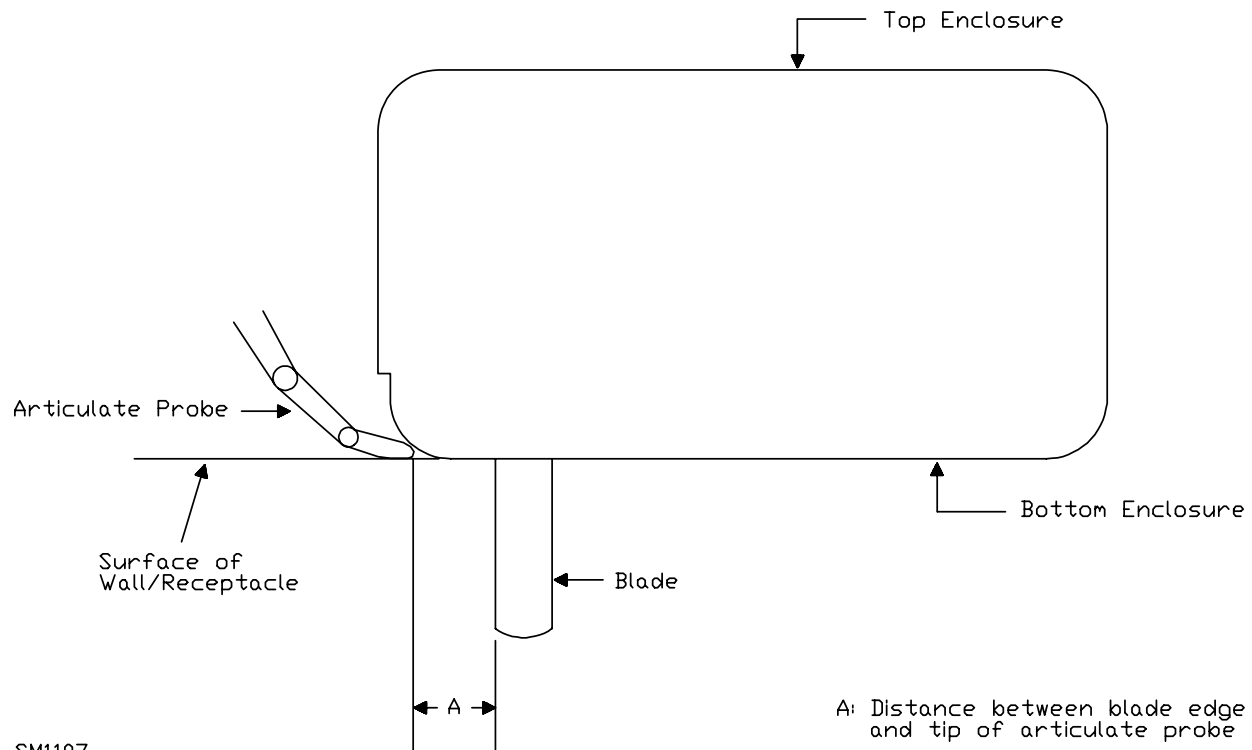

SM1107

7.18 With reference to [7.16](#), for a direct plug-in unit employing removable blades for the input connectors, the measurement shall also be determined on the plug module while removed from the direct plug-in unit.

8 Enclosure

8.1 A unit shall be provided with an enclosure that shall house all current-carrying parts that pose a risk of electric shock. The enclosure shall have the strength and properties necessary to reduce the risk of mechanical damage to the various parts.

8.2 A unit shall have no openings larger than those complying with [16.2.1](#).

8.3 If an acceptable grade of vulcanized fiber is used as part of the enclosure for the support of secondary parts (terminals and the like) that do not present a risk of fire or electric shock, the amount of fiber shall not be more than is necessary to support the secondary parts in question. The fiber shall not be less than 1/32 inch (0.8 mm) thick and shall not introduce a risk of fire, electric shock, or injury to persons as a result of abuse. See [46.1.1](#).

8.4 An enclosure constructed of sheet metal shall be formed from stock having a thickness not less than that specified in [Table 8.1](#). The thickness of enclosure sheet metal other than steel or aluminum shall not be less than that specified in [Table 8.1](#) for uncoated steel and shall have the necessary strength and rigidity.

Exception: For transformers with end bells forming part of the enclosure, sheet steel having a thickness of not less than 0.020 inch (0.51 mm) if uncoated, or 0.023 inch (0.58 mm) if zinc coated, may be used if the

drawn end bells have maximum dimensions of 2-1/4 inches (57.2 mm) on the flat portion and 1-1/2 inches (38.1 mm) at the base of the drawn portion.

Table 8.1
Minimum acceptable thickness of enclosure metal

Metal	At small, flat, unreinforced surfaces and at surfaces of a shape or size to provide adequate mechanical strength		At relatively large unreinforced flat surfaces	
	Inches	(mm)	Inches	(mm)
Die-cast	3/64	(1.2)	5/64	(2.0)
Cast malleable iron	1/16	(1.6)	3/32	(2.4)
Other cast metal	3/32	(2.4)	1/8	(3.2)
Uncoated sheet steel	0.026	(0.66)	0.026	(0.66)
Galvanized sheet steel	0.029	(0.74)	0.029	(0.74)
Nonferrous sheet metal other than copper	0.036	(0.91)	0.036	(0.91)
Copper	0.033	(0.84)	0.033	(0.84)

8.5 In addition to the performance tests specified in this Standard, the factors to be considered when evaluating a polymeric enclosure are:

- a) Material Flammability properties;
- b) Resistance to arcing properties; and
- c) Moisture absorptive properties.

These properties shall comply with the requirements in the Standard for Polymeric Materials – Use in Electrical Equipment Evaluations, UL 746C. For the purpose of this requirement, a semipermanent mounted unit is to be considered a portable unit.

8.6 A conductive coating applied to a nonmetallic surface such as the inside surface of a cover, enclosure, and the like shall comply with the appropriate requirements in the Standard for Polymeric Materials – Use in Electrical Equipment Evaluations, UL 746C, unless it can be determined that flaking or peeling of the coating does not result in a reduction of spacings or the bridging of live parts that may result in a risk of fire, electric shock, or injury to persons.

8.7 An adhesive used in the assembly of the enclosure shall be investigated as specified in the Standard for Polymeric Materials – Use in Electrical Equipment Evaluations, UL 746C.

Exception: A method utilizing fusion techniques, such as solvent cementing, ultrasonic welding, electromagnetic induction, and thermal welding need not be investigated.

9 Protection Against Corrosion

9.1 Except as noted in [9.2](#), iron and steel parts shall be protected against corrosion by galvanizing, plating, enameling, or other equivalent means if the corrosion of such unprotected parts results in a risk of fire, electric shock, or injury to persons.

Exception: This requirement does not apply to a part made of stainless steel.

9.2 The requirement in [9.1](#) applies to all enclosing cases or to other parts upon which intended mechanical operation may depend. It does not apply to laminations and small minor parts of iron or steel, such as washers, screws, and bolts, that are not current carrying, if the corrosion of such unprotected parts would not result in a risk of fire, electric shock, or injury to persons, or result in the device not operating as intended.

10 Switches

10.1 The requirements in this Section apply to switches not in a Class 2 circuit, and to switches in a Class 2 circuit the breakdown of which electrically or mechanically is likely to introduce a risk of fire or electric shock.

10.2 A switch subjected to a temperature higher than 50°C (122°F) shall be evaluated with respect to the temperature limits of the materials used.

10.3 A switch shall be located and positioned so that it is not subject to mechanical damage during normal use or as a result of abuse. See [46.1.1](#).

10.4 Other than as indicated in [10.7](#) and [10.8](#), a switch or other control device shall be acceptable for the application and shall have current and voltage ratings not less than those of the load that it controls.

10.5 A primary circuit switch shall be connected to an ungrounded circuit conductor.

10.6 A primary circuit switch shall have a current rating not less than twice the normal current draw under normal load conditions, or the switch shall be investigated for the application in accordance with the Overload and Endurance Tests on Switches and Controls, Section [36](#).

10.7 A switch or other control device connected in the output circuit may be used if the device complies with the Normal Temperature Test and the Overload Test on Secondary Switches. See [33.1](#) and [37.1](#).

10.8 A switch or other controller not having an acceptable rating and located on a direct plug-in unit where it cannot be operated unless the unit is withdrawn from a receptacle may be used if it complies with the Operation Test, Section [38](#).

11 Protective Devices

11.1 A protective device built into a unit shall comply with the requirements for that component.

11.2 The protective device may be located in either the primary or secondary circuit.

11.3 Crossed or nicked (reduced) cross-section conductors shall not be employed as a protective device.

11.4 Protective devices mentioned in [11.1](#) include, but are not limited to, eutectic material, fuses, overtemperature and overcurrent protectors, thermal protectors, and similar devices intended to interrupt or limit the flow of current as a result of overload.

11.5 A thermostat, thermal cutoff, Positive Temperature Coefficient (PTC) resistor, or Negative Temperature Coefficient (NTC) resistor incorporated in a unit shall not cause a risk of fire or electric shock due to improper application.

11.6 A manually reset thermostat shall be constructed so that automatic tripping of the thermostat is not prevented by any setting or position of the reset mechanism.

11.7 An automatically or manually reset protective device or a replaceable overcurrent-protective device shall not open when the unit is delivering its rated output. See the Normal Temperature Test, Section [33](#).

11.8 A primary circuit overcurrent protective device of the single-pole type, other than an automatic control without a marked "off" position, shall be connected to an ungrounded circuit conductor. See Exception No. 5 to [14.2.1](#).

11.9 When a single fuse is located in the primary circuit, it shall be connected to an ungrounded circuit conductor.

Exception: This requirement does not apply to a unit not intended to be serviced.

11.10 When both circuit conductors of a product intended for connection to a nominal 120 volt branch circuit are fused, the fuse in the grounded circuit conductor shall be rated not less than the fuse in the ungrounded circuit conductor. See [52.8](#).

Exception: This requirement does not apply to a unit not intended to be serviced.

11.11 A unit investigated for compliance with the energy limitations of [30.3.1](#) shall be provided with protection, such as a fuse or PTC, complying with the Calibration of Overcurrent Protection Devices Test, Section [31](#).

11.12 A protective device that is provided to comply with [11.11](#) shall not be of the automatic reclosing type, and shall not have automatic tripping prevented by any setting or position of the reset mechanism. When an accessible control of a manual reset protective device is held in the on or reset position, and the protective device is automatically tripped, the contact shall not automatically return to the closed position.

11.13 An overcurrent protective device shall be located inside the unit enclosure. The device shall be inaccessible to tampering.

Exception: A unit may be provided with an externally replaceable overcurrent protective device. If the device is relied upon for acceptable performance, the device shall not be interchangeable with a device having a higher current rating.

11.14 A fuse provided in the secondary circuit of a not inherently limiting Class 2 power unit shall be rated in accordance with [Table 30.2](#).

12 Components

12.1 A component – a fixed resistor, Positive Temperature Coefficient (PTC) or Negative Temperature Coefficient (NTC) resistor, diode, or the like – employed to limit (see [5.8](#)) the output of a unit to within the required current or power levels, or otherwise used to obtain acceptable performance, shall have permanence and stability which does not decrease its limiting capacities. Among the factors considered when evaluating a limiting component are:

- a) Effect of operating temperature;
- b) Electrical stress level;
- c) Effect of transient surges; and
- d) Resistance to moisture.

12.2 There shall be no components connected between primary and output circuits which result in a conductive connection (see [5.4](#)). If capacitive coupling is provided between primary and output circuits, it shall consist of either:

- a) A capacitor complying with the antenna coupling requirements specified in the Standard for Fixed Capacitors for Use in Electronic Equipment – Part 14: Sectional Specification: Fixed Capacitors for Electromagnetic Interference Suppression and Connection to the Supply Mains, UL 60384-14; or
- b) Two capacitors connected in series, each capacitor complying with the requirements in [34.1.3](#).

13 Coil Insulation

13.1 General

13.1.1 A coil shall be provided with insulation between the coil and any dead metal part, and between each adjacent pair of windings.

Exception No. 1: Two or more secondary windings may be considered as a single winding and interposing insulation is not required, if, when interconnected, the windings comply with the performance requirements for a single winding.

Exception No. 2: Insulation is not required if the spacings required by [24.1](#) are provided.

13.1.2 Coil insulation, unless inherently moisture resistant, shall be treated to render it moisture resistant.

13.1.3 Film-coated magnet wire is considered to be moisture resistant.

13.2 Insulation for transformers

13.2.1 The insulation between uninsulated, primary wires of opposite polarity shall be one of the following:

- a) Electrical grade paper, waxed or otherwise treated to resist the absorption of moisture, having a total thickness of not less than 0.012 inch (0.305 mm); or
- b) Other insulating material having a dielectric breakdown strength of not less than 2500 volts in the thickness used as determined by the Tests on Insulating Materials, Section [40](#).

13.2.2 Insulation between the primary and secondary windings shall be one of the following (for additional requirements, see [13.2.3](#) and [13.2.4](#)):

- a) Electrical grade paper, waxed or otherwise treated to resist the absorption of moisture, having a total minimum thickness of 0.012 inch (0.305 mm).
- b) A molded polymeric material such as a coil form or bobbin having a minimum thickness of 0.025 inch (0.64 mm).
- c) Insulation – other than of a molded polymeric material – as specified in [13.2.1](#)(b).

13.2.3 Tape used as insulation in lieu of spacings for a flanged bobbin wound transformer shall provide a continuous 1/32 inch (0.8 mm) minimum wide bent up edge against the bobbin flanges.

13.2.4 A flanged, bobbin-wound transformer shall be subjected to the output loading test described in [39.2](#). The test shall be continued for 15 days if the transformer has:

- a) The primary winding wound over the secondary winding or the secondary winding wound over the primary winding; and
- b) The primary winding insulated from the secondary winding by a layer of insulating material other than that specified in [13.2.2\(b\)](#).

Exception: The test is not required to be applied for 15 days if the following requirements are met:

- a) Multiple layered winding wire is used, which has been evaluated to the requirements for miscellaneous insulating devices and materials of the Standard for Polymeric Materials – Short Term Property Evaluations, UL 746A, the Standard for Polymeric Materials – Long Term Property Evaluations, UL 746B, and the Standard for Polymeric Materials – Use in Electrical Equipment Evaluations, UL 746C;*
- b) The spacing requirements of [Table 24.1](#) and [Table 24.2](#) are met;*
- c) The requirements in the Standard for Insulation Coordination Including Clearances and Creepage Distances for Electrical Equipment, UL 840, are met, along with the use of additional securement of the winding, and a Comparative Tracking Index (CTI) rating of 100 for all insulating material is determined; or*
- d) Insulated wiring is used which has been evaluated to the Standard for Single- and Multi-Layer Insulated Winding Wire, UL 2353.*

13.2.5 Insulation between the primary winding and the core shall be one of the following:

- a) Electrical grade paper, waxed or otherwise treated to resist moisture, having a minimum total thickness of 0.012 inch (0.305 mm);
- b) A molded polymeric material such as a coil form or bobbin having a minimum thickness of 0.025 inch (0.64 mm); or
- c) Insulation – other than of a molded polymeric material – as specified in [13.2.1\(b\)](#).

Exception: Insulation may be reduced or waived between the primary and core when all of the following conditions are met:

- a) The core is of a low electrical conductance material, for example ferrite used in switch-mode product;*
- b) The core is treated as a live and electrically conductive part when judging insulation and spacings between the core and:*
 - i) Accessible metal parts;*
 - ii) The secondary windings; and*
 - iii) Any other output circuitry.*
- c) In applying (b), the core shall be considered to be at the maximum potential of the primary winding; and*
- d) Insulation between secondary windings and core are in accordance with [13.2.5](#).*

13.2.6 Insulation between the primary winding lead connections and a metallic enclosure shall be one of the following:

- a) Electrical grade paper, waxed or otherwise treated to resist the absorption of moisture, not less than 0.012 inch (0.305 mm) thick if used in conjunction with an air spacing of one-half that specified in [24.1](#).
- b) Electrical grade paper, waxed or otherwise treated to resist the absorption of moisture having a total thickness of not less than 0.028 inch (0.71 mm) when the insulation is in contact with the enclosure.
- c) Insulation having a dielectric breakdown strength of not less than 2500 volts in the thickness used for (a) and 5000 volts in the thickness used for (b) as determined by Tests on Insulating Materials, Section [40](#).

13.2.7 Insulation in accordance with [13.2.8](#) shall be provided between a crossover lead and:

- a) The turns of the winding to which it is connected;
- b) The adjacent winding;
- c) The metallic enclosure; and
- d) The core.

13.2.8 To comply with [13.2.7](#), insulation shall be one of the following:

- a) Electrical grade paper, waxed or otherwise treated to resist the absorption of moisture, having a total thickness of not less than 0.012 inch (0.305 mm); or
- b) Insulation as specified in [13.2.1\(b\)](#).

Exception No. 1: Any type or thickness of insulation, or a through air spacing less than specified in [24.1](#), between a crossover lead and the winding to which it is connected may be used if either:

- a) The coil withstands the dielectric voltage withstand test described in [34.1.1](#) and [34.1.2](#) with the potential applied between the coil leads and with the coil lead cut at the point where it enters the inner layer; or*
- b) The coil withstands the induced potential test described in [34.2.1](#) – [34.2.3](#). See [13.2.9](#).*

Exception No. 2: This requirement does not apply to insulation between a Class 2 secondary crossover lead and:

- a) The secondary winding to which the crossover lead is connected;*
- b) The metallic enclosure; and*
- c) The core.*

13.2.9 With reference to Exception No. 1 to [13.2.8](#), the magnet coil of a molded bobbin transformer having a slot for the crossover or start lead – unspliced at the windings – is acceptable as crossover lead insulation if:

- a) The slots provide a graduated through air spacing to the winding, increasing to the end turns; and

b) The magnet-coil winding withstands the induced potential test described in [34.2.1](#) – [34.2.3](#) or the dielectric voltage withstand test described in [34.1.1](#) and [34.1.2](#).

13.2.10 Insulation between the primary-lead connections and the adjacent winding, and between secondary-lead connections and the primary winding shall be one of the following:

a) Electrical grade paper, waxed or otherwise treated to resist the absorption of moisture, having a total thickness of not less than 0.028 inch (0.71 mm); or

b) Other insulating material having a dielectric breakdown strength of not less than 5000 volts in the thickness used as determined by Tests on Insulating Materials, Section [40](#).

14 Input Connections

14.1 Direct plug-in units

14.1.1 The integral blade assembly of direct plug-in units shall comply with the construction requirements in the Standard for Attachment Plugs and Receptacles, UL 498, and Wiring Devices – Dimensional Specifications, ANSI/NEMA WD6. See [7.16](#) and [7.17](#).

14.1.2 If a direct plug-in unit employs a manually operated line connected single-pole switch or a fuse with an accessible contact, it shall employ a polarized- or grounding-type blade assembly.

14.1.3 If a direct plug-in unit employs removable, folding or retractable blades for the input connectors, it shall comply with the requirements specified in Section [44](#), Direct Plug-in Security of Input Contacts Test.

14.1.4 A power unit intended for use by travelers shall comply with (a) – (e):

a) The blade assembly shall be a 125 volt, 15 amp configuration;

b) The power unit shall employ a user adjustable voltage selector and comply with [39.6.1](#), or be capable of operating at different voltages without user adjustment;

c) The input voltage rating shall include nominal 120 volt;

d) The power unit shall be marked as specified in [51.8](#); and

e) The power unit shall be provided with instructions as specified in [54.4](#).

14.2 Cord-connected units

14.2.1 A portable or stationary unit shall be provided with a flexible cord in accordance with [Table 14.1](#) and an attachment plug for connection to the branch circuit. The blade assembly for connection to the branch circuit shall be of the polarized- or grounding-type. The length of cord external to the unit and including the attachment plug shall not be less than 6 feet (1.8 m) as measured from the face of the attachment plug to the point of attachment or entry.

Exception No. 1: A unit weighing 1 pound (454 g) or less is acceptable if the total length of the input and output cords is 6 feet or more, and the length of the input cord is at least 3 feet (0.91 m).

Exception No. 2: A stationary power unit intended to be fastened in place may require a form of supply connection that facilitates the interchange of equipment to maintain continuous service or otherwise meet special conditions of use. For such service, a Type S, SE, or equivalent flexible cord may be employed and may be of a length appropriate for the purpose, but no longer than 10 feet (3 m). Normally, a 2 foot (610 mm) length of cord will be sufficient for the plug and the receptacle connection.

Exception No. 3: A power unit marked in accordance with [51.7](#) and provided with instructions in accordance with [54.3](#) is not required to be provided with the detachable power supply cord.

Exception No. 4: If a power unit is intended for use in a country other than the U.S.A, the detachable power supply cord shall comply with the requirements of the country of destination.

Exception No. 5: For products that do not require a discharge path, a cord connected unit is not required to be supplied with a polarized plug when it does not include any single pole switches or fuseholders with accessible contacts.

Table 14.1
Acceptable flexible cords for cord connected power units

Flexible cord type	Maximum length, feet (m)
At least as serviceable as SP-2, SPE-2, SPT-2, SV, SVE, SVT	10 (3)
At least as serviceable as S, SE, SO, SP-3, SPT-3, ST, STO, SJ, SJE, SJO, SJT, SJTO	Not specified

14.2.2 If a unit with a permanently attached power supply cord can be adapted for use on two or more different voltages by field alteration of internal connections, the attachment plug provided with the unit shall be of a type required for the voltage and current for which the unit is connected when shipped from the factory.

14.2.3 If a multiple voltage rated power unit is intended for use with a detachable power supply cord, the cord shall be provided with the unit if either of the following apply:

- a) The power unit is provided with an operator adjustable voltage selector and complies with [39.6.1](#); or
- b) The power unit is capable of operating at different voltages without user adjustment.

The power unit shall be provided with instructions in accordance with [54.1](#) and [54.2](#).

Exception: A power unit marked in accordance with [51.7](#) and provided with instructions in accordance with [54.3](#) is not required to be provided with the detachable power supply cord.

14.2.4 A power unit intended for use by travelers shall comply with (a) – (e):

- a) The power supply cord shall terminate in a 125 volt, 15 amp plug configuration;
- b) The power unit shall employ a user adjustable voltage selector and comply with [39.6.1](#), or be capable of operating at different voltages without user adjustment;
- c) The input voltage rating shall include nominal 120 volt;
- d) The power unit shall be marked as indicated in [51.8](#); and
- e) The power unit shall be provided with instructions per [54.4](#).

14.3 DC input units

14.3.1 Units with a dc input shall be provided with a vehicle battery adapter in compliance with the Standard for Vehicle Battery Adapters, UL 2089, or with a cable as specified in [85.1](#).

Exception: A vehicle battery adapter is not required to be provided with the unit, when the unit is marked for use with a required vehicle battery adapter complying with the Standard for Vehicle Battery Adapters, UL 2089.

14.3.2 A fuse provided with a dc input jack shall not be relied upon to provide the overcurrent protection specified in the Output Current and Power Test, Section [30](#).

14.3.3 A unit employing an integral cigarette lighter connector assembly shall also comply with the Standard for Vehicle Battery Adapters, UL 2089. In addition, the overall mass of the unit shall not exceed 250 g (8.8 oz). The product of the total mass, and the distance between the center of gravity and the input contact positioned to simulate full insertion into a vehicle power outlet, shall not exceed 13500 g-mm (18.7 oz-in). For a unit with an attached cord, the determination shall be made with the cord severed at the enclosure, or at the strain-relief means if the strain-relief means is outside the enclosure. For a unit with a detachable cord, the determination shall be made with the cord severed from the mating connector connected to the cigarette lighter connector.

15 Output Connections

15.1 General

15.1.1 A unit shall be provided with an output cord, terminals, insulated leads, or output connectors. A battery charger with backfeed protection shall be provided with an output cord terminating in a connector, or a connector attached to or integral with the enclosure. See [15.4.3](#).

15.2 Output wiring

15.2.1 The output wiring shall be stranded conductors having insulation not less than 0.013 inch (0.33 mm) thick, and permanently attached to the output circuit. The wiring shall extend at least 6 feet (1.8 m) outside the unit, and shall comply with the requirements in [18.1](#) and [18.2](#).

Exception No. 1: Wiring less than 6 feet (1.8 m) long may be used if longer wiring introduces a risk of fire, electric shock, or injury to persons.

Exception No. 2: A product covered by Exception No. 1 to [14.2.1](#) need not extend the output wiring 6 feet (1.8 m) outside the unit.

15.2.2 For a cord-connected power unit with a minimum 6-foot (1.8-m) power-supply cord, the output flexible cord required by [15.1.1](#), whether permanently attached to the power unit or provided in the form of a separate cord set, shall be of any desirable length. The maximum combined length of the input and output cords shall not exceed 20 feet (6.1 m).

15.2.3 With respect to [15.2.1](#), for units with jacketed multiconductor output wiring, the individual conductor insulation may be less than 0.013 inch (0.33 mm) provided that the following conditions are met:

- a) The thickness of the individual conductor insulation plus the thickness of the jacket is not less than 0.013 inch (0.33 mm); and
- b) The unit complies with the requirements in [28.1](#) and [30.2.1](#) with any combination of output conductors interconnected.

15.2.4 A fitting having female contacts shall be constructed so that it does not receive the blades of a standard attachment plug. A fitting having male contacts shall be constructed so that the contacts do not touch a live part of a standard attachment-plug receptacle.

15.3 Output terminals

15.3.1 A terminal plate tapped for a wire-binding screw or stud shall be of brass or other nonferrous metal, or plated steel, not less than 0.030 inch (0.76 mm) thick, and shall provide not less than two full threads in the metal for the binding screw.

Exception No. 1: Two full threads are not required if a lesser number of threads results in a secure connection in which the threads do not strip when subjected to the test specified in [45.1](#).

Exception No. 2: A plate may be less than 0.030 inch (0.76 mm) thick if the tapped threads have acceptable mechanical strength. See [45.1](#).

Exception No. 3: This requirement does not apply to a terminal plate that complies with the Exception to [45.1](#).

15.3.2 A wire-binding screw or terminal stud shall not be smaller than No. 6 (3.5 mm diameter) and shall not have more than 32 threads per inch (25.4 mm). The screw or stud shall be of brass or other nonferrous metal, or plated iron or steel.

15.3.3 Terminal studs shall be prevented from turning by means other than friction between mounting surfaces. The acceptability of a lock washer or similar means to prevent turning shall be determined by the test described in [45.1](#) and [45.2](#).

15.3.4 A multi-output unit employing output terminals the output of which exceeds the current limit specified in [30.2](#) with outputs interconnected shall be marked in accordance with [52.12](#).

15.4 Output connectors

15.4.1 A unit with multiple outputs where interconnection exceeds Class 2 levels as defined in this standard shall be provided with a polarized connector.

15.4.2 Output connectors mounted on the enclosure and intended for direct connection of accessories, such as separable battery holders and the like, shall provide a secure connection between mating parts. The connections shall be polarized if the output is direct-current or if multiple outputs are provided.

15.4.3 A battery charger shall be provided with a means to inhibit backfeed of current during a fault in the output circuit, including faults in the output wiring, which results in a risk of fire or electric shock. The means of prevention shall protect each output and shall consist of any of the following:

- a) A fuse, calibrated in accordance with the Standard for Low-Voltage Fuses – Part 1: General Requirements, UL 248-1, and the Standard for Low-Voltage Fuses – Part 14: Supplemental Fuses, UL 248-14, located in the output connector and rated to correspond with the maximum overcurrent protection rating in [Table 30.2](#) for the open circuit voltage involved;
- b) A diode or fixed impedance located in the output connector where it will limit backfeed current in accordance with the test specified in [39.9.1](#) and [39.9.2](#);
- c) An overcurrent protector equivalent to (a) located in the output connector; or
- d) An output cord equivalent to that specified in [Table 14.1](#) with respect to insulating material and thickness; and the battery charger complies with the test specified in [39.9.3](#) and [39.9.4](#).

Exception No. 1: A means of protection is not required when a specific battery or battery pack, to be used with the charger, does not exceed Class 2 parameters at any level of charge condition. See [52.9](#). If the specific battery or battery pack employs limiting circuitry, it shall either:

- a) Comply with Class 2 parameters with all circuitry defeated; or*
- b) Comply with the Standard for Household and Commercial Batteries, UL 2054.*

Exception No. 2: A battery charger employing integral batteries is not required to comply with [15.4.3](#).

15.4.4 Connectors normally used with coaxial cable shall not be used for output connections.

15.5 Bushings

15.5.1 At a point where a flexible cord passes or is intended to pass through an opening in a metal wall, barrier, or enclosing case, there shall be a bushing or the equivalent that shall:

- a) Be substantial;
- b) Be secured in place; and
- c) Have a smooth, rounded surface against which the cord may bear.

15.5.2 If the cord hole is in a nonconducting material, a smooth, rounded surface is considered to be the equivalent of a bushing.

16 Accessibility of Live Parts

16.1 General

16.1.1 A live part that poses a risk of electric shock shall be located or enclosed so that the risk of contact is reduced.

16.1.2 The input impedance of the voltmeter used to measure voltage in accordance with the requirements of [16.2.1](#) and [16.3.1](#) is to be a minimum of one megohm. The input impedance of a meter with more than one megohm input impedance can be lowered by using shunt impedance.

16.1.3 A guard, baffle, or cover that can be removed without using a tool is to be removed when determining if a live part is accessible to the user. A live part that can be contacted by the test pin, articulate probe, or accessibility probe illustrated in [Figure 16.1](#), [Figure 16.2](#), or [Figure 16.4](#) is considered to be accessible.

Exception: For direct plug-in units provided with removable blades for the input connectors, accessibility of live parts shall also be determined on the plug module while removed from the direct plug-in unit, even if tools are required for removal.