



UL 60079-25

STANDARD FOR SAFETY

Explosive Atmospheres - Part 25: Intrinsically Safe Electrical Systems

This document is only permissible for use by User of . 8/23/2016 1:28:36 PM

**UL COPYRIGHTED MATERIAL –
NOT AUTHORIZED FOR FURTHER REPRODUCTION OR
DISTRIBUTION WITHOUT PERMISSION FROM UL**



Documents

Document Sharing Hub

This document is only permissible for use by User of . 8/23/2016 1:28:36 PM

**UL COPYRIGHTED MATERIAL –
NOT AUTHORIZED FOR FURTHER REPRODUCTION OR
DISTRIBUTION WITHOUT PERMISSION FROM UL**



Documents

Document Sharing Hub

UL Standard for Safety for Explosive Atmospheres - Part 25: Intrinsically Safe Electrical Systems, UL 60079-25

Second Edition, Dated December 2, 2011

Summary of Topics

Adoption of ANSI/ISA 60079-25, Standard for Explosive Atmospheres - Part 25: Intrinsically Safe Electrical Systems as ANSI/UL 60079-25. This Standard is being issued to update the title page to reflect the reaffirmation of its ANSI approval. No changes in requirements have been made.

Although this is the first-time publication of this Standard by UL, it is being published as the Second edition in order to align UL's edition number with that of the ISA and IEC Standards. Please note that as this is a simple reaffirmation of an existing ISA standard, National Differences are shown in ISA's format. All future revisions for this standard will be published using UL's National Differences.

These requirements are substantially in accordance with Proposal(s) on this subject dated September 25, 2015.

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form by any means, electronic, mechanical photocopying, recording, or otherwise without prior permission of UL.

UL provides this Standard "as is" without warranty of any kind, either expressed or implied, including but not limited to, the implied warranties of merchantability or fitness for any purpose.

In no event will UL be liable for any special, incidental, consequential, indirect or similar damages, including loss of profits, lost savings, loss of data, or any other damages arising out of the use of or the inability to use this Standard, even if UL or an authorized UL representative has been advised of the possibility of such damage. In no event shall UL's liability for any damage ever exceed the price paid for this Standard, regardless of the form of the claim.

Users of the electronic versions of UL's Standards for Safety agree to defend, indemnify, and hold UL harmless from and against any loss, expense, liability, damage, claim, or judgment (including reasonable attorney's fees) resulting from any error or deviation introduced while purchaser is storing an electronic Standard on the purchaser's computer system.



ISA - International Society of Automation
ANSI/ISA 60079-25-2011 (R2015)
Second Edition



Underwriters Laboratories Inc.
ANSI/UL 60079-25
Second Edition

Explosive Atmospheres - Part 25: Intrinsically Safe Electrical Systems

December 2, 2011

(Title Page Reprinted: November 20, 2015)



ANSI/ISA/UL 60079-25-2011 (R2015)

**UL COPYRIGHTED MATERIAL –
NOT AUTHORIZED FOR FURTHER REPRODUCTION OR
DISTRIBUTION WITHOUT PERMISSION FROM UL**



Documents

Document Sharing Hub

Commitment for Amendments

This standard is issued jointly by ISA and Underwriters Laboratories Incorporated (UL). Comments or proposals for revisions on any part of the standard may be submitted to UL at any time.

ISBN 978-1-941546-76-5 Copyright © 2015 ISA

These materials are subject to copyright claims of IEC, ANSI, and ISA. All rights reserved. Not for resale. Printed in the United States of America. No part of this publication may be reproduced in any form, including an electronic retrieval system, without the prior written permission of ISA. All requests pertaining to this standard should be submitted to ISA.

The most recent designation of ANSI/ISA-60079-25 as a Reaffirmed American National Standard (ANSI) occurred on November 20, 2015.

Copyright © 2015 Underwriters Laboratories Inc.

UL's Standards for Safety are copyrighted by UL. Neither a printed nor electronic copy of a Standard should be altered in any way. All of UL's Standards and all copyrights, ownerships, and rights regarding those Standards shall remain the sole and exclusive property of UL.

This ANSI/UL Standard for Safety consists of the Second Edition including revisions through November 20, 2015.

The most recent designation of ANSI/UL 60079-25 as a Reaffirmed American National Standard (ANS) occurred on November 20, 2015. ANSI approval for a standard does not include the Cover Page, Transmittal Pages, Title Page, or effective date information. The National Difference Page and IEC Foreword are also excluded from the ANSI approval of IEC-based standards.

Comments or proposals for revisions on any part of the Standard may be submitted to UL at any time. Proposals should be submitted via a Proposal Request in UL's On-Line Collaborative Standards Development System (CSDS) at <http://csds.ul.com>.

UL's Standards for Safety are copyrighted by UL. Neither a printed nor electronic copy of a Standard should be altered in any way. All of UL's Standards and all copyrights, ownerships, and rights regarding those Standards shall remain the sole and exclusive property of UL.

To purchase UL Standards, visit Comm 2000 at http://www.comm-2000.com/help/how_to_order.aspx or call toll-free 1-888-853-3503.

This document is only permissible for use by User of . 8/23/2016 1:28:36 PM

**UL COPYRIGHTED MATERIAL –
NOT AUTHORIZED FOR FURTHER REPRODUCTION OR
DISTRIBUTION WITHOUT PERMISSION FROM UL**



Documents

Document Sharing Hub

General Notes

This UL Standard is based on IEC Publication IEC 60079-25: Second edition, Explosive Atmospheres - Part 25: Intrinsically Safe Electrical Systems, and is copyrighted by the IEC.

Efforts have been made to synchronize the UL edition number with that of the corresponding IEC standard with which this standard is harmonized. As a result, one or more UL edition numbers have been skipped to match that of the IEC edition number.

This is the common ISA and UL standard for Explosive Atmospheres - Part 25: Intrinsically Safe Electrical Systems. It is the Second edition of ANSI/ISA-60079-25 (superseding ANSI/ISA-12.02.05)-2011 and the Second edition of ANSI/UL 60079-25. The document is a modification of the IEC document and includes U.S. national differences encompassing both additions and deletions of information.

As the publication of this standard by UL is being done as a result of a simple reaffirmation of ISA's currently published standard, National Differences are shown using ISA's format. All future publications of this standard will show National Differences using UL's format.

This common standard was prepared by the (ISA) - The International Society of Automation on November 23, 2011 but is now being maintained by Underwriters Laboratories Inc. (UL).

Note: Although the intended primary application of this standard is stated in its scope, it is important to note that it remains the responsibility of the users of the standard to judge its suitability for their particular purpose.

Level of harmonization

This standard adopts the IEC text with national differences.

The requirements in this Standard are not presented in different formats by UL and ISA as this is a simple reaffirmation of an existing ISA standard. Therefore, the UL version of the standard is being published as the ISA version of the standard which illustrates the national differences from the IEC text through the use of legislative text (strike-out and underline).

Interpretations

The interpretation by the SDO of an identical or equivalent standard shall be based on the literal text to determine compliance with the standard in accordance with the procedural rules of the SDO. If more than one interpretation of the literal text has been identified, a revision shall be proposed as soon as possible to each of the SDOs to more accurately reflect the intent.

Preface (ISA)

The preface, as well as all footnotes and annexes, is included for information purposes and is not part of ANSI/ISA-60079-25-2011(R2015).

This document has been prepared as part of the service of ISA toward a goal of uniformity in the field of instrumentation. To be of real value, this document should not be static but should be subject to periodic review.

The ISA Standards and Practices Department is aware of the growing need for attention to the metric system of units in general, and the International System of Units (SI) in particular, in the preparation of instrumentation standards. The Department is further aware of the benefits to USA users of ISA standards of incorporating suitable references to the SI (and the metric system) in their business and professional dealings with other countries. Toward this end, this Department will endeavour to introduce SI-acceptable metric units in all new and revised standards, recommended practices, and technical reports to the greatest extent possible. *Standard for Use of the International System of Units (SI): The Modern Metric System*, published by the American Society for Testing & Materials as IEEE/ASTM SI 10-97, and future revisions, will be the reference guide for definitions, symbols, abbreviations, and conversion factors.

It is the policy of ISA to encourage and welcome the participation of all concerned individuals and interests in the development of ISA standards, recommended practices, and technical reports. Participation in the ISA standards-making process by an individual in no way constitutes endorsement by the employer of that individual, of ISA, or of any of the standards, recommended practices, and technical reports that ISA develops.

CAUTION - ISA DOES NOT TAKE ANY POSITION WITH RESPECT TO THE EXISTENCE OR VALIDITY OF ANY PATENT RIGHTS ASSERTED IN CONNECTION WITH THIS DOCUMENT, AND ISA DISCLAIMS LIABILITY FOR THE INFRINGEMENT OF ANY PATENT RESULTING FROM THE USE OF THIS DOCUMENT. USERS ARE ADVISED THAT DETERMINATION OF THE VALIDITY OF ANY PATENT RIGHTS, AND THE RISK OF INFRINGEMENT OF SUCH RIGHTS, IS ENTIRELY THEIR OWN RESPONSIBILITY.

PURSUANT TO ISA'S PATENT POLICY, ONE OR MORE PATENT HOLDERS OR PATENT APPLICANTS MAY HAVE DISCLOSED PATENTS THAT COULD BE INFRINGED BY USE OF THIS DOCUMENT AND EXECUTED A LETTER OF ASSURANCE COMMITTING TO THE GRANTING OF A LICENSE ON A WORLDWIDE, NON-DISCRIMINATORY BASIS, WITH A FAIR AND REASONABLE ROYALTY RATE AND FAIR AND REASONABLE TERMS AND CONDITIONS. FOR MORE INFORMATION ON SUCH DISCLOSURES AND LETTERS OF ASSURANCE, CONTACT ISA OR VISIT WWW.ISA.ORG/STANDARDSPATENTS.

OTHER PATENTS OR PATENT CLAIMS MAY EXIST FOR WHICH A DISCLOSURE OR LETTER OF ASSURANCE HAS NOT BEEN RECEIVED. ISA IS NOT RESPONSIBLE FOR IDENTIFYING PATENTS OR PATENT APPLICATIONS FOR WHICH A LICENSE MAY BE REQUIRED, FOR CONDUCTING INQUIRIES INTO THE LEGAL VALIDITY OR SCOPE OF PATENTS, OR DETERMINING WHETHER ANY LICENSING TERMS OR CONDITIONS PROVIDED IN CONNECTION WITH SUBMISSION OF A LETTER OF ASSURANCE, IF ANY, OR IN ANY LICENSING AGREEMENTS ARE REASONABLE OR NON-DISCRIMINATORY.

ISA REQUESTS THAT ANYONE REVIEWING THIS DOCUMENT WHO IS AWARE OF ANY PATENTS THAT MAY IMPACT IMPLEMENTATION OF THE DOCUMENT NOTIFY THE ISA STANDARDS AND PRACTICES DEPARTMENT OF THE PATENT AND ITS OWNER.

**UL COPYRIGHTED MATERIAL –
NOT AUTHORIZED FOR FURTHER REPRODUCTION OR
DISTRIBUTION WITHOUT PERMISSION FROM**



Documents

Document Sharing Hub

ADDITIONALLY, THE USE OF THIS DOCUMENT MAY INVOLVE HAZARDOUS MATERIALS, OPERATIONS OR EQUIPMENT. THE DOCUMENT CANNOT ANTICIPATE ALL POSSIBLE APPLICATIONS OR ADDRESS ALL POSSIBLE SAFETY ISSUES ASSOCIATED WITH USE IN HAZARDOUS CONDITIONS. THE USER OF THIS DOCUMENT MUST EXERCISE SOUND PROFESSIONAL JUDGMENT CONCERNING ITS USE AND APPLICABILITY UNDER THE USER'S PARTICULAR CIRCUMSTANCES. THE USER MUST ALSO CONSIDER THE APPLICABILITY OF ANY GOVERNMENTAL REGULATORY LIMITATIONS AND ESTABLISHED SAFETY AND HEALTH PRACTICES BEFORE IMPLEMENTING THIS DOCUMENT.

THE USER OF THIS DOCUMENT SHOULD BE AWARE THAT THIS DOCUMENT MAY BE IMPACTED BY ELECTRONIC SECURITY ISSUES. THE COMMITTEE HAS NOT YET ADDRESSED THE POTENTIAL ISSUES IN THIS VERSION.

The following people served as members of STP 60079 and participated in the review of this Reaffirmation:

NAME	COMPANY
T. Schnaare, Chair	Rosemount Inc.
*T. Adam	FM Approvals LLC
R. Allen	Honeywell International Inc.
D. Ankele	UL LLC
S. Bihler	Atec Training and Certification LLC
S. Blais	Appleton Group
K. Bogeli	KBB Consulting
R. Brownlee	Pepperl+Fuchs Inc.
D. Burns	Shell P&T Innovation / R&D
*C. Coache	National Fire Protection Association
D. Cook	County of Shelby
M. Coppler	Det Norske Veritas Certification Inc.
*T. Crawford	Intertek Testing Services
G. Cullen	Ex Industries
M. Dona	Santos Ltd
T. Dubaniewicz	NIOSH
M. Egloff	Montana Tech, University of Montana
D. El Tawy	Solar Turbines Inc.
*A. Engler	Det Norske Veritas DNV
W. Fiske	Intertek
G. Garcha	GE Power & Water
D. Grady	Talema Group
R. Holub	Dupont
P. House	Thermon Mfg Co.
*P. Kelly	UL LLC
S. Kiddle	ABB Inc.
P. Kovscek	Industrial Scientific Corp.
A. Kreider	Phoenix Contact Development & Mfg Inc.
C. Kurtzman	Rosemount Inc.
W. Lawrence	FM Approvals LLC
E. Leubner	Eaton's Crouse-Hinds Business
W. Lowers	WCL Corp.
*N. Ludlam	FM Approvals Ltd.
E. Massey	Baldor Electric Co.
W. McBride	Northern Electric Co.
T. Milchalski	Killark, Div of Hubbell Inc.
J. Miller	Det-Tronics

*O. Murphy	Honeywell International Inc.
D. Nachtigall	Rockwell Automation
D. Nedorostek	Bureau of Safety & Environmental Enforcement
B. Page	Consultant
T. Patel	Littelfuse Inc.
*Kevin Robinson	OSHA
J. Ruggieri	General Machine Corp.
B. Seitz	AR Technical Services
*J. Scheller	Baldor Electric Co.
S. Sharma	General Electric Co.
R. Sierra	US Coast Guard
M. Spencer	Columbia Gas Transmission
*R. Teather	Det Norske Veritas Certification Inc.
D. Wechsler	American Chemistry Council
R. Wigg	E-X Solutions International Pty Ltd.
R. Zalosh	Firexplo

*Denotes non-voting members

The following people served as members of ISA Subcommittee ISA12.2:

NAME	COMPANY
N. Ludlam, Chair	FM Approvals Ltd.
M. Coppler, Managing Director	Ametek Inc.
N. Abbatiello	Speer Equipment Inc.
T. Adam	FM Approvals LLC
R. Allen	Honeywell Inc.
S. Arnold	Ametek Drexelbrook
S. Czaniecki	Endress + Hauser Canada
J. Dolphin	PSC Solutions
A. Engler	Det Norske Veritas DNV
J. Genre	Industrial Scientific Corp.
G. Kozinski	GE Infrastructure Sensing
R. Masek	CSA International
J. McCormick	Bently Nevada LLC
J. Miller	Detector Electronics Corp.
A. Page	Consultant
R. Parks	Intertek
B. Schaefer	Underwriters Laboratories Inc.
T. Schnaare	Rosemount Inc.
J. Thomas	Schlumberger
L. Vlaga	General Monitors
D. Wechsler	Dow Chemical Co.

The following people served as members of ISA Committee ISA12:

NAME	COMPANY
T. Schnaare, Chair	Rosemount Inc.
W. Lawrence, Vice Chair	FM Approvals LLC
M. Coppler, Managing Director	Ametek Inc.
R. Allen	Honeywell Inc.
D. Ankele	Underwriters Laboratories Inc.
R. Batra	Chevron Corporation
S. Bihler	Zone Safe Solutions

K. Boegli	Phoenix Contact
D. Burns	Shell P&T – Innovation / R&D
C. Casso	Nabors Industries
M. Dona	Santos Ltd.
T. Dubaniewicz	NIOSH
D. El Tawy	Solar Turbines, Inc.
A. Engler	Det Norske Veritas DNV
W. Fiske	Intertek
D. Jagger	Bifold-Fluid Power
J. Jonscher	Adalet PLM
P. Kovscek	Industrial Scientific Corporation
J. Kuczka	Killark
E. Leubner	Cooper Crouse-Hinds
N. Ludlam	FM Approvals Ltd.
R. Masek	CSA International
E. Massey	Baldor Electric Company
J. Miller	Detector Electronics Corporation
A. Page	Consultant
R. Seitz	Artech Engineering
R. Sierra	USCG
M. Spencer	Columbia Gas Transmission
J. Thomas	Schlumberger
D. Wechsler	Dow Chemical Company
R. Wigg	E-x Solutions International Pty. Ltd.

This standard was approved for publication by the ISA Standards and Practices Board on 22 November 2011.

NAME	COMPANY
D. Dunn, Vice President	Aramco Services Co.
R. Bartusiak	ExxonMobil Research & Engineering
P. Brett	Honeywell Inc.
J. Campbell	ConocoPhillips
M. Coppler	Ametek Inc.
E. Cosman	The Dow Chemical Company
B. Dumortier	Schneider Electric
J. Federlein	Federlein & Assoc. Inc.
J. Gilsinn	NIST/MEL
E. Icyan	ACES Inc.
J. Jamison	EnCana Corporation Ltd.
K. P. Lindner	Endress + Hauser Process Solutions AG
V. Maggioli	Feltronics Corp.
T. McAvinew	Instrumentation and Control Engineering, LLC
R. Reimer	Rockwell Automation
S. Russell	Valero Energy Corp.
N. Sands	DuPont
H. Sasajima	Yamatake Corp.
T. Schnaare	Rosemount Inc.
J. Tatera	Tatera & Associates Inc.
I. Verhappen	Industrial Automation Networks Inc.
W. Weidman	WCW Consulting
J. Weiss	Applied Control Solutions LLC
M. Wilkins	Yokogawa IA Global Marketing (USMK)
D. Zetterberg	Chevron Energy Technology Co.

This document is only permissible for use by User of . 8/23/2016 1:28:36 PM

This page intentionally left blank.

**UL COPYRIGHTED MATERIAL –
NOT AUTHORIZED FOR FURTHER REPRODUCTION OR
DISTRIBUTION WITHOUT PERMISSION FROM UL**



Documents

Document Sharing Hub

INTERNATIONAL ELECTROTECHNICAL COMMISSION

EXPLOSIVE ATMOSPHERES - Part 25: Intrinsically Safe Electrical Systems

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and nongovernmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.

2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.

3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.

4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.

5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.

6) All users should ensure that they have the latest edition of this publication.

7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.

8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.

9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

UL COPYRIGHTED MATERIAL –
NOT AUTHORIZED FOR FURTHER REPRODUCTION OR
DISTRIBUTION WITHOUT PERMISSION FROM  **Documents**
Document Sharing Hub

International Standard IEC 60079-25 has been prepared by subcommittee 31G: Intrinsically safe apparatus, of IEC technical committee 31: Equipment for explosive atmospheres.

This second edition cancels and replaces the first edition published in 2003 and constitutes a technical revision.

The significant changes with respect to the previous edition are listed below:

- extension of the scope from Group II to Groups I, II and III;
- introduction of level of protection “ic”;
- addition of requirements for cables and multi-core cables;
- reference to IEC 60079-11 regarding the termination of intrinsically safe circuit;
- requirements for the assessment of an expanded and clarified intrinsically safe system regarding level of protection “ic”, simple apparatus and faults in multi-core cables;
- introduction of predefined systems and merging of the system requirements for FISCO from IEC 60079-27;
- addition of requirements for simple intrinsically safe systems containing both lumped inductance and lumped capacitance;
- addition of a method for testing the electrical parameters of cables;
- additional information for the use of simple apparatus in systems.

The text of this standard is based on the following documents:

FDIS	Report on voting
31G/202/FDIS	31G/203/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of IEC 60079 series, under the general title *Explosive atmospheres* can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed;
- withdrawn;

- replaced by a revised edition; or
 - amended.
-

This document is only permissible for use by User of . 8/23/2016 1:28:36 PM

This document is only permissible for use by User of . 8/23/2016 1:28:36 PM

This page intentionally left blank.

**UL COPYRIGHTED MATERIAL –
NOT AUTHORIZED FOR FURTHER REPRODUCTION OR
DISTRIBUTION WITHOUT PERMISSION FROM UL**



Documents

Document Sharing Hub

CONTENTS

1	Scope	16
2	Normative References	16
3	Terms, definitions and abbreviations	17
3.1	Terms and definitions	17
3.2	Abbreviations	18
4	Descriptive system document	18
5	Grouping and classification	19
6	Levels of protection	19
6.1	General	19
6.2	Level of protection “ia”	19
6.3	Level of protection “ib”	19
6.4	Level of protection “ic”	20
7	Ambient temperature rating	20
8	Interconnecting wiring / cables used in an intrinsically safe electrical system	20
9	Requirements of cables and ~~multi-core~~ <u>multi-conductor</u> cables	20
9.1	General	20
9.2	~~Multi-core~~ <u>Multi-conductor</u> cables	21
9.3	Electrical parameters of cables	21
9.4	Conducting screens (<u>shields</u>)	21
9.5	Types of ~~multi-core~~ <u>multi-conductor</u> cables	21
9.5.1	General	21
9.5.2	Type A cable	21
9.5.3	Type B cable	21
9.5.4	Type C cable	22
10	Termination of intrinsically safe circuits	22
11	Earthing and bonding of intrinsically safe systems	22
12	Protection against lightning and other electrical surges	22
13	Assessment of an intrinsically safe system	23
13.1	General	23
13.2	Simple apparatus	24
13.3	Analysis of inductive circuits	25
13.4	Faults in ~~multi-core~~ <u>multi-conductor</u> cables	25
13.4.1	Type of ~~multi-core~~ <u>multi-conductor</u> cables	25
13.4.2	Type A cable	25
13.4.3	Type B cable	25
13.4.4	Type C cable	26
13.5	Type verifications and type tests	26
14	Marking	26
15	Predefined systems	26

This document is only permissible for use by User of . 8/23/2016 1:28:36 PM

Annex A (informative) Assessment of a simple intrinsically safe system	28
Annex B (normative) Assessment of circuits with more than one source of power	32
Annex C (informative) Interconnection of non-linear and linear intrinsically safe circuits	36
C.1 General.....	36
C.2 Basic types of non-linear circuits.....	41
C.2.1 Parameters	41
C.2.2 Information given in the certificates, instructions or control drawing	42
C.3 Interconnection of intrinsically safe circuits with more than one source	44
C.3.1 Determination of a resultant output characteristic.....	44
C.3.2 Safety assessment of the interconnection and determination of the maximum permissible capacitance and inductance.....	45
C.3.3 Supplementary comments about the procedure using output characteristics.....	46
C.4 Illustration of the procedure using output characteristics by means of an example	47
C.5 Summary	51
C.6 Diagrams	51
Annex D (normative) Verification of inductive parameters	74
Annex E (informative) A possible format for descriptive systems drawings and installation drawings	77
Annex F (informative) Surge protection of an intrinsically safe circuit.....	81
F.1 General.....	81
F.2 Installation to be protected.....	81
F.3 Lightning induced surges	81
F.4 Preventive measures	81
F.5 Supporting documentation	82
F.6 Further protection	82
Annex G (normative) Testing of cable electrical parameters.....	85
G.1 General.....	85
G.2 Measurements	85
G.3 ~~Multi-conductor~~ <u>Multi-core</u> cables.....	85
G.3.1 General.....	85
G.3.2 Type A ~~multi-core~~ <u>multi-conductor</u> cables	86
G.3.3 Type B ~~multi-core~~ <u>multi-conductor</u> cables	86
G.3.4 Type C ~~multi-core~~ <u>multi-conductor</u> -cables.....	86
Annex H (informative) Use of simple apparatus in systems	88
H.1 General.....	88
H.2 Use of apparatus with 'simple apparatus' input description.....	89
Annex I (normative) FISCO systems	91
I.1 General.....	91
I.2 System requirements	91
I.2.1 General.....	91
I.3 Additional requirements of "ic" FISCO systems	92
Annex J (normative) US National Deviations	95

General..... 95

Group I is excluded from the scope of this document, and all associated text has been deleted..... 95

Bibliography 98

This document is only permissible for use by User of . 8/23/2016 1:28:36 PM

FOREWORD

All text of IEC 60079-25:2010 (Edition 2) is included. U.S. National Deviations are shown by ~~strikeout~~ through text deleted and underline under text added. Tables, or portions of tables, that are to be deleted are shown as shaded; figures to be deleted are marked with the overlay "X." There are ten annexes in this standard. Annexes B, D, G, I and J are normative and are considered part of this standard. Annexes A, C, E, F, and H are informative and are not considered part of this standard.

This document is only permissible for use by User of . 8/23/2016 1:28:36 PM

This page intentionally left blank.

This document is only permissible for use by User of . 8/23/2016 1:28:36 PM



1 Scope

This ~~part of IEC 60079 standard~~ contains the specific requirements for construction and assessment of intrinsically safe electrical systems, type of protection "i", intended for use, as a whole or in part, in Class I, Zone 0, 1, or 2, or Zone 20, 21, or 22 hazardous (classified) locations as defined by the National Electrical Code[®] (NEC), ANSI/NFPA 70[®] ~~in locations in which the use of Group I, II or III apparatus is required.~~

NOTE 1 This standard is intended for use by the designer of the system who may be a manufacturer, a specialist consultant or a member of the end-user's staff.

This standard supplements and modifies the general requirements of ANSI/ISA-60079-0 and ANSI/ISA-61241-0 ~~IEC 60079-0~~ and the intrinsic safety standard ANSI/ISA-60079-11 and ANSI/ISA-61241-11 ~~IEC 60079-11~~. Where a requirement of this standard conflicts with a requirement of ANSI/ISA-60079-0, ANSI/ISA-60079-11, ANSI/ISA-61241-0 ~~IEC 60079-0~~ or ANSI/ISA-61241-11 ~~IEC 60079-11~~, the requirement of this standard takes precedence.

~~This standard supplements IEC 60079-11, the requirements of which apply to electrical apparatus used in intrinsically safe electrical systems.~~

The installation requirements of Group II or Group III systems designed in accordance with this standard are specified in the National Electrical Code ANSI/NFPA 70 ~~IEC 60079-14~~.

NOTE 2 Group I installation requirements are presently not provided in IEC 60079-14.

2 Normative References

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60060-1, *High-voltage test techniques – Part 1: General definitions and test requirements*

~~IEC 60079-0, Explosive atmospheres – Part 0: Equipment – General requirements~~

ANSI/ISA-60079-0 (12.00.01)-2009, Explosive atmospheres – Part 0: Equipment – General Requirements

~~IEC 60079-11:2006, Explosive atmospheres – Part 11: Equipment protection by intrinsic safety "i"~~

ANSI/ISA-60079-11 (12.02.01), Explosive Atmospheres – Part 11: Equipment protection by intrinsic safety "i"

~~IEC 60079-14:2007, Explosive atmospheres – Part 14: Electrical installations design, selection and erection~~

~~IEC 60079-15, Electrical apparatus for explosive gas atmospheres – Part 15: Construction, test and marking of type of protection "n" electrical apparatus~~

ANSI/ISA-60079-15 (12.12.02)-2009 Electrical Apparatus for Use in Class I, Zone 2 Hazardous (Classified) Locations: Type of Protection "n"

~~IEC 60079-27:2008, Explosive atmospheres – Part 27: Fieldbus intrinsically safe concept (FISCO)~~

ANSI/ISA-60079-27 (12.02.04)-2006, Fieldbus Intrinsically Safe Concept (FISCO) and Fieldbus Non-Incendive Concept (FNICO)

IEC 61158-2, *Industrial communication networks – Fieldbus specifications – Part 2: Physical layer specification and service definition*

~~IEC 61241-0, *Electrical apparatus for use in the presence of combustible dust – Part 0: General requirements*~~

ANSI/ISA-61241-0(12.10.02), *Electrical Apparatus for Use in Zone 20, Zone 21 and Zone 22 Hazardous (Classified) Locations – General Requirements*

~~IEC 61241-11, *Electrical apparatus for use in the presence of combustible dust – Part 11: Protection by intrinsic safety 'iD'*~~

ANSI/ISA-61241-11(12.10.04), *Electrical Apparatus for Use in Zone 20, 21, and Zone 22 Hazardous (Classified) Locations — Protection by Intrinsic Safety "iD"*

ANSI/NFPA 70:2011, *National Electrical Code*

3 Terms, definitions and abbreviations

3.1 Terms and definitions

For the purposes of this document, the following terms and definitions, specific to intrinsically safe electrical systems, apply. They supplement the terms and definitions which are given in ANSI/ISA-60079-0, ANSI/ISA-60079-11, ANSI/ISA-61241-0 ~~IEC 60079-0~~ and ANSI/ISA-61241-11 ~~IEC 60079-11~~.

3.1.1

intrinsically safe electrical system

assembly of interconnected items of electrical apparatus, described in a descriptive system document, in which the circuits or parts of circuits, intended to be used in an explosive atmosphere, are intrinsically safe circuits

3.1.2

~~listed certified~~ listed intrinsically safe electrical system

~~intrinsically safe electrical system conforming to 3.1.1 listed against for which a certificate has been issued confirming that the electrical system complies with~~ ANSI/ISA-60079-25 ~~IEC 60079-25~~

~~3.1.3~~

~~**uncertified intrinsically safe electrical system**~~

~~intrinsically safe electrical system conforming to 3.1.1 for which the knowledge of the electrical parameters of the items of certified intrinsically safe electrical apparatus, certified associated apparatus, simple apparatus and the knowledge of the electrical and physical parameters of the interconnecting wiring permit the unambiguous deduction that intrinsic safety is preserved~~

3.1.4

descriptive system document

document in which the items of electrical apparatus, their electrical parameters and those of the interconnecting wiring are specified

3.1.5

system designer

person who is responsible for the descriptive system document, has the necessary competence to fulfil the task and who is empowered to enter into the commitments on behalf of his employer

**NOT AUTHORIZED FOR FURTHER REPRODUCTION OR
DISTRIBUTION WITHOUT PERMISSION FROM**



Documents

Document Sharing Hub

3.1.6**maximum cable capacitance** C_c

maximum capacitance of the interconnecting cable that can be connected into an intrinsically safe circuit without invalidating intrinsic safety

3.1.7**maximum cable inductance** L_c

maximum inductance of the interconnecting cable that can be connected into an intrinsically safe circuit without invalidating intrinsic safety

3.1.8**maximum cable inductance to resistance ratio** L_c/R_c

maximum value of the ratio inductance (L_c) to resistance (R_c) of the interconnecting cable that can be connected into an intrinsically safe circuit without invalidating intrinsic safety

3.1.9**linear power supply**

power source from which the available output current is determined by a resistor; the output voltage decreases linearly as the output current increases.

3.1.10**non-linear power supply**

power supply where the output voltage and output current have a non-linear relationship

NOTE For example, a supply with a constant voltage output that can reach a constant current limit controlled by semiconductors.

3.2 Abbreviations

FISCO	Fieldbus Intrinsically Safe Concept
FNICO	Fieldbus Non-Incendive Concept

4 Descriptive system document

A descriptive system document shall be created for all systems. The descriptive system document shall provide an adequate analysis of the safety achieved by the system.

NOTE Annex E comprises examples of typical diagrams, which illustrate the requirements of the descriptive system document.

The minimum requirements are as follows:

- a) block diagram of the system listing all the items of apparatus within the system including simple apparatus and the interconnecting wiring. An example of such a diagram is shown in Figure E.1;
- b) a statement of the group subdivision (for Groups II and III), the level of protection for each part of the system, the temperature classification, and the ambient temperature rating in accordance with Clauses 5, 6 and 7;
- c) the requirements and permitted parameters of the interconnecting wiring in accordance with Clause 8;
- d) details of the earthing and bonding points of the systems in accordance with Clause 11. When surge protection devices are used, an analysis in accordance with Clause 12 shall also be included;

- e) where applicable, the justification of the assessment of apparatus as simple apparatus in accordance with ANSI/ISA-60079-11 ~~IEC 60079-11~~ shall be included;
- f) where the intrinsically safe circuit contains several pieces of intrinsically safe apparatus the analysis of the summation of their parameters shall be available. This shall include all simple apparatus and listed ~~certified~~ intrinsically safe apparatus;
- g) a unique identification of the descriptive system document shall be created;
- h) the system designer shall sign and date the document.

NOTE The descriptive systems drawing is not the same as the Control Drawing referred to in ANSI/ISA-60079-11 or ANSI/ISA-61241-11 ~~IEC 60079-11~~.

5 Grouping and classification

Intrinsically safe electrical systems shall be placed in a ~~Group I~~, Group II or Group III as defined in ANSI/ISA-60079-0 ~~IEC 60079-0~~. Groups II and III intrinsically safe electrical systems as a whole or parts thereof shall be given a further subdivision of the Group as appropriate.

Apparatus within Groups II and III intrinsically safe electrical system, intended for use in explosive gas or dust atmospheres, shall be given a temperature class or maximum surface temperature in accordance with ANSI/ISA-60079-0 ~~IEC 60079-0~~, ANSI/ISA-60079-11 ~~IEC 60079-11~~, ANSI/ISA-61214-0, ~~IEC 61241-0~~ and ANSI/ISA-61241-11 ~~IEC 61241-11~~ as applicable.

NOTE 1 In Group II and Group III intrinsically safe electrical systems, or parts thereof, the subdivisions A, B, C may be different from those of the particular intrinsically safe electrical apparatus and associated electrical apparatus included in the system.

NOTE 2 Different parts of the same intrinsically safe electrical system may have different subdivisions (A, B, C). The apparatus used may have different temperature classes and different ambient temperature ratings.

6 Levels of protection

6.1 General

Each part of an intrinsically safe electrical system intended for use in an explosive atmosphere will have a level of protection of "ia", "ib" or "ic" in accordance with ANSI/ISA-60079-11 or ANSI/ISA-61241-11 ~~IEC 60079-11~~. The complete system need not necessarily have a single level of protection.

NOTE 1 For example, where an instrument is primarily an "ib" instrument but which is designed for the connection of an "ia" sensor, such as a pH measuring instrument with its connected probe, the part of the system up to the instrument is "ib" and the sensor and its connections "ia".

NOTE 2 An "ia" field instrument powered via an "ib" associated apparatus would be considered as an "ib" system.

NOTE 3 A system may be "ib" in normal operation with external power, but when power is removed under defined safety-circumstances (ventilation failure) then the system could become "ia" under back up battery power. The level of protection will be clearly defined for foreseeable circumstances.

Clause 13 contains details of the required assessment.

6.2 Level of protection "ia"

Where the requirements applicable to electrical apparatus of level of protection "ia" (see ANSI/ISA-60079-11 and ANSI/ISA-61241-11 ~~IEC 60079-11~~) are satisfied by an intrinsically safe system or part of a system considered as an entity, then that system or part of a system shall be placed in level of protection "ia".

6.3 Level of protection "ib"

Where the requirements applicable to electrical apparatus of level of protection "ib" (see ANSI/ISA-60079-11 and ANSI/ISA-61241-11 ~~IEC 60079-11~~) are satisfied by an intrinsically safe system or part of a system considered as an entity, then that system or part of a system shall be placed in level of protection "ib".

6.4 Level of protection “ic”

Where the requirements applicable to electrical apparatus level of protection “ic” (see ANSI/ISA-60079-11 ~~IEC 60079-11~~) are satisfied by an intrinsically safe system or part of a system considered as an entity, then the system or part of a system shall be placed in level of protection “ic”.

7 Ambient temperature rating

Where part or all the intrinsically safe system is specified as being suitable for operation outside the normal operating temperature range of $-20\text{ }^{\circ}\text{C}$ and $+40\text{ }^{\circ}\text{C}$, this shall be specified in the descriptive system document.

8 Interconnecting wiring / cables used in an intrinsically safe electrical system

The electrical parameters of the interconnecting wiring upon which intrinsic safety depends and the derivation of these parameters shall be specified in the descriptive system document. Alternatively, a specific type of cable shall be specified and the justification for its use included in the documentation. Cables for the interconnecting wiring shall comply with the relevant requirements of Clause 9.

NOTE: The requirements for intrinsically safe wiring are contained within the National Electrical Code® (NEC) 504.10.

Where relevant, the descriptive system document shall also specify the permissible types of ~~multi-core~~ multi-conductor cables as specified in Clause 9, which each particular circuit may utilize. In the particular case where faults between separate circuits have not been taken into account, then a note shall be included on the block diagram of the descriptive system document stating the following: “where the interconnecting cable utilizes part of a ~~multi-core~~ multi-conductor cable containing other intrinsically safe circuits, then the ~~multi-core~~ multi-conductor cable shall be in accordance with the requirements of a ~~multi-core~~ multi-conductor cable type A or B, as specified in Clause 9 of ANSI/ISA-60079-25 ~~IEC 60079-25~~”.

A ~~multi-core~~ multi-conductor cable containing circuits classified as level of protection “ia”, “ib” or “ic” shall not contain non-intrinsically safe circuits.

“ic” ~~multi-core~~ multi-conductor cables may contain more than one intrinsically safe “ia”, “ib” or “ic” circuit subject to the applicable faults specified in Clause 13.

NOTE ~~Multi-core~~ Multi-conductor cables not complying with type A or B are permitted if the specific combination of circuits is examined against the requirements of ANSI/ISA-60079-11 or ANSI/ISA-61241-11 ~~IEC 60079-11~~.

Intrinsically safe “ic” circuits shall only be run together with intrinsically safe “ia” and “ib” circuits provided they are run in a ~~multi-core~~ multi-conductor cable of type A or type B specified in 9.5.

9 Requirements of cables and ~~multi-core~~ multi-conductor cables

9.1 General

The diameter of individual conductors or strands of multi-stranded conductors within the hazardous area shall not be less than 0,1 mm. This information shall be added to the Descriptive System Document.

Only insulated cables with insulation capable of withstanding a dielectric test of at least 500 V a.c. or 750 V d.c. shall be used in intrinsically safe circuits.

NOTE This clause is not intended to prevent the use of bare conductors in a signalling system and these should be considered as simple apparatus and not interconnecting wiring.

9.2 ~~Multi-core~~ Multi-conductor cables

The radial thickness of the insulation of each conductor~~core~~ shall be appropriate to the conductor diameter and the nature of the insulation with a minimum of ~~0,2~~ 0.25 mm.

~~Multi-core~~ Multi-conductor cables shall be capable of withstanding a dielectric test of at least:

- 500 V r.m.s. a.c. or 750 V d.c. applied between any armouring and/or screen(s) joined together and all the conductors~~cores~~ joined together.
- 1 000 V r.m.s. a.c. or 1 500 V d.c. applied between a bundle comprising one half of the cable cores joined together and a bundle comprising the other half of the conductors~~cores~~ joined together. This test is not applicable to ~~multi-core~~ multi-conductor cables with conducting screens for individual circuits.

The dielectric strength test shall be carried out in accordance with an appropriate cable standard or dielectric strength tests of ANSI/ISA-60079-11 or ANSI/ISA-61241-11 ~~IEC 60079-11~~.

9.3 Electrical parameters of cables

The electrical parameters (C_c and L_c or C_c and L_c/R_c) for all cables used within an intrinsically safe system shall be determined according to a), b) or c):

- the most onerous electrical parameters provided by the cable manufacturer;
- electrical parameters determined by measurement of a sample, with the method of testing electrical parameters of cables given in Annex G;
- where the interconnection comprises two or three cores of a conventionally constructed cable (with or without screen): 200 pF/m and either 1 μ H/m or an inductance to resistance ratio (L_c/R_c) calculated by dividing 1 μ H by the manufacturers specified loop resistance per meter. Alternatively, for currents up to $I_0 = 3$ A an L/R ratio of 30 μ H/ Ω may be used.

Where a FISCO or FNICO system is used, the requirements for the cable parameters shall comply with Annex I.

9.4 Conducting screens (shields)

Where conducting screens provide protection for separate intrinsically safe circuits in order to prevent such circuits becoming connected to one another, the coverage of those screens shall be at least 60 % of the surface area.

9.5 Types of ~~multi-core~~ multi-conductor cables

9.5.1 General

~~Multi-core~~ Multi-conductor cables shall be classified as either type A, type B or type C for the purposes of applying faults and assessing the ~~safety~~ of the cabling within an intrinsically safe system. The cable types are specified in 9.5.2, 9.5.3, and 9.5.4.

The use of ~~multi-core~~ multi-conductor cables that do not comply with the requirements for types A, B, or C is not permitted.

9.5.2 Type A cable

A cable whose construction complies with 9.1, 9.2, 9.3 and has conducting screens providing individual protection for each intrinsically safe circuit according to 9.4.

9.5.3 Type B cable

A cable whose construction complies with 9.1, 9.2 and 9.3, is fixed and effectively protected against damage and does not contain any circuit with a maximum voltage U_0 exceeding 60 V.

9.5.4 Type C cable

A cable whose construction complies with 9.1, 9.2 and 9.3.

10 Termination of intrinsically safe circuits

Intrinsically safe systems that contain junction boxes or marshalling cubicles where intrinsically safe circuits are terminated shall comply with the terminal requirements in the facilities for the connection of external circuits of ANSI/ISA-60079-11 or ANSI/ISA-61241-11 as appropriate ~~IEC 60079-11~~.

11 Earthing and bonding of intrinsically safe systems

In general, an intrinsically safe circuit shall either be fully floating or bonded to the reference potential associated with a hazardous area at one point only. The level of isolation required (except at that one point) is to be designed to withstand a 500 V insulation test in accordance with the dielectric strength requirement of ANSI/ISA-60079-11 or ANSI/ISA-61241-11 ~~IEC 60079-11~~. Where this requirement is not met, the circuit shall be considered to be earthed at that point. More than one earth connection is permitted on a circuit, provided that the circuit is galvanically separated into sub-circuits, each of which has only one connection to the grounding electrode system earth point.

Screens shall be connected to earth or the structure in accordance with the National Electrical Code ANSI/NFPA 70 ~~IEC 60079-14~~. Where a system is intended for use in an installation where significant potential differences (greater than 10 V) between the structure and the circuit can occur, the preferred technique is to use a circuit galvanically isolated from external influences such as changes in ground potential at some distance from the structure. Particular care is required where part of the system is intended to be used in Class I Zone 0 or Zone 20 locations ~~or when the system has a very high level of protection so as to conform to EPL Ma requirements~~.

The descriptive system document should clearly indicate which point or points of the system are intended to be connected to the plant reference potential and any special requirements of such a bond. This may be achieved by adding a reference to National Electrical Code ANSI/NFPA 70 ~~IEC 60079-14~~ in the descriptive system document.

NOTE ~~IEC 60079-14 does not apply to electrical installations in mines susceptible to firedamp.~~

12 Protection against lightning and other electrical surges

Where a risk analysis shows that an installation is particularly susceptible to lightning or other surges, precautions shall be taken to avoid the possible hazards.

If part of an intrinsically safe circuit is installed in Zone 0 in such a way that there is a risk of developing hazardous or damaging potential differences within Zone 0, a surge protection device shall be installed. Surge protection is required between each conductor of the cable including the screen and the structure where the conductor is not already bonded to the structure. The surge protection device shall be installed outside but as near to the boundary of Zone 0 as is practicable, preferably within 1 m.

Surge protection for apparatus in Class I, Zones 1 and 2 shall be included in the system design for highly susceptible locations.

The surge protection device shall be capable of diverting a minimum peak discharge current of 10 kA (8/20 μ s impulse according to IEC 60060-1 for 10 operations). The connection between the protection device and the local structure shall have a minimum cross-sectional area equivalent to 4 mm² copper. The cable between the intrinsically safe apparatus in Zone 0 and the surge protection device shall be installed in such a way that it is protected from lightning. Any

surge protection device introduced into an intrinsically safe circuit shall be suitably explosion protected for its intended location and comply with the applicable ordinary location standard.

The use of surge protection devices which interconnect the circuit and the structure via non-linear devices such as gas discharge tubes and semiconductors is not considered to adversely affect the intrinsic safety of a circuit, provided that in normal operation the current through the device is less than 10 μ A.

NOTE If insulation testing at 500 V is carried out under well-controlled conditions, then it may be necessary to disconnect the surge suppression devices to prevent them invalidating the measurement.

Intrinsically safe systems utilizing surge suppression techniques shall be supported by a an adequately documented analysis of the effect of indirect multiple earthing, taking into account the criteria set out above. The capacitance and inductance of the surge suppression devices shall be considered in the assessment of the intrinsically safe system.

Annex F illustrates some aspects of the design of surge protection of an intrinsically safe system.

13 Assessment of an intrinsically safe system

13.1 General

Where a system contains apparatus which does not separately conform to ANSI/ISA-60079-11 or ANSI/ISA-61241-11 IEC 60079-11, then that system shall be analysed as a whole, as if it were an apparatus. A level of protection "ia" system shall be analysed in accordance with the level of protection "ia" criteria of ANSI/ISA-60079-11 or ANSI/ISA-61241-11 IEC 60079-11. A level of protection "ib" system shall be analysed in accordance with the level of protection "ib" criteria of ANSI/ISA-60079-11 or ANSI/ISA-61241-11 IEC 60079-11. A level of protection "ic" system shall be analysed in accordance with the level of protection "ic" criteria of ANSI/ISA-60079-11 or ANSI/ISA-61241-11 IEC 60079-11. In addition to the faults within the apparatus, the failures within the field wiring listed in 13.4 shall also be taken into account.

NOTE ~~It is recognized that applying faults to the system as a whole is less stringent than applying faults to each piece of apparatus; nevertheless, this is considered to achieve an acceptable level of safety.~~


Where all the necessary information is available, it is permissible to apply the fault count to the system as a whole even when apparatus conforming to ANSI/ISA-60079-11 or ANSI/ISA-61241-11 IEC 60079-11 is being used. This is an alternative solution to the more usual straightforward comparison of input and output characteristics of the separately analysed or tested apparatus.

Where a system contains only separately analysed or tested apparatus conforming to ANSI/ISA-60079-11 or ANSI/ISA-61241-11 IEC 60079-11, the compatibility of all the apparatus included in the system shall be demonstrated. Faults within the apparatus have already been considered and no further consideration of these faults is necessary. Where a system contains a single source of power, the output parameters of the power source take into account opening, shorting and earthing of the external interconnecting cable, and consequently these failures do not need to be further considered. Annex A contains further details of the analysis of these simple circuits.

When a system contains more than one linear source of power, then the effect of the combined sources of power shall be analysed. Annex B illustrates the analysis to be used in the most frequently occurring combinations.

If an intrinsically safe system contains more than one source of power, and one or more of these sources are non-linear, the assessment method described in Annex B cannot be used. For this kind of intrinsically safe system, Annex C explains how the system analysis can be conducted if the combination contains a single non-linear power supply.

Figure 1 illustrates the principles of the system's analysis.

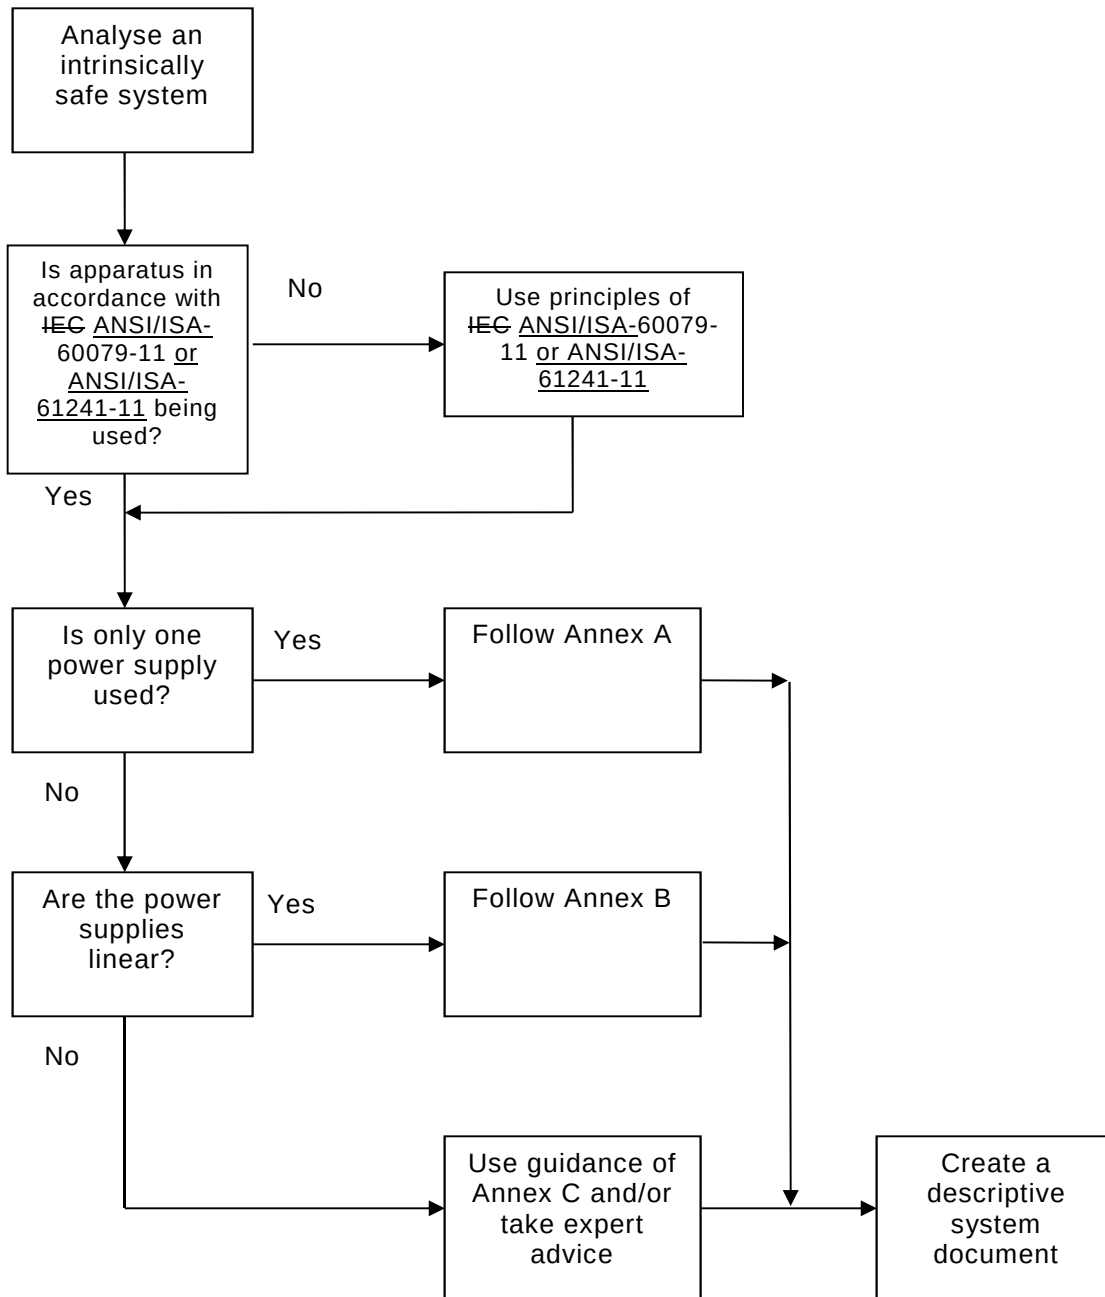

IEC 244/10

Figure 1 – Systems analysis

13.2 Simple apparatus

Switches, terminals, terminal boxes, plugs and sockets complying with the simple apparatus requirements of ANSI/ISA-60079-11 or ANSI/ISA-61241-11, may be added to a system without modifying the safety assessment. The possible heating effects on simple apparatus shall be considered. When other types of simple apparatus consisting of energy storing components for example capacitors or inductors complying with ANSI/ISA-60079-11 or

UL COPYRIGHTED MATERIAL –

**NOT AUTHORIZED FOR FURTHER REPRODUCTION OR
DISTRIBUTION WITHOUT PERMISSION FROM**




Documents

Document Sharing Hub

~~ANSI/ISA-61241-11~~ ~~IEC 60079-11~~ are added to a system, the safety assessment shall take into account their electrical parameters. A typical system using simple apparatus is shown in Figure 2.

Where simple apparatus are intended to contain several separate intrinsically safe circuits, e.g. connectors, plugs and sockets or a resistance thermometer with two separate resistance windings, the separation requirements of ~~ANSI/ISA-60079-11~~ or ~~ANSI/ISA-61241-11~~ ~~IEC 60079-11~~ apply. If they do not conform, then the interconnected circuits shall be assessed as a single intrinsically safe circuit.

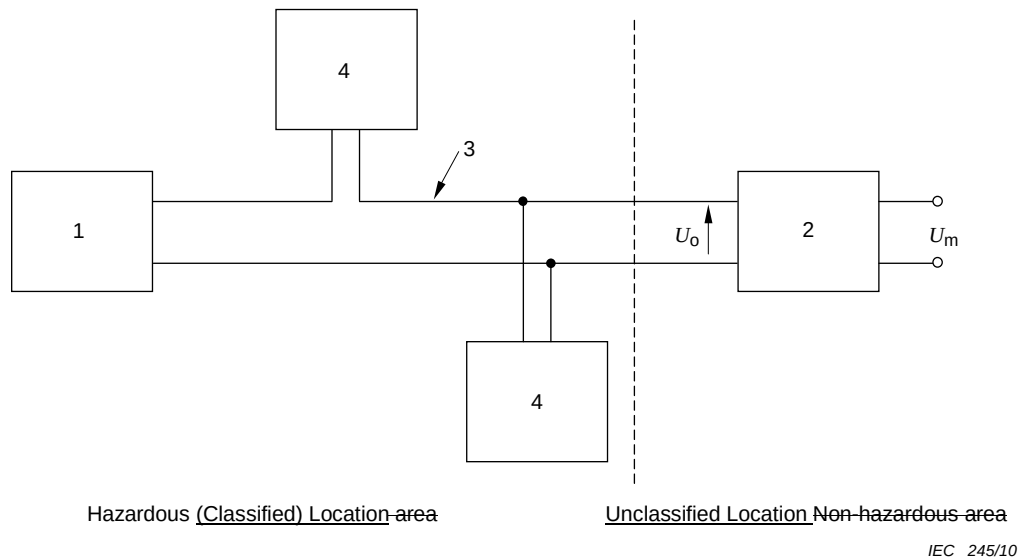

Key

- 1 ~~listed certified~~ listed intrinsically safe apparatus
- 2 ~~listed certified~~ listed associated intrinsically safe apparatus
- 3 ~~cable~~ wiring
- 4 simple apparatus

Figure 2 – Typical system using simple apparatus

13.3 Analysis of inductive circuits

Where an apparatus has a well-defined inductance and resistance either by virtue of its documentation or construction, then the ~~safety of the~~ inductive aspects of the system shall be confirmed by the process defined in Annex D.

13.4 Faults in ~~multi-core~~ multi-conductor cables

13.4.1 Type of ~~multi-core~~ multi-conductor cables

The faults, if any, which shall be taken into consideration in ~~multi-core~~ multi-conductor cables used within intrinsically safe electrical systems depend upon the type of cable used. The following subclauses detail the cable faults to be assessed for each type of cable.

13.4.2 Type A cable

No faults between circuits shall be taken into consideration if the cable complies with 9.5.2.

13.4.3 Type B cable

No faults between circuits shall be taken into consideration if the cable complies with 9.5.3.

13.4.4 Type C cable

The combination of faults comprising of two short circuits between conductors and simultaneously up to four open circuits of conductors that result in the most onerous condition if the cable complies with 9.5.4.

All circuits in a ~~multi-core~~ multi-conductor cable subject to damage shall adopt the level of protection of the circuit with the lowest level of protection.

13.5 Type verifications and type tests

Where it is necessary to carry out type verifications and/or type tests to establish that a system is adequately safe, then the methods specified in ANSI/ISA-60079-11 or ANSI/ISA-61241-11~~IEC 60079-11~~ shall be used.

14 Marking

All apparatus within the system shall be readily identifiable. The minimum requirement is that the relevant descriptive system document shall be readily traceable. One acceptable technique is a clear instrument loop number, which identifies the loop documentation, which in turn lists the descriptive system document.

Where a system is assessed as a whole and is found to conform to ANSI/ISA-60079-11 or ANSI/ISA-61241-11~~IEC 60079-11~~, each piece of apparatus shall be marked in accordance with that standard.

15 Predefined systems

A system and all of its individual devices may be predefined and previously assessed in such a way that the interconnection of the individual devices and cables is sufficiently well known. In such cases, the assessment requirements of this standard can be simplified. One such predefined system is the FISCO system, the assessment of a FISCO system is set forth in **Error! Reference source not found.**

NOTE: The requirements for FISCO Power Supplies, Field Devices, and Terminators are contained within ANSI/ISA-60079-27.

This document is only permissible for use by User of . 8/23/2016 1:28:36 PM