



INTERNATIONAL TELECOMMUNICATION UNION

ITU-T

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

Q.612

INTERWORKING OF SIGNALLING SYSTEMS

LOGIC PROCEDURES FOR INCOMING SIGNALLING SYSTEM No. 5

ITU-T Recommendation Q.612

(Extract from the *Blue Book*)

NOTES

- 1 ITU-T Recommendation Q.612 was published in Fascicle VI.6 of the *Blue Book*. This file is an extract from the *Blue Book*. While the presentation and layout of the text might be slightly different from the *Blue Book* version, the contents of the file are identical to the *Blue Book* version and copyright conditions remain unchanged (see below).
- 2 In this Recommendation, the expression “Administration” is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

© ITU 1988, 1993


All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the ITU.



Documents

Document Sharing Hub

LOGIC PROCEDURES FOR INCOMING SIGNALLING SYSTEM No. 5

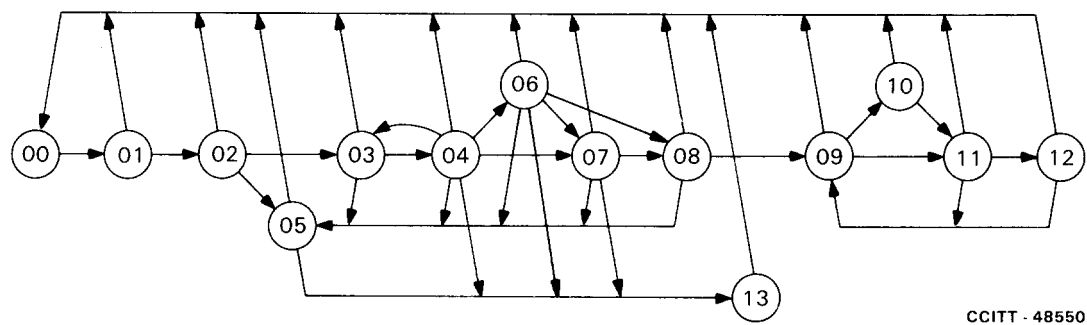

CCITT - 48550

State number	State description	Sheet reference	Running timers
00	Idle	1,4	
01	Wait for register activation	1	
02	Wait for register signal	1	t_1+t_2
03	Wait for next register signal	1	t_2
04	Wait for digit analysis	2	t_2
05	Wait for acknowledgement	2	t_3
06	Wait for next register signal	3	t_2
07	Wait for register deactivation	3	
08	Wait for answer	3	
09	Wait for acknowledgement	4	t_3
10	Answered	4	
11	Wait for acknowledgement	4	t_3
12	Clear-back	4	
13	Wait for clear-forward	2	

FIGURE 1/Q.612

State overview diagram for incoming Signalling System No. 5

Supervisory timers

- t_1 = 10-20 s Recommendation Q.141, § 2.1.3.1, e); Q.141, § 2.1.6, d)
- t_2 = 20-40 s Recommendation Q.156, § 3.6.2, b)
- t_3 = 10-20 s Recommendation Q.141, § 2.1.3.1, e)

Procedures not shown

The following procedures, not directly relevant to interworking, are not shown in the logic procedures.

- P_1 - Procedure for timeout of receipt of busy flash acknowledgement signal
- P_2 - Procedure for timeout of receipt of answer acknowledgement signal
- P_3 - Procedure for timeout of receipt of clearback acknowledgement signal

FIGURE 2/Q.612

Notes to incoming Signalling System N°. 5