



Information technology equipment— Immunity characteristics—Limits and methods of measurement



This Australian Standard® was prepared by Committee TE-003, Electromagnetic Interference. It was approved on behalf of the Council of Standards Australia on 22 May 2013.

This Standard was published on 20 June 2013.

The following are represented on Committee TE-003:

- Australian Broadcasting Corporation
 - Australian Communications and Media Authority
 - Australian Industry Group
 - Australian Information Industry Association
 - Consumer Electronics Suppliers Association
 - Consumers Federation of Australia
 - Curtin University of Technology
 - Department of Defence, Australia
 - Electrical Compliance Testing Association
 - Energy Networks Association
 - Engineers Australia
 - Lighting Council New Zealand
 - Lighting Council of Australia
 - Ministry of Economic Development, New Zealand
 - National Measurement Institute
 - Wireless Institute Australia
-

This Standard was issued in draft form for comment as DR AS/NZS CISPR 24.

Standards Australia wishes to acknowledge the participation of the expert individuals that contributed to the development of this Standard through their representation on the Committee and through the public comment period.

Keeping Standards up-to-date

Australian Standards® are living documents that reflect progress in science, technology and systems. To maintain their currency, all Standards are periodically reviewed, and new editions are published. Between editions, amendments may be issued.

Standards may also be withdrawn. It is important that readers assure themselves they are using a current Standard, which should include any amendments that may have been published since the Standard was published.

Detailed information about Australian Standards, drafts, amendments and new projects can be found by visiting **www.standards.org.au**

Standards Australia welcomes suggestions for improvements, and encourages readers to notify us immediately of any apparent inaccuracies or ambiguities. Contact us via email at **mail@standards.org.au**, or write to Standards Australia, GPO Box 476, Sydney, NSW 2001.

Australian Standard®

Information technology equipment— Immunity characteristics—Limits and methods of measurement

Originated as AS/NZS CISPR 24:2002.
Second edition 2013.
Reissued incorporating Amendment No. 1 (June 2017).

COPYRIGHT

© Standards Australia Limited

All rights are reserved. No part of this work may be reproduced or copied in any form or by any means, electronic or mechanical, including photocopying, without the written permission of the publisher, unless otherwise permitted under the Copyright Act 1968.

Published by SAI Global Limited under licence from Standards Australia Limited, GPO Box 476, Sydney, NSW 2001, Australia

ISBN 978 1 74342 475 9

PREFACE

This Standard was prepared by the Joint Standards Australia/Standards New Zealand Committee TE-003, Electromagnetic Interference, to supersede AS/NZS CISPR 24:2002.

A1 | Amendment No. 1 to this Standard was prepared by the Australian members of Joint Standards Australia/Standards New Zealand Committee TE-003, Electromagnetic Interference, to add changes introduced by CISPR 24:2010/AMD 1:2015. As a consequence of Amendment No. 1, which is published as an Australian-only amendment, the designation of this Standard has been changed from AS/NZS CISPR 24:2013 to AS CISPR 24:2013.

A1 | The objective of this Standard is to establish requirements that will provide an adequate level of intrinsic immunity so that the equipment will operate as intended in its environment. Immunity test requirements are specified for equipment in relation to continuous and transient conducted and radiated disturbances, including electrostatic discharges (ESD). This Standard includes CISPR 24 Amendment No. 1 (April 2015). The changes required by the CISPR amendment are added at the end of this Standard.

As this Standard is reproduced from an International Standard, the following applies:

- (a) Its number appears on the cover and title page while the International Standard number appears only on the cover.
- (b) In the source text 'this CISPR publication' should read 'this Australian/New Zealand Standard'.
- (c) A full point substitutes for a comma when referring to a decimal marker.

References to International Standards should be replaced by references to Australian or Australian/New Zealand Standards, as follows:

<i>Reference to International Standard</i>		<i>Australian/New Zealand Standard</i>	
CISPR		AS/NZS CISPR	
16	Specification for radio disturbance and immunity measuring apparatus and methods	16	Specification for radio disturbance and immunity measuring apparatus and methods
16-1-2	Part 1-2: Radio disturbance and immunity measuring apparatus—Ancillary equipment—Conducted disturbances	16.1.2	Part 1.2: Radio disturbance and immunity measuring apparatus—Ancillary equipment—Conducted disturbances
20	Sound and television broadcast receivers and associated equipment—Immunity characteristics—Limits and methods of measurement	20	Sound and television broadcast receivers and associated equipment—Immunity characteristics—Limits and methods of measure
22	Information technology equipment—Radio disturbance characteristics—Limits and methods of measurement	22	Information technology equipment—Radio disturbance characteristics—Limits and methods of measurement
IEC		AS/NZS	
61000	Electromagnetic compatibility (EMC)	61000	Electromagnetic compatibility (EMC)
61000-4-2	Part 4-2: Testing and measurement techniques—Electrostatic discharge immunity test	61000.4.2	Part 4.2: Testing and measurement techniques—Electrostatic discharge immunity test
61000-4-3	Part 4-3: Testing and measurement techniques—Radiated, radio-frequency, electromagnetic field immunity test	61000.4.3	Part 4.3: Testing and measurement techniques—Radiated, radio-frequency, electromagnetic field immunity test

61000-4-4 Part 4-4: Testing and measurement techniques—Electrical fast transient/burst immunity test

IEC

61000-4-5 Part 4-5: Testing and measurement techniques—Surge immunity test

61000-4-6 Part 4-6: Testing and measurement techniques—Immunity to conducted disturbances, induced by radio-frequency fields

61000-4-8 Part 4-8: Testing and measurement techniques—Power frequency magnetic field immunity test

61000.4.4 Part 4.4: Testing and measurement techniques—Electrical fast transient/burst immunity test

AS/NZS

61000.4.5 Part 4.5: Testing and measurement techniques—Surge immunity test

61000.4.6 Part 4.6: Testing and measurement techniques—Immunity to conducted disturbances, induced by radio-frequency fields

61000.4.8 Part 4.8: Testing and measurement techniques—Power frequency magnetic field immunity test

Only international references that have been adopted as Australian or Australian/New Zealand Standards have been listed.

The term ‘normative’ has been used in this Standard to define the application of the annex to which it applies. A ‘normative’ annex is an integral part of a Standard.

CONTENTS

1	Scope and object	7
2	Normative references	7
3	Terms and definitions	8
4	Immunity test requirements	11
4.1	General	11
4.2	Particular requirements	11
4.2.1	Electrostatic discharges (ESD)	11
4.2.2	Electrical fast transients (EFT)	12
4.2.3	Continuous radio frequency disturbances	12
4.2.4	Power-frequency magnetic fields	13
4.2.5	Surges	13
4.2.6	Voltage dips and interruptions	13
5	Applicability	13
6	Conditions during testing	14
6.1	General conditions	14
6.2	Particular conditions (EUT operational modes, etc.)	15
7	Performance criteria	15
7.1	General performance criteria	15
7.2	Performance criterion A	15
7.3	Performance criterion B	15
7.4	Performance criterion C	15
7.5	Particular performance criteria	16
8	Product documentation	16
9	Measurement uncertainty	16
10	Immunity requirements	16
	Annex A (normative) Telephony terminal equipment	19
	Annex B (normative) Data processing equipment	29
	Annex C (normative) Local area networks (LAN)	33
	Annex D (normative) Printers and plotters	34
	Annex E (normative) Copying machines	35
	Annex F (normative) Automatic teller machines (ATM)	36
	Annex G (normative) Point of sale terminals (POST)	38
	Annex H (normative) xDSL Terminal equipment	40
	Bibliography	44
	Figure 1 – Description of ports	9
	Figure A.1 – Example sound coupling set-up between the acoustic output device of a telephone handset and an artificial ear for detecting demodulated sound pressure level	21
	Figure A.2 – Example test set-up for measuring the sound pressure level from the acoustic output device of a telephone handset	23
	Figure A.3 – Test setup for measuring the reference sound pressure level from a speaker/hands free phone	24
	Figure A.4 – Demodulation on analogue lines, set up	25

Figure A.5 – Example of typical small key telephone system or PABX	27
Figure H.1 – DSL access system configuration	40
Table 1 – Immunity, enclosure port	16
Table 2 – Immunity, signal ports and telecommunication ports	17
Table 3 – Immunity, input d.c. power port (excluding equipment marketed with a a.c./d.c. power converter)	17
Table 4 – Immunity, input a.c. power ports (including equipment marketed with a separate a.c./d.c power converter)	18
Table A.1 – Criteria applied to TTE functions, used during continuous disturbances testing	19
Table A.2 – Maximum acoustic demodulated levels at an ear piece	22
Table A.3 – Maximum acoustic demodulated levels relative to reference level	23
Table A.4 – Maximum demodulated differential mode signals at analogue ports	25
Table A.5 – TTE performance criteria for spot frequency tests	26
Table A.6 – TTE performance criteria for non-continuous radio frequency disturbances	26
Table A.7 – Test configurations and performance assessment methods applicable to a PABX and associated terminals for continuous RF disturbance tests	28
Table H.1 – ITU-T recommendations for xDSL systems	41
Table H.2 – Example cable attenuation	41

INTRODUCTION

This CISPR publication establishes uniform requirements for the electromagnetic immunity of information technology equipment. The test methods are given in the referenced Basic EMC Immunity Standards. This publication specifies applicable tests, test levels, product operating conditions and assessment criteria.

AUSTRALIAN STANDARD

Information technology equipment—Immunity characteristics—Limits and methods of measurement**1 Scope and object**

This CISPR publication applies to information technology equipment (ITE) as defined in CISPR 22.

The object of this publication is to establish requirements that will provide an adequate level of intrinsic immunity so that the equipment will operate as intended in its environment. The publication defines the immunity test requirements for equipment within its scope in relation to continuous and transient conducted and radiated disturbances, including electrostatic discharges (ESD).

Procedures are defined for the measurement of ITE and limits are specified which are developed for ITE within the frequency range from 0 Hz to 400 GHz.

For exceptional environmental conditions, special mitigation measures may be required.

Owing to testing and performance assessment considerations, some tests are specified in defined frequency bands or at selected frequencies. Equipment which fulfils the requirements at these frequencies is deemed to fulfil the requirements in the entire frequency range from 0 Hz to 400 GHz for electromagnetic phenomena.

The test requirements are specified for each port considered.

NOTE 1 Safety considerations are not covered in this publication.

NOTE 2 In special cases, situations will arise where the level of disturbance may exceed the levels specified in this publication, for example where a hand-held transmitter is used in proximity to equipment. In these instances, special mitigation measures may have to be employed.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-161:1990, *International Electrotechnical Vocabulary (IEV) – Chapter 161: Electromagnetic compatibility*

IEC 60318-1:2009, *Electroacoustics – Simulators of human head and ear – Part 1: Ear simulator for the measurement of supra-aural and circumaural earphones*

IEC 61000-4-2:2008, *Electromagnetic compatibility (EMC) – Part 4-2: Testing and measurement techniques – Electrostatic discharge immunity test*

IEC 61000-4-3:2006, *Electromagnetic compatibility (EMC) – Part 4-3: Testing and measurement techniques – Radiated, radio-frequency, electromagnetic field immunity test*
Amendment 1(2007)
Amendment 2(2010)

IEC 61000-4-4:2004, *Electromagnetic compatibility (EMC) – Part 4-4: Testing and measurement techniques – Electrical fast transient/burst immunity test*

IEC 61000-4-5:2005, *Electromagnetic compatibility (EMC) – Part 4-5: Testing and measurement techniques – Surge immunity test*

IEC 61000-4-6:2008, *Electromagnetic compatibility (EMC) – Part 4-6: Testing and measurement techniques – Immunity to conducted disturbances, induced by radio-frequency fields*

IEC 61000-4-8:2009, *Electromagnetic compatibility (EMC) – Part 4-8: Testing and measurement techniques – Power frequency magnetic field immunity test*

IEC 61000-4-11:2004, *Electromagnetic compatibility (EMC) – Part 4-11: Testing and measurement techniques – Voltage dips, short interruptions and voltage variations immunity tests*

CISPR 16-1-2:2003, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 1-2: Radio disturbance and immunity measuring apparatus – Ancillary equipment – Conducted disturbances*

Amendment 1(2004)

Amendment 2(2006)

CISPR 20:2006, *Sound and television broadcast receivers and associated equipment – Immunity characteristics – Limits and methods of measurement*

CISPR 22:2008, *Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60050-161, and the following apply.

3.1

degradation

unwanted change in operational performance of an EUT due to electromagnetic disturbances. This does not necessarily mean malfunction or catastrophic failure

3.2

equipment under test

EUT

representative device or functionally interactive group of devices (that is a system) which includes one or more host units that is subjected to test procedures specified in this publication

3.3

information technology equipment

ITE

any equipment:

- a) which has a primary function of either (or a combination of) entry, storage, display, retrieval, transmission, processing, switching, or control, of data and of telecommunication messages and which may be equipped with one or more terminal ports typically operated for information transfer;
- b) with a rated supply voltage not exceeding 600 V.

It includes, for example, data processing equipment, office machines, electronic business equipment and telecommunication equipment.

Any equipment (or part of the ITE equipment) which has a primary function of radio transmission and/or reception according to the ITU Radio Regulations are excluded from the scope of this publication.

NOTE Any equipment which has a function of radio transmission and/or reception according to the definitions of the ITU Radio Regulations should fulfil the national radio regulations, whether or not this publication is also valid.

Equipment, for which all disturbance requirements in the frequency range are explicitly formulated in other IEC or CISPR publications, are excluded from the scope of this publication.

[3.1 of CISPR 22:2008]

3.4

jitter (of a cathode ray tube (CRT) monitor)

peak-to-peak variation in the geometric location of picture elements on the viewing surface of the CRT monitor

3.5

port

particular interface of the specified EUT with the external electromagnetic environment (see Figure 1)

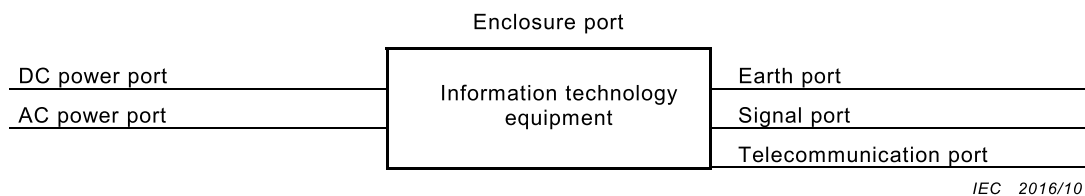


Figure 1 – Description of ports

3.6

enclosure port

physical boundary of the EUT through which electromagnetic fields may radiate or impinge. For plug-in units, the physical boundary will be defined by the host unit

3.7

telephony call

process exercised in the network and the telecommunication terminal equipment (TTE) to allow interchange of information (speech, video or data) with another TTE through the network

NOTE The call should be operated in the way specified by the manufacturer. For circuit switched services, the exchange of data should be considered to be possible when a 64 kbit/s channel or equivalent is available for both parties. For packet service, the exchange of information should be considered to be possible when a virtual path is established to the called TTE.

3.8

establishment of a telephony call

the operating procedure for a user or an automatic process in conjunction with the network to reach the capability to exchange information with another TTE

NOTE See Note of 3.7.

3.9

reception of a telephony call

the operating procedure for a user or an automatic process initiated by, and in conjunction with, the network to reach the capability to exchange information with another TTE

NOTE See Note of 3.7.

3.10

maintenance of a telephony call

the capability of exchanging information without having to clear and re-establish a call

NOTE See Note of 3.7.

3.11**clearing of a telephony call**

the operating procedure for a user or an automatic process in conjunction with the network (either at the initiative of the local party or the distant party) to stop the capability of exchanging information by an orderly return to a state where the establishment of a new call is possible

NOTE See Note of 3.7.

3.12**network terminator****NT**

associated equipment representing the termination of the telecommunication network

3.13**telephony service**

a service providing users with the ability for real-time two-way speech conversation via a network

[see ITU-T, I.241.1]

3.14**telecommunications terminal equipment****TTE**

equipment intended to be connected to a public or private telecommunications network, that is:

- a) to be connected directly to the termination of a telecommunications network in order to send, process or receive information; or
- b) to inter-work with a telecommunications network being connected directly or indirectly to the termination of a telecommunications network in order to send, process or receive information

3.15**multifunction equipment**

information technology equipment in which two or more functions subject to this standard and/or to other standards are provided in the same unit

NOTE Examples of multifunction equipment include

- a personal computer provided with a telecommunication function and/or broadcast reception function;
- a personal computer provided with a measuring function, etc.

3.16**telecommunication network port**

point of connection for voice, data and signaling transfers intended to interconnect widely dispersed systems via such means as direct connection to multi-user telecommunications networks (e.g. public switched telecommunications networks (PSTN), integrated services digital networks (ISDN), x-type digital subscriber lines (xDSL), etc.), local area networks (e.g. Ethernet, Token Ring, etc.) and similar networks

NOTE A port generally intended for interconnection of components of an ITE system under test (e.g. RS-232, IEEE Standard 1284 (parallel printer), Universal Serial Bus (USB), IEEE Standard 1394 ("Fire Wire"), etc.) and used in accordance with its functional specifications (e.g. for the maximum length of cable connected to it), is not considered to be a telecommunications/network port under this definition.

3.17**analogue interface**

an interface that transmits and receives signals whose characteristic quantities follow continuously the variations of another physical quantity representing information

3.18**acoustic interface**

port at which audio signals emanate and/or originate

3.19**associated equipment****AE**

equipment needed to exercise and/or monitor the operation of the EUT in a representative way

4 Immunity test requirements**4.1 General**

The immunity test requirements for equipment are given on a port-by-port basis.

Tests shall be conducted in a well-defined and reproducible manner.

The tests shall be carried out as single tests in sequence. The sequence of testing is optional.

The description of the test, the test generator, the test methods and the test set-up are given in IEC basic EMC standards which are referred to in the following tables.

The contents of these IEC basic EMC standards are not repeated here; however, modifications or additional information needed for the practical application of the tests are given in this publication.

4.2 Particular requirements**4.2.1 Electrostatic discharges (ESD)**

The test procedure shall be in accordance with IEC 61000-4-2, with the following modifications and clarifications.

Electrostatic discharges shall be applied only to those points and surfaces of the EUT which are expected to be touched during usual operation, including user access, as specified in the user manual, for example cleaning or adding consumables when the EUT is powered.

The number of test points is EUT dependent. The requirements of 8.3.1 and A.5 of IEC 61000-4-2 shall be taken into consideration when selecting test points. The application of discharges to the contacts of open connectors is not required.

Guidance on the selection of actual test points is given in A.5 of IEC 61000-4-2. When selecting test points particular attention shall be given to keyboards, dialing pads, power switches, mice, drive slots, card slots, around communication ports, etc.

The discharges shall be applied in two ways:

a) Contact discharges to the conductive surfaces and to coupling planes:

The EUT shall be exposed to at least 200 discharges, 100 each at negative and positive polarity, at a minimum of four test points. For table-top equipment one of the test points shall be the centre front edge of the horizontal coupling plane, which shall be subjected to at least 50 indirect discharges (25 of each polarity). All other test points shall each receive at least 50 direct contact discharges (25 of each polarity). All areas normally touched by the user should be tested. If no direct contact test points are available, then at least 200 indirect discharges shall be applied in the indirect mode (see IEC 61000-4-2 for use of the Vertical Conducting Plane (VCP)).

For contact discharge, the requirement to apply ESD discharges at lower levels, as defined in Clause 5 of IEC 61000-4-2, is not applicable.

b) Air discharge at apertures and insulating surfaces:

On those parts of the EUT where it is not possible to perform contact discharge testing, the EUT should be investigated to identify the user accessible points where breakdown may occur; examples are openings at edges of keys, or the covers of keyboards and telephone handsets. Such points are tested using the air discharge method.

4.2.2 Electrical fast transients (EFT)

The test method is given in IEC 61000-4-4. However, the test set-up for *in situ* measurements is not applicable for ITE.

The test procedure is as given in IEC 61000-4-4 together with the following changes and clarifications:

- if the EUT contains several ports with the same particular interface, only one shall be tested;
- multiconductor cables, such as a 50-pair telecommunication cable, shall be tested as a single cable. Cables shall not be split or divided into groups of conductors for this test;
- applicable only to cables which according to the manufacturer's specification support communication on cable lengths greater than 3 m;
- the cable length between the EUT and the coupling device shall be as short as possible in the range 0,5 m to 3,0 m.

4.2.3 Continuous radio frequency disturbances

4.2.3.1 General

The frequency range for the radiated field test is 80 MHz to 1 000 MHz. The frequency range for the continuous conducted test is 0,15 MHz to 80 MHz.

The frequency ranges are scanned as specified; however, at a limited number of selected frequencies a more comprehensive functional test may be required. The requirement to undertake this additional selected frequency test is not universally applicable to all products, but only to products which have this requirement specified in Annex A (under particular product specific requirements). The selected frequencies are given in Tables 1 to 4.

The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised and to be able to respond. However, the dwell time shall not exceed 5 seconds at each of the frequencies during the scan.

The time to exercise the EUT shall not be interpreted as a total time of a programme or a cycle but related to the reaction time in case of failure of the EUT.

Unless required by an annex of this document, clock and other sensitive frequencies do not need to be assessed separately.

4.2.3.2 Continuous radiated disturbances

The test procedure shall be in accordance with IEC 61000-4-3.

The EUT shall be positioned so that the four sides of the EUT shall be exposed to the electromagnetic field in sequence. In each position the performance of the EUT will be investigated.

In the case where the most sensitive surface side of the EUT is known throughout the frequency range (for example, via preliminary tests), testing may be restricted to that surface side only. Where it is not possible to determine the most sensitive face with any certainty (for example where different faces are sensitive at different frequencies) all four faces shall be tested.

If the EUT is too large such that it cannot be fully illuminated by the radiating antenna, or exceeds the size of the Uniform Field Area (UFA) then partial illumination shall be used. The EUT can be repositioned so that the front surface remains within the UFA in order to illuminate those sections of the EUT that were previously outside the UFA.

4.2.3.3 Continuous conducted disturbances

There shall be no additional deviations from IEC 61000-4-6 (other than those specified in 4.2.3.1).

4.2.4 Power-frequency magnetic fields

The test procedure shall be in accordance with IEC 61000-4-8.

The EUT shall be arranged and connected to satisfy its functional requirements, and shall be placed at the centre of the coil system (immersion method).

The cables supplied by the EUT manufacturer shall be used or, in their absence, suitable alternative cables of the type appropriate to the signals involved shall be used.

Physically large products need not be completely submerged in the magnetic field, only the sensitive devices (such as CRT monitors if they are the only sensitive parts). In this case, and if the CRT monitor is integral with the ITE, then the CRT monitor or sensitive device may be removed for testing.

4.2.5 Surges

The test procedure shall be in accordance with IEC 61000-4-5.

4.2.6 Voltage dips and interruptions

The test procedure shall be in accordance with IEC 61000-4-11.

5 Applicability

Tests shall be applied to the relevant ports of the EUT according to Tables 1 to 4.

It may be determined from consideration of the electrical characteristics and usage of particular EUT that some of the tests are inappropriate and therefore unnecessary. In such a case, it is required that both the decision and the justification not to apply any particular test to any particular port be recorded in the test report.

Multifunction equipment which is subjected simultaneously to different clauses of this standard and/or other standards shall be tested with each function operated in isolation, if this can be achieved without physically modifying the equipment internally. The equipment thus tested shall be deemed to have complied with the requirements of all clauses/standards when each function has satisfied the requirements of the relevant clause/standard. For example, a personal computer with a broadcast reception function shall be tested with the broadcast reception function disabled according to this standard and then tested with only the broadcast reception function activated according to CISPR 20, if it can operate each function in isolation under normal operation.

For equipment which it is not practical to test with each function operated in isolation, or where the isolation of a particular function would result in the equipment being unable to fulfil its primary function, or where the simultaneous operation of several functions would result in saving measurement time, the EUT shall be deemed to have complied if it meets the provisions of the relevant clause/standard with the necessary functions operated. For example, if a personal computer with a broadcast reception function cannot operate the broadcast reception function in isolation from the computing function, the personal computer may be tested with the computing function and broadcast reception function activated according to this standard and to CISPR 20 with respect to these requirements.

Where an allowance is made excluding specific ports or frequencies or functions in a standard because of different test specification and/or test set-up and/or performance criterion, the allowance may be made when relevant functions within multifunction equipment are tested against a different standard (e.g. excluding of the application of Table 2 to an antenna port or excluding of the evaluation of the broadcast function during a measurement of equipment containing the broadcast reception function according to this standard).

Dependent upon the EUT more than one criterion defined in the annexes may apply, for example a TTE attached to a LAN shall meet the criteria defined in Annex A and Annex C.

6 Conditions during testing

6.1 General conditions

The tests shall be made exercising all primary functions in the most representative mode consistent with typical applications. The test sample shall be configured in a manner consistent with typical installation practice.

If the EUT is part of a system or can be connected to associated equipment, then the equipment shall be tested while connected to the minimum representative configuration of associated equipment necessary to exercise the ports in a similar manner to that described in Clause 8 of CISPR 22.

The configuration and mode of operating during the tests shall be precisely noted in the test report. It is not always possible to test every function of the apparatus; in such cases, the most critical mode of operation shall be selected.

If the EUT either has a large number of terminals or a large number of ports with similar connection types, then a sufficient number shall be selected to simulate the actual operating conditions and to ensure that all the different types of termination are covered.

Coil cables (such as keyboard cables) shall not be intentionally stretched during testing. For such cables, the length specified in the table notes refers to the stretched conditions.

The test equipment or associated equipment (for example NT or simulator) connected to the EUT shall not have any influence on the result of the testing.

In cases where a manufacturer's specification requires external protection devices or measures which are clearly specified in the user's manual, then the test requirements of this standard shall be applied with the external protection devices or measures in place.

During testing, the environmental conditions and supply voltages shall remain within the operating ranges specified for the product unless otherwise indicated in the basic standard.

If an earth connection independent of the power supply cable is provided, this earth connection shall be installed according to the specifications of the manufacturer for the tests given in Tables 1 to 4.

6.2 Particular conditions (EUT operational modes, etc.)

The particular conditions specified in the annexes take precedence over the corresponding parts of the general conditions.

Where particular conditions for specific functions are not given in this standard, then the general conditions shall apply.

7 Performance criteria

7.1 General performance criteria

The manufacturer has the obligation to express the performance criteria in terms which relate to the performance of his specific product when used as intended.

The following performance criteria are applicable, and shall only be evaluated when the functions referred to are implemented.

Examples of functions defined by the manufacturer to be evaluated during testing include, but are not limited to, the following:

- essential operational modes and states;
- tests of all peripheral access (hard disks, floppy disks, printers, keyboard, mouse, etc.);
- quality of software execution;
- quality of data display and transmission;
- quality of speech transmission.

7.2 Performance criterion A

During and after the test the EUT shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a minimum performance level specified by the manufacturer when the EUT is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the EUT if used as intended.

7.3 Performance criterion B

After the test, the EUT shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the EUT is used as intended. The performance level may be replaced by a permissible loss of performance.

During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.

If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the EUT if used as intended.

7.4 Performance criterion C

During and after testing, a temporary loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls or cycling of the power to the EUT by the user in accordance with the manufacturer's instructions.

Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

7.5 Particular performance criteria

The particular performance criteria which are specified in the normative annexes take precedence over the corresponding parts of the general performance criteria.

Where particular performance criteria for specific functions are not given, then the general performance criteria shall apply.

8 Product documentation

The specification used by the manufacturer to define the performance criteria for the testing required by this standard shall be made available to the user upon request.

9 Measurement uncertainty

When applying the test levels given in Tables 1 to 4, the requirements shall not be changed based on an estimate of measurement uncertainties.

NOTE Measurement uncertainties are not required to be calculated.

10 Immunity requirements

Table 1 – Immunity, enclosure port

	Environmental phenomenon	Test specification	Units	Basic standard	Remarks	Performance criterion
1.1	Power-frequency magnetic field	50 or 60 1	Hz A/m (r.m.s.)	IEC 61000-4-8	See ^a	A See Annex B as appropriate
1.2	Radio-frequency electromagnetic field Amplitude modulated	80-1 000 3 80	MHz V/m (unmodulated, r.m.s) % AM (1 kHz)	IEC 61000-4-3	The test level specified is prior to modulation See ^b	A
1.3	Electrostatic discharge	4 (Contact discharge) 8 (Air discharge)	kV (charge voltage) kV (charge voltage)	IEC 61000-4-2		B
^a Applicable only to EUT containing devices susceptible to magnetic fields, such as CRT monitors, Hall elements, electrodynamic microphones, magnetic field sensors, etc. ^b The frequency range is scanned as specified. However, when specified in Annex A, an additional comprehensive functional test shall be carried out at a limited number of frequencies. The selected frequencies are: 80, 120, 160, 230, 434, 460, 600, 863 and 900 MHz ($\pm 1\%$).						