PD IEC TR 63401-4:2022

BSI Standards Publication

Dynamic characteristics of inverter-based resources in bulk power systems

Part 4: Behaviour of inverter-based resources in response to bulk grid faults

Documents
Document Sharing Hub

Full document details: PD IEC TR 63401-4:2022

National foreword

This Published Document is the UK implementation of IEC TR 63401-4:2022.

The UK participation in its preparation was entrusted to Technical Committee GEL/8/1.

A list of organizations represented on this committee can be obtained on request to its committee manager.

Contractual and legal considerations

This publication has been prepared in good faith, however no representation, warranty, assurance or undertaking (express or implied) is or will be made, and no responsibility or liability is or will be accepted by BSI in relation to the adequacy, accuracy, completeness or reasonableness of this publication. All and any such responsibility and liability is expressly disclaimed to the full extent permitted by the law.

This publication is provided as is, and is to be used at the recipient's own risk.

The recipient is advised to consider seeking professional guidance with respect to its use of this publication.

This publication is not intended to constitute a contract. Users are responsible for its correct application.

This publication is not to be regarded as a British Standard.

© The British Standards Institution 2022
Published by BSI Standards Limited 2022

ISBN 978 0 539 18765 6

ICS 29.020

Compliance with a Published Document cannot confer immunity from legal obligations.

This Published Document was published under the authority of the Standards Policy and Strategy Committee on 30 September 2022.

Amendments/corrigenda issued since publication

Date	Text affected

Documents
Document Sharing Hub

Full document details: PD IEC TR 63401-4:2022

IEC TR 63401-4

Edition 1.0 2022-06

TECHNICAL REPORT

colour inside

Dynamic characteristics of inverter-based resources in bulk power systems – Part 4: Behaviour of inverter-based resources in response to bulk grid faults

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 29.020

ISBN 978-2-8322-3930-8

Warning! Make sure that you obtained this publication from an authorized distributor.

® Registered trademark of the International Electrotechnical Commission

Documents
Document Sharing Hub

Full document details: PD IEC TR 63401-4:2022

CONTENTS

FOREWORD 5
INTRODUCTION 7
1 Scope 8
2 Normative references 8
3 Terms, definitions and abbreviated terms 8
3.1 Terms and definitions 8
3.2 Abbreviated terms 9
4 Existing requirements for fault current behaviour of IBRs 9
4.1 Review of the present requirements 9
4.2 Requirements for wind power stations and PV stations by NERC 12
4.3 Requirements for wind power stations and PV power stations in China 14
4.4 Requirements for wind power stations and PV power stations in Germany 17
4.5 Clause summary 19
5 Analysis on the behaviour of fault current 19
5.1 Fault current needs 19
5.2 Fault current characteristics of full-scale-converter based IBRs 19
5.2.1 General 19
5.2.2 Typical control schemes of FSC-based IBRs 20
5.2.3 Fault current characteristics of FSC-based IBR during symmetrical fault 22
5.2.4 Fault current characteristics of FSC-based IBR under unsymmetrical fault 22
5.3 Fault current behaviour of doubly fed induction generator (DFIG) based wind turbine (WT) 23
5.3.1 General 23
5.3.2 FRT solutions of DFIG-based WT 23
5.3.3 Fault current behaviour of DFIG-based WT during symmetrical faults 26
5.3.4 Fault current behaviour of DFIG-based WT during unsymmetrical faults 27
5.4 Behaviour of large-scale wind farm when outgoing line faults 27
5.5 Clause summary 32
6 Impact of IBRs on relay protection 33
6.1 Influence factors of IBRs on relay protection 33
6.2 Impact on distance protection 34
6.2.1 Basic principle of distance protection 34
6.2.2 Power frequency component distance relay 36
6.2.3 Time-domain distance relay 36
6.2.4 Power frequency variation component distance relay 36
6.2.5 Phase-comparison distance relay 37
6.2.6 Conclusion 39
6.3 Impact on phase selector 39
6.3.1 Fault component of phase current difference based phase selector 39
6.3.2 Fault component of sequence current based phase selector 41
6.3.3 Conclusion 42
6.4 Impact on directional relay 42
6.4.1 Fault component of phase voltage and current based directional relay 42
6.4.2 Fault component of sequence voltage and current based directional relay 42
6.4.3 Conclusion 44

AVA Documents
Document Sharing Hub

6.5 Clause summary 45
7 Conclusions and future work 45
7.1 Conclusions 45
7.2 Future work 45
Annex A (informative) Expressions of DFIG-based WT's fault current 46
Bibliography 48

Figure 1 – Fault-ride-through profile of power-generating modules 10
Figure 2 – Category Ⅰ Abnormal voltage ride-through requirement [2] 12
Figure 3 – Category Ⅱ Abnormal voltage ride-through requirement [2] 13
Figure 4 – Category Ⅲ Abnormal voltage ride-through requirement as amended in [2] 13
Figure 5 – Under voltage ride through requirements for wind farms in China 14
Figure 6 – Under voltage ride through requirements for photovoltaic power stations in China 15
Figure 7 – Over voltage ride through requirements for photovoltaic power stations in China 16
Figure 8 – Voltage ride through requirements for type II power stations according to VDE-AR-N-4120 17
Figure 9 – Requirements of the reactive current according to VDE-AR-N 4120 18
Figure 10 – Typical topology of a Type-IV WT 20
Figure 11 – Typical topology of a VSC-based PV inverter 20
Figure 12 – Diagram of basic AC current control strategy of GSC during fault 20
Figure 13 – Diagram of positive- and negative-sequence AC current control strategy of GSC for eliminating oscillations during voltage unbalance 21
Figure 14 – Diagram of positive- and negative-sequence AC current control strategy of GSC for complying I1R and I2R injection requirements 22
Figure 15 – Typical topology of a DFIG-based WT 23
Figure 16 – Energy flow and ESEs of a DFIG-based WT in normal operation 24
Figure 17 – ESEs and vector control scheme of a DFIG-based WT in normal operation 24
Figure 18 – FRT solutions of a DFIG-based WT during grid fault 25
Figure 19 – FRT solutions of a DFIG-based WT during grid fault 26
Figure 20 – The identified components of fault currents by the analytical expression 26
Figure 21 – The topology of wind farm integrated to power grid in Shanxi Province 28
Figure 22 – The u_{OL} and i_{OL} recorded when BG fault occurs at point F1 28
Figure 23 – The u_D and i_D recorded when BG fault occurs at point F1 29
Figure 24 – The EPSI, ENSI, EZSI of wind farm including both DFIG and PMSG based WTs 30
Figure 25 – The EPSI, ENSI, EZSI of wind farm including only DFIG based WTs 31
Figure 26 – The u_{OL}, i_{OL} and i_D recorded when ABCG fault occurs at point F2 32
Figure 27 – General fault characteristics of wind power system 34
Figure 28 – Diagrams of wind power integration system for distance protection 35
Figure 29 – Wind power integration system 37
Figure 30 – Operation performance of distance relays when the BC fault occurs at the midpoint of DFIG wind power outgoing line 38

AVA Documents
Document Sharing Hub
Full document details: PD IEC TR 63401-4:2022

Figure 31 – Fault component network 39
Figure 32 – The ratio of positive and negative sequence impedance for DFIG wind farm when an AG fault occurs 43
Figure 33 – Fault component of phase voltage and current based directional relay 43
Figure 34 – Fault component of line to line voltage and current based directional relay 44
Figure 35 – Fault component of sequence voltage and current based directional relay 44

Table 1 – Parameters for Figure 1 for fault-ride-through capability of power-generating modules 10
Table 2 – Detailed parameters for Figure 1 for fault-ride-through capability of power-generating modules in different countries 11
Table 3 – Simulation results of distance relays when BC faults occur at different locations of the DFIG wind power outgoing line 39
Table 4 – Behaviour of traditional phase selectors under different kinds of faults 41
Table 5 – Summary of adaptability of traditional relay protection 45
Table A.1 – Fault current expressions of DFIG-based WT during symmetrical voltage dip 46
Table A.2 – Typical values and ranges of parameters in fault current expression 47

Documents
Document Sharing Hub

Full document details: PD IEC TR 63401-4:2022

INTERNATIONAL ELECTROTECHNICAL COMMISSION

DYNAMIC CHARACTERISTICS OF INVERTER-BASED RESOURCES IN BULK POWER SYSTEMS –

Part 4: Behaviour of inverter-based resources in response to bulk grid faults

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC TR 63401-4 has been prepared by subcommittee SC 8A: Grid Integration of renewable energy generation, of IEC technical committee TC 8: Systems aspects of electrical energy supply. It is a Technical Report.

The text of this Technical Report is based on the following documents:

Draft TR	Report on voting
8A/100/DTR	8A/104/RVDTR

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this Technical Report is English.

Documents
Document Sharing Hub

Full document details: PD IEC TR 63401-4:2022

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

A list of all parts in the IEC 63401 series, published under the general title *Dynamic characteristics of inverter-based resources in bulk power systems*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

Documents
Document Sharing Hub

Full document details: PD IEC TR 63401-4:2022

INTRODUCTION

Wind turbines and photovoltaic based power sources employ power electronic converters. Their controllable characteristics significantly change the behaviour of the power system to bulk grid faults, which brings new challenges to the reliability and safety of the modern power systems. Relay protection plays a key role in safe and stable operation of power systems for identifying and isolating faults quickly and reliably.

Relay protection operates on electrical characteristics when a fault occurs. Legacy protection principles are generally based on the fault characteristics of the synchronous machine. With the large-scale integration of these inverter-based resources (IBRs) into power systems, the diversity in IBR topologies and control strategies makes the fault behaviour turn to complex, and the electrical characteristics in the faulted power systems are significantly changed from the traditional. Legacy relay protections could be negatively affected.

Considering these challenges, this technical report aims at presenting the fault behaviour of IBRs in different topologies and control strategies, and then evaluating the adaptability of existing relay protection principles in IBR scenarios. In this report, IBRs are generally classified as full-scale converter based IBR (including Type-IV wind turbine and PV inverter) and Type-III wind turbine (also referred to as doubly-fed induction generator based wind turbine).

Documents
Document Sharing Hub

Full document details: PD IEC TR 63401-4:2022

DYNAMIC CHARACTERISTICS OF INVERTER-BASED RESOURCES IN BULK POWER SYSTEMS –

Part 4: Behaviour of inverter-based resources in response to bulk grid faults

1 Scope

This part of IEC 63401, which is a technical report, mainly focuses on the fault behaviour of IBRs and performances of the existing relay protection in grids with large-scale integration of IBRs.

This document mainly includes:

- The IBR fault current requirements in present grid codes, including the requirements of active and reactive currents in positive- and negative-sequence systems during symmetrical and unsymmetrical faults.
- Fault current behaviour of IBRs, including the current components in transient and fundamental frequency in different IBR topology and control schemes.

Adaptability of existing relay protection with the large-scale integration of IBRs, including the performances of distance protection, phase selector, directional relay and over-current protection.

2 Normative references

There are no normative references in this document.

3 Terms, definitions and abbreviated terms

3.1 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at http://www.electropedia.org/
- ISO Online browsing platform: available at http://www.iso.org/obp

Documents
Document Sharing Hub

Full document details: PD IEC TR 63401-4:2022

3.2 Abbreviated terms

Abbreviated term	Description
DER	Distributed Energy Resource(s)
DFIG	Doubly Fed Induction Generator
EMF	Electromotive Force
ENSI	Equivalent Negative-Sequence Impedance
EPS	Electrical Power System
EPSI	Equivalent Positive-Sequence Impedance
ESE	Energy Storage Element
EZSI	Equivalent Zero Sequence Impedance
FRT	Fault Ride Through
FSC	Full-Scale Converter
GSC	Grid-Side Converter
IBR	Inverter-Based Resource
I1A	Positive-Sequence Active Current
I1R	Positive-Sequence Reactive Current
I2A	Negative-Sequence Active Current
I2R	Negative -Sequence Reactive Current
MSC	Machine-Side Converter
PMSG	Permanent Magnet Synchronous Generator
PCC	Point of Common Coupling
RCI	Reactive Current Injection
RSC	Rotor Side Converter
SG	Synchronous Generator
WT	Wind Turbine

4 Existing requirements for fault current behaviour of IBRs

4.1 Review of the present requirements

Considering the influence of IBRs during the fault, the technical requirements for connecting IBRs to power system have been established in many countries around the world. Taking the network code on requirements for grid connection of generators in EU as an example, the power-generating modules must be capable of remaining connected to the network and continuing to operate stably when a symmetrical voltage drop occurs at the point of common coupling (PCC), unless the protection scheme for internal electrical faults requires the disconnection of the power-generating modules from the network. The fault-ride-through capabilities in case of asymmetrical faults must be specified [1][1].

Table 1 shows the parameters for Figure 1 for fault-ride-through capability of power-generating modules and the detailed parameters in some countries are given in Table 2.

[1] Numbers in square brackets refer to the bibliography.

Documents
Document Sharing Hub

Full document details: PD IEC TR 63401-4:2022

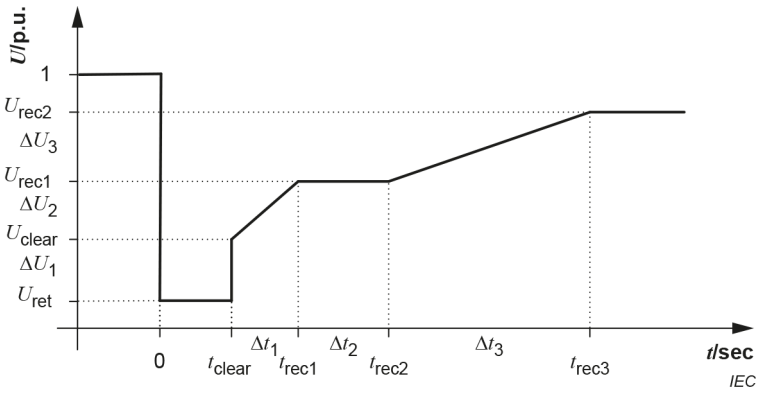

Figure 1 – Fault-ride-through profile of power-generating modules

The diagram represents the lower limit of a voltage-against-time profile of the voltage at the PCC, expressed as the ratio of its actual value to its reference 1 p.u. value before, during and after the fault, U_{ret} is the retained voltage at the PCC during the fault, t_{clear} is the instant after the fault is cleared, U_{clear} is the instantaneous voltage after the fault is cleared, U_{rec1}, U_{rec2}, t_{rec1}, t_{rec2} and t_{rec3} specify certain points of the lower limit of voltage recovery after the fault is cleared.

Table 1 – Parameters for Figure 1 for fault-ride-through capability of power-generating modules

Voltage parameters (p.u.)		Time parameters (seconds)	
U_{ret}	0-0.2	t_{clear}	0,15-0,625
U_{clear}	$U_{ret} + \Delta U_1$	t_{rec1}	$t_{clear} + \Delta t_1$
U_{rec1}	$U_{clear} + \Delta U_2$	t_{rec2}	$t_{rec1} + \Delta t_2$
U_{rec2}	$U_{rec1} + \Delta U_3$	t_{rec3}	$t_{rec2} + \Delta t_3$

Documents
Document Sharing Hub
Full document details: PD IEC TR 63401-4:2022

Table 2 – Detailed parameters for Figure 1 for fault-ride-through capability of power-generating modules in different countries

Requirements for different countries	Requirements for wind power in China	Requirements for PV power in China	Requirements for wind power and PV power in Germany	Requirements for wind power in Denmark	Requirements for wind power in USA
Duration of under voltage ride-through	U_{ret} = 0,2pu t_{clear} = 625 ms	U_{ret} = 0 t_{clear} = 150 ms	Symmetrical fault, U_{ret} = 0 t_{clear} = 150 ms Asymmetrical fault, U_{ret} = 0 t_{clear} = 220 ms	Symmetrical fault, U_{ret} = 0 t_{clear} = 250 ms	U_{ret} = 0,15pu t_{clear} = 625 ms
Duration of over voltage ride-through	None	U_{pcc} = 1,30pu t_{uni} = 500 ms U_{pcc} = 1,20pu t_{uni} = 10s	U_{pcc} = 1,30pu t_{uni} = 100 ms U_{pcc} = 1,24pu t_{uni} = 60s	None	None
Fault voltage recovery time	U_{rec2} = 0,9pu t_{rec3} = 2s	U_{rec2} = 0,9pu t_{rec3} = 2s	Symmetrical fault, U_{rec2} = 0,85pu t_{rec3} = 3s two-phase short-circuit fault U_{rec2} = 0,85pu t_{rec3} = 5s	Symmetrical fault, U_{rec2} = 0,9pu t_{rec3} = 10s	U_{rec2} = 0,9pu t_{rec3} = 3s
Active power recovery Rate	At least 10 % P_n/s	At least 30 % P_n/s	At least 20 % P_n/s	At least 10 % P_n/s	At least 10 % P_n/s
Dynamic reactive power capability	t_{res}≤ 75ms, t_{dur}≥550 ms I_T≥1,5 × (0,9-U_{pcc})I_n (0,2≤U_{pcc}≤0,9)	t_{res}≤ 60ms t_{adj}≤ 150ms η<20 % I_T≥K_1 × (0,9-U_{pcc})I_n (U_{pcc}<0,9, 1,5≤K_1≤2,5) I_T≥K_2 × (1,1-U_{pcc})I_N (U_{pcc}>1,1, 0≤K_2≤1,5)	t_{res}≤30ms t_{ste}≤60ms	I_T≥I_n	None
Requirements for positive-sequence and negative-sequence reactive current	None	None	$\Delta u_1 = \frac{\lvert U_1 \rvert - U_{1\min}}{U_n}$ $\Delta u_2 = \frac{U_2}{U_n}$ $\Delta i_1 = k \cdot \Delta u_1$ $\Delta i_2 = k \cdot \Delta u_2$	None	None

Documents
Document Sharing Hub

where U_{pcc} is the voltage at the PCC in p.u., P_n is the rated active power output of power-generating modules, I_n is the rated current of power-generating modules, I_T is the reactive output current of power-generating modules, t_{uni} is the uninterrupted operation time of power-generating modules, t_{res} is the response time of dynamic reactive current, t_{adj} is the adjustment time of dynamic reactive current, η is the maximum overshoot of dynamic reactive current, t_{dur} is the duration time of dynamic reactive current, t_{ste} is the steady time of dynamic reactive current, U_n is the rated line voltage at the PCC, U_{1min} is the average line voltage at the PCC within one minute, U_1 is the positive-sequence voltage during the short-circuit fault, U_2 is the negative-sequence voltage during the short-circuit fault, Δu_1 is the ratio of the difference positive-sequence voltage between average line voltage to rated line voltage during the short-circuit fault, Δu_2 is the ratio of negative-sequence voltage to rated line voltage during the short-circuit fault, Δi_1 is the positive-sequence reactive current during the short-circuit fault and Δi_2 is the negative-sequence reactive current during the short-circuit fault, and k is the scale factor.

Taking the technical requirements for connecting IBRs to power system in USA, China and Germany as an example, as shown in 4.2, 4.3 and 4.4.

4.2 Requirements for wind power stations and PV stations by NERC

According to IEEE 1547-2018 and its amendment published in 2020 [2], there are 3 different voltage ride-through capability abnormal performance categories shown as follows,

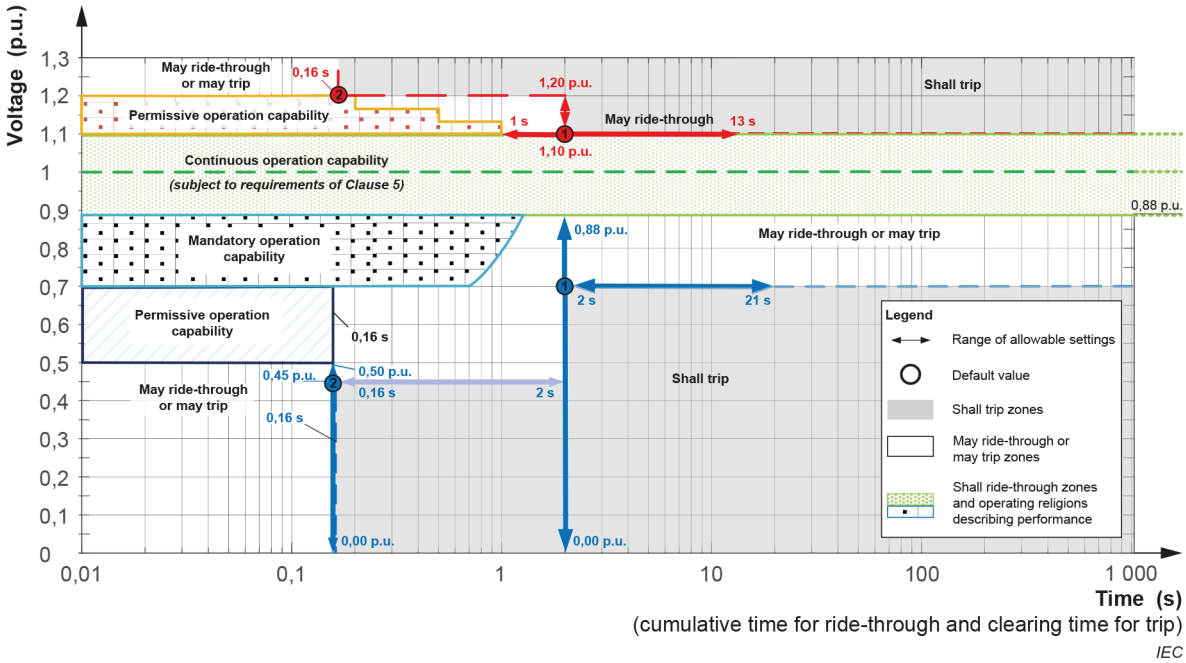

Figure 2 – Category Ⅰ Abnormal voltage ride-through requirement [2]

Documents
Document Sharing Hub
Full document details: PD IEC TR 63401-4:2022

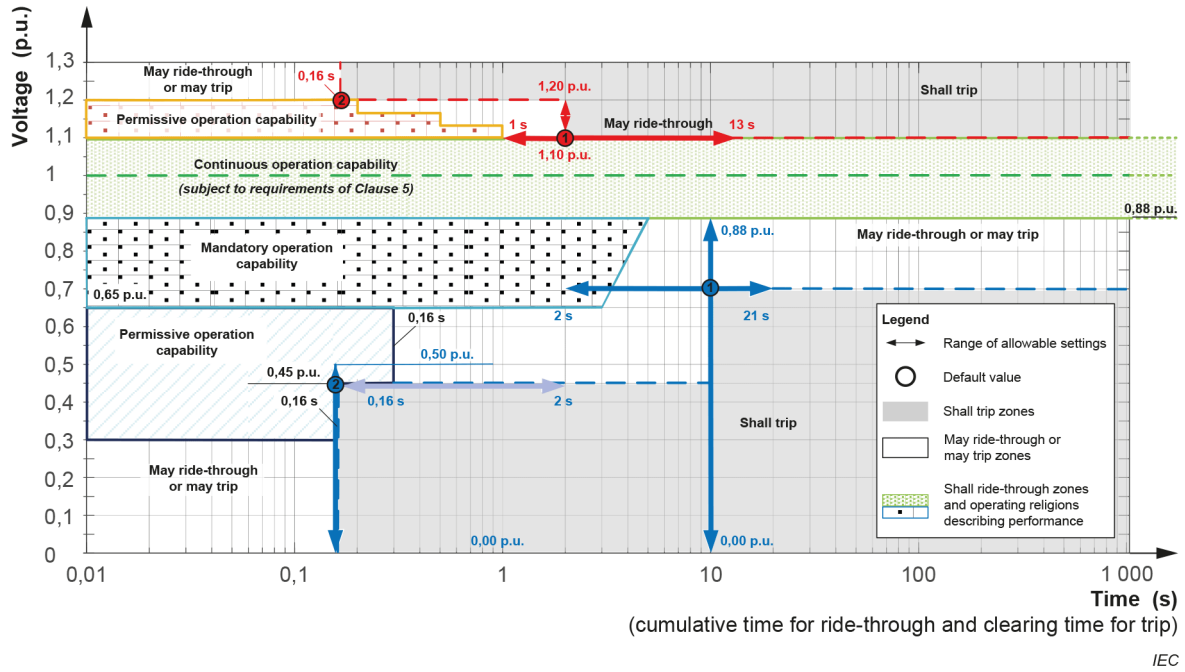

Figure 3 – Category Ⅱ Abnormal voltage ride-through requirement [2]

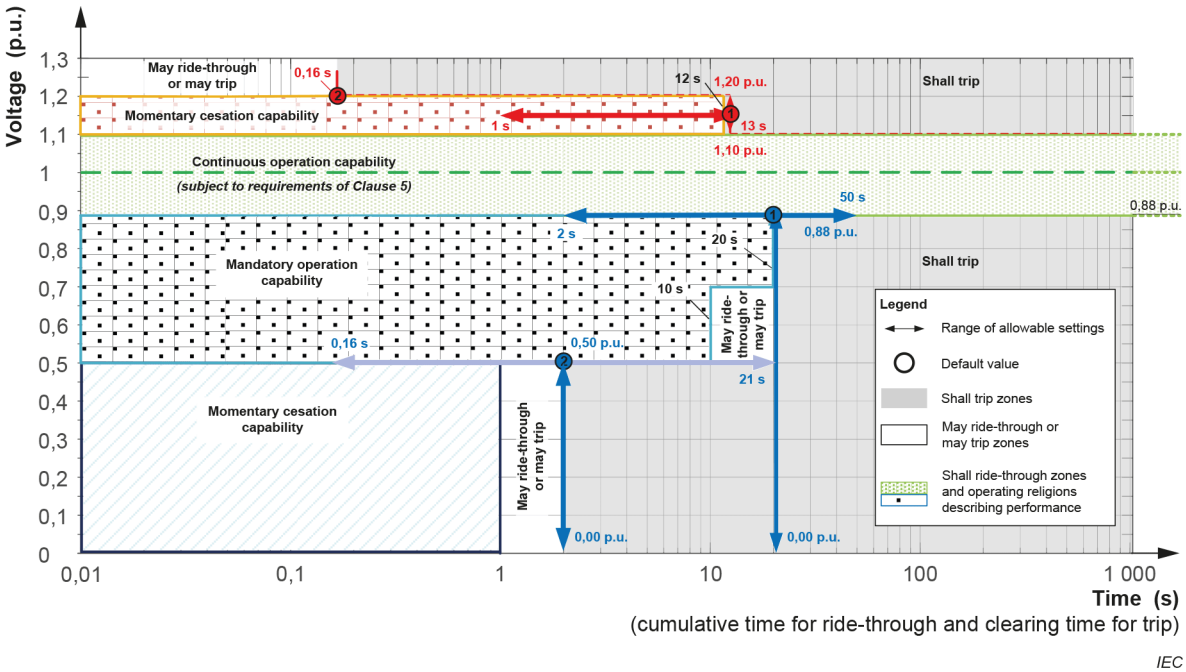

Figure 4 – Category Ⅲ Abnormal voltage ride-through requirement as amended in [2]

In Figure 2, Figure 3 and Figure 4, depending on the magnitude of voltage and disturbance duration time, different operation regions are presented. The differences among three performance categories also lie in the disturbance duration time and range of magnitude of voltage. The low-voltage ride-through performances in different operation regions for all three performance categories are as follows:

1) within the mandatory operation region, the distributed energy resources (DER) must operate synchronously with the Area electrical power system (EPS) and continue to exchange current with the Area EPS without stopping power supply and tripping-off.

Documents
Document Sharing Hub
Full document details: PD IEC TR 63401-4:2022

2) within the permissive operation region, the DER must operate synchronously with the Area EPS or must not trip and may continue to exchange current with the Area EPS or may stop power supply.
3) within the continuous operation regions, the DER must operate synchronously with the Area EPS and continue to transmit active power at least the same level of magnitude as the active power before disturbance.
4) within the permissive operation region, the DER must operate synchronously with the Area EPS or shall not trip and may continue to exchange current with the Area EPS or may stop power supply.
5) within the momentary cessation operation region, when the DER is connected to the Area EPS, it shall temporarily stop power supply. When the applicable voltage returns, the DER must immediately restore output of operation.

4.3 Requirements for wind power stations and PV power stations in China

According to the technical requirements for connecting wind farms to power system [3], the active power recovery speed and dynamic reactive power support capacity are set during the under voltage ride through process. The under voltage ride through requirements for wind farms in China are shown in Figure 5.

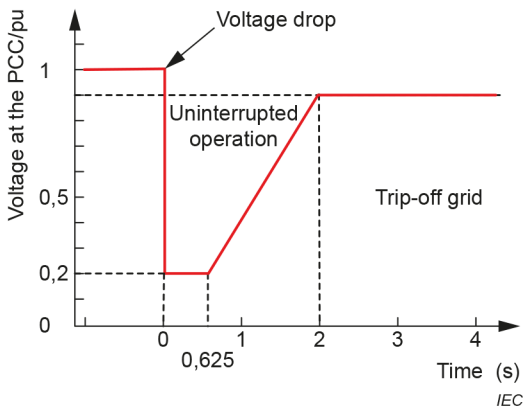

Figure 5 – Under voltage ride through requirements for wind farms in China

When the voltage at the PCC of wind farms drops to 20 % of nominal voltage, the wind turbines in the wind farms should ensure uninterrupted operation for 625 ms without trip-off grid. Besides, the wind turbines should also ensure uninterrupted operation when the voltage at the PCC of wind farms recovers to 90 % of nominal voltage within 2 seconds.

(1) Active power recovery

For wind turbines that are not trip-off grid during the fault, the active power should be recovered with the rate of at least 10 % P_n per second from the time point of voltage recovery.

(2) Dynamic reactive power support capability

When a symmetrical fault occurs at the PCC of wind farms, it should respond quickly from the moment of voltage drop. And reactive current should be provided by wind turbines for voltage support. Detailed requirements are as follows.

From the moment of voltage drop, the response time of the dynamic reactive current should not be more than 75 ms, and the duration time of the dynamic reactive current is not less than 550 ms.

The dynamic reactive current provided by wind turbines should meet the following requirements:

Documents
Document Sharing Hub
Full document details: PD IEC TR 63401-4:2022