

STANDARDS AUSTRALIA/STANDARDS NEW ZEALAND

Amendment No. 1
to
AS/NZS 1221:1997
Fire hose reels

REVISED TEXT

The 1997 edition of AS/NZS 1221:1997 is amended as follows; the amendment(s) should be inserted in the appropriate place(s).

SUMMARY: This Amendment applies to clauses 2.3.1, 3.1, 4.3.1, 4.3.2, Table 2.1, Figure C1 and Appendix F.

Published on 23 January 2003.

Approved for publication in New Zealand on behalf of the Standards Council of New Zealand on 13 December 2002.

Page 9 Clause 2.3.1

Delete Item (a) and *replace* with the following:

- (a) *Fixed hose reels*—shall have not less than 100 mm clearance between the cabinet side walls and the hose reel. The clearance of the hose reel to the projected outline of the cabinet door opening shall be not less than 100 mm (see Figure 2.3)

Page 10 Table 2.1, Column 3, 3rd, 4th and 5th entries

Between the words ‘bore of’ and ‘Ø19’ and the words ‘and’ and ‘Ø25’ *insert* the words ‘not less than’.

Page 14 Clause 3.1, paragraph 1, lines 2 and 3

Delete the words ‘except that hose reels manufactured for use in New Zealand need not be 100% pressure tested as long as they are marked in accordance with Clause 4.3.1(f).

Page 16 Clause 4.3.1 (Item f)

Delete Item (f).

Page 16 Clause 4.3.2

Delete Clause 4.3.2.

AMDT
No. 1
JAN
2003

AMDT
No. 1
JAN
2003

AMDT
No. 1
JAN
2003

AMDT
No. 1
JAN
2003

AMDT
No. 1
JAN
2003

AMDT
No. 1
JAN
2003

Page 24 Figure C1

Delete existing figure and replace with the following (In the caption for the weight the word 'changed' has been corrected to read 'charged'):

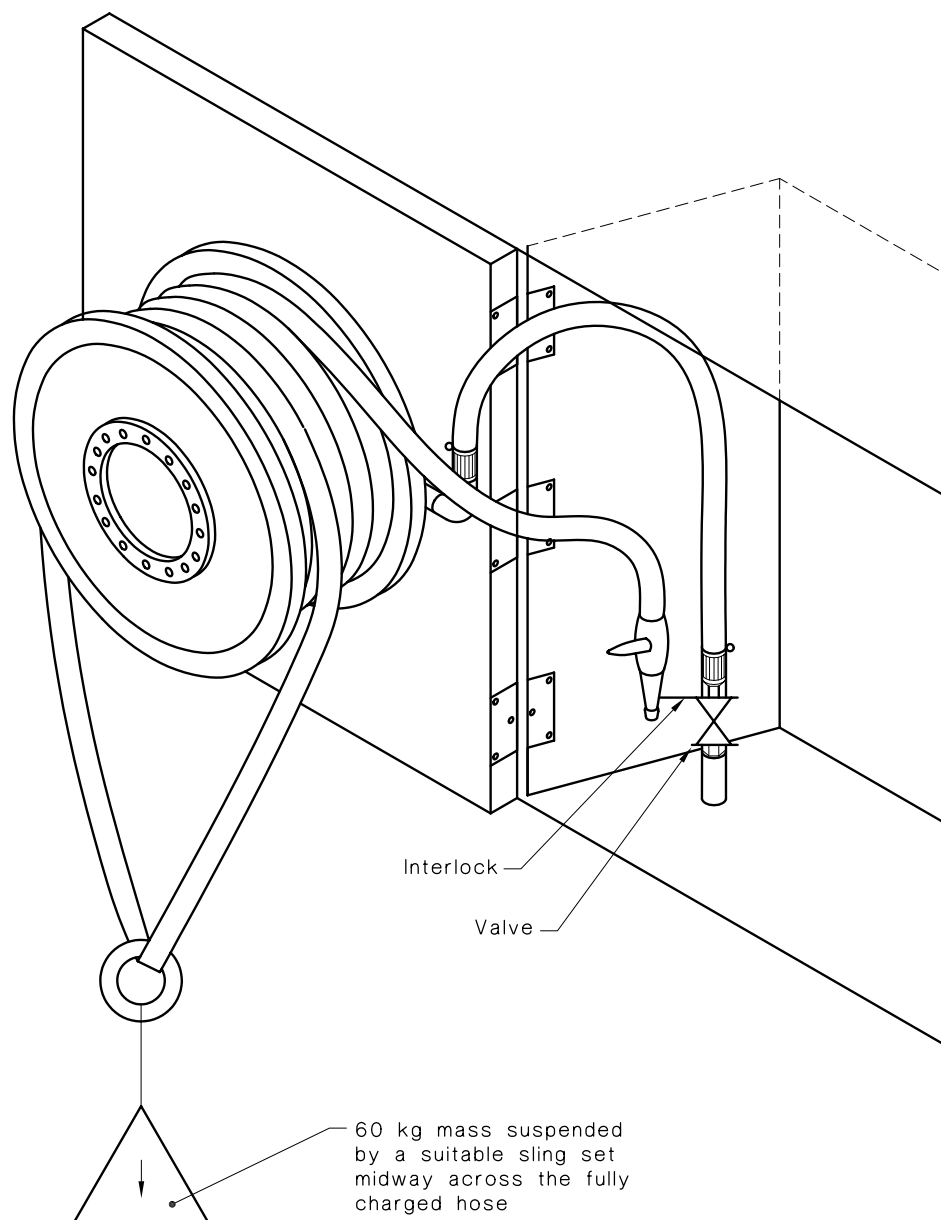


FIGURE C1 DETAILS OF LOAD TEST FOR SWING ARM TYPE HOSE REELS

AMDT
No. 1
JAN
2003

Page 28 Appendix F, paragraph F4 (Item (a))

In line 2, delete the word 'altitude' and replace with the word 'attitude'.