

STANDARDS AUSTRALIA/STANDARDS NEW ZEALAND

Amendment No. 1
to
AS/NZS 3123:2005
Approval and test specification—Plugs, socket-outlets and couplers for general industrial application

REVISED TEXT

The 2005 edition of AS/NZS 3123 is amended as follows; the amendments should be inserted in the appropriate places.

SUMMARY: This Amendment applies to the Preface, Clauses 7.1, 7.2, 7.3 and 7.4, and Figure 7 (new).

Published on 17 July 2020.

Approved for publication in New Zealand by the New Zealand Standards Approval Board on 1 July 2020.

AMDT
No. 1
JUL
2020

Preface

Add the following text after the second paragraph:

AS/NZS 3123:2005 will remain current for 24 months from the date of publication of this document. After this time, it will be superseded by AS/NZS 3123:2005 incorporating Amendment No. 1. Regulatory authorities that reference this Standard in regulation may apply these requirements at a different time. Users of this Standard should consult with these authorities to confirm their requirements.

AMDT
No. 1
JUL
2020

Clause 7.1

After Item (f), *add* the following:

- (g) On products referenced in Standard Sheets 9 and 10, a warning for keyway connection with the words 'ENSURE CORRECT INSERTION OF KEYWAYS' or the 'keyway warning symbol' (see Figure 7).

AMDT
No. 1
JUL
2020

Clause 7.2

After the last symbol, *add* the following symbol:

Keyway warning symbol (if used) 

AMDT
No. 1
JUL
2020

Clause 7.3

Delete the third paragraph and *replace* with the following:

The marking for rated voltage, type reference, the symbol for degree of protection and keyway warning shall be visible after installation of the accessory, either on the outside of the enclosure or on the lid if the lid cannot be removed without the aid of a tool.

The marking for the keyway warning for Standard Sheets 9 and 10 products shall be marked in the 12 o'clock position in relation to the socket outlets and connectors shown in the Standard Sheets.

NOTE: The term 'main part' of a socket-outlet or an appliance inlet means the part carrying the contacts.

AMDT
No. 1
JUL
2020

Clause 7.4


Add the following before the Note:

The marking for the keyway warning for Standard Sheets 9 and 10 products shall be marked in the 12 o'clock position in relation to the socket outlets and connectors shown in the Standard Sheets.

AMDT
No. 1
JUL
2020

Figure 7 (new)

Add the following figure after Figure 6:

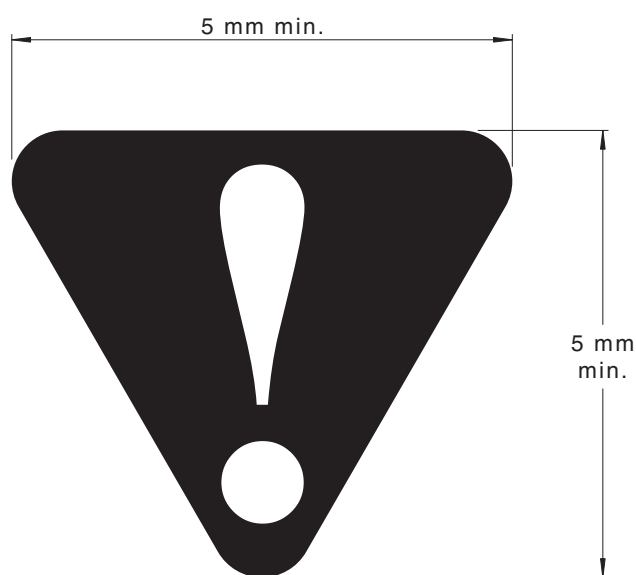

NOTE: The triangle is to be a solid infill as shown

FIGURE 7 KEYWAY WARNING SYMBOL
