

Australian/New Zealand Standard™

Safety of toys

Part 6: Swings, slides and similar activity toys for indoor and outdoor family domestic use (ISO 8124-4:2014, MOD)



AS/NZS 8124.6:2016

This Joint Australian/New Zealand Standard was prepared by Joint Technical Committee CS-018, Safety of Children's Toys. It was approved on behalf of the Council of Standards Australia on 19 May 2016 and by the New Zealand Standards Approval Board on 2 June 2016.

This Standard was published on 30 June 2016.

The following are represented on Committee CS-018:

Australian Chamber of Commerce and Industry
Australian Competition and Consumer Commission
Australian Industry Group
Australian Toy Association
Children's Hospital, Westmead
CHOICE
Consumer Affairs Victoria
Consumers Federation of Australia
Kidsafe
Ministry of Business Innovation and Employment, New Zealand
National Acoustic Laboratories
National Retail Association
New Zealand Toy Distributors Association
NSW Fair Trading
Office of Fair Trading, Qld
Safekids New Zealand

Keeping Standards up-to-date

Standards are living documents which reflect progress in science, technology and systems. To maintain their currency, all Standards are periodically reviewed, and new editions are published. Between editions, amendments may be issued. Standards may also be withdrawn. It is important that readers assure themselves they are using a current Standard, which should include any amendments which may have been published since the Standard was purchased.

Detailed information about joint Australian/New Zealand Standards can be found by visiting the Standards Web Shop at www.saiglobal.com or Standards New Zealand web site at www.standards.govt.nz and looking up the relevant Standard in the on-line catalogue.

For more frequent listings or notification of revisions, amendments and withdrawals, Standards Australia and Standards New Zealand offer a number of update options. For information about these services, users should contact their respective national Standards organization.

We also welcome suggestions for improvement in our Standards, and especially encourage readers to notify us immediately of any apparent inaccuracies or ambiguities. Please address your comments to the Chief Executive of Standards Australia or the New Zealand Standards Executive at the address shown on the back cover.

This Standard was issued in draft form for comment as DR AS/NZS 8124.6:2015.

Australian/New Zealand Standard™

Safety of toys

Part 6: Swings, slides and similar activity toys for indoor and outdoor family domestic use (ISO 8124-4:2014, MOD)

First published as AS/NZS ISO 8124.6:2011.
Jointly revised and designated as AS/NZS 8124.6:2016.

COPYRIGHT

© Standards Australia Limited/Standards New Zealand

All rights are reserved. No part of this work may be reproduced or copied in any form or by any means, electronic or mechanical, including photocopying, without the written permission of the publisher, unless otherwise permitted under the Copyright Act 1968 (Australia) or the Copyright Act 1994 (New Zealand).

Jointly published by SAI Global Limited under licence from Standards Australia Limited, GPO Box 476, Sydney, NSW 2001 and by Standards New Zealand, PO Box 10729, Wellington 6011.

PREFACE

This Standard was prepared by the Joint Standards Australia/Standards New Zealand Committee CS-018, Safety of Children's Toys, to supersede AS/NZS ISO 8124.6:2011, *Safety of toys, Part 6: Swings, slides and similar activity toys for indoor and outdoor family domestic use*.

The objective of this Standard is to provide requirements to minimize the risk from certain specific hazards associated with the referenced products when used in a domestic environment.

This Standard is an adoption with national modifications and has been reproduced from ISO 8124-4:2014, *Safety of toys, Part 4: Swings, slides and similar activity toys for indoor and outdoor family domestic use*. The modification is to replace references to an international normative reference with references to a non-identical national Standard as set out below.

As this Standard is reproduced from an International Standard, the following applies:

- (a) In the source text 'this part of ISO 8124' should read 'this Australian/New Zealand Standard'.
- (b) A full point substitutes for a comma when referring to a decimal marker.

References to ISO 8124-1 shall be replaced by references to the Australian/New Zealand Standard, as follows:

<i>Reference to International Standard</i>		<i>Australian/New Zealand Standard</i>	
ISO		AS/NZS	
8124	Safety of toys	8124	Safety of toys
8124-1	Part 1: Safety aspects related to mechanical and physical properties	8124.1	Part 1: Safety aspects related to mechanical and physical properties (ISO 8124-1:2014, MOD)

The term 'informative' has been used in this Standard to define the application of the annex to which it applies. An 'informative' annex is only for information and guidance.

AS/NZS 8124 consists of the following parts under the general title, *Safety of toys*:

- Part 1: Safety aspects related to mechanical and physical properties (ISO 8124-1:2014, MOD)
- Part 2: Flammability (ISO 8124-2:2014, MOD)
- Part 3: Migration of certain elements (ISO 8124-3:2010, MOD)
- Part 6: Swings, slides and similar activity toys for indoor and outdoor family domestic use (ISO 8124-4:2014, MOD)
- Part 9: Organic chemical compounds—Requirements
- Part 10: Organic chemical compounds—Sample preparation and extraction
- Part 11: Organic chemical compounds—Methods of analysis

AS 8124 consists of the following parts under the same general title:

- Part 4: Experimental sets for chemistry and related activities
- Part 5: Chemical toys (sets) other than experimental sets
- Part 7: Finger paints—Requirements and test methods

There are regulated requirements for toys in Australia and New Zealand. Users of this Standard are reminded that such regulations may refer to specific versions of the Standard and may also make variations to the requirements stated in the referenced version. Compliance with this Standard can therefore not be relied on to ensure compliance with the legal requirements for the sale of toys. Suppliers of toys should familiarize themselves with all regulated requirements for toys and ensure compliance with those as well as this standard. Regulations for consumer products can be found at www.productsafety.gov.au.

CONTENTS

1	Scope	1
2	Normative references	1
3	Terms and definitions	1
4	Requirements	6
4.1	General	6
4.2	Barriers	10
4.3	Rung ladders, stepladders and stairways	11
4.4	Entrapment	12
4.5	Stability of activity toys other than slides, swings and toys with crossbeams	14
4.6	Slides	15
4.7	Swings	18
4.8	Seesaws	21
4.9	Carousels and rocking toys	22
4.10	Inflatable activity toys	22
4.11	Paddling pools	24
5	Warnings and labelling	25
5.1	Labelling	25
5.2	Assembly and installation instructions	25
5.3	Maintenance instructions	26
5.4	Warnings	27
6	Test methods	28
6.1	Stability	28
6.2	Static strength	37
6.3	Dynamic strength of barriers and handrails	38
6.4	Determination of impact from swing elements	39
6.5	Test for head and neck entrapment	42
6.6	Toggle test	47
6.7	Test for protrusions	50
6.8	Durability test for suspension connectors and means of suspension	53
6.9	Deflation of inflatable activity toys	55
6.10	Static load test for paddling pools with non-inflatable walls	55
	Annex A (informative) Rationale	56
	Annex B (informative) Consumer information sheet for playground surfacing materials	60
	Annex C (informative) Safety labelling guidelines for certain types of activity toys	61
	Bibliography	63

INTRODUCTION

This part of ISO 8124 is largely based upon existing standards in the European Union (EN 71-8) and in the United States (ASTM F1148).

However, it should not be construed that a toy manufactured in compliance with this part of ISO 8124 will be in full compliance with relevant national toy safety requirements in the market where the product is intended to be distributed. The user of this part of ISO 8124 is therefore advised to be aware of relevant national requirements.

Compliance with the requirements of this part of ISO 8124 will minimize potential hazards associated with toys resulting from their use in their intended play modes (normal use) as well as unintended play modes (reasonable foreseeable abuse).

This part of ISO 8124 will not, nor is it intended to, eliminate parental responsibility in the appropriate selection of toys. In addition, this part of ISO 8124 will not eliminate the need for parental supervision in situations where children of various ages may have access to the same toy(s).

AUSTRALIAN/NEW ZEALAND STANDARD

Safety of toys**Part 6:****Swings, slides and similar activity toys for indoor and outdoor family domestic use (ISO 8124-4:2014, MOD)****1 Scope**

This part of ISO 8124 specifies requirements and test methods for activity toys for domestic family use intended for children under 14 years to play on or in.

Products covered by this part of ISO 8124 include swings, slides, seesaws, carousels, rocking toys, climbing frames, fully enclosed toddler swing seats and other products intended to bear the mass of one or more children.

Products not included within the scope of this part of ISO 8124 are:

- a) fitness and sporting equipment unless attached to the activity toy;
- b) equipment intended for use in schools, day care centres, kindergartens, public playgrounds, restaurants, shopping centres and similar public places;
- c) juvenile care products such as, but not limited to, infant swings, playpens/enclosures, beds or furniture including picnic tables, cradle rockers and products specifically designed for therapeutic use.

Inflatable activity toys are included in the scope of this part of ISO 8124. However, a powered blower used to continuously inflate the toy is not covered by this part of ISO 8124 since it is considered to be a household appliance and covered by requirements given in IEC 60335-2-80.

See [A.1](#).

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 8124-1, *Safety of toys — Part 1: Safety aspects related to mechanical and physical properties*

3 Terms and definitions


For the purpose of this document, the terms and definitions given in ISO 8124-1 and the following apply.

3.1**activity toy**

toy intended for family domestic use, intended to bear the mass of one or more children, the support structure of which remains stationary while the activity is taking place and which is intended for the performance by a child of any of the following activities: climbing, swinging, sliding, rocking, spinning, jumping, bouncing, crawling and creeping, or any combination thereof

EXAMPLE Swings, slides, carousels and climbing frames (see [Figure 1](#)).

Note 1 to entry: Aquatic toys, paddling pools, trampolines and ride-on vehicles are not considered as activity toys in the context of this part of ISO 8124.

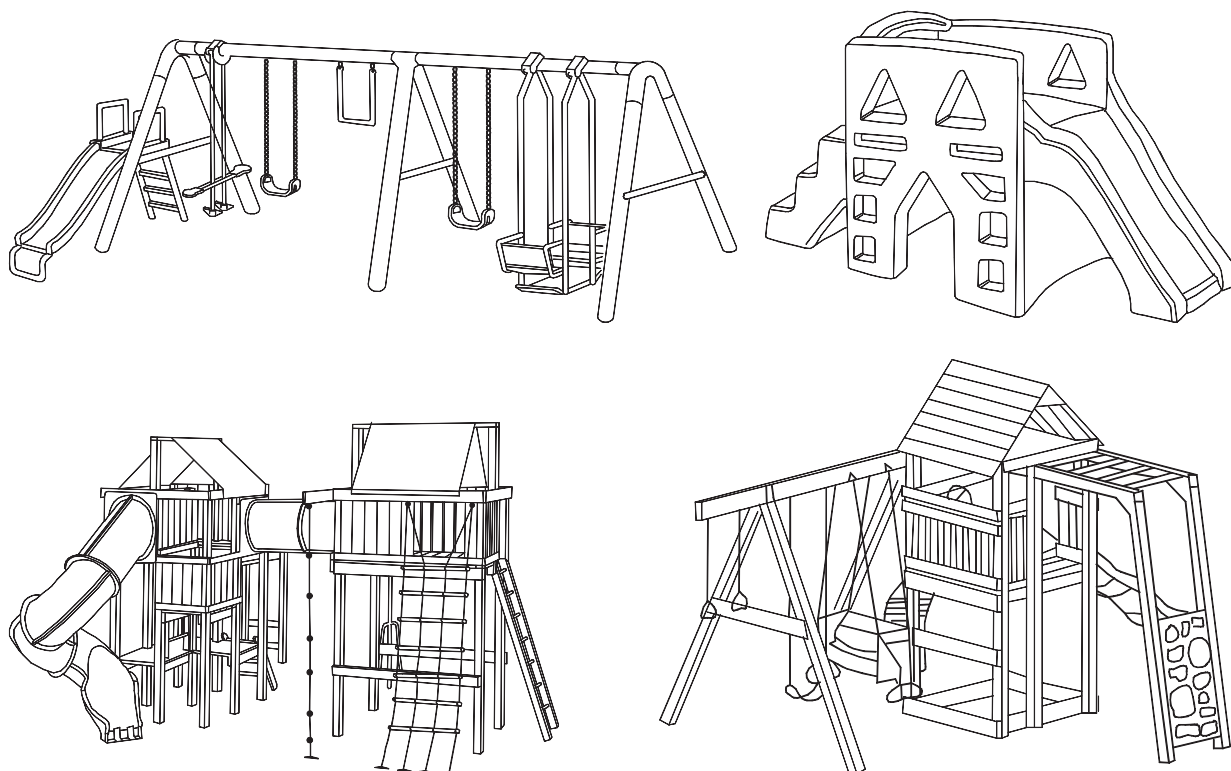

“Not to scale”

Figure 1 — Examples of activity toys

3.2

anchor

device used to fix the toy to the ground surface

3.3

attachment slide

slide for which access to the starting section is possible only by passing via other equipment or parts of other equipment

3.4

barrier

device intended to prevent children from falling from elevated surfaces

3.5

crossbeam

bar or beam which forms a main load-bearing part of the toy

3.6

entrapment

condition in which a body, part of a body or clothing becomes caught and impedes withdrawal

3.7

forced movement

movement where the direction and the extent of the child's movement is determined by the operation of the equipment, for example swinging, sliding, rocking or revolving

3.8**free height of fall**

greatest vertical distance from the intended body support, for example from the seat of a swing to the impact area below

3.9**free space**

space in, on or around the activity toy that can be occupied by a user undergoing a forced movement by the equipment, for example swinging, sliding, rocking or revolving

Note 1 to entry: The definition of free space does not include the three-dimensional area in which a falling movement takes place.

3.10**fully enclosed toddler swing seats**

fully enclosed single occupancy swing intended for young children who can sit upright unaided

Note 1 to entry: A seat is considered fully enclosed when a containment system is employed to support the child on all sides and in between the legs (see [Figure 2](#)).

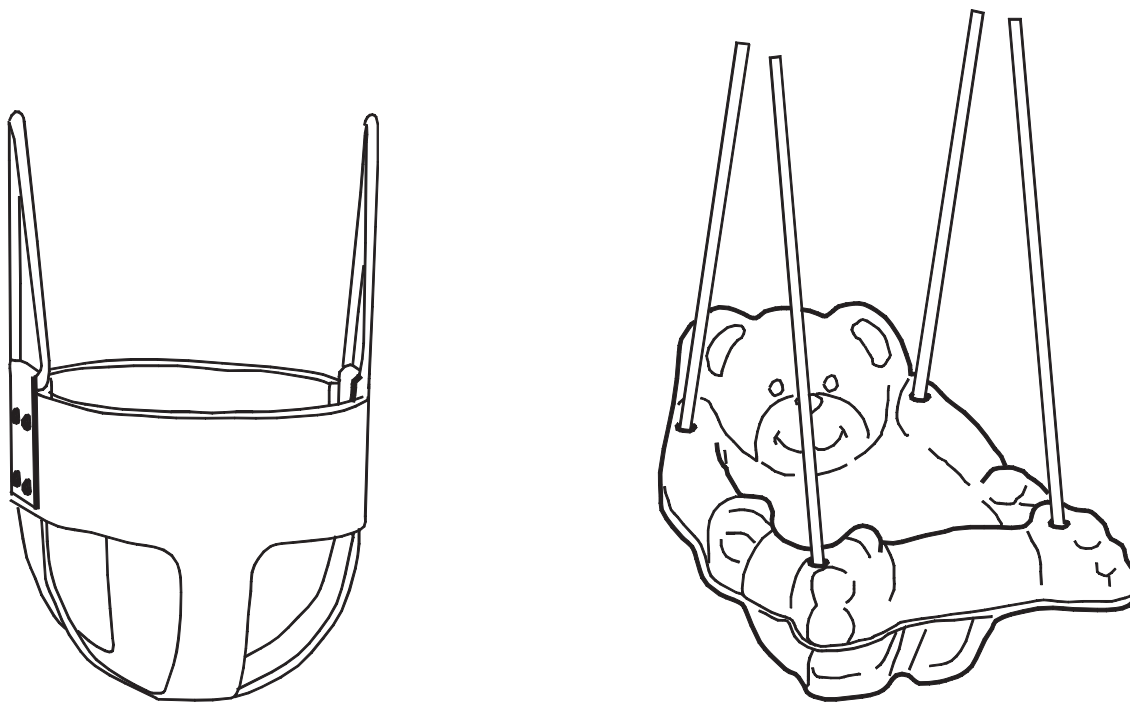


Figure 2 — Examples of fully enclosed toddler swing seat

3.11**impact area**

area of a swing element that comes into contact with the test mass during an impact test in accordance with [6.4](#) (determination of impact from swing elements)

3.12**infant swing**

stationary unit with a frame and a powered mechanism enabling an infant to swing in a seated position

Note 1 to entry: An infant swing is intended for use with infants from birth until the child is able to sit upright unassisted.

3.13**handrail**

rail intended to assist the users to balance or steady themselves

3.14**platform**

any elevated substantially horizontal surface intended to be used by a child as a place for play or as a transition between components


Note 1 to entry: Slide starting sections less than 129 000 mm² are not considered platforms.

3.15**slide**

structure with inclined surface(s) on which the user slides in a defined track

See Figure 3.

Note 1 to entry: Note1 to entry: Inclined planes, designed primarily for other purposes, such as roofs and ramps, do not constitute slides.

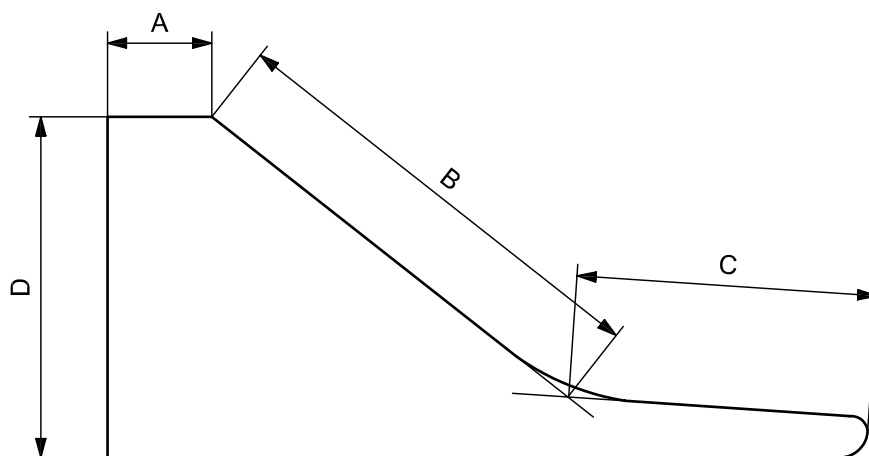**Key**

- A starting section
- B sliding section
- C run-out section
- D height of slide
- B+ C slide length

NOTE The dimensions A, B, and C are measured at the centreline of the sliding surface. Each of these sizes represents one of the zones of the sliding surface. Each zone of the sliding surface is determined by the intersection of the curve of the sliding surface (taken at the bottom of the sliding surface) and the bisecting line of the angle formed between the zones of the sliding surfaces.

Figure 3 — Diagrammatic representation of a slide

3.16**suspension connector**


device that forms the direct contact between a crossbeam and the swing device

See Figure 4.

3.17**swing**

structure, normally intended to be attached to or incorporating a crossbeam, suspension connectors and a swing device with swing element, means of suspension and suspension coupling

See Figure 4.

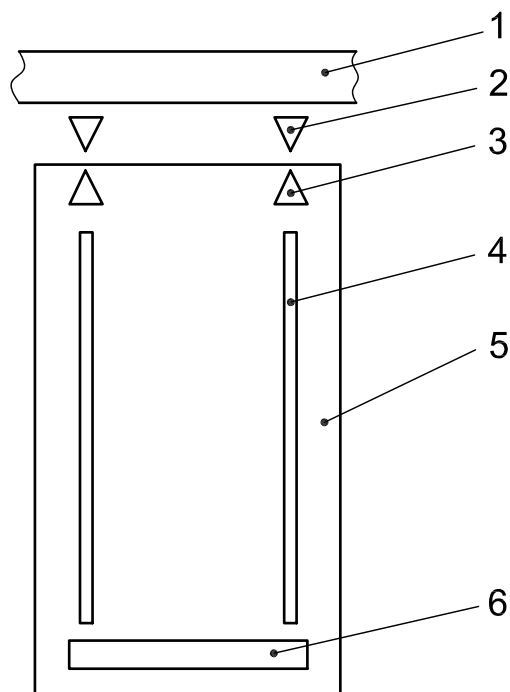

Key

- 1 crossbeam/support member
- 2 suspension connector
- 3 suspension coupling
- 4 means of suspension
- 5 swing device
- 6 swing element (e.g. seat, rings, bar, gondola)

Figure 4 — Diagrammatic representation of a swing

3.18

inflatable activity toy

activity toy, with a structure made of flexible material, inflated by air, intended for children to play on or in

EXAMPLE Bouncy castle, inflatable slides (see [Figure 5](#)).

Note 1 to entry: There are two types of inflatable activity toys: one is kept inflated by a closure (valve) once inflated; the other is kept inflated only by the continuous input of air from a blower.

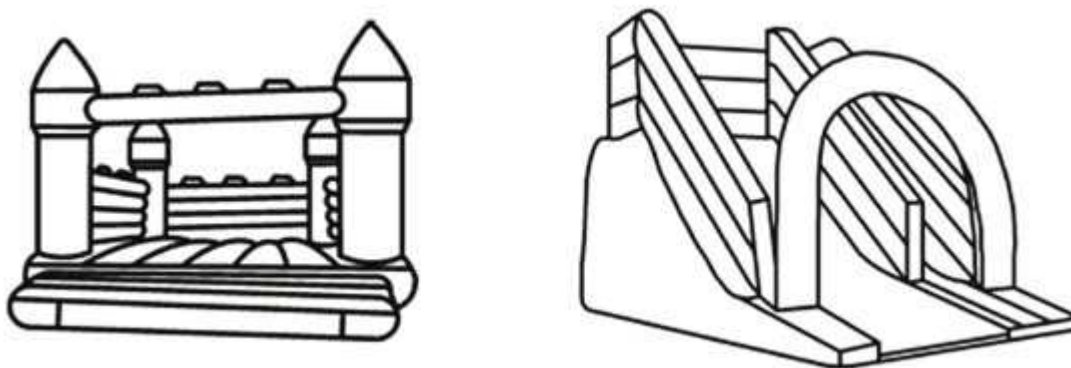


Figure 5 — Examples of inflatable activity toys

3.19

paddling pool

toy pool with a maximum depth of water of 400 mm measured between the overflow level and the deepest point within the pool

Note 1 to entry: A permanently installed pool would not be considered to be a toy.

Note 2 to entry: Examples of typical paddling pools can be found in the guidance document on the application of the European directive on the safety of toys (2009/48/EC), (http://ec.europa.eu/enterprise/sectors/toys/files/gd_doc8pools_en.pdf).

4 Requirements

4.1 General

See A.4.1.

4.1.1 Static strength

Activity toys, other than swings, shall not collapse when tested in accordance with 6.2.1 (strength of toys other than swings). After testing, the toy shall continue to comply with the relevant requirements of this part of ISO 8124. Requirements for swings are given in 4.7 (swings).

4.1.2 Maximum height

See A.4.1.2.

There shall be no part of the activity toy designed to encourage the child to climb, sit on or stand on, with a height of 2 500 mm or more when measured from the ground.

This does not include barriers, roofs, etc., that are not intended to be climbed, sat on or stood on.

Barriers, roofs, etc., that are not intended to be climbed shall be designed in such a way that climbing is not encouraged.

4.1.3 Corners and edges

See A.4.1.3.

Exposed corners and edges shall be rounded.

Corners and exposed edges on moving parts shall have a minimum radius of 3 mm. This does not apply to swing elements with a mass of 1 000 g or less, the corners and edges of which shall be rounded.


4.1.4 Protruding parts

4.1.4.1 General

Protruding parts (such as bolt ends and nuts) shall be recessed or be protected in such a way that they do not constitute an entrapment hazard or other hazard to users.

If protrusions cannot be placed within the 50 mm outside diameter test gauge defined in 6.7.1 (all protrusions), they are considered to be inaccessible and are exempted from these requirements (see Figure 6).

Rope protrusions are specifically exempted from the requirements of 4.1.4.

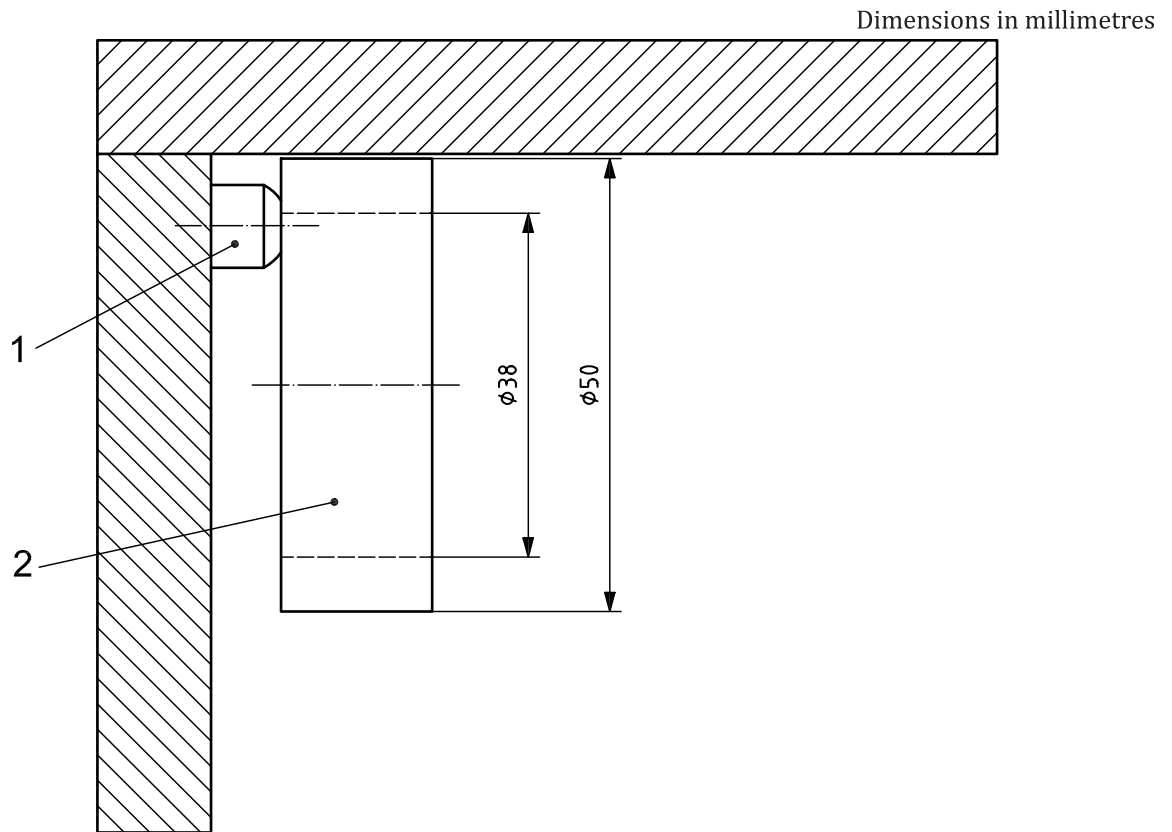
**Key**

- 1 inaccessible protrusion (excluded)
- 2 test gauge (50 mm diameter)

Figure 6 — Example of excluded protrusion**4.1.4.2 All protrusions**

No protrusion shall extend beyond the full depth of the test gauges when tested in accordance with [6.7.1](#).

No protrusion shall terminate in a dimension greater than that of the base dimension (see [Figure 7](#)). In the case of hardware, the base dimension shall be defined as the major dimension of the attachment nut or bolt head.

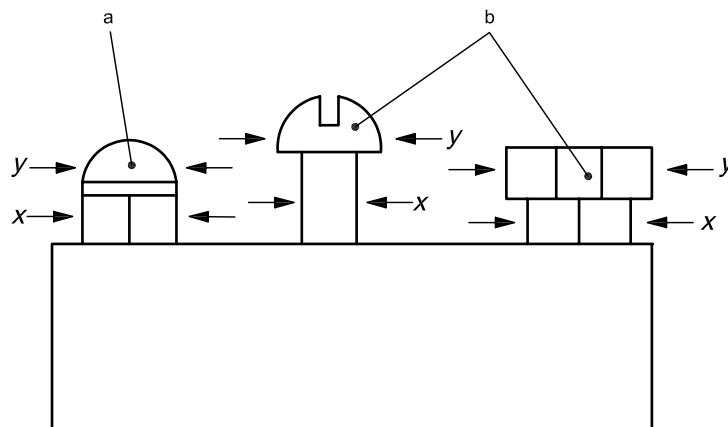

Key


- a Pass ($y \leq x$).
- b Fail ($y > x$).

Figure 7 — Examples of protrusion configurations

4.1.4.3 Upright protrusions

Protrusions that fit within any of the gauges defined in 6.7.1 and that project upwards from a horizontal plane shall have no projection perpendicular or at an acute angle to the plane of the initial surface extending more than 3 mm in height (see Figure 8).

For example, the hemispherical ends of bolts are exempt from this requirement because they do not project perpendicular to the plane of the initial surface.

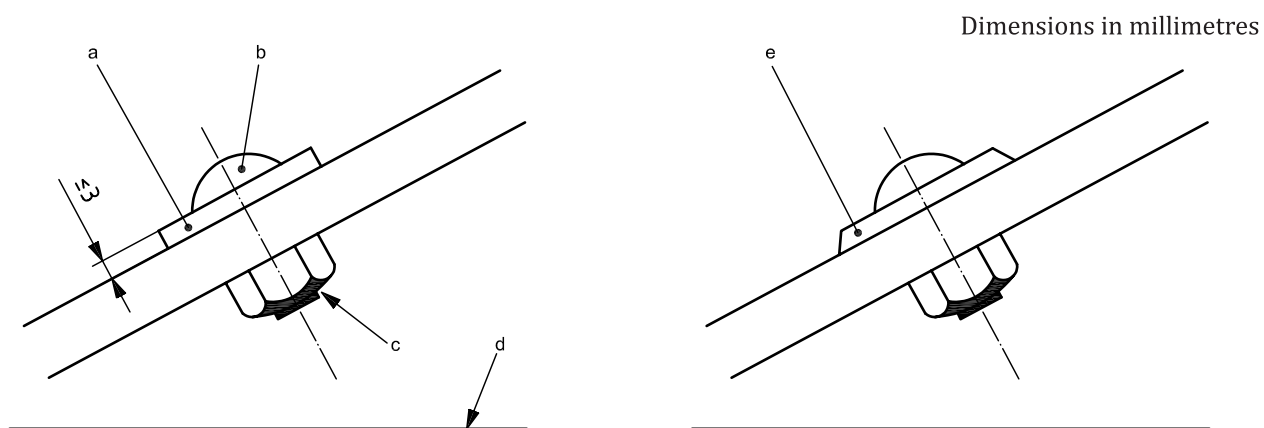

Key

- a Protrusions that project perpendicular or at an acute angle to the plane of the initial surface with the axis inclined upward from the horizontal plane shall comply with the 3 mm maximum requirement.
- b Hemispherical end exempted from the 3 mm maximum requirement.
- c Protrusions with axis horizontal or below horizontal shall not extend beyond the face of the test gauges defined in 6.7.1.
- d Horizontal plane.
- e Protrusions that project at an obtuse angle to the plane of the initial surface are exempt from the 3 mm maximum requirement.

Figure 8 — Upright protrusion test


4.1.4.4 Motion rides

Protrusions on the front and rear surfaces of suspended members of swinging elements and those on the interior surface of slides shall not protrude beyond the full depth of the test gauge when tested in accordance with [6.7.2](#) (protrusions in motion rides).

4.1.4.5 Slides

Slides, including protective barriers and their means of attachment, and transition areas pose a greater risk of entrapment than other areas of play equipment. Therefore, the following requirements apply to slides and sliding devices.

Any accessible protrusion that allows the 77 mm test gauge defined in [6.7.1.2](#) to pass over it shall have no projection perpendicular or at an acute angle to the plane of the initial surface extending more than 3 mm. The areas subject to this requirement are outlined in [Figure 9](#). The outside surface of tunnel slides that are completely enclosed are exempt from this requirement.

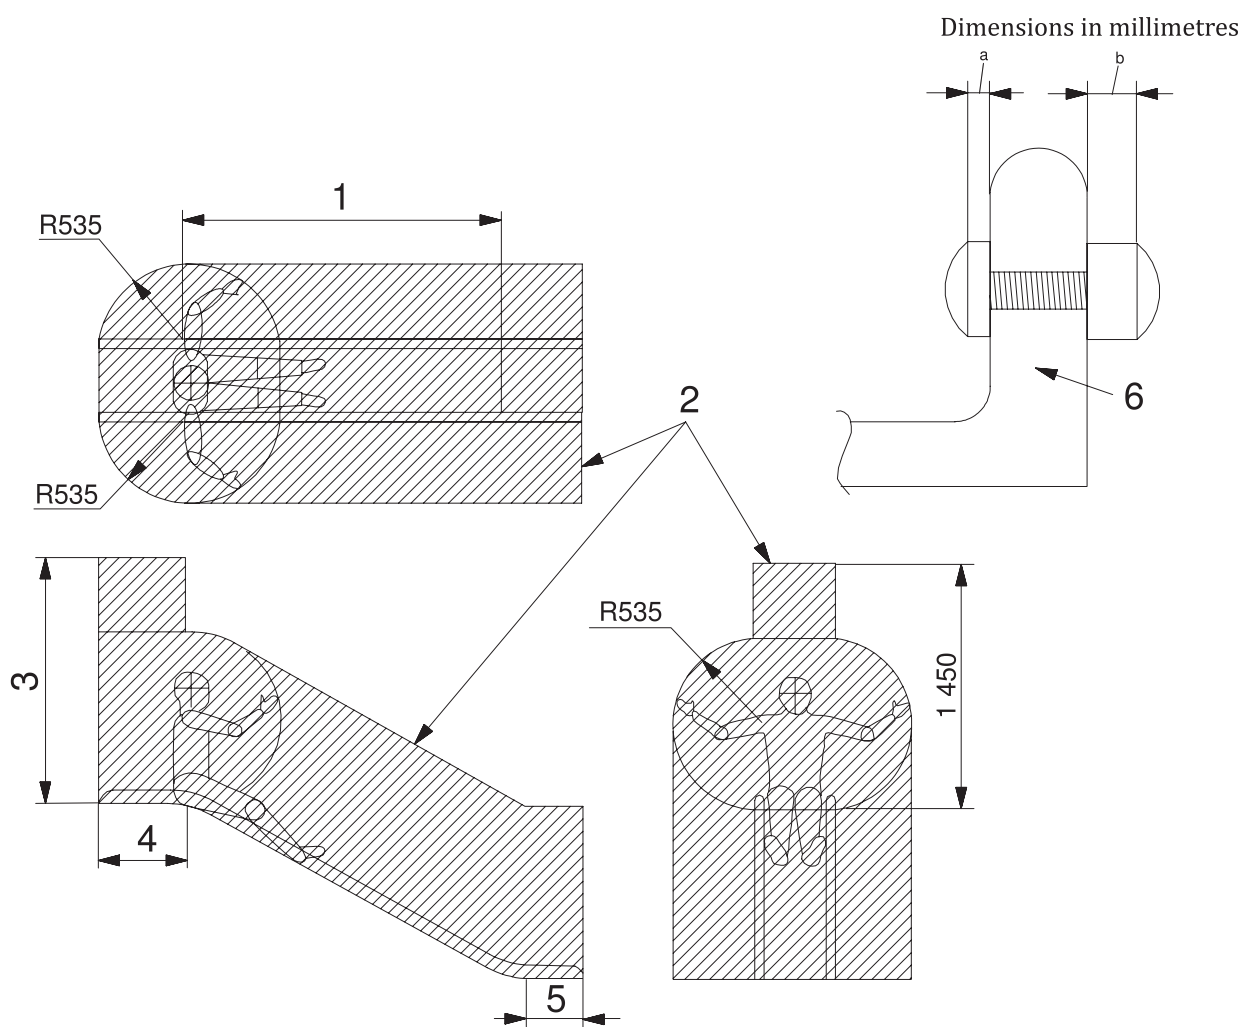

Key

- | | | | |
|---|--|---|------------------|
| 1 | sliding surface | 4 | starting section |
| 2 | shaded areas representing non-entrapment/
protrusion zone | 5 | run-out section |
| 3 | standing height | 6 | slide side rail |

- a Pass (3 mm or less).
- b Fail (more than 3 mm).

Figure 9 — Non-entrapment/protrusion zone and protrusion examples

Slides shall be constructed in such a way as to provide a smooth continuous sliding surface with no gaps or spaces that might create an entrapment hazard such as, but not limited to, the space created between sidewalls when two single slides are combined to create a doubly wide slide, or the point where a hood is attached to the sidewalls of a slide. Roller slides are exempt from the requirements of this subclause. See [4.6.4](#) (roller slides) for specific requirements for roller slides.

4.1.5 Climbing and swinging ropes, chains and cables

See A.4.1.5.

A suspended climbing rope, chain or cable shall be secured at both ends to prevent the rope, chain or cable from being looped back on itself creating a loop with an interior perimeter of 130 mm (diameter 41,4 mm) or more.

A rope, chain or cable used to support a swing seat is exempt from these requirements.

4.1.6 Open tubing

All open tubing ends that are not resting on the ground or otherwise covered shall be provided with caps or plugs that have a smooth finish and are tight-fitting. The protective cap or cover shall not become detached when tested in accordance with the torque test and the tension test for protective components specified in ISO 8124-1.

4.2 Barriers

See A.4.2.

Any platform intended for sitting or standing 760 mm or more above the ground shall be equipped with a barrier on all sides that face outward from the toy.

Openings in barriers to give access to slides, climbing frames and ladders are allowed.

Barriers for platforms from 760 mm to 1 000 mm above the ground shall have a minimum height of 630 mm.

Barriers for platforms greater than 1 000 mm and up to 1 830 mm above the ground shall have a minimum height of 720 mm.

Barriers for platforms more than 1 830 mm above the ground shall have a minimum height of 840 mm.

Barriers for platforms from 760 mm to 1 000 mm above the ground shall have a maximum vertical opening of 610 mm between the lowermost member of the barrier and the platform that it surrounds.

Barriers for platforms more than 1 000 mm above the ground shall be designed to minimize the likelihood of climbing. Openings within these barriers or between the barrier and the platform surface shall not permit the passage of the torso probe defined in [6.5.1](#) (head and neck entrapment in completely bound openings).

For barriers with an uneven top design, a straightedge of (200 ± 5) mm shall be used for measuring minimum height. Place the straightedge horizontally on top of the barrier. Measure the vertical distance between the platform and the bottom of the straightedge. The distance shall in no place be less than the minimum heights specified in this part of ISO 8124.

NOTE Special requirements apply to slides (see [4.6.2](#) (retaining sides for slides) and [4.6.3](#) (starting, sliding and run-out section on slides)).

When tested in accordance with [6.3](#) (dynamic strength of barriers and handrails), no part of the barrier or handrail shall collapse, such that the toy does not comply with the relevant requirements of this part of ISO 8124.

4.3 Rung ladders, stepladders and stairways

These requirements do not apply to toys with a platform height of 600 mm or less.


Rung ladders, stepladders and stairways shall comply with the following requirements.

- a) The rung or tread shall have a substantial horizontal stepping surface with a lateral width of 240 mm or more (see [Figure 10](#)).
- b) The distance between the upper surface of the rungs or treads on rung ladders or stepladders shall not be more than 310 mm and on stairways not more than 230 mm when measured vertically in accordance with [Figure 10](#).
- c) The surface of the tread shall not be slippery.

NOTE This can be achieved by corrugation of the tread or by use of non-slip materials.

- d) The diameter or cross-sectional dimension of the rungs on rung ladders shall be at least 16 mm but not more than 45 mm. Care should be taken when using designs other than circular cross-sections to ensure that gripping potential is not seriously impaired.
- e) The depth of treads on stepladders with closed risers or stairways shall be 180 mm or more.
- f) The inclination of stairways shall not be more than 50°. The inclination of stepladders shall not be less than 65° and not more than 75°. The inclination of rung ladders shall not be less than 60° and not more than 90°.
- g) Stairways and stepladders with a height of 1 200 mm or more above the ground shall be provided with a means of continuous hand support from a height of 760 mm (see [Figure 10](#)).

Dimensions in millimetres

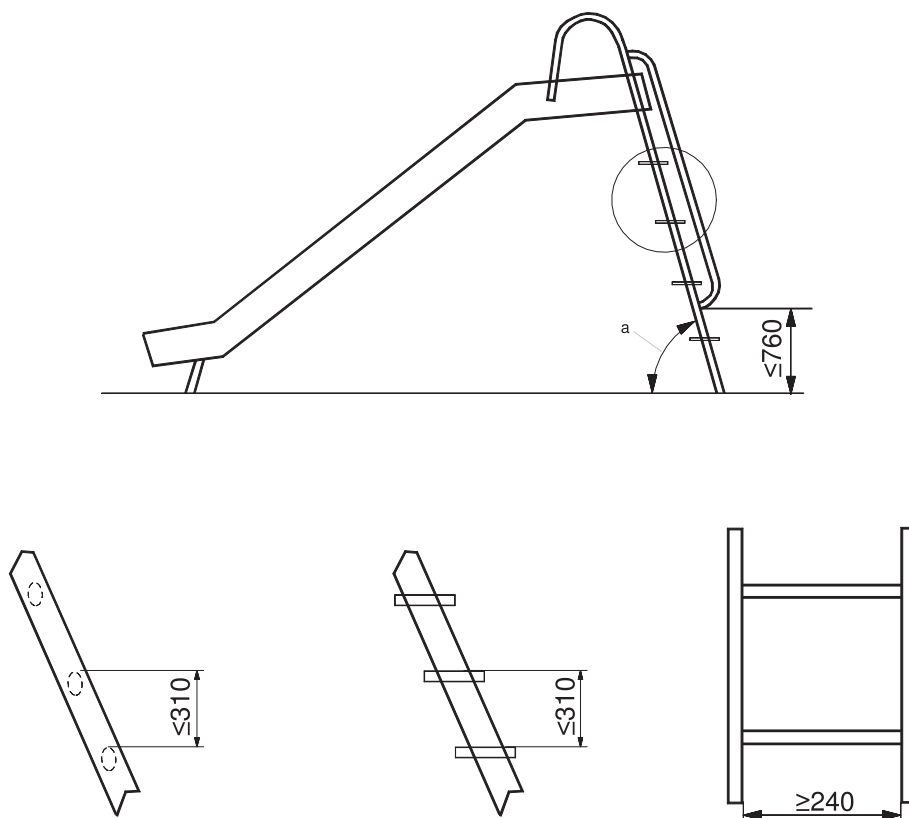

Key

- a Angle of inclination:
- for stepladders $\geq 65^\circ$ and $\leq 75^\circ$;
 - for rung ladders $\geq 60^\circ$ and $\leq 90^\circ$

Figure 10 — Dimensions of ladders

4.4 Entrapment

See A.4.4.

4.4.1 Head and neck entrapment

These requirements do not apply to openings where the ground forms the lower boundary.

Activity toys shall be constructed so that no openings create head and neck entrapment hazards either by head first or feet first passage.

NOTE Hazardous situations in which this type of entrapment can be encountered include the following:

- completely bound openings through which a user can slide head first or feet first;
- partially bound or V-shaped openings;
- shearing and moving openings.

When choosing materials, the manufacturer shall take into account the entrapment hazards that can occur due to distortion of material during use.

- a) Accessible completely bound openings shall also allow passage of probe D ([Figure 26](#)) if they allow passage of probe C ([Figure 25](#)) when tested in accordance with [6.5.1](#) (test for head and neck entrapment).
- b) Accessible rigid openings shall not allow the passage of probe E ([Figure 27](#)) unless they also allow the passage of probe D when tested in accordance with [6.5.1](#).
- c) Partially bound and V-shaped openings shall be constructed so that either:
 - 1) the opening is not accessible as illustrated in [Figure 29](#) and when tested in accordance with [6.5.2.3 a](#)); or
 - 2) the tip of the template contacts the base of the opening when tested in accordance with [6.5.2.3 b](#));
- d) Openings between flexible parts of suspended bridges and any rigid side members shall allow the passage of probe D ([Figure 26](#)) under the worst-case condition of loading. Both loaded and unloaded situations shall be tested.
- e) Non-rigid members (e.g. ropes) shall not overlap if by doing so they create openings that do not comply with the requirements in a).
- f) A shield intended to make inaccessible any opening that would otherwise fail the requirements of a) to e) shall
 - 1) be constructed of a rigid material;
 - 2) not fracture, fail or be displaced in a manner that will allow the opening to become accessible when impacted by a 127 mm diameter steel ball with 27 J at a point within 25 mm of the geometric centre of the shield;
 - 3) not fracture, fail or be displaced in a manner that will allow the opening to become accessible when tested in accordance with the torque and tension tests of ISO 8124-1.

4.4.2 Entrapment of clothing and hair

Hazardous situations in which clothing or hair can be entrapped may be created by:

- a) gaps or V-shaped openings in which parts of clothing can become entrapped while or immediately before the user undergoes a forced movement;
- b) protrusions;
- c) rotating parts.

Slides, fireman's poles and roofs shall be constructed in such a way that the toggle or chain is not entrapped when tested in accordance with [6.6](#) (toggle test).

NOTE 1 When using elements of circular cross-section, special consideration should be given to avoid clothing and hair entrapment. This can be achieved by using spacers or similar devices.

Slides, fireman's poles and roofs shall be constructed so that openings located within the free space do not entrap the toggle or chain when tested in accordance with [6.6](#).

Rotating parts (e.g. spindles) shall have means of preventing entanglement of clothing or hair.

NOTE 2 Suitable covering or shields can be used to prevent entanglement of clothing or hair in rotating parts.

4.4.3 Entrapment of feet

Surfaces intended for standing, running or walking shall not contain any gaps likely to cause foot or leg entrapment. There shall be no gaps greater than 30 mm measured in one direction (see [Figure 11](#)), unless suitable means of balance is provided.

Dimensions in millimetres

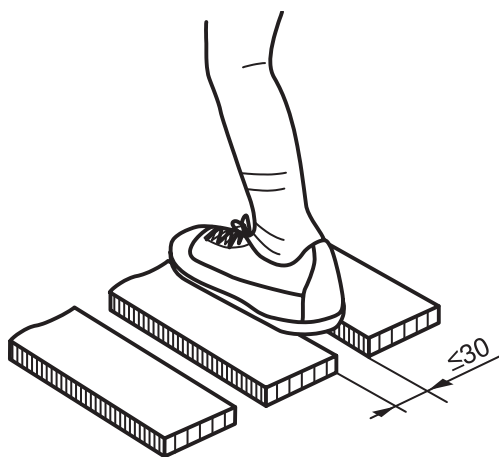


Figure 11 — Measurement of surface gap on running and walking levels

4.4.4 Entrapment of fingers

Activity toys shall be constructed in such a way that holes, slots and gaps do not cause an entrapment hazard to fingers.

Accessible holes, slots and gaps in or between any rigid materials (excluding chains), where the body is in a forced movement, shall also admit a 12 mm diameter rod if they can admit a 5 mm diameter rod to a depth of 10 mm or more.

The requirements in this subclause do not apply to weather-induced dry cracks in solid wood.

4.5 Stability of activity toys other than slides, swings and toys with crossbeams

4.5.1 General

NOTE Stability requirements for slides are given in [4.6.1](#) (stability of slides) and for swings and other activity toys with crossbeams in [4.7.1](#) (stability of swings and other activity toys with crossbeams).

Activity toys supplied with anchors intended to be permanently fixed (e.g. in concrete) when used in accordance with the manufacturer's instructions shall not be subjected to stability tests.

Activity toys supplied with removable ground anchors shall be tested with anchors fixed in accordance with the manufacturer's instructions.

Activity toys not supplied with anchors shall be subjected to stability tests.

4.5.2 Stability of activity toys with a free height of fall of 600 mm or less

Activity toys with a free height of fall of 600 mm or less shall not tip over when tested in accordance with [6.1.1](#) (stability of activity toys with a free height of fall of 600 mm or less).

4.5.3 Stability of activity toys with a free height of fall of more than 600 mm

Activity toys with a free height of fall of more than 600 mm shall not tip over when tested in accordance with 6.1.2 (stability of activity toys with a free height of fall of more than 600 mm).

4.6 Slides

See A.4.6.

4.6.1 Stability of slides

Slides supplied with anchors intended to be permanently fixed (e.g. in concrete) when in use in accordance with the manufacturer's instructions shall not be subjected to stability tests.

Slides supplied with removable ground anchors shall be tested with anchors fixed in accordance with the manufacturer's instructions.

Slides not supplied with anchors shall be subjected to stability tests.


Slides shall not tip over when tested in accordance with 6.1.3 (stability of slides).

4.6.2 Retaining sides for slides

Retaining sides for slides shall comply with the following requirements (see Figure 12).

- For slides with a height of more than 1 000 mm above the ground, the height, h , of the retaining sides shall be 100 mm or more.
- For slides with a height of 1 000 mm or less above the ground, the height, h , of the retaining sides shall be 50 mm or more.

Retaining sides are not required for the run-out section.

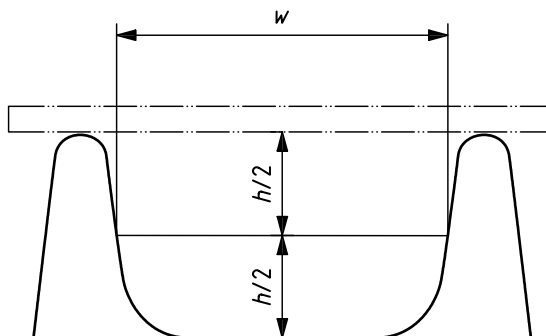

Key

- h height of the retaining sides
 w width of the slide

Figure 12 — Height of retaining sides

4.6.3 Starting, sliding and run-out section on slides

NOTE For attachment slides, the platform may be used as a starting section.

The starting and run-out section on slides shall comply with the following requirements (see [Figure 13](#)).

- a) The starting section for slides with a height of 1 000 mm or less above the ground shall have:
 - a width greater than the sliding section less 40 mm (see [Figure 12](#) for measurement of width); if, for example, the sliding section has a width of 300 mm, the starting section shall have a width greater than 260 mm;
 - a length of 150 mm or more;
 - an inclination of between 0° and 10° to the horizontal.
- b) The starting section for slides with a height of more than 1 000 mm above the ground shall have:
 - a width greater than the sliding section less 40 mm (see [Figure 12](#) for measurement of width); if, for example, the sliding section has a width of 300 mm, the starting section shall have a width greater than 260 mm;
 - a length of 250 mm or more;
 - an inclination of between 0° and 10° to the horizontal.
- c) The starting section shall be provided with a means of assistance to the child coming from the stair/ladder into the sitting position, e.g. a handrail. A barrier provided in accordance with [4.2](#) (barriers) may also serve as a handrail.
- d) The angle of inclination to the horizontal of the sliding section shall not exceed 60° at any point. The inclination of the sliding section shall be measured at the centreline.
- e) The run-out section for the slide shall have:
 - a length of 150 mm or more;
 - a height of 300 mm or less above the ground at the end of the section;
 - an inclination of between 0° and 10° to the horizontal.
- f) The finishing end of the run-out section shall have a radius of 25 mm or more through at least 90°. This requirement does not apply to slides where the run-out section ends 25 mm or less from the ground.