

AS/NZS IEC 62196.2:2023
IEC 62196-2:2022



Australian/New Zealand Standard™

Plugs, socket-outlets, vehicle connectors and vehicle inlets — Conductive charging of electric vehicles

Part 2: Dimensional compatibility requirements for AC pin and contact-tube accessories



AS/NZS IEC 62196.2:2023

This Joint Australian/New Zealand Standard™ was prepared by Joint Technical Committee EL-004, Electrical Accessories. It was approved on behalf of the Council of Standards Australia on 02 May 2023 and by the New Zealand Standards Approval Board on 05 April 2023.

This Standard was published on 19 May 2023.

The following are represented on Committee EL-004:

- Association of Accredited Certification Bodies
- Australian Chamber of Commerce and Industry
- Australian Industry Group
- Better Regulation Division (Fair Trading, SafeWork NSW, TestSafe)
- Consumer Electronics Suppliers Association
- Consumers Federation of Australia
- Electrical Regulatory Authorities Council, Australia
- Engineers Australia
- International Accreditation New Zealand
- Joint Accreditation System of Australia & New Zealand
- Manufacturers' Network
- National Electrical and Communications Association
- Plastics Industry Pipe Association of Australia
- Plastics New Zealand
- WorkSafe New Zealand

This Standard was issued in draft form for comment as DR AS/NZS IEC 62196.2:2023.

Keeping Standards up-to-date

Ensure you have the latest versions of our publications and keep up-to-date about Amendments, Rulings, Withdrawals, and new projects by visiting:

www.standards.org.au

www.standards.govt.nz

ISBN 978 1 76139 170 5

Australian/New Zealand Standard™

Plugs, socket-outlets, vehicle connectors and vehicle inlets — Conductive charging of electric vehicles

Part 2: Dimensional compatibility requirements for AC pin and contact-tube accessories

Originated in Australia as AS IEC 62196.2:2014.
Jointly revised and redesignated as AS/NZS IEC 62196.2:2023.



© IEC Geneva Switzerland 2023 — All rights reserved
© Standards Australia Limited/the Crown in right of New Zealand, administered by the New Zealand Standards Executive 2023

All rights are reserved. No part of this work may be reproduced or copied in any form or by any means, electronic or mechanical, including photocopying, without the written permission of either the IEC or the publisher, unless otherwise permitted under the Copyright Act 1968 (Cth) or the Copyright Act 1994 (New Zealand). If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please see the contact details on the back cover or the contact us page of the website for further information.

Preface

This Standard was prepared by the Australian members of the Joint Standards Australia/Standards New Zealand Committee EL-004, Electrical Accessories, to supersede AS IEC 62196.2:2014, *Plugs, socket-outlets, vehicle connectors and vehicle inlets — Conductive charging of electric vehicles, Part 2: Dimensional compatibility and interchangeability requirements for AC pin and contact-tube accessories*.

The objective of this document is to specify requirements for EV plugs, EV socket-outlets, vehicle connectors and vehicle inlets with pins and contact-tubes of standardized configurations, herein referred to as accessories. These accessories have a nominal rated operating voltage not exceeding 480 V AC, 50 Hz to 60 Hz, and a rated current not exceeding 63 A three phase or 70 A single phase, for use in conductive charging of electric vehicles.

This document covers the basic interface accessories for vehicle supply as specified in IEC 62196-1:2022.

NOTE The term “electric road vehicles (EV)” comprises all road vehicles, including plug-in hybrid road vehicles (PHEV) that derive all or part of their energy from the rechargeable energy storage systems (RESS).

These accessories are intended to be used for circuits specified in IEC 61851-1:2017, which operate at different voltages and frequencies, and which can include extra-low voltage (ELV) and communication signals.

This document applies to accessories to be used in an ambient temperature between –30 °C and +40 °C.

These accessories are intended to be connected only to cables with copper or copper-alloy conductors.

Vehicle inlets and vehicle connectors described in this document are intended to be used for charging in modes 1, 2 and 3, cases B and C. The EV socket-outlets and EV plugs covered by this document are intended to be used for charging mode 3 only, case A and B.

The modes and permissible connections are specified in IEC 61851-1:2017.

The essential safety requirements in AS/NZS 3820, *Essential safety requirements for electrical equipment*, which could be applicable to plugs, socket-outlets, vehicle connectors and vehicle inlets for conductive charging of electric vehicles, are covered by this document, taken in conjunction with any other relevant requirements affecting safety.

This document is identical with, and has been reproduced from, IEC 62196-2:2022, *Plugs, socket-outlets, vehicle connectors and vehicle inlets — Conductive charging of electric vehicles — Part 2: Dimensional compatibility requirements for AC pin and contact-tube accessories*.

As this document has been reproduced from an International document, a full point substitutes for a comma when referring to a decimal marker.

Australian or Australian/New Zealand Standards that are identical adoptions of international normative references may be used interchangeably. Refer to the online catalogue for information on specific Standards.

The terms “normative” and “informative” are used in Standards to define the application of the appendices or annexes to which they apply. A “normative” appendix or annex is an integral part of a Standard, whereas an “informative” appendix or annex is only for information and guidance.

NOTES

CONTENTS

FOREWORD.....	4
INTRODUCTION.....	6
1 Scope.....	7
2 Normative references	7
3 Terms and definitions	8
4 General	8
5 Ratings.....	8
6 Connection between the power supply and the electric vehicle	8
7 Classification of accessories.....	11
8 Marking	11
9 Dimensions.....	11
10 Protection against electric shock	12
11 Size and colour of protective earthing and neutral conductors	12
12 Provisions for earthing.....	12
13 Terminals	13
14 Interlocks.....	13
15 Resistance to ageing of rubber and thermoplastic material	13
16 General construction	13
17 Construction of EV socket-outlets – General.....	13
18 Construction of EV plugs and vehicle connectors.....	13
19 Construction of vehicle inlets	13
20 Degrees of protection	13
21 Insulation resistance and dielectric strength	13
22 Breaking capacity	13
23 Normal operation	14
24 Temperature rise	14
25 Flexible cables and their connection	14
26 Mechanical strength	14
27 Screws, current-carrying parts and connections.....	14
28 Creepage distances, clearances and distances through sealing compound.....	14
29 Resistance to heat and to fire	14
30 Corrosion and resistance to rusting	14
31 Conditional short-circuit current.....	14
32 Electromagnetic compatibility (EMC)	14
33 Vehicle drive over.....	15
34 Thermal cycling	15
35 Humidity exposure.....	15
36 Misalignment	15
37 Contact endurance test.....	15
201 Resistor coding.....	15
STANDARD SHEETS.....	16
CONFIGURATION TYPE 1	16



CONFIGURATION TYPE 2	27
CONFIGURATION TYPE 3	42
Annex A (informative) Legacy drawings from IEC 62196-2:2016	61
Bibliography.....	66
 Table 201 – Overview of the basic vehicle interface, configuration type 1, single phase.....	10
Table 202 – Overview of the basic vehicle interface, configuration types 2 and 3, three phase or single phase.....	10
Table 203 – Configuration types and standard sheets	12
Table 204 – Interoperation of configuration type 2 accessories	27

INTERNATIONAL ELECTROTECHNICAL COMMISSION

PLUGS, SOCKET-OUTLETS, VEHICLE CONNECTORS AND VEHICLE INLETS – CONDUCTIVE CHARGING OF ELECTRIC VEHICLES –**Part 2: Dimensional compatibility requirements
for AC pin and contact-tube accessories**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 62196-2 has been prepared by IEC subcommittee 23H: Plugs, socket-outlets and couplers for industrial and similar applications, and for electric vehicles, of IEC technical committee 23: Electrical accessories. It is an International Standard.

This third edition cancels and replaces the second edition published in 2016. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) interchangeability requirements have been removed from the title of Part 2;
- b) alignment with IEC 62196-1:2022 and IEC 62196-3:2022;
- c) alignment with IEC 61851-1:2017.

The text of this International Standard is based on the following documents:

Draft	Report on voting
23H/502/FDIS	23H/506/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

A list of all the parts in the IEC 62196 series, published under the general title *Plugs, socket-outlets, vehicle connectors and vehicle inlets – Conductive charging of electric vehicles*, can be found on the IEC website.

This document is to be read in conjunction with IEC 62196-1:2022. The clauses of the particular requirements in this document supplement or modify the corresponding clauses in IEC 62196-1:2022. Where the text indicates "addition" to or "replacement" of the relevant requirement, test specification or explanation of IEC 62196-1:2022, these changes are made to the relevant text of IEC 62196-1:2022, which then becomes part of this document. Where no change is necessary, the words "Clause X of IEC 62196-1:2022 is applicable" are used.

Subclauses, figures, tables, or notes which are additional to those in IEC 62196-1:2022 are numbered starting from 201.

In this document, the following print types are used:

- requirements proper: in roman type;
- *test specifications: in italic type;*
- notes: in smaller roman type.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

INTRODUCTION

IEC 61851 (all parts) specifies requirements for electric vehicle (EV) conductive supply equipment.

IEC 62196 (all parts) specifies the requirements for plugs, socket-outlets, vehicle connectors, vehicle inlets and cable assemblies as described in IEC 61851 (all parts).

Some charging using on-board vehicle chargers can be achieved by direct connection from an electric vehicle to an AC supply network using common socket-outlets or by the use of equipment incorporating control and communication circuits.

To support the connection of AC power for such vehicles, this document provides the standard interface configurations of AC vehicle couplers and accessories to be used in conductive charging of electric vehicles, taking the most frequent charging situations into consideration.

IEC 62196 consists of the following parts:

- Part 1: General requirements, comprising clauses of a general character.
- Part 2: Dimensional compatibility requirements for AC pin and contact-tube accessories.
- Part 3: Dimensional compatibility requirements for DC and AC/DC pin and contact-tube vehicle couplers.
- Part 3-1: Vehicle connector, vehicle inlet and cable assembly intended to be used with a thermal management system for DC charging.
- Part 4: Dimensional compatibility requirements for DC pin and contact-tube accessories for Class II or Class III applications.
- Part 6: Dimensional compatibility requirements for DC pin and contact-tube couplers for applications using a system of protective electrical separation.

PLUGS, SOCKET-OUTLETS, VEHICLE CONNECTORS AND VEHICLE INLETS – CONDUCTIVE CHARGING OF ELECTRIC VEHICLES –

Part 2: Dimensional compatibility requirements for AC pin and contact-tube accessories

1 Scope

This part of IEC 62196 applies to EV plugs, EV socket-outlets, vehicle connectors and vehicle inlets with pins and contact-tubes of standardized configurations, herein referred to as accessories. These accessories have a nominal rated operating voltage not exceeding 480 V AC, 50 Hz to 60 Hz, and a rated current not exceeding 63 A three phase or 70 A single phase, for use in conductive charging of electric vehicles.

This document covers the basic interface accessories for vehicle supply as specified in IEC 62196-1:2022.

NOTE 1 The term "Electric road vehicles (EV)" comprises all road vehicles, including plug-in hybrid road vehicles (PHEV) that derive all or part of their energy from the rechargeable energy storage systems (RESS).

These accessories are intended to be used for circuits specified in IEC 61851-1:2017, which operate at different voltages and frequencies, and which can include extra-low voltage (ELV) and communication signals.

The use of these accessories for bidirectional power transfer is under consideration.

This document applies to accessories to be used in an ambient temperature between –30 °C and +40 °C.

NOTE 2 In the following country, other requirements regarding the lower temperature may apply: NO.

NOTE 3 In the following country, –35 °C applies: SE.

These accessories are intended to be connected only to cables with copper or copper-alloy conductors.

Vehicle inlets and vehicle connectors described in this document are intended to be used for charging in modes 1, 2 and 3, cases B and C. The EV socket-outlets and EV plugs covered by this document are intended to be used for charging mode 3 only, case A and B.

The modes and permissible connections are specified in IEC 61851-1:2017.

2 Normative references

Clause 2 of IEC 62196-1:2022 applies, except as follows:

Addition:

IEC 62196-1:2022, *Plugs, socket-outlets, vehicle connectors and vehicle inlets – Conductive charging of electric vehicles – Part 1: General requirements*

3 Terms and definitions

Clause 3 of IEC 62196-1:2022 applies.

4 General

Clause 4 of IEC 62196-1:2022 applies.

5 Ratings

Clause 5 of IEC 62196-1:2022 applies, except as follows:

5.1 Preferred rated operating voltage ranges

Replacement:

Replace the existing text and title of IEC 62196-1:2022, 5.1 with the following:

5.1 Rated operating voltage ranges

Rated operating voltages are as follows:

- 30 V (signal or control purposes only)
- 250 V AC
- 480 V AC

5.2 Preferred rated currents

Replacement:

Replace the existing title of IEC 62196-1:2022, 5.2 and the existing text of Subclause 5.2.1 with the following:

5.2 Rated currents

5.2.1 General

The rated currents are as follows:

- 13 A single phase
- 16 A single and three phase
- 20 A single and three phase
- 30 A or 32 A single and three phase
- 60 A or 63 A single and three phase
- 70 A single phase only

NOTE 1 In the following country, the branch circuit overcurrent protection device is based upon 125 % of the accessory rating: US.

NOTE 2 Reference to "30 A or 32 A" and "60 A or 63 A" rating is made in accordance with national requirements.

6 Connection between the power supply and the electric vehicle

Clause 6 of IEC 62196-1:2022 applies, except as follows:

6.1 Interfaces

Replacement:

Replace the existing text of IEC 62196-1:2022, 6.1 with the following:

This Clause 6 provides a description of the physical conductive electrical interface requirements between the vehicle and the power supply, which allows the following design at the vehicle interface:

- a basic interface that provides for current ratings up to 63 A AC three-phase and up to 70 A AC single phase.

Different configuration types for the basic interface may allow different application of mode and current ratings. See introduction to relevant standard sheets for more details.

6.2 Basic interface

Replacement:

Replace the existing text of IEC 62196-1:2022, 6.2 with the following:

There is one type of vehicle inlet:

- basic

The basic interface may contain up to seven power or signal contacts, with unique physical configurations of contact positions for single or three phases. The electrical ratings and their function are described in Table 201 and Table 202. The electrical ratings and their function are described in the standard sheets.

Each vehicle inlet shall only mate with the corresponding type of vehicle connector. Each EV plug shall only mate with the corresponding type of EV socket-outlet.

The accessories, configuration types 1, 2 or 3 are rated as follows:

- configuration type 1 vehicle coupler is rated 250 V, 32 A single phase;
- configuration type 2 vehicle coupler, EV socket-outlet and EV plug are rated:
 - 250 V, 13 A or 20 A or 32 A or 63 A or 70 A single phase,
 - 480 V, 13 A or 20 A or 32 A or 63 A, three phase.
- configuration type 3 vehicle coupler, EV socket-outlet and EV plug are rated:
 - 250 V, 16 A or 32 A, single phase,
 - 480 V, 32 A or 63 A three phase.

**Table 201 – Overview of the basic vehicle interface,
configuration type 1, single phase**

Position number ^a	AC	Functions ^c
1	250 V 32 A ^b	L1 (mains 1)
2	250 V 32 A	L2 (mains 2) / N (neutral)
3	Rated for fault	PE (ground/earth)
4	30 V 2 A	CP (Control pilot)
5	30 V 2 A	CS (Connection switch)
^a Position number does not refer to the location and/or identification of the contact in the accessory. ^b In the following country, the branch circuit overcurrent protection is based upon 125 % of the device rating: US. ^c For contacts 4 and 5, environmental conditions may demand larger conductor cross-sections.		

**Table 202 – Overview of the basic vehicle interface,
configuration types 2 and 3, three phase or single phase**

Position number ^f	$U_{\max}$	Three phase		Single phase		Functions
		$I_{\max}^a$		$I_{\max}^a$		
	V AC	A		A		
		Type 2	Type 3	Type 2 ^b	Type 3	
1	480	63		70	63	L1 (mains 1) ^b
2	480	63		– ^c	– ^c	L2 (mains 2)
3	480	63		– ^c	– ^c	L3 (mains 3)
4	480	63		70	63	N (neutral) ^{b, e}
5	—	Rated for fault				PE (ground/earth)
6	30	2				CP (Control pilot)
7	30	2				PP (Proximity) ^d or CS (Connection switch) ^d
^a In the following country, the branch circuit overcurrent protection is based upon 125 % of the device rating: US						
^b For single phase charging, contacts 1 and 4 shall be used.						
^c Unused contacts need not be installed. Not provided for Standard Sheets 2-IIIa and 2-IIIb.						
^d Not provided for Standard Sheet 2-IIIa.						
^e For single phase system supply phase to phase this contact can be used for L2 (mains 2).						
^f Position number does not refer to the location and/or identification of the contact in the accessory.						

6.3 DC Interface

Not applicable

6.4 Combined interface

Not applicable.

Addition:

Add the following new subclause:

6.201 Communication and control pilot function

The control pilot and proximity detection or connection contacts are intended to be used in accordance with IEC 61851-1:2017.

7 Classification of accessories

Clause 7 of IEC 62196-1:2022 applies, except as follows:

7.4 According to electrical operation

Replacement:

Replace the existing text of IEC 62196-1:2022, 7.4 with the following:

- suitable for making and breaking an electrical circuit under load for 32 A configurations types 1 and 3;
- not suitable for making and breaking an electrical circuit under load for configuration type 2;
- not suitable for making and breaking an electrical circuit under load for 63 A configuration type 3.

NOTE Communication circuits according to this document are deemed not to make or break load as a result of this Subclause 7.4.

7.5 According to interface

Replacement:

Replace the existing text of IEC 62196-1:2022, 7.5 with the following:

Interface is specified in Clause 6:

- basic type.

Addition:

Add the following new subclause:

7.201 According to the standard sheet used

- configuration type 1;
- configuration type 2;
- configuration type 3.

8 Marking

Clause 8 of IEC 62196-1:2022 applies.

9 Dimensions

Clause 9 of IEC 62196-1:2022 applies, except as follows:

Addition:

Add the following new subclause:

9.201 Standard sheets

Accessories shall comply with the relevant standard sheets as specified below and in Table 203:

– Configuration type 1

- 32 A, 250 V single-phase vehicle couplers: Standard Sheet 2-I.
- Optional latching system: Standard Sheet 2-Ia.

NOTE In the following countries, Standard Sheets 2-I and 2-Ia may be applied to vehicle couplers with rated current up to 80 A: US, KR.

– Configuration type 2

- 63 A, 480 V three-phase or 250 V, 70 A single-phase accessories: Standard Sheets 2-II, IIa, IIb, IIc, IId, IIe, IIg and IIh, as specified in Table 204.

– Configuration type 3

- 16 A, 250 V single-phase accessories with one pilot: Standard Sheet 2-IIIa;
- 32 A, 250 V single-phase accessories with two pilots: Standard Sheet 2-IIIb;
- 63 A, 480 V three-phase accessories with two pilots: Standard Sheet 2-IIIc;
- Latching means and packaging room: Standard Sheet 2-IIId.

Table 203 – Configuration types and standard sheets

Configuration type	Standard sheet	Applicable accessories	Rated voltage V	Rated current A	Phase
1	2-I	Vehicle couplers	250	32	Single phase
2	2-II	Accessories	250	70	Single phase
			480	63	Three phase
3	2-III	Accessories	250	16	Single phase
			250	32	Single phase
			480	63	Three phase

10 Protection against electric shock

Clause 10 of IEC 62196-1:2022 applies.

11 Size and colour of protective earthing and neutral conductors

Replacement:

Replace the existing text of IEC 62196-1:2022, Clause 11 with the following:

The core connected to the earthing terminal shall be identified by the colour combination green-and-yellow. The nominal cross-sectional area of the earthing conductor and of the neutral conductor, if any, shall be at least equal to that of the phase conductors.

NOTE In the following countries, the colour green may be used to identify the earthing conductor: JP, US, CA, KR, BR.

12 Provisions for earthing

Clause 12 of IEC 62196-1:2022 applies.

13 Terminals

Clause 13 of IEC 62196-1:2022 applies, except as follows.

Addition:

Add the following new subclause:

13.201 Wire connection of components, for example coding resistors, may be rewirable or non-rewirable.

14 Interlocks

Clause 14 of IEC 62196-1:2022 applies.

15 Resistance to ageing of rubber and thermoplastic material

Clause 15 of IEC 62196-1:2022 applies.

16 General construction

Clause 16 of IEC 62196-1:2022 applies.

17 Construction of EV socket-outlets – General

Clause 17 of IEC 62196-1:2022 applies.

18 Construction of EV plugs and vehicle connectors

Clause 18 of IEC 62196-1:2022 applies.

19 Construction of vehicle inlets

Clause 19 of IEC 62196-1:2022 applies.

20 Degrees of protection

Clause 20 of IEC 62196-1:2022 applies.

21 Insulation resistance and dielectric strength

Clause 21 of IEC 62196-1:2022 applies.

22 Breaking capacity

Clause 22 of IEC 62196-1:2022 applies.

23 Normal operation

Clause 23 of IEC 62196-1:2022 applies.

24 Temperature rise

Clause 24 of IEC 62196-1:2022 applies, except as follows:

24.1 Addition:

Add, after the seventh paragraph of the existing text, i.e., "Non-rewirable accessories are tested as delivered.", the following:

For accessories dependent upon a resistor coding to define the accessory's assigned current rating, the test shall be repeated using a set of three samples for each resistor coding value and tested at the maximum current corresponding to that resistor coding value.

25 Flexible cables and their connection

Clause 25 of IEC 62196-1:2022 applies.

26 Mechanical strength

Clause 26 of IEC 62196-1:2022 applies.

27 Screws, current-carrying parts and connections

Clause 27 of IEC 62196-1:2022 applies.

28 Creepage distances, clearances and distances through sealing compound

Clause 28 of IEC 62196-1:2022 applies.

29 Resistance to heat and to fire

Clause 29 of IEC 62196-1:2022 applies.

30 Corrosion and resistance to rusting

Clause 30 of IEC 62196-1:2022 applies.

31 Conditional short-circuit current

Clause 31 of IEC 62196-1:2022 applies.

32 Electromagnetic compatibility (EMC)

Clause 32 of IEC 62196-1:2022 applies.

33 Vehicle drive over

Clause 33 of IEC 62196-1:2022 applies, except as follows:

33.3 *Not applicable.*

33.4 *Not applicable.*

34 Thermal cycling

Clause 34 of IEC 62196-1:2022 applies.

35 Humidity exposure

Clause 35 of IEC 62196-1:2022 applies.

36 Misalignment

Clause 36 of IEC 62196-1:2022 applies.

37 Contact endurance test

Clause 37 of IEC 62196-1:2022 applies.

201 Resistor coding

The vehicle connector and EV plug of configurations type 2 and type 3b and 3c shall be provided with coding resistors (R_c) to define the maximum current capability of the cable assembly and vehicle connector and EV plug.

The resistor values and tolerances shall be as specified in IEC 61851-1:2017, Clause B.2.

Compliance is checked by inspection.

STANDARD SHEETS

CONFIGURATION TYPE 1

32 A, 250 V AC VEHICLE COUPLER

STANDARD SHEETS 2-I

Overview

The Standard Sheets 2-I apply to configuration type 1: 32 A, 250 V AC single-phase vehicle couplers.

For configuration type 1, Annex A "Control pilot function through a control pilot circuit using a PWM signal and a control pilot wire" and Annex B "Proximity detection and cable current coding circuits for the basic interface" of IEC 61851-1:2017 shall be applied. +V DC of Table B.1 of IEC 61851-1:2017 shall be a +5 V regulated supply.

The Standard Sheets 2-Ia define the optional latching system.

For details of the locking of the latch, see IEC 62196-3, Standard Sheet 3-IIIc.


This configuration shall not be used for mode 1 above 150 V line-to-earth.










CONFIGURATION TYPE 1

STANDARD SHEETS 2-I
VEHICLE INLET RATED 250 V AC UP to 32A

Sheet 1

Dimensions in millimetres

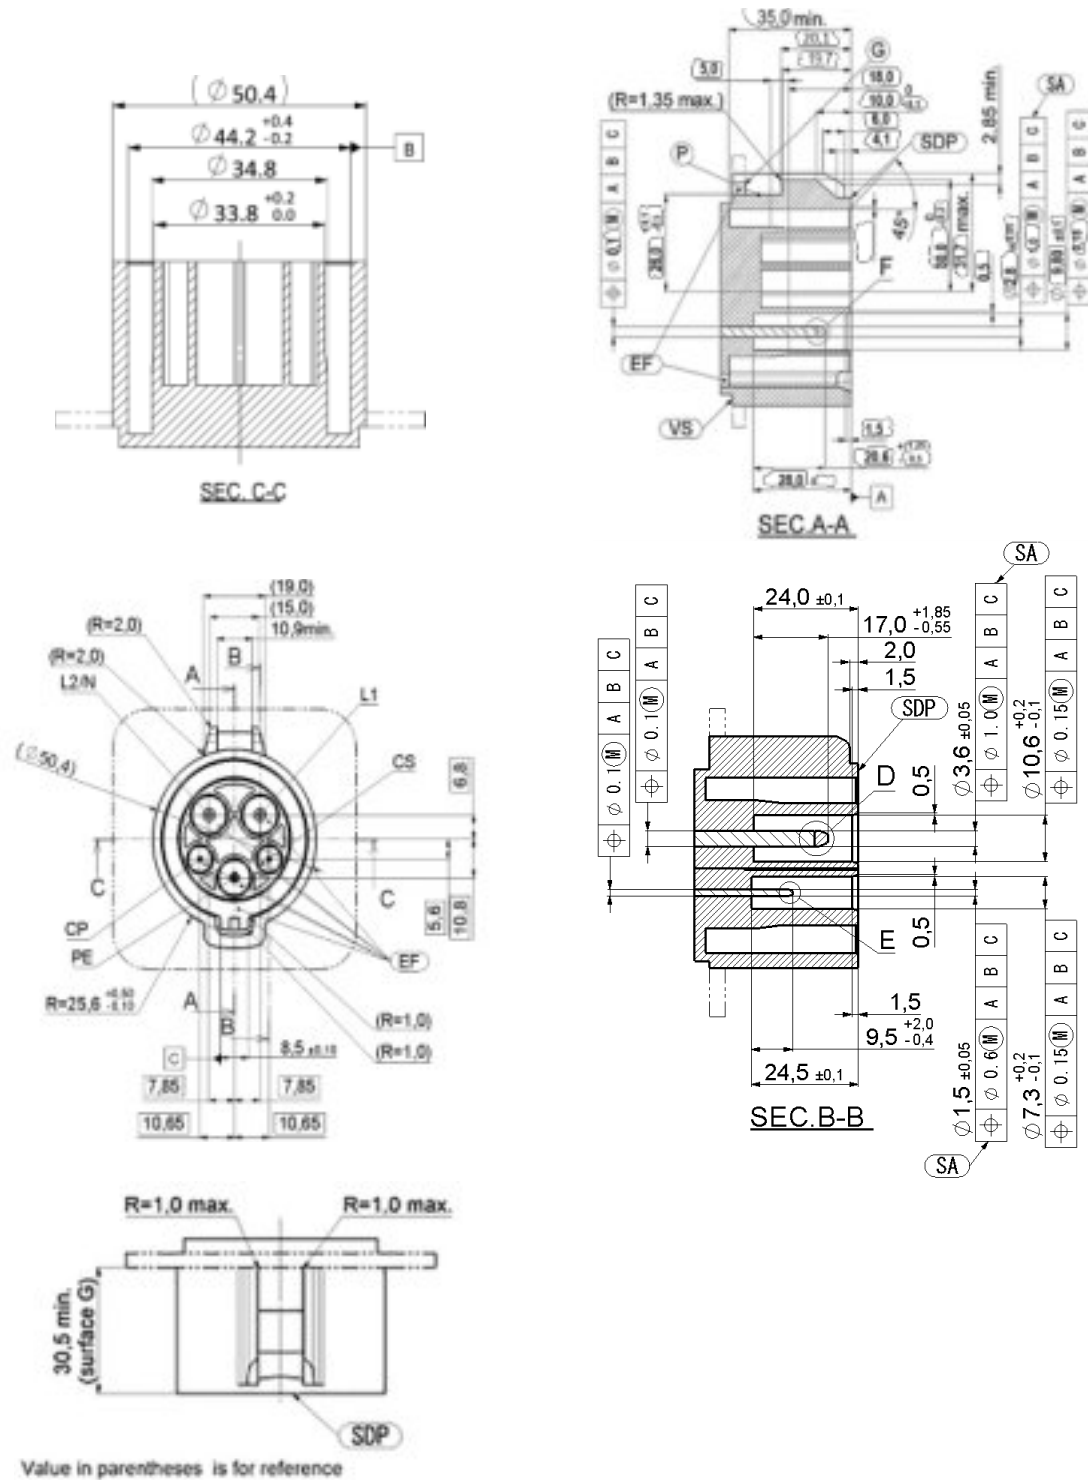

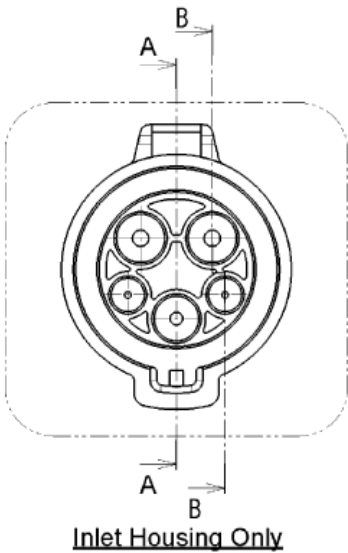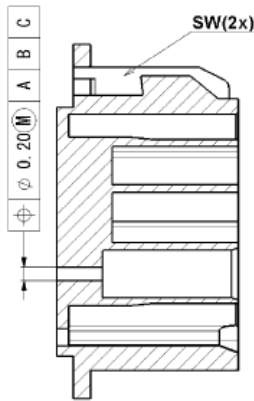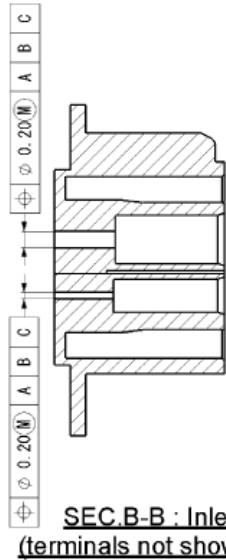

Value in parentheses is for reference.

General tolerance			
0 max.: ±0,15	50 max.: ±0,2	100 max.: ±0,3	Angle: ±30°

Key			
SDP	Standard datum plane	EF	Egress of fluids (if necessary)
G	Surface G (if any)	VS	Vehicle surface
P	Surface P	SW	Optional side wall
IC	Isolated cap (if necessary)	SA	These position tolerances are applicable only for self-aligning contacts
CT	Contact		