

Australian/New Zealand Standard™

Geographic information—Schema for moving features



AS/NZS ISO 19141:2011

This Joint Australian/New Zealand Standard was prepared by Joint Technical Committee IT-004, Geographical Information/Geomatics. It was approved on behalf of the Council of Standards Australia on 15 November 2011 and on behalf of the Council of Standards New Zealand on 14 November 2011. This Standard was published on 30 November 2011.

The following are represented on Committee IT-004:

ANZLIC—The Spatial Information Council
Australasian Fire and Emergency Service Authorities Council
Australian Antarctic Division
Australian Hydrographic Office
Australian Map Circle
CSIRO Exploration and Mining
Department of Lands, NSW
Department of Primary Industries and Water, Tas.
Geoscience Australia
Land Information New Zealand
Mercury Project Solutions
Office of Spatial Data Management
The University of Melbourne

Keeping Standards up-to-date

Standards are living documents which reflect progress in science, technology and systems. To maintain their currency, all Standards are periodically reviewed, and new editions are published. Between editions, amendments may be issued. Standards may also be withdrawn. It is important that readers assure themselves they are using a current Standard, which should include any amendments which may have been published since the Standard was purchased.

Detailed information about joint Australian/New Zealand Standards can be found by visiting the Standards Web Shop at www.saiglobal.com.au or Standards New Zealand web site at www.standards.co.nz and looking up the relevant Standard in the on-line catalogue.

For more frequent listings or notification of revisions, amendments and withdrawals, Standards Australia and Standards New Zealand offer a number of update options. For information about these services, users should contact their respective national Standards organization.

We also welcome suggestions for improvement in our Standards, and especially encourage readers to notify us immediately of any apparent inaccuracies or ambiguities. Please address your comments to the Chief Executive of either Standards Australia or Standards New Zealand at the address shown on the back cover.

This Standard was issued in draft form for comment as DR AS/NZS ISO 19141.

Australian/New Zealand Standard™

Geographic information—Schema for moving features

First published as AS/NZS ISO 19141:2011.

COPYRIGHT

© Standards Australia Limited/Standards New Zealand

All rights are reserved. No part of this work may be reproduced or copied in any form or by any means, electronic or mechanical, including photocopying, without the written permission of the publisher, unless otherwise permitted under the Copyright Act 1968 (Australia) or the Copyright Act 1994 (New Zealand).

Jointly published by SAI Global Limited under licence from Standards Australia Limited, GPO Box 476, Sydney, NSW 2001 and by Standards New Zealand, Private Bag 2439, Wellington 6140.

PREFACE

This Standard was prepared by the Joint Standards Australia/Standards New Zealand Committee IT-004, Geographical Information/Geomatics.

The objective of this Standard is to specify a conceptual schema that addresses moving features, i.e., features whose locations change over time. This schema includes classes, attributes, associations and operations that provide a common conceptual framework that can be implemented to support various application areas that deal with moving features.

This Standard is identical with, and has been reproduced from ISO 19141:2008, *Geographic information—Schema for moving features*.

As this Standard is reproduced from an International Standard, the following applies:

- (a) Its number appears on the cover and title page while the International Standard number appears only on the cover.
- (b) In the source text ‘this International Standard’ should read ‘this Australian/New Zealand Standard’.
- (c) A full point substitutes for a comma when referring to a decimal marker.

References to International Standards should be replaced by references to Australian or Australian/New Zealand Standards, as follows:

<i>Reference to International Standard</i>		<i>Australian/New Zealand Standard</i>	
ISO/TS		AS/NZS ISO	
19103	Geographic information—Conceptual schema language	19103	Geographic information—Conceptual schema language
ISO			
19107	Geographic information—Spatial schema	19107	Geographic information—Spatial schema
19108	Geographic information—Temporal schema	19108	Geographic information—Temporal schema
19109	Geographic information—Rules for application schema	19109	Geographic information—Rules for application schema
19133	Geographic information—Location-based services—Tracking and navigation	19133	Geographic information—Location-based services—Tracking and navigation

The terms ‘normative’ and ‘informative’ have been used in this Standard to define the application of the annex to which they apply. A ‘normative’ annex is an integral part of a Standard, whereas an ‘informative’ annex is only for information and guidance.

CONTENTS

1	Scope	1
2	Conformance.....	1
2.1	Conformance classes.....	1
2.2	Requirements	2
3	Normative references	2
4	Terms, definitions, and abbreviated terms	3
4.1	Terms and definitions.....	3
4.2	Abbreviated terms	5
5	Package – Moving Features.....	6
5.1	Semantics	6
5.2	Package structure.....	7
5.3	Class hierarchy	7
6	Package – Geometry Types	9
6.1	Package semantics.....	9
6.2	Type – MF_OneParamGeometry	9
6.3	Type – MF_TemporalGeometry	11
6.4	Type – MF_Trajectory	12
6.5	Type – MF_TemporalTrajectory.....	14
6.6	Class – MF_PositionExpression	20
6.7	Type – MF_SecondaryOffset	20
6.8	Type – MF_MeasureFunction	21
7	Package – Prism Geometry	22
7.1	Package structure.....	22
7.2	CodeList – MF_GlobalAxisName.....	23
7.3	Type – MF_LocalGeometry	25
7.4	Type – MF_PrismGeometry	27
7.5	Type – MF_RigidTemporalGeometry	28
7.6	Type – MF_RotationMatrix	29
7.7	Type – MF_TemporalOrientation.....	30
8	Moving features in application schemas.....	30
8.1	Introduction	30
8.2	Representing the spatial characteristics of moving features	31
8.3	Associations of moving features	31
8.4	Operations of moving features.....	31
Annex A	(normative) Abstract test suite.....	32
A.1	Application schemas for data transfer	32
A.2	Application schemas for data with operations	32
Annex B	(informative) UML Notation	34
B.1	Introduction	34
B.2	Class.....	34
B.3	Stereotype	34
B.4	Attribute	35
B.5	Operation	35
B.6	Constraint	36
B.7	Note	36

B.8	Association	36
B.9	Role name	36
B.10	Multiplicity	37
B.11	Navigability	37
B.12	Aggregation	37
B.13	Composition	38
B.14	Dependency	38
B.15	Generalization	38
B.16	Realization	39
Annex C (informative)	Interpolating between orientations	40
C.1	Introduction	40
C.2	Euler rotations and gimbal lock	40
C.3	Interpolating between two orientation matrices	42
C.4	Interpolating between other orientation representations	44
C.5	Sample interpolation	45
Bibliography		49

INTRODUCTION

This International Standard specifies a conceptual schema that addresses moving features, i.e., features whose locations change over time. This schema includes classes, attributes, associations and operations that provide a common conceptual framework that can be implemented to support various application areas that deal with moving features, including:

- Location Based Services,
- Intelligent Transportation Systems,
- Tracking and navigation (land-based, marine, or space), and
- Modeling and simulation.

The schema specifies mechanisms to describe motion consisting of translation and/or rotation of the feature, but not including deformation of the feature. The schema is based on the concept of a one parameter set of geometries that may be viewed as a set of leaves or a set of trajectories, where a leaf represents the geometry of the moving feature at a particular value of the parameter (e.g., a point in time) and a trajectory is a curve that represents the path of a point in the geometry of the moving feature as it moves with respect to the parameter.

AUSTRALIAN/NEW ZEALAND STANDARD

Geographic information—Schema for moving features

1 Scope

This International Standard defines a method to describe the geometry of a feature that moves as a rigid body. Such movement has the following characteristics.

- a) The feature moves within any domain composed of spatial objects as specified in ISO 19107.
- b) The feature may move along a planned route, but it may deviate from the planned route.
- c) Motion may be influenced by physical forces, such as orbital, gravitational, or inertial forces.
- d) Motion of a feature may influence or be influenced by other features, for example:
 - 1) The moving feature might follow a predefined route (e.g. road), perhaps part of a network, and might change routes at known points (e.g. bus stops, waypoints).
 - 2) Two or more moving features may be “pulled” together or pushed apart (e.g. an airplane will be refuelled during flight, a predator detects and tracks a prey, refugee groups join forces).
 - 3) Two or more moving features may be constrained to maintain a given spatial relationship for some period (e.g. tractor and trailer, convoy).

This International Standard does not address other types of change to the feature. Examples of changes that are not addressed include the following:

- The deformation of features.
- The succession of either features or their associations.
- The change of non-spatial attributes of features.
- The feature’s geometric representation cannot be embedded in a geometric complex that contains the geometric representations of other features, since this would require the other features’ representations to be updated as the feature moves.

Because this International Standard is concerned with the geometric description of feature movement, it does not specify a mechanism for describing feature motion in terms of geographic identifiers. This is done, in part, in ISO 19133.

2 Conformance

2.1 Conformance classes

2.1.1 Introduction

This International Standard specifies four conformance classes (Table 1). They are differentiated on the basis of two criteria: purpose and level of complexity.

2.1.2 Purpose

This International Standard may be used in support of data transfer. Operations defined for objects are irrelevant to data transfer, which requires only descriptions of the state of the objects at the time of transfer. Thus, two conformance classes require only the implementation of attributes and associations of the classes specified in the schema. The other two conformance classes support the object-oriented implementation of systems or interfaces; they require implementation of operations as well as implementation of attributes and associations.

2.1.3 Complexity

Many applications do not need a complete description of the geometry of a feature and its orientation at any point in time. Their requirements are satisfied by describing the movement of a single reference point on the feature using its trajectory as specified in Clause 6. One pair of conformance classes supports these simple applications.

Other applications need knowledge of the positions at each time of all points or a significant subset of the points on a moving feature. They require the full description provided by the prism geometry specified in Clause 7.

Table 1 — Conformance classes

Complexity	Purpose	
	Data Transfer	Data with operations
Trajectory	A.1.1	A.2.1
Prism Geometry	A.1.2	A.2.2

2.2 Requirements

To conform to this International Standard, an application schema shall satisfy the requirements of the Abstract Test Suite in Annex A.

3 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/TS 19103, *Geographic information — Conceptual schema language*

ISO 19107, *Geographic information — Spatial schema*

ISO 19108, *Geographic information — Temporal schema*

ISO 19109, *Geographic information — Rules for application schema*

ISO 19133, *Geographic information — Location-based services — Tracking and navigation*

4 Terms, definitions, and abbreviated terms

4.1 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

4.1.1

base representation

⟨moving features⟩ representation, using a local origin and local ordinate **vectors**, of a **geometric object** at a given reference time

NOTE 1 A rigid geometric object may undergo translation or rotation, but remains congruent with its base representation.

NOTE 2 The local origin and ordinate vectors establish an engineering coordinate reference system (ISO 19111), also called a local frame or a local Euclidean coordinate system.

4.1.2

curve

1-dimensional **geometric primitive**, representing the continuous image of a line

[ISO 19107:2003, definition 4.23]

NOTE The boundary of a curve is the set of **points** at either end of the curve. If the curve is a cycle, the two ends are identical, and the curve (if topologically closed) is considered to not have a boundary. The first point is called the start point, and the last is the end point. Connectivity of the curve is guaranteed by the "continuous image of a line" clause. A topological theorem states that a continuous image of a connected set is connected.

4.1.3

design coordinate reference system

engineering coordinate reference system in which the **base representation** of a moving object is specified

4.1.4

feature

abstraction of real world phenomena

[ISO 19101:2002, definition 4.11]

NOTE A feature may occur as a type or an instance. Feature type or feature instance shall be used when only one is meant.

4.1.5

feature association

relationship that links instances of one **feature** type with instances of the same or a different feature type

[ISO 19110:2004, definition 4.2]

NOTE Feature associations include aggregation of features.

4.1.6

feature attribute

characteristic of a **feature**

[ISO 19101:2002, definition 4.12]

4.1.7

feature operation

operation that every instance of a **feature** type may perform

[ISO 19110:2004, definition 4.5]

4.1.8**foliation**

one parameter set of geometries such that each point in the **prism** of the set is in one and only one **trajectory** and in one and only one **leaf**

4.1.9**geometric object**

spatial object representing a geometric set

[ISO 19107:2003, definition 4.47]

4.1.10**geometric primitive**

geometric object representing a single, connected, homogeneous element of space

[ISO 19107:2003, definition 4.48]

NOTE Geometric primitives are non-decomposed objects that present information about geometric configuration. They include points, curves, surfaces, and solids.

4.1.11**instant**

0-dimensional **geometric primitive** representing position in time

[ISO 19108:2002, definition 4.1.17]

4.1.12**leaf**

⟨one parameter set of geometries⟩ geometry at a particular value of the parameter

4.1.13**location-based service****LBS**

service whose return or other property is dependent on the location of the client requesting the service or of some other thing, object or person

[ISO 19133:2005, definition 4.11]

4.1.14**network**

abstract structure consisting of a set of 0-dimensional objects called junctions, and a set of 1-dimensional objects called links that connect the junctions, each link being associated with a start (origin, source) junction and end (destination, sink) junction

[ISO 19133:2005, definition 4.17]

NOTE The network is essentially the universe of discourse for the navigation problem. Networks are a variety of 1-dimensional topological complex. In this light, junction and topological node are synonyms, as are link and directed edge.

4.1.15**one parameter set of geometries**

function f from an interval $t \in [a, b]$ such that $f(t)$ is a geometry and for each **point** $P \in f(a)$ there is a one parameter set of points (called the trajectory of P) $P(t) : [a, b] \rightarrow P(t)$ such that $P(t) \in f(t)$

EXAMPLE A curve C with constructive parameter t is a one parameter set of points $c(t)$.

4.1.16**period**

one-dimensional **geometric primitive** representing extent in time

[ISO 19108:2002, definition 4.1.27]

NOTE A period is bounded by two different **temporal positions**.

4.1.17**point**

0-dimensional **geometric primitive**, representing a position

[ISO 19107:2003, definition 4.61]

NOTE The boundary of a **point** is the empty set.

4.1.18**prism**

⟨one parameter set of geometries⟩ set of points in the union of the geometries (or the union of the **trajectories**) of a **one parameter set of geometries**

NOTE This is a generalization of the concept of a geometric prism that is the convex hull of two congruent polygons in 3D-space. Such polyhedrons can be viewed as a **foliation** of congruent polygons.

4.1.19**temporal coordinate system**

temporal reference system based on an interval scale on which distance is measured as a multiple of a single unit of time

[ISO 19108:2002, definition 4.1.31]

4.1.20**temporal position**

location relative to a **temporal reference system**

[ISO 19108:2002, definition 4.1.34]

4.1.21**temporal reference system**

reference system against which time is measured

[ISO 19108:2002, definition 4.1.35]

4.1.22**trajectory**

path of a moving **point** described by a one parameter set of points

4.1.23**vector**

quantity having direction as well as magnitude

[ISO 19123:2005, definition 4.1.43]

4.2 Abbreviated terms

CRS	Coordinate Reference System (ISO 19111)
SLERP	Spherical Linear Interpolation
LRS	Linear Referencing System (ISO 19133)
OCL	Object Constraint Language (ISO/IEC 19501)
UML	Unified Modelling Language (ISO/IEC 19501)

5 Package – Moving Features

5.1 Semantics

A moving feature can be modelled as a combination of movements. The overall motion can be expressed as the temporal path or trajectory of some reference point on the object (the “origin”), such as its center of gravity. Once the origin’s trajectory has been established, the position along the trajectory can be described using a linear reference system (as defined in ISO 19133). The “parameterization by length” for curves (as defined in ISO 19107) can be used as a simple linear reference if no other is available. The relationship between time (t) and measure value (m) can be represented as the graph of the $t \rightarrow m$ function in a plane with coordinates (t, m). This separation of the geometry of the path and the actual “time to position” function allows the moving feature to be tracked along existing geometry.

Figure 1 illustrates how the concepts of foliation, prism, trajectory, and leaf relate to one another. In this illustration, a 2D rectangle moves and rotates. Each representation of the rectangle at a given time is a leaf. The path traced by each corner point of the rectangle (and by each of its other points) is a trajectory. The set of points contained in all of the leaves, and in all of the trajectories, forms a prism. The set of leaves also forms a foliation.

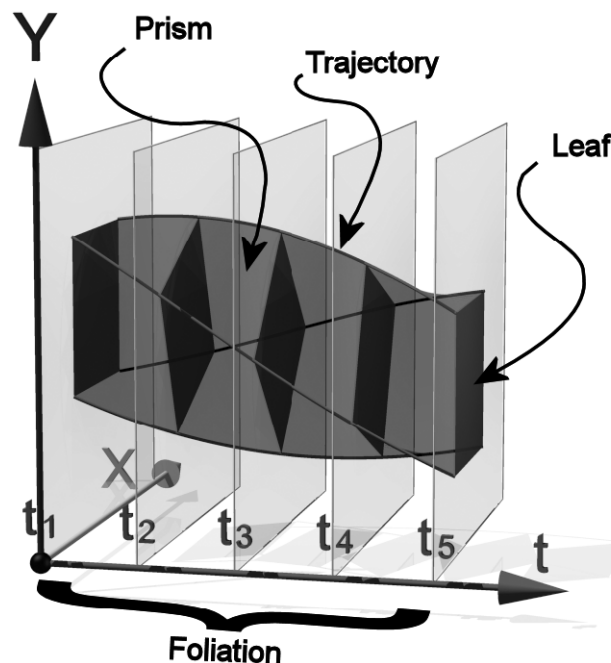


Figure 1 — Feature movement as foliation

These two object representations, of the path and the position along that path, give the general position of the moving feature. The other variable in describing the position of the feature is the rotation about the chosen reference point. To describe this, a local engineering coordinate system is established using the object reference point as its origin. The geometry of the feature is described in the engineering coordinate system and the real-world orientation of the feature is given by mapping of the local coordinate axes to the global coordinate system (the CRS of the trajectory of the reference point). This can be given as a matrix that maps the unit vectors of the local coordinate system to vectors in the global CRS.

If the global CRS and local CRS have the same dimension, then each point within the local CRS can be traced in time through the global CRS by combinations of these various mappings. The map would trace from time (t) to the measure (m) to a position on the reference point's path using the LRS. Then using the rotation matrix, the calculated offset from this point gives a direct position in the global CRS.

This means that the ‘prism’ of the moving feature (defined as all the points which part of the feature passes through) can be viewed (and calculated to whatever degree of accuracy needed) as a bundle of trajectories of

points on the local engineering representation of the feature's geometry. If viewed in a 4 dimensional spatio-temporal coordinate system, the points on the feature at different times are different points. Then the pre-image of the prism (points on the trajectories augmented by a time coordinate) is a foliation, meaning that there is a complete and separate representation of the geometry of the feature for each specific time (called a "leaf"). These names come from a 3D metaphor of a book, where each page or leaf is a slice of time in the "folio".

This might form the basis for an extension of this standard to non-rigid, mutable objects. Each leaf in the 4D foliation is a separate representation of the object, and by creating methods to describe the change through time of the shape and form of the feature, the existing machinery in this International Standard can be used to place those representations in positions with respect to the global coordinate system.

5.2 Package structure

This clause presents a conceptual schema for describing moving features that is specified using the Unified Modelling Language (UML) [ISO/IEC 19501], following the guidance of ISO/TS 19103. Annex B describes UML notation as used in this International Standard.

The schema is contained in the UML package Moving Features. Names of classes included in this package carry the prefix "MF_". The package is subdivided into two leaf packages (Figure 2), Geometry Types and Prism Geometry. The classes in these two packages are derived from classes included in the Geometry Package specified in ISO 19107. Classes from the packages Basic Types [ISO/TS 19103], Geometry [ISO 19107], Temporal Objects, and Temporal Reference System [ISO 19108] are used as data types in the schema.

5.3 Class hierarchy

The classes of the moving features schema form an inheritance hierarchy that has its source in the classes GM_Object and GM_Curve specified in ISO 19107 (Figure 3). This allows the subclasses specific to this schema to be used as feature attributes in compliance with the General Feature Model specified in ISO 19109. The second level of the hierarchy consists of a set of classes that describe a one-parameter geometry. These might be used to describe the movement of a feature with respect to any single variable such as pressure, temperature, or time. The third level specializes these classes to describe motion in time. The classes are specified fully in Clauses 6 and 7.

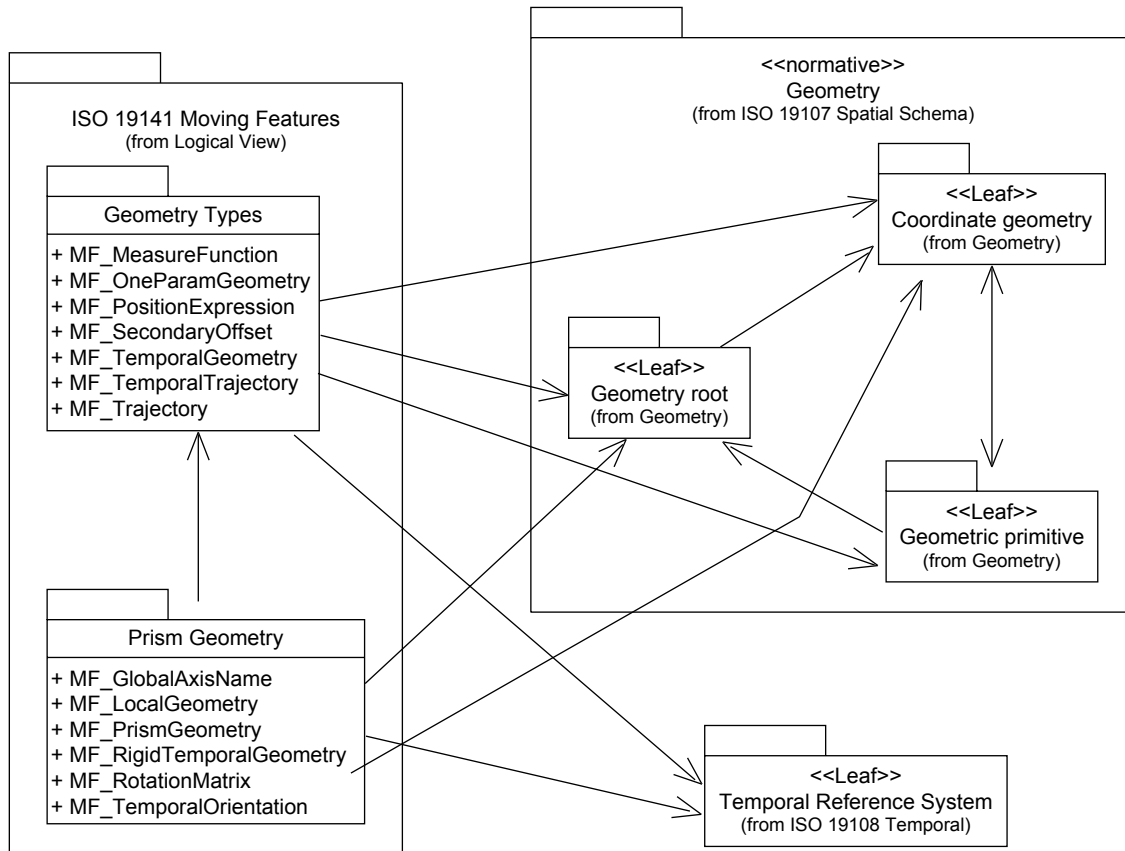


Figure 2 — Moving Feature Package

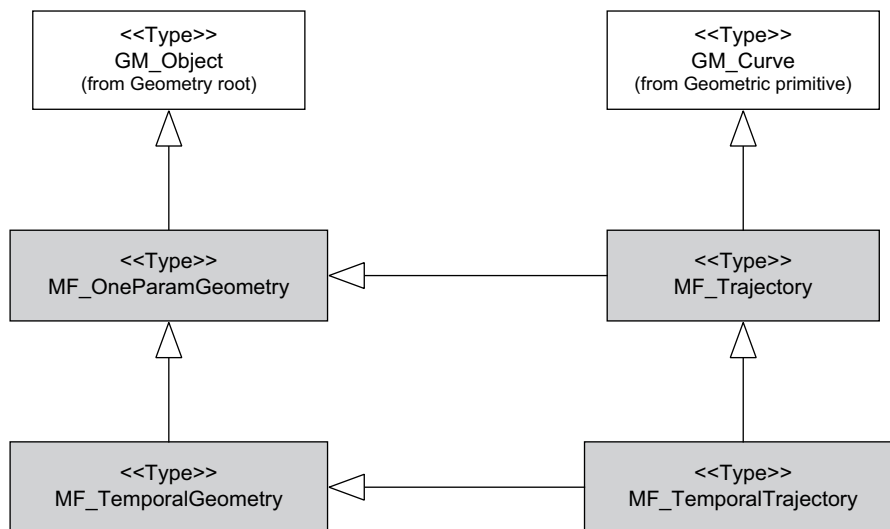


Figure 3 — Components of the Geometry Types Package

6 Package – Geometry Types

6.1 Package semantics

The Geometry Types package contains seven types. Two classes – MF_OneParamGeometry and MF_Trajectory – specify one-parameter geometry types based on the geometric objects specified in ISO 19107 (see Figure 3). Two other classes – MF_TemporalGeometry and MF_TemporalTrajectory – specialize the first classes in order to specify a one-parameter set of geometries in which the parameter is time. The other three classes – MF_MeasureFunction, MF_SecondaryOffset and MF_PositionExpression (Figure 4) – are used to extend the concepts of linear reference systems as defined in ISO 19133. Description of movement in terms of geographic identifiers is out of scope, and is partly covered in ISO 19133.

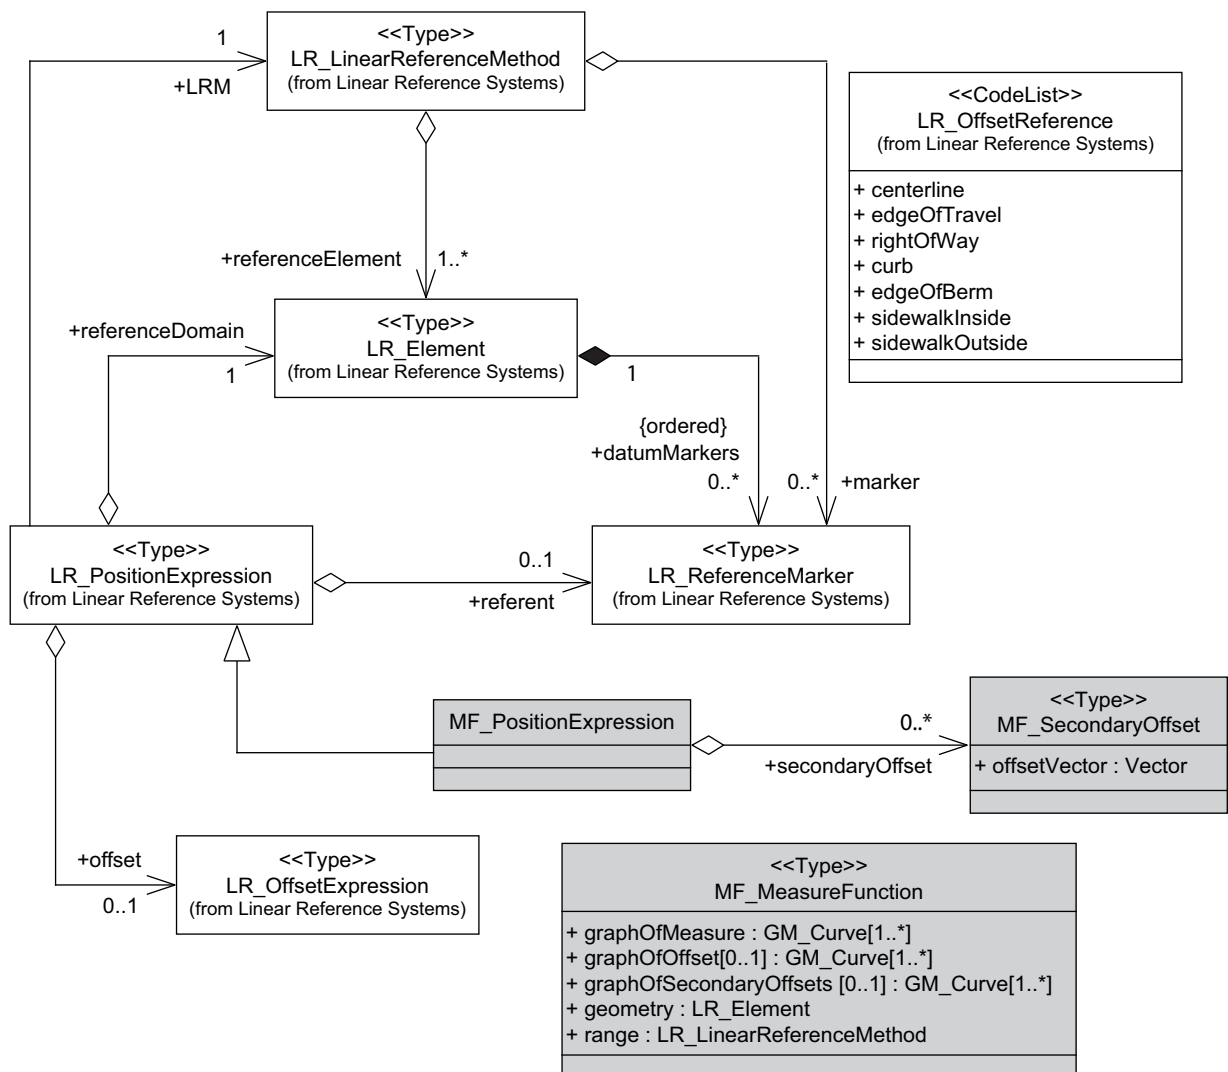


Figure 4 — Use of Linear Reference System by Moving Features

6.2 Type – MF_OneParamGeometry

6.2.1 Class semantics

A one parameter set of geometries is a function f from an interval $t \in [a, b]$ such that $f(t)$ is a geometry and for each point $P \in f(a)$ there is a one parameter set of points (called the trajectory of P) $P(t) : [a, b] \rightarrow P(t)$ such that $P(t) \in f(t)$. A leaf of a one parameter set of geometries is the geometry $f(t)$ at a particular value of the

parameter. The set of geometries forms a prism that is the set of points in the union of the geometries (or the union of the trajectories).

EXAMPLE A curve C with constructive parameter t is a one parameter set of points c(t).

6.2.2 Inheritance from GM_Object

The type "MF_OneParamGeometry" (Figure 5) inherits from the type "GM_Object." As such it shall implement all attributes, operations and associations inherited from that type as specified in ISO 19107, as well as those specified in this subclause.

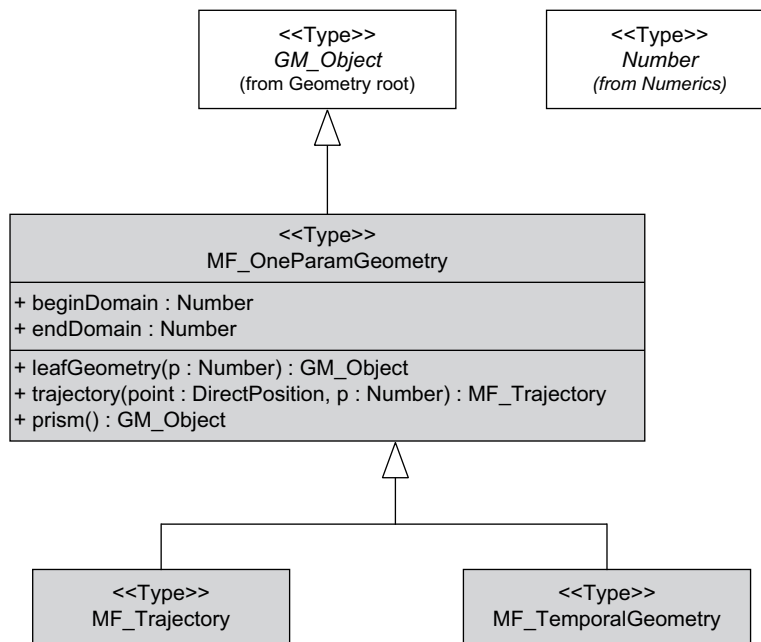


Figure 5 — Context Diagram: MF_OneParamGeometry

6.2.3 Attribute – beginDomain

The attribute "beginDomain" shall contain the value of the parameter at the start of the domain of the one-parameter geometry. The data type Number is specified in ISO/TS 19103.

```
MF_OneParamGeometry::beginDomain: Number
```

6.2.4 Attribute – endDomain

The attribute "endDomain" shall contain the value of the parameter at the end of the domain of the one-parameter geometry.

```
MF_OneParamGeometry::endDomain: Number
```

6.2.5 Operation – leafGeometry

The operation leafGeometry shall accept a value of the parameter as input and return the leaf associated with that value as an instance of GM_Object.

```
MF_OneParamGeometry::leafGeometry( p: Number ): GM_Object
```

6.2.6 Operation – trajectory

The operation trajectory shall accept the position of a point on a leaf (identified by a value of the parameter p) of the one parameter set of geometries and return the trajectory of that point.

```
MF_OneParamGeometry::trajectory( point: DirectPosition, p: Number ):
    MF_Trajectory
```

6.2.7 Operation – prism

The operation prism shall return an instance of GM_Object that is the prism formed by the union of all the leaves of this instance of MF_OneParamGeometry.

```
MF_OneParamGeometry::prism( ): GM_Object
```

6.3 Type – MF_TemporalGeometry

6.3.1 Class semantics

MF_TemporalGeometry (Figure 6) is a specialization of MF_OneParamGeometry in which the parameter is time as expressed by TM_Coordinate. TM_Coordinate is specified in ISO 19108; it expresses time as a multiple of a single unit of measure such as year, day, or second.

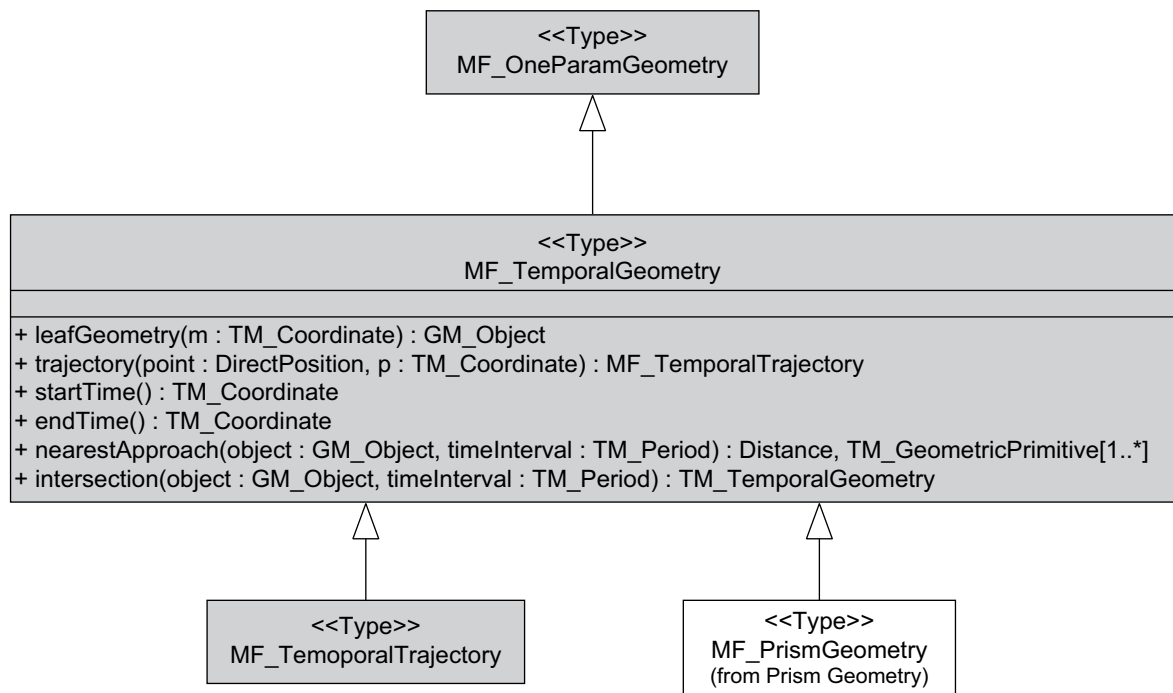


Figure 6 — Context Diagram: MF_TemporalGeometry

6.3.2 Inheritance from MF_OneParamGeometry

The type "MF_TemporalGeometry" inherits from the type "MF_OneParamGeometry". As such it shall implement all inherited attributes, operations and associations.