

ASABE/ISO 3463:2006 SEP2017 (R2020)

Tractors for agriculture and forestry — Roll-over protective structures (ROPS) — Dynamic test method and acceptance conditions



**American Society of
Agricultural and Biological Engineers**

STANDARD

ASABE is a professional and technical organization, of members worldwide, who are dedicated to advancement of engineering applicable to agricultural, food, and biological systems. ASABE Standards are consensus documents developed and adopted by the American Society of Agricultural and Biological Engineers to meet standardization needs within the scope of the Society; principally agricultural field equipment, farmstead equipment, structures, soil and water resource management, turf and landscape equipment, forest engineering, food and process engineering, electric power applications, plant and animal environment, and waste management.

NOTE: ASABE Standards, Engineering Practices, and Data are informational and advisory only. Their use by anyone engaged in industry or trade is entirely voluntary. The ASABE assumes no responsibility for results attributable to the application of ASABE Standards, Engineering Practices, and Data. Conformity does not ensure compliance with applicable ordinances, laws and regulations. Prospective users are responsible for protecting themselves against liability for infringement of patents.

ASABE Standards, Engineering Practices, and Data initially approved prior to the society name change in July of 2005 are designated as "ASAE", regardless of the revision approval date. Newly developed Standards, Engineering Practices and Data approved after July of 2005 are designated as "ASABE".

Standards designated as "ANSI" are American National Standards as are all ISO adoptions published by ASABE. Adoption as an American National Standard requires verification by ANSI that the requirements for due process, consensus, and other criteria for approval have been met by ASABE.

Consensus is established when, in the judgment of the ANSI Board of Standards Review, substantial agreement has been reached by directly and materially affected interests. Substantial agreement means much more than a simple majority, but not necessarily unanimity. Consensus requires that all views and objections be considered, and that a concerted effort be made toward their resolution.

CAUTION NOTICE: ASABE and ANSI standards may be revised or withdrawn at any time. Additionally, procedures of ASABE require that action be taken periodically to reaffirm, revise, or withdraw each standard.

Copyright American Society of Agricultural and Biological Engineers. All rights reserved.

ASABE, 2950 Niles Road, St. Joseph, MI 49085-9659, USA, phone 269-429-0300, fax 269-429-3852, hq@asabe.org

ASABE/ISO 3463:2006 SEP2017 (R2020)

Approved September 2017; reaffirmed September 2020 as an American National Standard

Tractors for agriculture and forestry — Roll-over protective structures (ROPS) — Dynamic test method and acceptance conditions

These materials are subject to copyright claims of ISO and ASABE. No part of this publication may be reproduced in any form, including an electronic retrieval system, without the prior written permission of ASABE. All requests pertaining to ASABE/ISO 3463:2006 SEP2017 standard should be submitted to ASABE.

This standard was reviewed and approved for adoption by the ASABE Machinery System Agricultural Machinery Common Tests subcommittee. The adoption of this standard was made possible by the signing of 2004 SAE-ASABE copyright agreements, which gave ASABE a royalty-free license to publish in whole or in part SAE standard document J2194. Approved as an ASABE standard and approved by ANSI September 2017; reaffirmed September 2020.

Keywords: Roll-over, ROPS, Safety, Test procedure, Tractor

0 Foreword

0.1 ASABE/ISO 3463:2006 SEP2017, Tractors for agriculture and forestry — Roll-over protective structures (ROPS) — Dynamic test method and acceptance conditions, is an adoption without modification of the identically titled ISO standard ISO 3463:2006, Tractors for agriculture and forestry — Roll-over protective structures (ROPS) — Dynamic test method and acceptance conditions.

0.2 ASABE/ISO 3463:2006 SEP2017 specifies a dynamic test method and the acceptance conditions for roll-over protective structures (cab or frame) of wheeled tractors for agriculture and forestry.

It is applicable to tractors having at least two axles for wheels mounted with pneumatic tyres, or having tracks instead of wheels, with an unballasted tractor mass of not less than 600 kg, but generally less than 6 000 kg, and with a minimum track width of the rear wheels greater than 1 150 mm.

0.3 Three normative references are listed in ISO 3463:2006. These references have been reviewed and accepted as part of the adoption of the ISO document in ASABE adoption number.

0.4 This standard has been approved as an American National standard by ANSI (American National Standard Institute). The original content of ISO 3463 was based on SAE J2194. The 2004 SAE-ASABE MOU gives ASABE copyright and royalty-free publishing rights to SAE J2194 and international derivative standards.

0.5 Product labelled to reference ISO 3463 shall be deemed compliant to ASABE/ISO 3463.

Text of ISO 3463:2006, Tractors for agriculture and forestry — Roll-over protective structures (ROPS) — Dynamic test method and acceptance conditions, follows.

1 Scope

This International Standard specifies a dynamic test method and the acceptance conditions for roll-over protective structures (cab or frame) of wheeled tractors for agriculture and forestry.

It is applicable to tractors having at least two axles for wheels mounted with pneumatic tyres, or having tracks instead of wheels, with an unballasted tractor mass of not less than 600 kg, but generally less than 6 000 kg, and with a minimum track width of the rear wheels greater than 1 150 mm.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 630, Structural steels — Plates, wide flats, bars, sections and profiles

ISO 5353:1995, Earth-moving machinery, and tractors and machinery for agriculture and forestry — Seat index point

ASTM A370, Standard Test Methods and Definitions for Mechanical Testing of Steel Products

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

roll-over protective structure

ROPS

framework protecting drivers of agricultural and forestry tractors that minimizes the likelihood of driver injury resulting from accidental overturning during normal operation

NOTE: The ROPS is characterized by the provision of space for a clearance zone, either inside the envelope of the structure or within a space bounded by a series of straight lines from the outer edges of the structure to any part of the tractor that might come into contact with flat ground and that is capable of supporting the tractor in that position if the tractor overturns.

3.2

tractor mass

mass of the unladen tractor in working order with tanks and radiators full, roll-over protective structure with cladding, and any track equipment or additional front-wheel drive components required for normal use

NOTE: Not included are the operator, optional ballast weights, additional wheel equipment, special equipment and loads.

3.3

reference mass

m_t

mass, not less than the tractor mass, selected by the manufacturer for calculation of the energy inputs to be used in the tests

3.4

impact test

application of a dynamic load produced by a block acting as a pendulum

3.5

crushing test

application of a vertical load through a beam placed laterally across the uppermost members of the roll-over protective structure.

3.6

longitudinal median plane

longitudinal plane of symmetry

zero Y plane

vertical plane Y passing through the mid-points of AB, perpendicular to AB, A and B being such that

- for each wheel, the vertical plane passing through its axis cuts the mid-plane of the wheel following a straight line Δ which meets the supporting surface of the vehicle at one point, and
- A and B are two points thus defined which correspond to two wheels, both of which are either steering or powered wheels, situated respectively at the two ends of the same real or imaginary axle

See Figure 1.

NOTE 1: The mid-plane of the dual wheels being equidistant from the inner edge of one wheel and the outer edge of the other, the straight line Δ is, in this particular case, the intersection of the mid-plane of the dual wheels and the vertical plane passing through the axis of the axle pin.

NOTE 2: Adapted from ISO 612:1978^[1], Clause 5.

3.7

reference plane

vertical plane generally longitudinal to the tractor and passing through the seat index point and the steering-wheel centre.

NOTE: Normally, this plane coincides with the longitudinal median plane of the tractor.

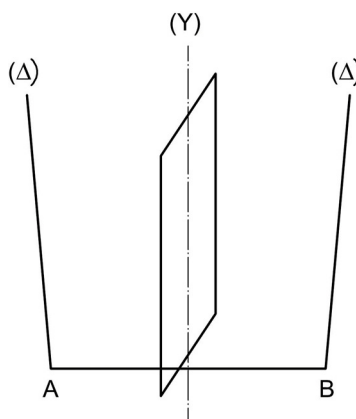


Figure 1 – Longitudinal median plane

4 Symbols and abbreviated terms

For the purposes of this document, the symbols given in Table 1 are used.


Table 1 – Symbols

Symbol	Description	Unit
α_h	Half of the horizontal seat adjustment	mm
α_v	Half of the vertical seat adjustment	mm
E	Energy input to be absorbed during the test	J
F	Static load force	N
H	Lift height of the pendulum block centre of gravity	mm
I	Moment of inertia about the rear axle excluding the rear wheels	kg.m ²
L	Tractor reference wheel base	mm
m_t	Reference mass	kg

5 Apparatus

5.1 Clearance zone framework

Means to prove that the clearance zone has not been entered during the test: a measuring rig in accordance with Figure 2 and Figure 11 a) and b) can be used.

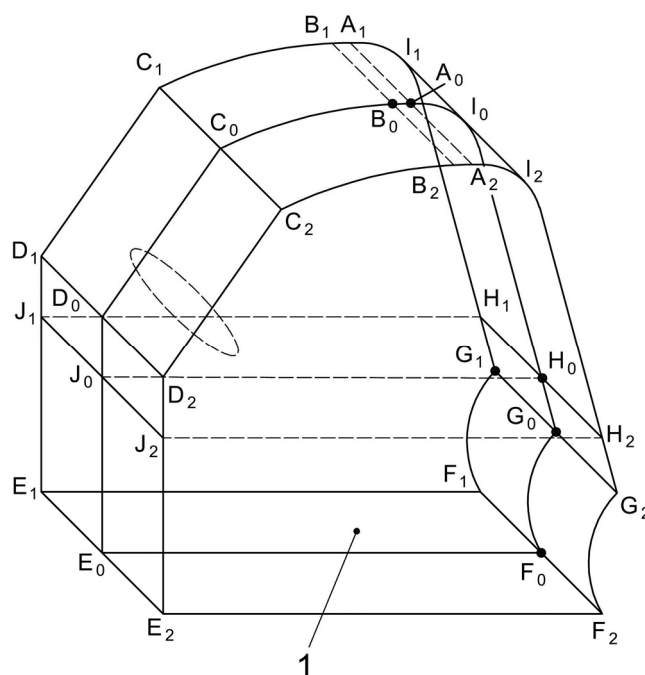

Key

1 Seat index point (SIP)

Dimensions		Remarks
	mm	
$\left. \begin{matrix} A_1A_0 \\ B_1B_0 \end{matrix} \right\}$	100	Minimum
$\left. \begin{matrix} A_1A_2 \\ B_1B_2 \\ C_1C_2 \end{matrix} \right\}$	500	
$\left. \begin{matrix} D_1D_2 \\ E_1E_2 \end{matrix} \right\}$	500	Minimum or equal to the steering-wheel radius plus 40 mm, whichever is greater
$\left. \begin{matrix} F_1F_2 \\ G_1G_2 \\ H_1H_2 \\ I_1I_2 \\ J_1J_2 \end{matrix} \right\}$	500	
$\left. \begin{matrix} E_1E_0 \\ E_2E_0 \end{matrix} \right\}$	250	Minimum or equal to the steering-wheel radius plus 40 mm, whichever is greater
J_0E_0	300	Depending on the tractor
F_0G_0	–	
I_0G_0	–	
C_0D_0	–	
E_0F_0	–	
NOTE: For other dimensions, see Figure 11 a) and b).		

Figure 2 – Clearance zone measuring rig

5.2 Impact test


The impact test shall be carried out by means of the elements described in 5.2.1 to 5.2.5.

5.2.1 Device for striking blow against ROPS

A pendulum block of mass of 2 000 kg. The pendulum block mass does not include the mass of the chains.

The maximum chain mass shall be 100 kg. The dimensions of the block, which shall be suspended from two chains from pivot points 6 m or more above ground level, shall be as shown in Figure 3. The pendulum block centre of gravity shall coincide with its geometric centre.

Dimensions in millimetres

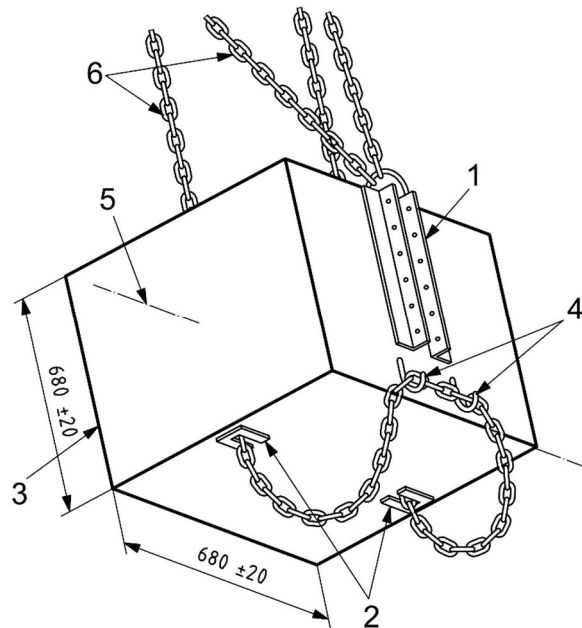

Key

- 1 attachment for release mechanism
- 2 height adjustment
- 3 impact face
- 4 hooks to hold spare chain
- 5 centre of gravity axis
- 6 pendulum chains

Figure 3 – Illustration of pendulum block


5.2.2 Means to lash the tractor to the ground

The tractor shall be lashed, by means of steel wire ropes incorporating tensioning devices, to ground rails preferably spaced approximately 600 mm apart throughout the area immediately below the pivot points and extending for approximately 9 m along the pendulum block axis and approximately 1 800 mm to either side. The points of attachment of the lashings shall be approximately 2 000 mm behind the rear axle and 1 500 mm in front of the front axle. There shall be two lashings on each axle: one on each side of the median plane of the tractor. The lashings shall be steel cable of from 12,5 to 15 mm diameter, with tensile strength of from 1 100 MPa to 1 260 MPa. Details of the means are given in Figures 4, 5 and 6.

5.2.3 Softwood beam

Softwood beam, of cross-section 150 mm × 150 mm, used to restrain the rear wheels when striking from the front and rear, and to clamp against the side of the front and rear wheels when striking from the side, as shown in Figures 4, 5, and 6.

Dimensions in millimetres

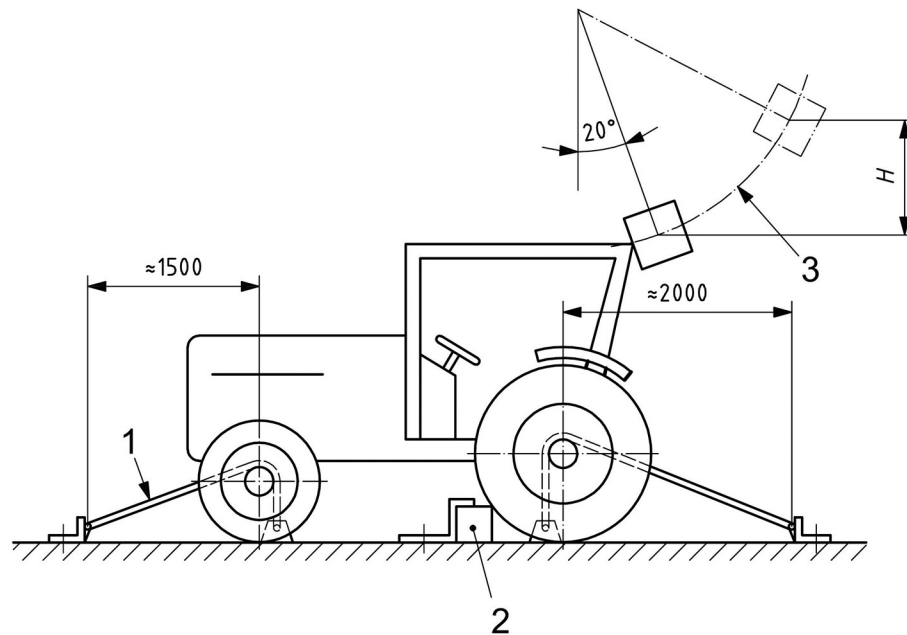


Key

- 1 positioning tie
- 2 150 mm square softwood beam clamped behind both rear wheels after anchoring
- 3 travel arc of pendulum block centre of gravity passing through contact point

Figure 4 – Example of lashing method — Rear impact

Dimensions in millimetres

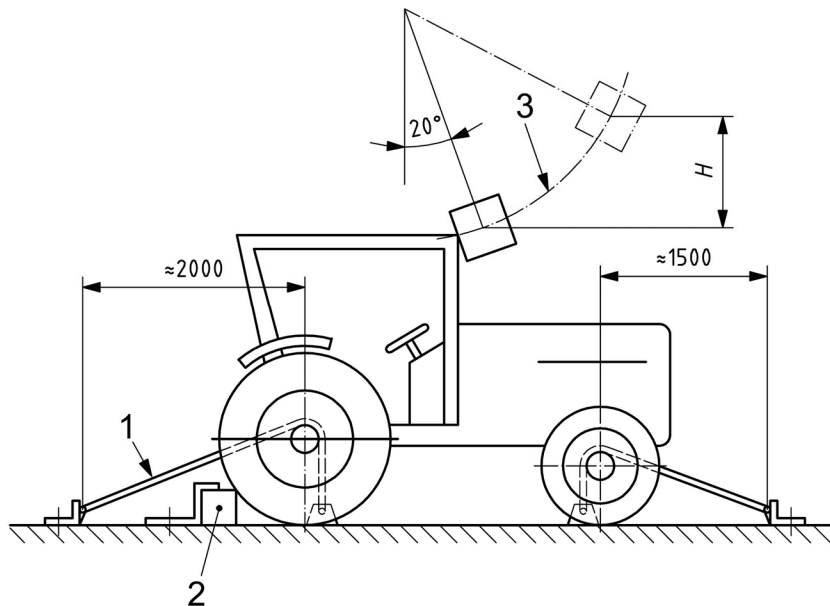

Key

- 1 positioning tie
- 2 150 mm square softwood beam clamped behind both rear wheels after anchoring
- 3 travel arc of pendulum block centre of gravity passing through contact point

Figure 5 – Example of lashing method — Front impact



- Figure 6 – Example of lashing method — Side impact**

5.3.2 Equipment for measuring the total vertical force applied.