



Designation: D 4875 – 99

Standard Test Methods of Polyurethane Raw Materials: Determination of the Polymerized Ethylene Oxide Content of Polyether Polyols¹

This standard is issued under the fixed designation D 4875; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ε) indicates an editorial change since the last revision or reapproval.

1. Scope*

1.1 *Test Method A*—Proton Nuclear Magnetic Resonance Spectroscopy (¹H NMR) measures polymerized ethylene oxide (EO) in ethylene oxide-propylene oxide polyethers used in flexible urethane foams and nonfoams. It is suitable for diols made from the commonly used initiators and containing EO percentages greater than or equal to six. For triols initiated with glycerin and trimethylol propane, an uncorrected EO value is obtained since both initiators have protons that contribute to the EO measurement (see Note 1).

1.2 *Test Method B*—Carbon-13 Nuclear Magnetic Resonance Spectroscopy (¹³C NMR) measures the polymerized EO content of ethylene oxide-propylene oxide polyethers used in flexible urethane foams and nonfoams. It is suitable for diols and triols made from the commonly used initiators and containing EO percentages greater than or equal to six.

NOTE 1—There are no equivalent ISO standards.

1.3 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

2.1 ASTM Standards:²

D 883 Terminology Relating to Plastics

E 180 Practice for Developing the Precision Data of ASTM Methods for Analysis and Testing of Industrial Chemicals

E 691 Practice for Conducting an Interlaboratory Study to Determine the Precision of a Test Method

3. Terminology

3.1 *Definitions*—Terminology in these test methods follows the standard terminology defined in Terminology D 883.

¹ These test methods are under the jurisdiction of ASTM Committee D-20 on Plastics and are the direct responsibility of Subcommittee D20.22 on Cellular Plastics.

Current edition approved Nov. 10, 1999. Published February 2000. Originally published as D 4875 – 88. Last previous edition D 4875 – 94.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

3.2 Definitions of Terms Specific to This Standard:

3.2.1 *heteric polyol, n*—a poly ether polyol in which ethylene oxide and propylene oxide units are randomly arranged.

3.2.2 *initiator, n*—a substance with which ethylene oxide or propylene oxide reacts to form a polyether polyol.

3.2.2.1 *Discussion*—one initiator unit is incorporated into each polymer or oligomer molecule.

4. Summary of Test Methods

4.1 *Test Method A*—The ¹H NMR spectra of polyether polyols show two groups of resonance peaks corresponding to the methyl protons of propylene oxide (PO) and to the methylene and methine protons of EO and PO. The EO peak area is obtained by subtracting the area of the PO methyl peaks from the area of the methylene and methine peaks. Initiators other than glycols of EO and PO give systematic errors (see Note 2).

NOTE 2—The initiator error can be estimated by calculating the theoretical contribution of initiator protons to the EO and PO peak areas.

4.2 *Test Method B*—The ¹³C NMR spectra of polyethers contain multiple resonances arising from initiator, alkoxide, alkoxide sequencing, and end-group distribution. EO content may be determined relative to PO or relative to PO and triol initiator. In the former, the area of the EO peaks is ratioed to the total area of alkoxide methylene and methine carbons. In the latter, the area of the EO peaks is ratioed to the total area of alkoxide methylene and methine carbons and two initiator carbons. This test method describes the determination of EO relative to PO only.

5. Significance and Use

5.1 Measurements of EO content correlate with polyol reactivity (as related to primary hydroxyl content), linearity of foam rise, and the hydrophilicity of the polyol and final product.

5.2 Statistical data suggest that the ¹³C NMR test method is the preferred method for measuring low levels (less than 10 %) of polymerized EO in polyols.

5.3 The ¹H and ¹³C NMR test methods give different results which are highly correlated. The equation of the linear regression is:

$$\%EO_{\text{proton}} = 1.031 (\%EO_{\text{carbon-13}}) + 0.883 \quad (1)$$

*A Summary of Changes section appears at the end of this standard.

The standard deviation of the regression is 0.49 and the multiple R-square is 0.9990.

TEST METHOD A—HYDROGEN-1 NMR

6. Equipment

6.1 *NMR Continuous Wave (CW) or Fourier Transform (FT) Spectrometer*, with an ^1H resonance frequency of 60 MHz or higher.

6.2 *NMR Sample Tubes*, having an outside diameter of at least 5 mm.

7. Reagents and Materials

7.1 All reagents should be ACS certified or spectroscopic grade unless otherwise specified.

7.2 *Trifluoroacetic Acid*.

7.3 *Chloroform- d_1* , NMR-grade, containing tetramethylsilane as an internal standard.

8. Standard

8.1 This test method does not require standards. To evaluate the test method, standards may be prepared from commercially available poly(propylene oxide) and poly(ethylene oxide).

9. Preparation of Sample

9.1 Mix a few drops of polyol with deuterated chloroform to prepare 1 mL of an approximately 10 %³ polyol solution. Add a drop of trifluoroacetic acid, mix well, and transfer to an NMR tube.

10. Instrument Preparation

10.1 The instrument settings given here are for a Varian EM-390 CW spectrometer and a Varian XL-100 FT spectrometer. Instrument preparation may vary with the spectrometer. For a description of a particular spectrometer and suitable parameters, refer to the manufacturer's operating manual.

10.2 Typical EM-390 console settings are as follows:

Lock	optional, TMS
Offset	0
Sweep width	5 ppm
Sweep time	2 min
Integration time	2 min
Rf Filter	open
RF power	0.05 mG

10.3 Typical XL-100 console settings are as follows:

Lock	chloroform- d_1
Pulse width	90°
Pulse delay	0
Spectra width	10 ppm
Acquisition time	4 sec
Data points	8K
Number of transients	128

11. NMR Analysis

11.1 Place the NMR tube containing the polyol solution into the spectrometer probe and optimize the field homogeneity. For CW NMR, scan the spectrum from 5 to 0 ppm. Integrate the spectrum five times at a power level below that which causes

saturation. See Figs. 1 and 2 for examples of polyol spectra with high and low EO concentrations, respectively.

11.2 For FT NMR, acquire the desired number of transients and transform the free induction decay signal to the frequency domain spectrum. Integrate the spectrum.

12. Calculation

12.1 Determine the areas of the PO methyl protons (area A) and the EO and PO methylene and methine protons (area B) from the integration curves. Calculate the percent EO from the following equation:

$$EO = \frac{33.1 \times Z}{33.1 \times Z + 58.1} \times 100 \quad (2)$$

where:

$$Z = (B/A) - 1$$

13. Report

13.1 Report results to the nearest tenth percent EO.

14. Precision and Bias

14.1 Table 1 is based on a round robin conducted in 1981 in accordance with Practice E 691, involving six polyol samples with EO content ranging from 6 to 45 weight % (see Table 2) tested by eight laboratories. For each polyol, all of the samples were prepared at one source, but the individual specimens were prepared at the laboratories that tested them. Each test result was obtained from one individual NMR run. Each lab obtained two test results for each material on two separate days.

14.2 In Table 1, for the polyols indicated and for test results that are derived from testing two specimens of each polyol on each of two separate days:

14.2.1 S_r is the within-laboratory standard deviation of the average; $I_r = 2.83 S_r$ (see 14.2.3 for application of I_r).

14.2.2 S_R is the between-laboratory standard deviation of the average; $I_R = 2.83 S_R$ (see 14.2.4 for application of I_R).

14.2.3 *Repeatability*—In comparing two test results for the same polyol, obtained by the same operator using the same

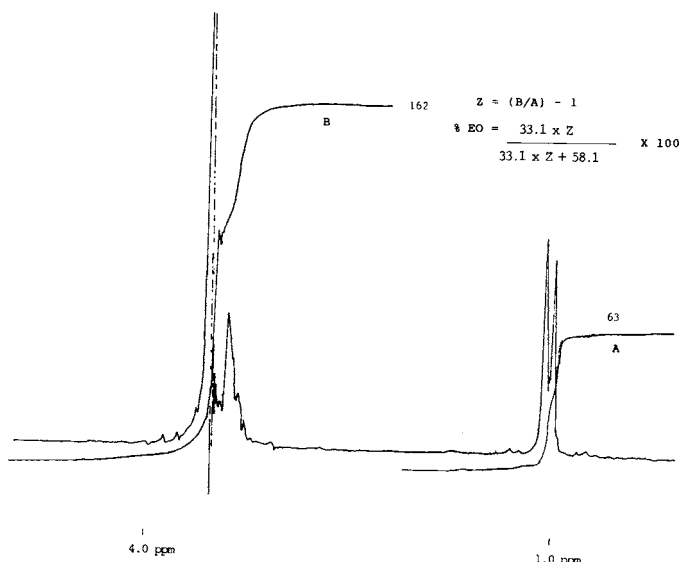


FIG. 1 ^1H NMR Spectrum of a Polyol Containing 45% EO

³ Highfield, FT spectrophotometers require less concentrated solutions. A 1 % solution is more appropriate for such spectrophotometers.