



Designation: D6379 – 04



Designation: 436/01

Standard Test Method for Determination of Aromatic Hydrocarbon Types in Aviation Fuels and Petroleum Distillates—High Performance Liquid Chromatography Method with Refractive Index Detection¹

This standard is issued under the fixed designation D6379; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

INTRODUCTION

This test method is intended to be technically equivalent to **IP 436-01** with an identical title. The ASTM format for test methods has been used, and where possible, equivalent ASTM test methods have replaced the IP or ISO standards.

The test method is intended to be used as one of several possible alternative instrumental test methods that are aimed at quantitative determination of hydrocarbon types in fuels. This does not imply that a correlation necessarily exists between this and any other test method intended to give this information, and it is the responsibility of the user to determine such correlation if necessary.

1. Scope*

1.1 This test method covers a high performance liquid chromatographic test method for the determination of mono-aromatic and di-aromatic hydrocarbon contents in aviation kerosines and petroleum distillates boiling in the range from 50 to 300°C, such as Jet A or Jet A-1 fuels. The total aromatic content is calculated from the sum of the individual aromatic hydrocarbon-types.

NOTE 1—Samples with a final boiling point greater than 300°C that contain tri-aromatic and higher polycyclic aromatic compounds are not determined by this test method and should be analyzed by Test Method **D6591** or other suitable equivalent test methods.

1.2 This test method is calibrated for distillates containing from 10 to 25 % m/m mono-aromatic hydrocarbons and from 0 to 7 % m/m di-aromatic hydrocarbons.

1.3 The precision of this test method has been established for kerosine boiling range distillates containing from 10 to 25 % m/m mono-aromatic hydrocarbons and from 0 to 7 % m/m di-aromatic hydrocarbons.

1.4 Compounds containing sulfur, nitrogen, and oxygen are possible interferents. Mono-alkenes do not interfere, but conjugated di- and poly-alkenes, if present, are possible interferents.

1.5 *This standard does not purport to address the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

2.1 ASTM Standards:²

D4052 Test Method for Density and Relative Density of Liquids by Digital Density Meter

D4057 Practice for Manual Sampling of Petroleum and Petroleum Products

D4177 Practice for Automatic Sampling of Petroleum and Petroleum Products

D6591 Test Method for Determination of Aromatic Hydrocarbon Types in Middle Distillates—High Performance Liquid Chromatography Method with Refractive Index Detection

¹ This test method is under the jurisdiction of ASTM Committee **D02** on Petroleum Products and Lubricants and is the direct responsibility of Subcommittee **D02.04** on Hydrocarbon Analysis.

Current edition approved May 1, 2004. Published June 2004. Originally approved in 1999. Last previous edition approved in 1999 as D6379–99.

In the IP, this test method is under the jurisdiction of the Standardization Committee. DOI: 10.1520/D6379-04.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

*A Summary of Changes section appears at the end of this standard.



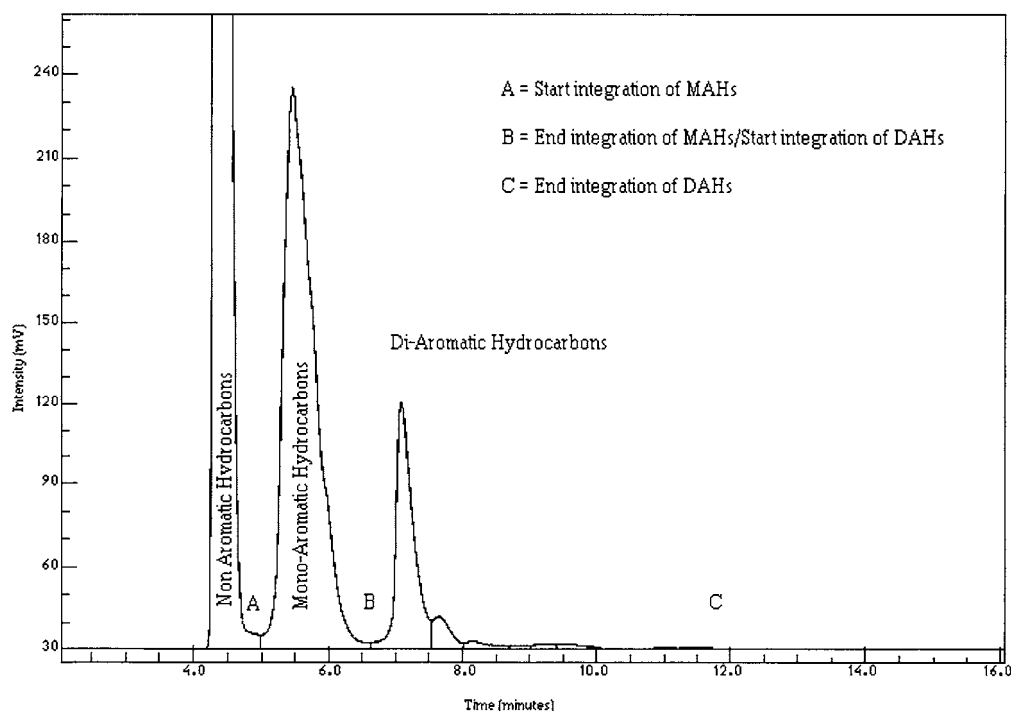


FIG. 1 Example Chromatogram of an Aviation Fuel Showing Integration Points and Aromatic Hydrocarbon Type Groups

2.2 Energy Institute Standards:³

IP 436 Test Method for Determination of Aromatic Hydrocarbon Types in Aviation Fuels and Petroleum Distillates—High Performance Liquid Chromatography Method with Refractive Index

3. Terminology

3.1 Definitions of Terms Specific to This Standard:

3.1.1 *di-aromatic hydrocarbons (DAHs)*, *n*—compounds that have a longer retention time on the specified polar column than the MAHs.

3.1.2 *mono-aromatic hydrocarbons (MAHs)*, *n*—compounds that have a longer retention time on the specified polar column than the non-aromatic hydrocarbons but a shorter retention time than the di-aromatic hydrocarbons.

3.1.3 *non-aromatic hydrocarbons*, *n*—compounds that have a shorter retention time on the specified polar column than the mono-aromatic hydrocarbons.

3.1.4 *total aromatic hydrocarbons*, *n*—sum of the MAHs and DAHs.

NOTE 2—The elution characteristics of aromatic and non-aromatic compounds on the specified polar column have not been specifically determined for this test method. Published and unpublished data indicate the major constituents for each hydrocarbon type as follows: (1) Non-aromatic hydrocarbons: acyclic and cyclic alkanes (paraffins and naphthenes), mono-alkenes (if present). (2) MAHs: benzenes, tetralins, indanes, thiophenes, conjugated poly-alkenes. (3) DAHs: naphthalenes, biphenyls, indenes, fluorenes, acenaphthenes, benzothiophenes.

4. Summary of Test Method

4.1 The test portion is diluted 1:1 with the mobile phase, such as heptane, and a fixed volume of this solution injected into a high performance liquid chromatograph fitted with a polar column. This column has little affinity for the non-aromatic hydrocarbons and exhibits a pronounced selectivity for aromatic hydrocarbons. As a result of this selectivity, the aromatic hydrocarbons are separated from the non-aromatic hydrocarbons into distinct bands in accordance with their ring structure, that is, MAHs and DAHs.

4.2 The column is connected to a refractive index detector that detects the components as they elute from the column. The electronic signal from the detector is continually monitored by a data processor. The amplitudes of the signals (peak areas) from the sample aromatics are compared with those obtained from previously-run calibration standards in order to calculate the percent m/m MAHs and DAHs in the sample. The sum of the MAHs and DAHs is reported as the total aromatic content (percent m/m) of the sample.

5. Significance and Use

5.1 Accurate quantitative information on aromatic hydrocarbon types can be useful in determining the effects of petroleum processes on production of various finished fuels. This information can also be useful for indicating the quality of fuels and for assessing the relative combustion properties of finished fuels.

6. Apparatus

6.1 *High Performance Liquid Chromatograph (HPLC)*—Any high performance liquid chromatograph capable of pumping the mobile phase at flow rates between 0.5 and 1.0 mL/min

³ Available from Energy Institute, 61 New Cavendish St., London, WIG 7AR, U.K.